SAMSUNG CHASSISJ51A

MODEL

SERVICE MANUAL

1. Precautions

Follow these safety, servicing and ESD precautions to prevent damage and protect against potential hazards such as electrical shock and X-rays.

1-1 Safety Precautions

1. Be sure that all of the built-in protective devices are replaced. Restore any missing protective shields.

2. When reinstalling the chassis and its assemblies, be sure to restore all protective devices, including: nonmetallic control knobs and compartment covers.

3. Make sure that there are no cabinet openings through which people—particularly children—might insert fingers and contact dangerous voltages. Such openings include the spacing between the picture tube and the cabinet mask, excessively wide cabinet ventilation slots, and improperly fitted back covers.

   If the measured resistance is less than 1.0 megohm or greater than 5.2 megohms, an abnormality exists that must be corrected before the unit is returned to the customer.

4. Leakage Current Hot Check (Figure 1-1):
   Warning: Do not use an isolation transformer during this test. Use a leakage-current tester or a metering system that complies with American National Standards Institute (ANIS C101.1, Leakage Current for Appliances), and Underwriters Laboratories (UL Publication UL1410, 59.7).

5. With the unit completely reassembled, plug the AC line cord directly into the power outlet. With the unit's AC switch first in the ON position and then OFF, measure the current between a known earth ground (metal water pipe, conduit, etc.) and all exposed metal parts, including: antennas, handle brackets, metal cabinets, screwheads and control shafts. The current measured should not exceed 0.5 milliamp. Reverse the power-plug prongs in the AC outlet and repeat the test.

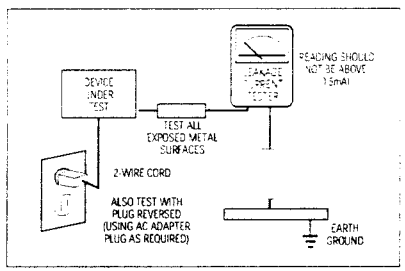
DEVICE UNDER TEST
TEST ALL EXPOSED METAL SURFACES
2-WIRE CORD
ALSO TEST WITH PLUG REVERSED (USING AC ADAPTER PLUG AS REQUIRED)
EARTH GROUND
READING SHOULD NOT BE ABOVE 0.5mA!

Fig. 1-1 AC Leakage Test

6. Antenna Cold Check:
   With the unit's AC plug disconnected from the AC source, connect an electrical jumper across the two AC prongs. Connect one lead of the ohmmeter to an AC prong. Connect the other lead to the coaxial connector.

7. X-ray Limits:
   The picture tube is especially designed to prohibit X-ray emissions. To ensure continued X-ray protection, replace the picture tube only with one that is the same type as the original. Carefully reinstall the picture tube shields and mounting hardware; these also provide X-ray protection.

8. High Voltage Limits:
   High voltage must be measured each time servicing is done on the B+, horizontal deflection or high voltage circuits. Correct operation of the X-ray protection circuits must be reconfirmed whenever they are serviced. (X-ray protection circuits also may be called "horizontal disable" or "hold-down".)

   Heed the high voltage limits. These include the X-ray Protection Specifications Label, and the Product Safety and X-ray Warning Note on the service data schematic.

1-1 Safety Precautions (Continued)

9. High voltage is maintained within specified limits by close-tolerance, safety-related components and adjustments. If the high voltage exceeds the specified limits, check each of the special components.

10. Design Alteration Warning:
    Never alter or add to the mechanical or electrical design of this unit. Example: Do not add auxiliary audio or video connectors. Such alterations might create a safety hazard. Also, any design changes or additions will void the manufacturer's warranty.

11. Hot Chassis Warning:
    Some TV receiver chassis are electrically connected directly to one conductor of the AC power cord. If an isolation transformer is not used, these units may be safely serviced only if the AC power plug is inserted so that the chassis is connected to the ground side of the AC source.

    To confirm that the AC power plug is inserted correctly, do the following: Using an AC voltmeter, measure the voltage between the chassis and a known earth ground. If the reading is greater than 1.0V, remove the AC power plug, reverse its polarity and reinsert. Re-measure the voltage between the chassis and ground.

12. Some TV chassis are designed to operate with 85 volts AC between chassis and ground, regardless of the AC plug polarity. These units can be safely serviced only if an isolation transformer inserted between the receiver and the power source.

13. Some TV chassis have a secondary ground system in addition to the main chassis ground. This secondary ground system is not isolated from the AC power line. The two ground systems are electrically separated by insulating material that must not be defeated or altered.

14. Components, parts and wiring that appear to have overheated or that are otherwise damaged should be replaced with parts that meet the original specifications. Always determine the cause of damage or overheating, and correct any potential hazards.

15. Observe the original lead dress, especially near the following areas: Antenna wiring, sharp edges, and especially the AC and high voltage power supplies. Always inspect for pinched, out-of-place, or frayed wiring. Do not change the spacing between components and the printed circuit board. Check the AC power cord for damage. Make sure that leads and components do not touch thermally hot parts.

16. Picture Tube Implosion Warning:
    The picture tube in this receiver employs "integral implosion" protection. To ensure continued implosion protection, make sure that the replacement picture tube is the same as the original.

17. Do not remove, install or handle the picture tube without first putting on shatterproof goggles equipped with side shields. Never handle the picture tube by its neck. Some "in-line" picture tubes are equipped with a permanently attached deflection yoke; do not try to remove such "permanently attached" yokes from the picture tube.

18. Product Safety Notice:
    Some electrical and mechanical parts have special safety-related characteristics which might not be obvious from visual inspection. These safety features and the protection they give might be lost if the replacement component differs from the original—even if the replacement is rated for higher voltage, wattage, etc.

    Components that are critical for safety are indicated in the circuit diagram by shading, (▒) or (▪).
    Use replacement components that have the same ratings, especially for flame resistance and dielectric strength specifications.
    A replacement part that does not have the same safety characteristics as the original might create shock, fire or other hazards.

1-2 Servicing Precautions

Warning 1 : First read the "Safety Precautions" section of this manual. If some unforeseen circumstance creates a conflict between the servicing and safety precautions, always follow the safety precautions.
Warning 2 : An electrolytic capacitor installed with the wrong polarity might explode.

1. Servicing precautions are printed on the cabinet. Follow them.
2. Always unplug the unit's AC power cord from the AC power source before attempting to: (a) Remove or reinstall any component or assembly, (b) Disconnect an electrical plug or connector, (c) Connect a test component in parallel with an electrolytic capacitor.
3. Some components are raised above the printed circuit board for safety. An insulation tube or tape is sometimes used. The internal wiring is sometimes clamped to prevent contact with thermally hot components. Reinstall all such elements to their original position.
4. After servicing, always check that the screws, components and wiring have been correctly reinstalled. Make sure that the portion around the serviced part has not been damaged.
5. Check the insulation between the blades of the AC plug and accessible conductive parts (examples: metal panels, input terminals and earphone jacks).
6. Insulation Checking Procedure: Disconnect the power cord from the AC source and turn the power switch ON. Connect an insulation resistance meter (500V) to the blades of the AC plug.

   The insulation resistance between each blade of the AC plug and accessible conductive parts (see above) should be greater than 1 megohm.
7. Never defeat any of the B+ voltage interlocks. Do not apply AC power to the unit (or any of its assemblies) unless all solid-state heat sinks are correctly installed.
8. Always connect a test instrument's ground lead to the instrument chassis ground before connecting the positive lead; always remove the instrument's ground lead last.
9. When some parts inside the optical engine (except lamp) are damaged, replace the whole optical engine.

1-3 Precautions for Electrostatically Sensitive Devices (ESDs)

1. Some semiconductor ("solid state") devices are easily damaged by static electricity. Such components are called Electrostatically Sensitive Devices (ESDs); examples include integrated circuits and some field-effect transistors. The following techniques will reduce the occurrence of component damage caused by static electricity.
2. Immediately before handling any semicon ductor components or assemblies, drain the electrostatic charge from your body by touching a known earth ground. Alternatively, wear a discharging wrist-strap device. (Be sure to remove it prior to applying power—this is an electric shock precaution.)
3. After removing an ESD-equipped assembly, place it on a conductive surface such as aluminum foil to prevent accumulation of electrostatic charge.
4. Do not use freon-propelled chemicals. These can generate electrical charges that damage ESDs.
5. Use only a grounded-tip soldering iron when soldering or unsoldering ESDs.
6. Use only an anti-static solder removal device. Many solder removal devices are not rated as "anti-static"; these can accumulate sufficient electrical charge to damage ESDs.
7. Do not remove a replacement ESD from its protective package until you are ready to install it. Most replacement ESDs are packaged with leads that are electrically shorted together by conductive foam, aluminum foil or other conductive materials.
8. Immediately before removing the protective material from the leads of a replacement ESD, touch the protective material to the chassis or circuit assembly into which the device will be installed.
9. Minimize body motions when handling unpackaged replacement ESDs. Motions such as brushing clothes together, or lifting a foot from a carpeted floor can generate enough static electricity to damage an ESD.

2. Reference Information

2-1 Tables of Abbreviations and Acronyms

Table 2-1 Abbreviations

A	Ampere	MV	Megavolt
Ah	Ampere-hour	MW	Megawatt
Å	Angstrom	MΩ	Megohm
dB	Decibel	m	Meter
dBm	Decibel Referenced to One Milliwatt	µA	Microampere
		µF	Microfarad
°C	Degree Celsius	µH	Microhenry
°F	Degree Fahrenheit	µm	Micrometer
°K	degree Kelvin	µs	Microsecond
F	Farad	µW	Microwatt
G	Gauss	mA	Milliampere
GHz	Gigahertz	mg	Milligram
g	Gram	mH	Millihenry
H	Henry	ml	Milliliter
Hz	Hertz	mm	Millimeter
h	Hour	ms	Millisecond
ips	Inches Per Second	mV	Millivolt
kWh	Kilowatt-hour	nF	Nanofarad
kg	Kilogram	Ω	Ohm
kHz	Kilohertz	pF	Picofarad
kΩ	Kilohm	lb	Pound
km	Kilometer	rpm	Revolutions Per Minute
km/h	Kilometer Per Hour	rps	Revolutions Per Second
kV	Kilovolt	s	Second (Time)
kVA	Kilovolt-ampere	V	Volt
kW	Kilowatt	VA	Volt-ampere
l	Liter	W	Watt
MHz	Megahertz	Wh	Watt-hour

Table 2-2 Table of Acronyms

ABL	Automatic Brightness Limiter	I/O	Input/output
AC	Alternating Current	L	Left
ACC	Automatic Chroma Control	L	Low
AF	Audio Frequency	LED	Light Emitting Diode
AFC	Automatic Frequency Control	LF	Low Frequency
AFT	Automatic Fine Tuning	MOSFET	Metal-Oxide-Semiconductor-Field-Effect-Tr
AGC	Automatic Gain Control	MTS	Multi-channel Television Sound
AM	Amplitude Modulation	NAB	National Association of Broadcasters
ANSI	American National Standards Institute	NEC	National Electric Code
APC	Automatic Phase Control	NTSC	National Television Systems Committee
APC	Automatic Picture Control	OSD	On Screen Display
A/V	Audio-Video	PCB	Printed Circuit Board
AVC	Automatic Volume Control	PLL	Phase-Locked Loop
BAL	Balance	PWM	Pulse Width Modulation
BPF	Bandpass Filter	QIF	Quadrature Intermediate Frequency
B-Y	Blue-Y	R	Right
CATV	Community Antenna Television (Cable TV)	RC	Resistor & Capacitor
CB	Citizens Band	RF	Radio Frequency
CCD	Charge Coupled Device	R-Y	Red-Y
CCTV	Closed Circuit Television	SAP	Second Audio Program
Ch	Channel	SAW	Surface Acoustic Wave(Filter)
CRT	Cathode Ray Tube	SIF	Sound Intermediate Frequency
CW	Continuous Wave	SMPS	Switching Mode Power Supply
DC	Direct Current	S/N	Signal/Noise
DVM	Digital Volt Meter	SW	Switch
EIA	Electronics Industries Association	TP	Test Point
ESD	Electrostatic Discharge	TTL	Transistor Transistor Logic
ESD	Electrostatically Sensitive Device	TV	Television
FBP	Feedback Pulse	UHF	Ultra High Frequency
FBT	Flyback Transformer	UL	Underwriters Laboratories
FF	Flip-Flop	UV	Ultraviolet
FM	Frequency Modulation	VCD	Variable-Capacitance Diode
FS	Fail Safe	VCO	Voltage Controlled Oscillator
GND	Ground	VCXO	Voltage Controlled Crystal Oscillator
G-Y	Green-Y	VHF	Very High Frequency
H	High	VIF	Video Intermediate Frequency
HF	High-Frequency	VR	Variable Resistor
HI-FI	High Fidelity	VTR	Video Tape Recorder
IC	Inductance-Capacitance	VTVM	Vacuum Tube Voltmeter
IC	Integrated Circuit	TR	Transistor
IF	Intermediate Frequency		

2-2 IC Line Up

IC Line-Up			
No.	Block Name	IC Location	IC Name
1	MAIN	IC507	TDA8601
		IC665	TDA7265
		IC902	<S024C08
		IC103	TDA9810
		ICS801	TNY253P
		ICS802	PS2561
2	TERMINAL BOARD	IC701/IC702	TDA6920
		IC703	PCF8574P
		IC704	TDA8601
		IC705	4052
3	PIP	ICP101	TDA9160A
		ICP102	TDA9815
		ICP103	PAP102
		ICP105	SDA9189X
		IC201	SDA9187
4	HV MODULE	IC471	TL494CN
5	CONVERGENCE	ICZ104,ICZ103	STK392-040
6	SUB	IC301	LA7845
		IC801	STR-F6656
		IC802	SVD001
		IC804	SE110N
		IC806	PS2561
7	CRT	IC501/IC531/IC561	TDA6111Q
8	TTX	ICT01	SDA5457
		ICT02	TEA5114
		ICT04	24C04
		ICT05	74HC32

Table 2-3 IC Line-Up (Continued)			
No.	Block Name	IC Location	IC Name
9	FORMAT-CONVERTER	IC01	FS310KBC
		IC02	72V161621
		IC03	Z9021106PSC
		IC04	24C02
10	PROSCAN	ICP101	VPC3215C
		ICP103	CIP3250A
		ICP301	SDA9400
		ICP302	4931
		ICP401	SDA9280
		ICP501	CXA2101AQ
		ICP601	SDA9361
		ICP901	7533
11	DOLBY-SOUND	IC601	MSP3410D
		IC604,ICD602	TL062CDT
		ICD601	DPL3519A

2-3 MICOM IIC BUS LINE -UP

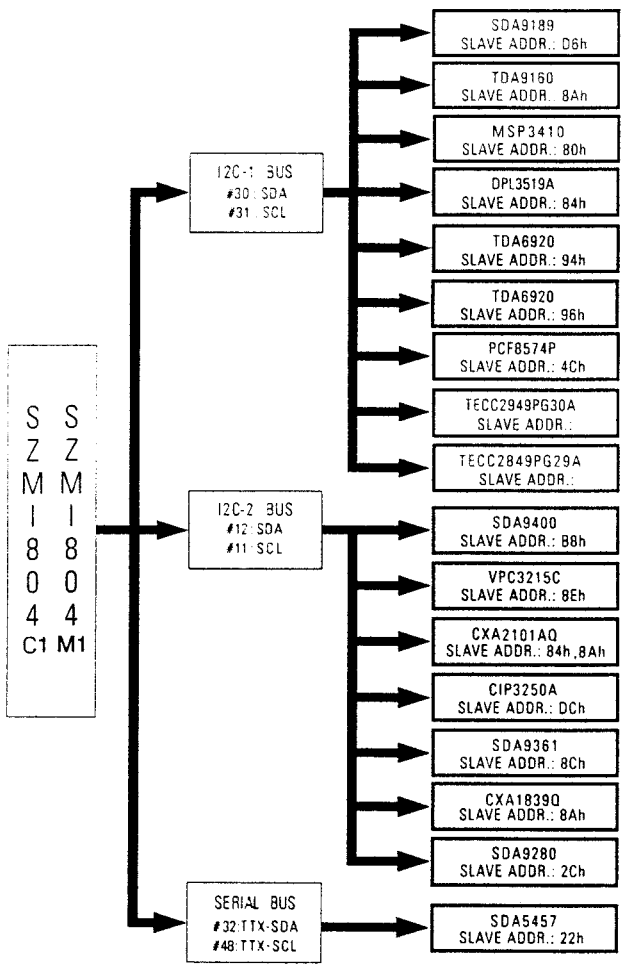

MEMO

3. Specification

Broadcasting System	PAL			
Scanning System	100Hz			
Tuning Range	VHF : CH2 ~ CH13 UHF : CH14 ~ CH69 Cable : CH1, CH14 ~ CH125			
Antenna Impedance	75 ohm Unbalanced			
Intermediate Frequency	Video : 38.9 [MHz] Sound : 33.4 [MHz]			
Sound Output	STD : 20W FULL MAX : 22W			
Rated Voltage	AC100~260 [V] 50/60[Hz], AC220[V] 50/60[Hz]			
W/B Coordinates	43J5	Hx : 272	Hy : 260	Y : 7.0
		Lx : 245	Ly : 225	Y : 0.16
	53J5	Hx : 272	Hy : 265	Y : 6.00
		Lx : 255	Ly : 230	Y : 0.16
	61J5	Hx : 278	Hy : 282	Y : 3.50
		Lx : 265	Ly: 233	Y : 0.20
	43J8	Hx : 272	Hy : 260	Y : 7.0
		Lx : 245	Ly : 225	Y : 0.16
	54J8	Hx : 272	Hy : 265	Y : 6.00
		Lx : 255	Ly : 230	Y : 0.16
	62J8	Hx : 278	Hy : 282	Y : 3.50
		Lx : 265	Ly: 233	Y : 0.20
High Voltage	31.5 [KV]			
FUSE	250[V] 6.3[A] CODE NO : 3801-001007			
Power Consumption	285W			

MEMO

4. Alignment and Adjustments

4-1 When entering the service mode:

1. Turn on the TV and then select "STANDARD"on the picture adjustment mode.
2. Turn off the TV (STAND-BY).
3. Enter the service mode by pressing the remote control keys in the following sequence :
   DISPLAY→MENU→MUTE →Power On

Note : If necessary, re-do steps 1~3.

Initial display when the service mode is switched.

1. When a RF signal is received



2. When the PC mode is received
   (Press to F.MENU)



3. Service Mode Control Keys

MAIN MENU	MENU DISPLAY
CH UP/DOWN	Select item by moving cursor
VOL UP/DOWN	Decrease or increase the adjustment values

Note : The PC mode can be switched to the service mode by pressing the F.Mode Key (only on the factory remote control).

PAL (43J5)

ITEM	FUNCTION	INITIAL VALUE	ITEM	FUNCTION	INITIAL VALUE
GEOMETRIC(PAL/NTSC)					
VS	V-SHIFT	106/124	LOC	LO-CORR	128
VA	V-SIZE	60/76(Variable)	HEH	H-EHT	0
VL	V-LINEAR	114	VE	V-EHT	0
VSC	V-S-COLOR	104	VAN	V-ANGLE	124
HS	H-SHIFT	73/77	VBO	V-BOW	128
HA	H-SIZE	79/86(Variable)	HSP	H-SYNC-PHASE	138
PPH	PIN-PHASE	143/180	--		0
PAM	PIN-AMP	70	--		0
UPC	UP-CORR	128	--		0
PICTURE					
SBR	SUB-BRIGHT	20(Variable)	BCT	B-CUT OFF	31(Variable)
RDR	R-DRIVE	22(Variable)	GAM	GAMMA LEVEL	12
GDR	G-DRIVE	31	ABM	ABL MODE	1
BDR	B-DRIVE	37(Variable)	ATH	ABL Threshold	1
RCT	R-CUT OFF	9(Variable)	PYD	PAL/NT Y/C DELAY	10
GCT	G-CUT OFF	31	SYD	SECAM Y/C DELAY	10
PICTURE2					
SHC	SUB-HUE	7	SFO	SHARPNESS-FO	2
R-R	R-Y AXIS R-Y	3	STI	LUMINANCE	2
R-B	R-Y AXIS R-Y	7	CTI	CHROMINANCE	1
G-R	R-Y AXIS R-Y	15	POV	PRE-OVERSHOOT	3
G-B	R-Y AXIS R-Y	2	VML	VM-LEVEL	2
SCN	SUB-CONTRAST	7(Variable)	VMD	VM-DELAY	3
SCR	SUB-COLOR	15	DCT	DC-TRAN	3
HWD	HSYNC WIDTH	1	DNP	AUTO PEDESTAL	3
HTM	HSYNC-TIME-MASK	1	BPF	BAND PASS FILTER	12
SHP	SUB-SHARPNESS	3	HPF	HIGH PASS FILTER	10
PIP					
PCN	CONTRAST	8(Variable)			
PHP	POS-HOR	55(Variable)			
PVP	POS-VER	27(Variable)			
OPTION					
TTX	OFF, WEST/ARABIC, EAST/FARSI		PC	ON, OFF	
LNA	ON,OFF		SCART2	OFF, TV OUT, MONITOR OUT	
			THAI	ON, OFF	
LANGUAGE					
MULTI-12	Eng, Arab, French, Thai, Russian, Croatian, Polish, Turkish, Hungaran, Iran, Pakistan, Hindi				
MidEast	Eng, Arab, French, Turkish, Iran, Pakistan				
Asia	Eng, Thai, Hindi				
Russia	Eng, Russia				
M. Europe	Eng, Croatian, Polish, Hungaran				

PAL (53J5)

ITEM	FUNCTION	INITIAL VALUE	ITEM	FUNCTION	INITIAL VALUE
GEOMETRIC(PAL/NTSC)					
VS	V-SHIFT	106/124	LOC	LO-CORR	128
VA	V-SIZE	72/83(Variable)	HEH	H-EHT	0
VL	V-LINEAR	114	VE	V-EHT	0
VSC	V-S-COLOR	104	VAN	V-ANGLE	124
HS	H-SHIFT	73/77	VBO	V-BOW	128
HA	H-SIZE	79/86(Variable)	HSP	H-SYNC-PHASE	138
PPH	PIN-PHASE	143/180	--		0
PAM	PIN-AMP	70	--		0
UPC	UP-CORR	128	--		0
PICTURE					
SBR	SUB-BRIGHT	19(Variable)	BCT	B-CUT OFF	28(Variable)
RDR	R-DRIVE	15(Variable)	GAM	GAMMA LEVEL	12
GDR	G-DRIVE	31	ABM	ABL MODE	1
BDR	B-DRIVE	29(Variable)	ATH	ABL THRESHOLD	1
RCT	R-CUT OFF	17(Variable)	PYD	PAL/NT Y/C DELAY	10
GCT	G-CUT OFF	31	SYD	SECAM Y/C DELAY	10
PICTURE2					
SHC	SUB-HUE	7	SFO	SHARPNESS-FO	2
R-R	R-Y AXIS R-Y	3	STI	LUMINANCE	2
R-B	R-Y AXIS R-Y	7	CTI	CHROMINANCE	1
G-R	R-Y AXIS R-Y	15	POV	PRE-OVERSHOOT	3
G-B	R-Y AXIS R-Y	2	VML	VM-LEVEL	2
SCN	SUB-CONTRAST	13(Variable)	VMD	VM-DELAY	3
SCR	SUB-COLOR	15	DCT	DC-TRAN	3
HWD	HSYNC WIDTH	1	DNP	AUTO PEDESTAL	3
HTM	HSYNC-TIME-MASK	1	BPF	BAND PASS FILTER	12
SHP	SUB-SHARPNESS	3	HPF	HIGH PASS FILTER	10
PIP					
PCN	CONTRAST	8(Variable)			
PHP	POS-HOR	55(Variable)			
PVP	POS-VER	27(Variable)			
OPTION					
TTX	OFF, WEST/ARABIC, EAST/FARSI		PC	ON, OFF	
LNA	ON,OFF		SCART2	OFF, TV OUT, MONITOR OUT	
			THAI	ON, OFF	
LANGUAGE					
MULTI-12	Eng, Arab, French, Thai, Russian, Croatian, Polish, Turkish, Hungaran, Iran, Pakistan, Hinci				
MidEast	Eng, Arab, French, Turkish, Iran, Pakistan				
Asia	Eng, Thai, Hindi				
Russia	Eng, Russia				
M. Europe	Eng, Croatian, Polish, Hungaran				

PAL (61J5)

ITEM	FUNCTION	INITIAL VALUE	ITEM	FUNCTION	INITIAL VALUE
GEOMETRIC(PAL/NTSC)					
VS	V-SHIFT	106/124	LOC	LO-CORR	128
VA	V-SIZE	90 94(Variable)	HEH	H-EHT	0
VL	V-LINEAR	114	VE	V-EHT	0
VSC	V-S-COLOR	104	VAN	V-ANGLE	124
HS	H-SHIFT	73/77	VBO	V-BOW	128
HA	H-SIZE	82 74(Variable)	HSP	H-SYNC-PHASE	138
PPH	PIN-PHASE	143/180	--		0
PAM	PIN-AMP	70	--		0
UPC	UP-CORR	128	--		0
PICTURE					
SBR	SUB-BRIGHT	25(Variable)	BCT	B-CUT OFF	23(Variable)
RDR	R-DRIVE	8(Variable)	GAM	GAMMA LEVEL	12
GDR	G-DRIVE	31	ABM	ABL MODE	1
BDR	B-DRIVE	32(Variable)	ATH	ABL Threshold	1
RCT	R-CUT OFF	16(Variable)	PYD	PAL/NT Y/C DELAY	10
GCT	G-CUT OFF	31	SYD	SECAM Y/C DELAY	10
PICTURE2					
SHC	SUB-HUE	7	SFO	SHARPNESS-FO	2
R-R	R-Y AXIS R-Y	3	STI	LUMINANCE	2
R-B	R-Y AXIS R-Y	7	CTI	CHROMINANCE	1
G-R	R-Y AXIS R-Y	15	POV	PRE-OVERSHOOT	3
G-B	R-Y AXIS R-Y	2	VML	VM-LEVEL	2
SCN	SUB-CONTRAST	13(Variable)	VMD	VM-DELAY	3
SCR	SUB-COLOR	15	DCT	DC-TRAN	3
HWD	HSYNC WIDTH	1	DNP	AUTO PEDESTAL	3
HTM	HSYNC-TIME-MASK	1	BPF	BAND PASS FILTER	12
SHP	SUB-SHARPNESS	3	HPF	HIGH PASS FILTER	10
PIP					
PCN	CONTRAST	8(Variable)			
PHP	POS-HOR	55(Variable)			
PVP	POS-VER	27(Variable)			
OPTION					
TTX	OFF, WEST/ARABIC, EAST/FARSI		PC	ON, OFF	
LNA	ON,OFF		SCART2	OFF, TV OUT, MONITOR OUT	
			THAI	ON, OFF	
LANGUAGE					
MULTI-12	Eng, Arab, French, Thai, Russian, Croatian, Polish, Turkish, Hungaran, Iran, Pakistan, Hindi				
MidEast	Eng, Arab, French, Turkish, Iran, Pakistan				
Asia	Eng, Thai, Hindi				
Russia	Eng, Russia				
M. Europe	Eng, Croatian, Polish, Hungaran				

PAL (43J8)

ITEM	FUNCTION	INITIAL VALUE	ITEM	FUNCTION	INITIAL VALUE
GEOMETRIC(PAL/NTSC)					
VS	V-SHIFT	106/124	LOC	LO-CORR	128
VA	V-SIZE	60/76(Variable)	HEH	H-EHT	0
VL	V-LINEAR	114	VE	V-EHT	0
VSC	V-S-COLOR	104	VAN	V-ANGLE	124
HS	H-SHIFT	73/77	VBO	V-BOW	128
HA	H-SIZE	78/86(Variable)	HSP	H-SYNC-PHASE	138
PPH	PIN-PHASE	143/180	--		0
PAM	PIN-AMP	70	--		0
UPC	UP-CORR	128	--		0
PICTURE					
SBR	SUB-BRIGHT	20(Variable)	BCT	B-CUT OFF	31(Variable)
RDR	R-DRIVE	22(Variable)	GAM	GAMMA LEVEL	12
GDR	G-DRIVE	31	ABM	ABL MODE	1
BDR	B-DRIVE	37(Variable)	ATH	ABL Threshold	1
RCT	R-CUT OFF	9(Variable)	PYD	PAL/NT Y/C DELAY	10
GCT	G-CUT OFF	31	SYD	SECAM Y/C DELAY	10
PICTURE2					
SHC	SUB-HUE	7	SFO	SHARPNESS-FO	2
R-R	R-Y AXIS R-Y	3	STI	LUMINANCE	2
R-B	R-Y AXIS R-Y	7	CTI	CHROMINANCE	1
G-R	R-Y AXIS R-Y	15	POV	PRE-OVERSHOOT	3
G-B	R-Y AXIS R-Y	2	VML	VM-LEVEL	2
SCN	SUB-CONTRAST	7(Variable)	VMD	VM-DELAY	3
SCR	SUB-COLOR	15	DCT	DC-TRAN	3
HWD	HSYNC WIDTH	1	DNP	AUTO PEDESTAL	3
HTM	HSYNC-TIME-MASK	1	BPF	BAND PASS FILTER	12
SHP	SUB-SHARPNESS	3	HPF	HIGH PASS FILTER	10
PIP					
PCN	CONTRAST	8(Variable)			
PHP	POS-HOR	55(Variable)			
PVP	POS-VER	27(Variable)			
OPTION					
TTX	OFF, WEST/ARABIC, EAST/FARSI		PC	ON, OFF	
LNA	ON,OFF		SCART2	OFF, TV OUT, MONITOR OUT	
			THAI	ON, OFF	
LANGUAGE					
MULTI-12	Eng, Arab, French, Thai, Russian, Croatian, Polish, Turkish, Hungaran, Iran, Pakistan, Hindi				
MidEast	Eng, Arab, French, Turkish, Iran, Pakistan				
Asia	Eng, Thai, Hindi				
Russia	Eng, Russia				
M. Europe	Eng, Croatian, Polish, Hungaran				

PAL (54J8)

ITEM	FUNCTION	INITIAL VALUE	ITEM	FUNCTION	INITIAL VALUE
GEOMETRIC(PAL/NTSC)					
VS	V-SHIFT	106/124	LOC	LO-CORR	128
VA	V-SIZE	60/76(Variable)	HEH	H-EHT	0
VL	V-LINEAR	114	VE	V-EHT	0
VSC	V-S-COLOR	104	VAN	V-ANGLE	124
HS	H-SHIFT	73/77	VBO	V-BOW	128
HA	H-SIZE	78/86(Variable)	HSP	H-SYNC-PHASE	138
PPH	PIN-PHASE	143/180	--		0
PAM	PIN-AMP	70	--		0
UPC	UP-CORR	128	--		0
PICTURE					
SBR	SUB-BRIGHT	20(Variable)	BCT	B-CUT OFF	31(Variable)
RDR	R-DRIVE	22(Variable)	GAM	GAMMA LEVEL	12
GDR	G-DRIVE	31	ABM	ABL MODE	1
BDR	B-DRIVE	37(Variable)	ATH	ABL Threshold	1
RCT	R-CUT OFF	9(Variable)	PYD	PAL/NT Y/C DELAY	10
GCT	G-CUT OFF	31	SYD	SECAM Y/C DELAY	10
PICTURE2					
SHC	SUB-HUE	7	SFO	SHARPNESS-FO	2
R-R	R-Y AXIS R-Y	3	LTI	LUMINANCE	2
R-B	R-Y AXIS R-Y	7	CTI	CHROMINANCE	1
G-R	R-Y AXIS R-Y	15	POV	PRE-OVERSHOOT	3
G-B	R-Y AXIS R-Y	2	VML	VM-LEVEL	2
SCN	SUB-CONTRAST	7(Variable)	VMD	VM-DELAY	3
SCR	SUB-COLOR	15	DCT	DC-TRAN	3
HWD	HSYNC WIDTH	1	DNP	AUTO PEDESTAL	3
HTM	HSYNC-TIME-MASK	1	BPF	BAND PASS FILTER	12
SHP	SUB-SHARPNESS	3	HPF	HIGH PASS FILTER	10
PIP					
PCN	CONTRAST	8(Variable)			
PHP	POS-HOR	55(Variable)			
PVP	POS-VER	27(Variable)			
OPTION					
TTX	OFF, WEST/ARABIC, EAST/FARSI		PC	ON, OFF	
LNA	ON,OFF		SCART2	OFF, TV OUT, MONITOR OUT	
			THAI	ON, OFF	
LANGUAGE					
MULTI-12	Eng, Arab, French, Thai, Russian, Croatian, Polish, Turkish, Hungaran, Iran, Pakistan, Hindi				
MidEast	Eng, Arab, French, Turkish, Iran, Pakistan				
Asia	Eng, Thai, Hindi				
Russia	Eng, Russia				
M. Europe	Eng, Croatian, Polish, Hungaran				

PAL (62J8)

ITEM	FUNCTION	INITIAL VALUE	ITEM	FUNCTION	INITIAL VALUE
GEOMETRIC(PAL/NTSC)					
VS	V-SHIFT	106/124	LOC	LO-CORR	128
VA	V-SIZE	90/94(Variable)	HEH	H-EHT	0
VL	V-LINEAR	114	VE	V-EHT	0
VSC	V-S-COLOR	104	VAN	V-ANGLE	124
HS	H-SHIFT	73/77	VBO	V-BOW	128
HA	H-SIZE	62/74(Variable)	HSP	H-SYNC-PHASE	138
PPH	PIN-PHASE	143/180	--		0
PAM	PIN-AMP	70	--		0
UPC	UP-CORR	128	--		0
PICTURE					
SBR	SUB-BRIGHT	25(Variable)	BCT	B-CUT OFF	23(Variable)
RDR	R-DRIVE	8(Variable)	GAM	GAMMA LEVEL	12
GDR	G-DRIVE	31	ABM	ABL MODE	1
BDR	B-DRIVE	32(Variable)	ATH	ABL Threshold	1
RCT	R-CUT OFF	16(Variable)	PYD	PAL/NT Y/C DELAY	10
GCT	G-CUT OFF	31	SYD	SECAM Y/C DELAY	10
PICTURE2					
SHC	SUB-HUE	7	SFO	SHARPNESS-FO	2
R-R	R-Y AXIS R-Y	3	STI	LUMINANCE	2
R-B	R-Y AXIS R-Y	7	CTI	CHROMINANCE	1
G-R	R-Y AXIS R-Y	15	POV	PRE-OVERSHOOT	3
G-B	R-Y AXIS R-Y	2	VML	VM-LEVEL	2
SCN	SUB-CONTRAST	13(Variable)	VMD	VM-DELAY	3
SCR	SUB-COLOR	15	DCT	DC-TRAN	3
HWD	HSYNC WIDTH	1	DNP	AUTO PEDESTAL	3
HTM	HSYNC-TIME-MASK	1	BPF	BAND PASS FILTER	12
SHP	SUB-SHARPNESS	3	HPF	HIGH PASS FILTER	10
PIP					
PCN	CONTRAST	8(Variable)			
PHP	POS-HOR	55(Variable)			
PVP	POS-VER	27(Variable)			
OPTION					
TTX	OFF, WEST/ARABIC, EAST/FARSI		PC	ON, OFF	
LNA	ON,OFF		SCART2	OFF, TV OUT, MONITOR OUT	
			THAI	ON, OFF	
LANGUAGE					
MULTI-12	Eng, Arab, French, Thai, Russian, Croatian, Polish, Turkish, Hungaran, Iran, Pakistan, Hindi				
MidEast	Eng, Arab, French, Turkish, Iran, Pakistan				
Asia	Eng, Thai, Hindi				
Russia	Eng, Russia				
M. Europe	Eng, Croatian, Polish, Hungaran				

4-2 Screen Change (When adjusting I²C Bus Geometric items)

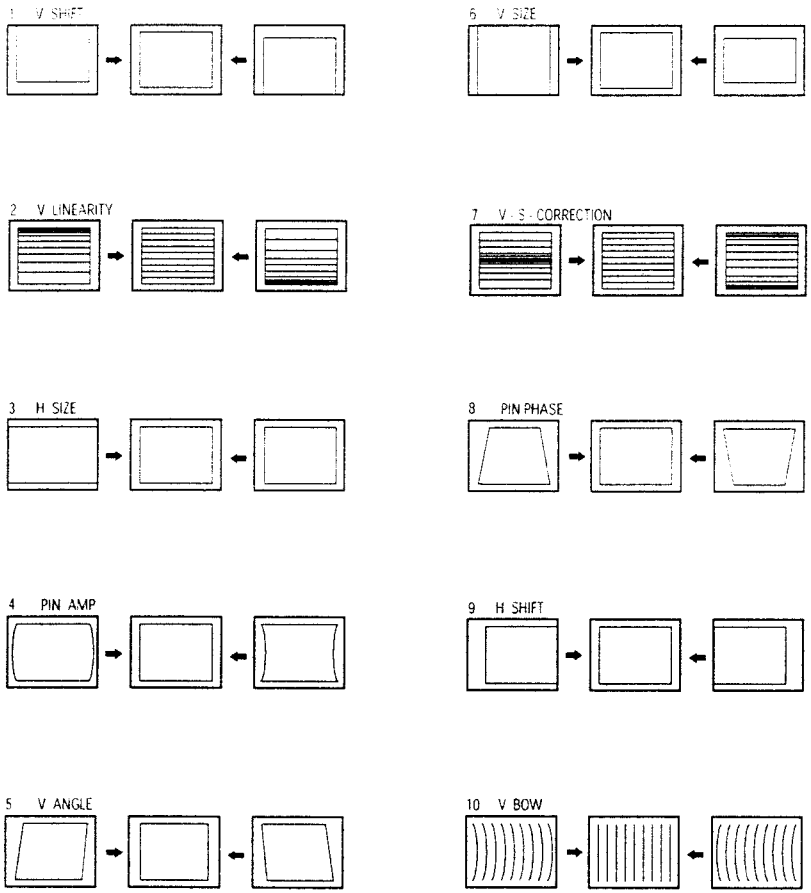

4-3 Beam Alignment

PRECAUTION

1. Input a crosshatch and dot pattern.
2. Select the "STANDARD" video mode.
3. Warm up the TV for at least 10 minutes.
4. Connect an audio oscillator to the pin jig between GT401~GT402 (located on the deflection PCB) and GND.
5. Determine the ZERO-magnet area (using the beam-alignment CY)
6. Check the squarewave at the point where the focus is misaligned (Use an audio oscillator).



(Creation of CPM Zero Magnet) (Creation of the 2-pole/4-pole zero magnets)

ADJUSTMENT

1. Cover the Red and Blue lenses.
2. Adjust the Green lens as shown in the figures below

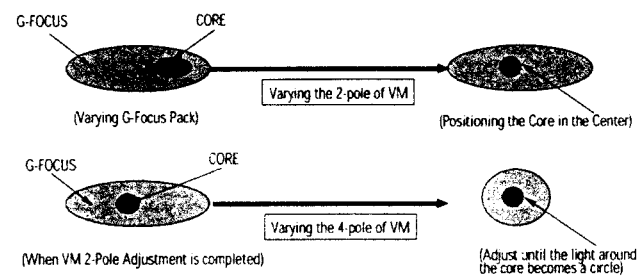

3. Adjust the G-Focus until any light around the core disappears.
4. Cover the Green and Blue lenses.
5. Adjust the Red lens using the same method as with the Green lens.
6. Note: The Blue lens is not adjusted because its focus varies little (VM-coil is installed).
7. After the adjustments are completed, disconnect the jig pin connector.

4-4 Other Adjustments

4-4-1 Screen Adjustment

1. Warm up the TV for at least 30 minutes.
2. Turn to the Video Mode (No Signal) using a remote-control.
3. Connect an oscilloscope to RK,GK,BK.
4. Adjust the VR (VR501, VR531, VR561) screen so that RK, GK, BK pulse is 20Vp-p each. (Turn the R,G,B VR screen fully counterclockwise in the area of each flyback line.)

4-4-2 White Balance Adjustment

1. Select the "STANDARD" video mode.
2. Input 100% white pattern.
3. In the stand-by mode, press the remote-control keys in the following sequence: DISPLAY→MENU→MUTE →Power On
4. Warm up the TV for at least 30 minutes.
5. Input a 10-step signal.
6. R-cut off, B-cut off, and G-cut off by pressing the Volume +/- keys.
7. Adjust the low light with viewing the dark side of the screen.
8. Select R-drive, G-drive, and B-drive by pressing the Volume +/- keys.
9. Adjust the high light with viewing the light side of the screen.
10. If necessary, redo adjustments 6~9.
11. Press the Menu key to exit.

4-4-3 Sub-Brightness Adjustment

1. Input a sub-brightness adjustment signal. (TOSHIBA PATTERN)
2. In the stand-by mode, press the remote-control keys in the following sequence : DISPLAY→MENU→MUTE →Power On
3. Select SBT by pressing the Volume +/- keys.
4. Adjust so that the 7th step on the right side of the screen is not seen (Use the Volume +/- keys).
5. Press the Menu key to exit.

4-4-4 High Voltage (31KV) Check

PRECAUTION

1. Input a lion head pattern.
2. Select "STANDARD" video mode.
3. Warm up the TV for at least 10 minutes.
4. Use a 1000:1 probe.

ADJUSTMENT

1. Connect the (+) terminal of the 1000:1 probe to the high voltage distributor and the (-) terminal to GND (located on the deflection board).
2. Adjust VR471 (located on the deflection board) so that the digital meter indicates DC 31V ± 0.1V.

4-4-5 F.S. (Fail Safe) Circuit Check

Note : The F.S. Circuit check must be performed after servicing.

1. Turn on the TV.
2. Select the "STANDARD" video mode.
3. Short GT18, GT17 (located on the Convergence PCB). Then, both sound and picture disappear. (Note: Even if the shorted terminals are removed, both sound and picture do not appear. This proves the F.S. circuit is working.)
4. To restore both sound and picture, turn off the TV and reset it after about 30 seconds.

4-4-6 Static Focus Adjustment

PRECAUTION

1. Select the "STANDARD" video mode.
2. Input a crosshatch pattern.
3. Cover the lenses that are not being adjusted.
4. Connect a convergence jig and read data.
5. Adjust the lens for best focus. (See Fig, 4-1, next page)

STATIC FOCUS (CONTINUED)

Vary the focus pack VR (Red, Blue) on the front cabinet. Adjust the TV for best possible focus around the center of the crosshatch pattern, without losing overall screen balance.
Figure Crosshatch Pattern
Examine these points together.



Fig. 4-1 Crosshatch Pattern.

4-4-7 Lens Focus Adjustment

PRECAUTIONS

1. Do this adjustment after the static focus adjustment and the tilt adjustment.
2. Select the "STANDARD" video mode. (Contrast:64, Brightness:32)
3. Input a crosshatch pattern.

ADJUSTMENT

1. Loosen the lens screws.
2. Cover the two lenses that are not being adjusted.
3. Adjust the lens, observing the color aberration vertically and horizontally within 3 blocks of the center of the crosshatch pattern.
4. When the lens is turned clockwise, the color aberration will change as follows:

Lens	Color Aberration Change
R	Orange - Crimson
G	Blue - Red
B	Purple - Green

5. Green lens adjustment:
   Set the lens at the point where Blue just changes to Red. If the color aberration is irregular throughout the picture screen, adjust the lens to show Red color aberration (approximately 1~3 mm area) within a 3-block grid around the horizontal center-line. If the color aberration is irregular, adjust the lens as shown in the diagram below. (Accurate alignment of Green is important for overall color quality.)
6. Red lens adjustment
   Set the Red lens at the point where Orange becomes Crimson.
7. Blue lens adjustment
   Set the Blue lens at the point where Purple becomes Green.



Fig. 4-2 Color Aberration

4-5 Screen-Jig

4-5-1 43J5 Convergence Jig Spec

43J5 Screen Size : X 873, Y 655 (X:374=7*2+30*12, Y:220=14*2+32*6)

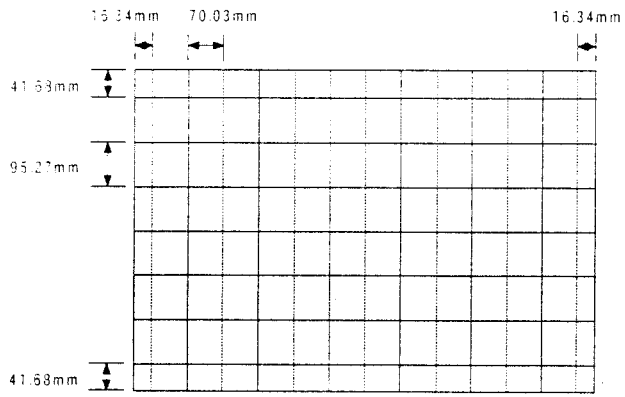

4-5-2 53J5 Convergence Jig Spec

53J5 Screen Size : X 1087, Y 817 (X:374=7*2+30*12, Y:220=14*2+32*6)

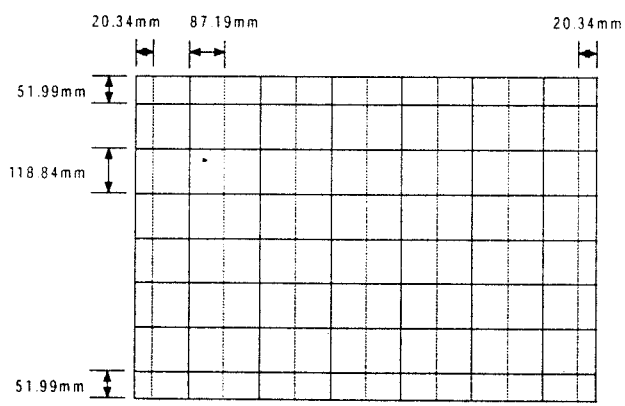

4-5-3 61J5 Convergence Jig Spec

61J5 Screen Size : X 1253, Y 943 (X:374=7*2+30*12, Y:220=14*2+32*6)

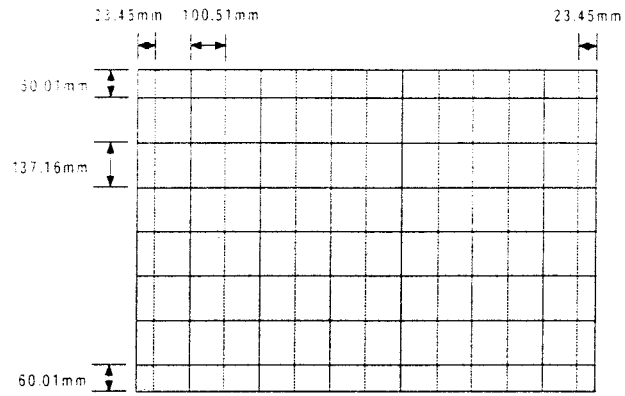

4-5-4 43J8 Convergence Jig Spec

43J8 Screen Size : X 884.4, Y 665.9 (X:374=7*2+30*12, Y:220=14*2+32*6)

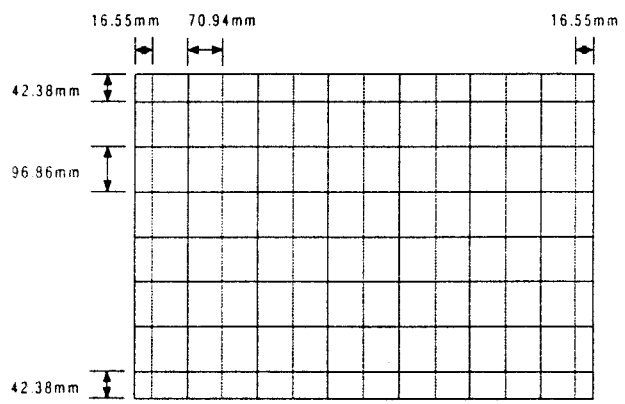

4-5-5 54J8 Convergence Jig Spec

54J8 Screen Size : X 1099.4, Y 827.9 (X:374=7*2+30*12, Y:220=14*2+32*6)

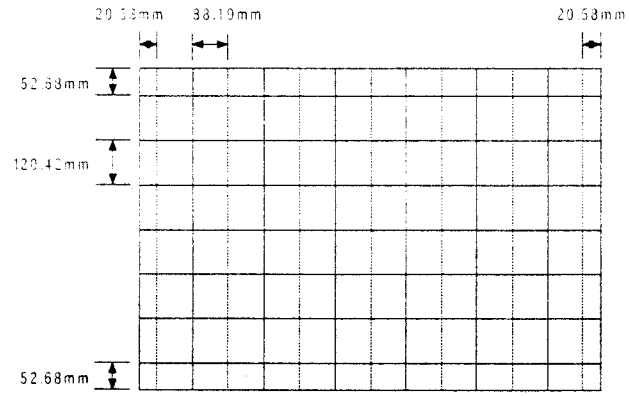

4-5-6 62J8 Convergence Jig Spec

62J8 Screen Size : X 1259.4, Y 947.9 (X:374=7*2+30*12, Y:220=14*2+32*6)

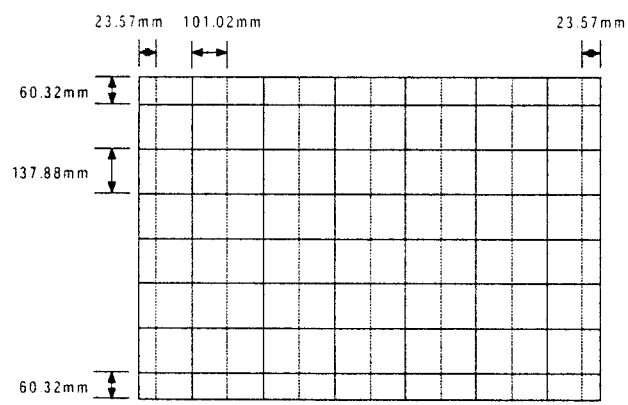

4-6 Remote Control for Servicing (Convergence Mode)

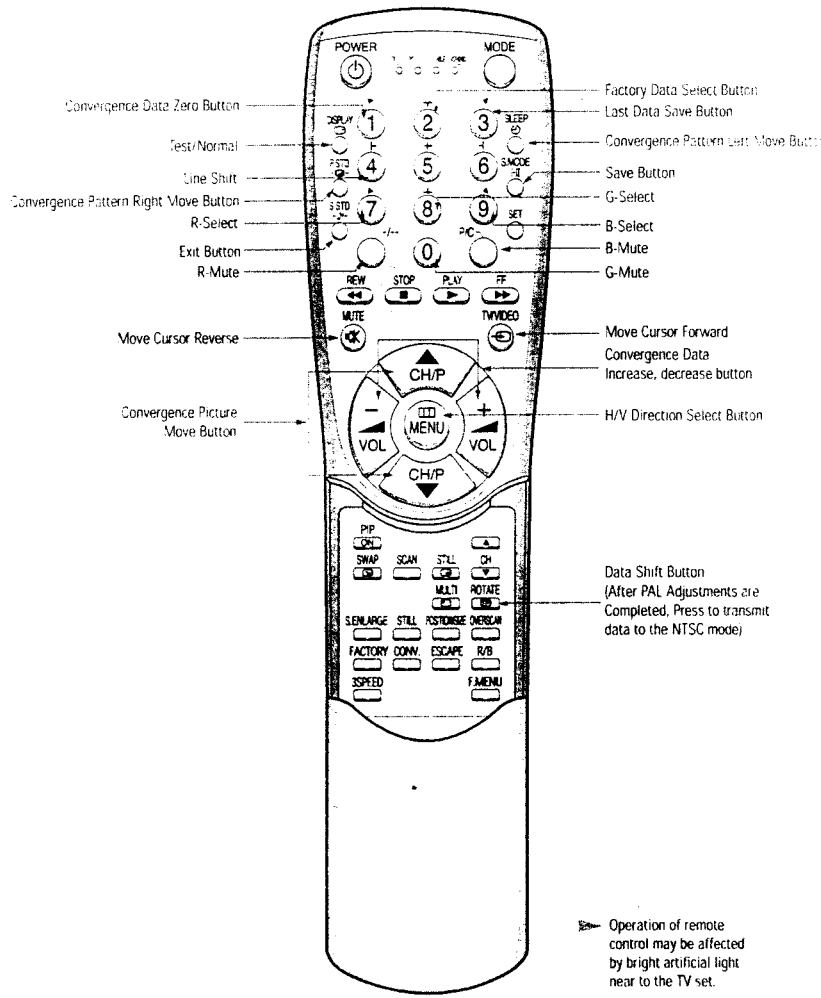

Operation of remote control may be affected by bright artificial light near to the TV set.

4-6-1 KEY Function

1. R-SELECT (7)
   Press to select RED color.

2. G-SELECT (8)
   Press to select GREEN color.

3. B-SELECT (9)
   Press to select BLUE color.

4. R-MUTE
   Press to mute RED color.

5. G-MUTE (0)
   Press to mute GREEN color.

6. B-MUTE
   Press to mute BLUE color.

7. CANCEL KEY (3)
   Press to revert to the previous data during the Convergence Adjustment.

8. TEST/NORMAL
   Press to check TV mode in the Convergence Mode.

9. LINE SHIFT (4)
   Press to move a line up/down or left/right.

10. FACTORY DATA SELECT BUTTON (2)
    Press to call the factory default values.

11. H/V DIRECTION SELECT BUTTON (MENU)
    Press to switch the cursor direction horizontally or vertically.

12. SAVE BUTTON (P.MODE)
    After the Convergence adjustments are completed, press to save data.

13. EXIT BUTTON (P.STD)
    After the Convergence Adjustments are completed, press to exit to TV mode.

14. MOVE CURSOR FORWARD (TV/VIDEO)
    Press to move the cursor right or down.

15. MOVE CURSOR REVERSE (MUTE)
    Press to move the cursor left or up.

16. CONVERGENCE PICTURE MOVE BUTTON



17. CONVERGENCE PATTERN MOVE BUTTON
    Press to move the convergence pattern left (SLEEP) or right (P.STD).

18. CONVERGENCE DATA ZERO BUTTON (1)
    Press to zero the convergence correction data.

19. DATA SHIFT BUTTON (ROTATE)
    Press to transmit data (PAL mode / NTSC mode).

4-7 Convergence Adjustment

1. Warm up the TV for at least 30 minutes.

2. Input a PAL Signal. (Use an antenna or AV source.)

NOTE

Make sure that both deflection and convergence yokes are properly adjusted so that the center of Green, Red, Blue pattern is aligned on the center of screen jig.

3. Enter the Convergence Mode by pressing the remote control keys in the following sequence:

R/B → 1 → 8 → 3

NOTE

If OSD is displayed as shown in figure below, press the S.STD key to exit.
Then, redo step 3 to enter the Convergence Mode.
After entering the Convergence Mode, Stand by for about five seconds before doing the adjustments.

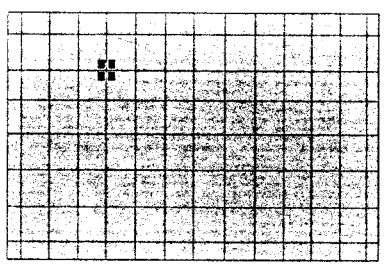

4. To adjust GREEN, first press the − key and the P/C key, and then press the 8 key.

− → P/C → 8

5. The CH/PAGE key moves the cursor right, and the MUTE key moves the cursor left.

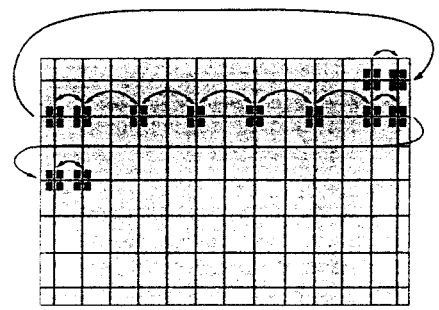

The (MENU) key moves the cursor horizontally or vertically.

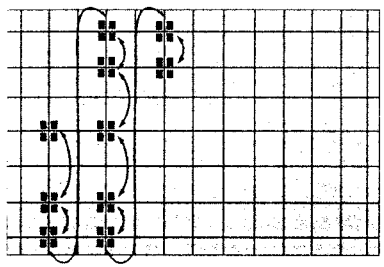

NOTE When the (MENU) key is pressed once again, the cursor moves horizontally.

7. Use the (4) key for overall balance.



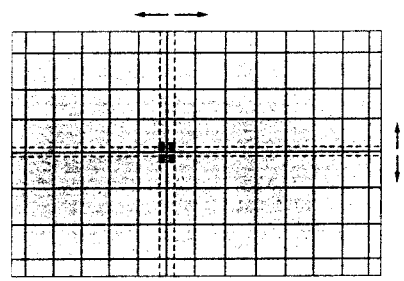

8. After the Line Shift is cancelled by pressing the (4) key, use the Channel and Volume keys (Up/Down) to make big adjustments.

9. After the green convergence adjustments are completed, press the (SOURCE/P.B) key to save the data.

10. Superimpose the Red and Green colors by pressing the ◯ and the (7) keys.

11. To adjust RED, redo steps5~8.

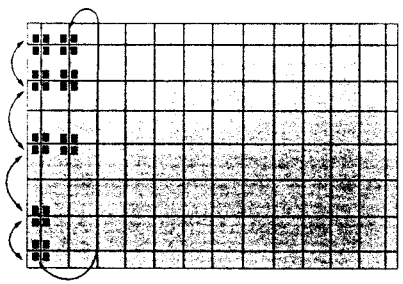

When the cursor moves vertically (SOURCE/MENU)

12. To superimpose the blue and green colors, press (1) the ◯ key for R-Mute, (2) the P.C ◯ key to cancel the B-Mute, and (3) the (9) key for B-select.

13. **To adjust BLUE, redo steps 5 ~ 8, 12.**

14. **If any color is not properly adjusted when displaying the red, blue and green colors, readjust the color.**

15. After the color adjustments are completed, press the (SOURCE/MENU) ◯ key to save the data.

NOTE

The cursor moves to center, and then automatically moves up and to the left about five seconds later.

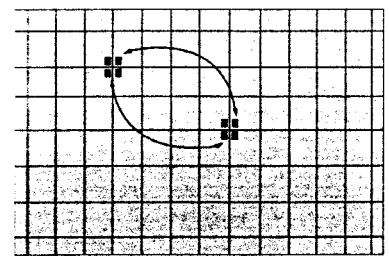

16. After the Convergence Adjustments are completed, press the S.STD ◯ key to exit.

4-8 PC Mode

4-8-1 TV Setup Mode

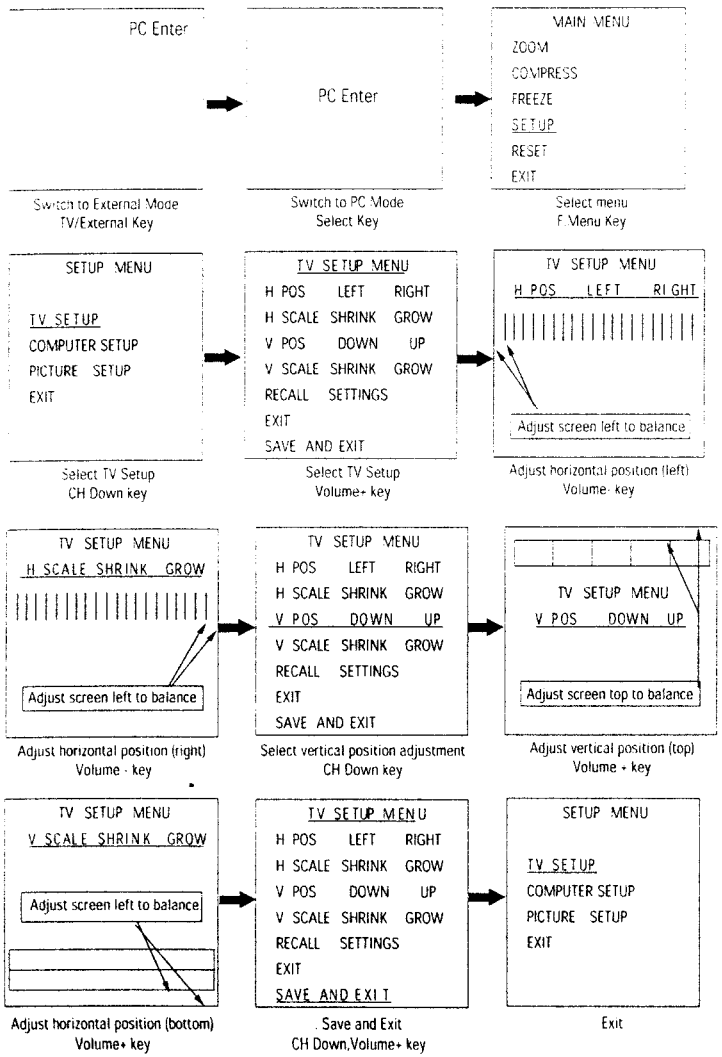

4-8-2 Picture Setup Mode

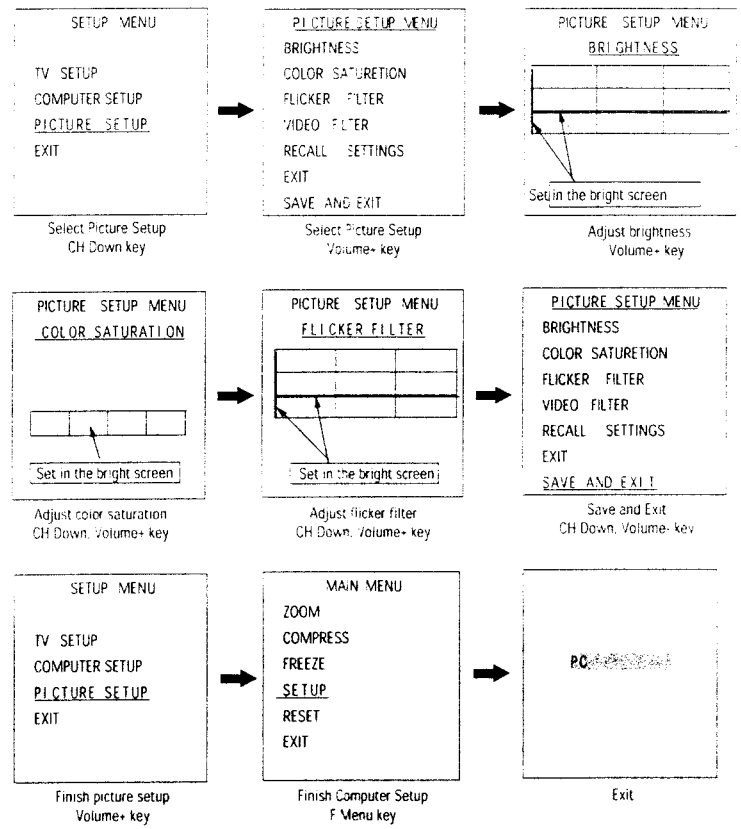

1. Adjust four different modes:VGA3 (VGA), VGA (DOS), VESA (SVGA), VEAS (XGA).

2). Perform the setup for each PC mode and picture setup.

4-8-3 Picture Setup Mode (computer setup mode only)

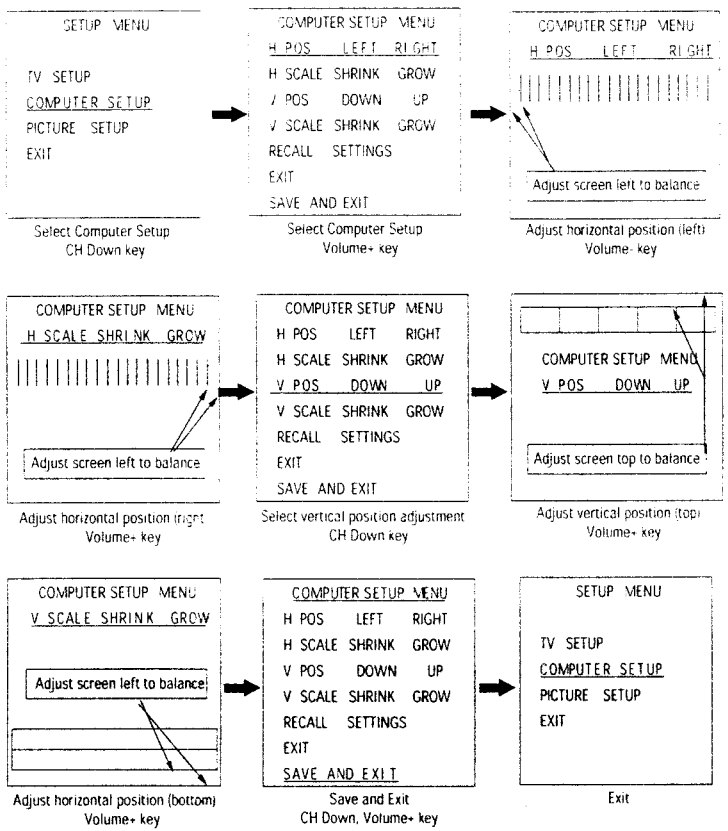

1. Adjust four different modes:VGA3 (VGA), VGA (DOS), VESA (SVGA), VEAS (XGA).
2. Perform the setup for each PC mode and picture setup.

4-9 MICOM and Pins Voltage

4-9-1 Pin Layout

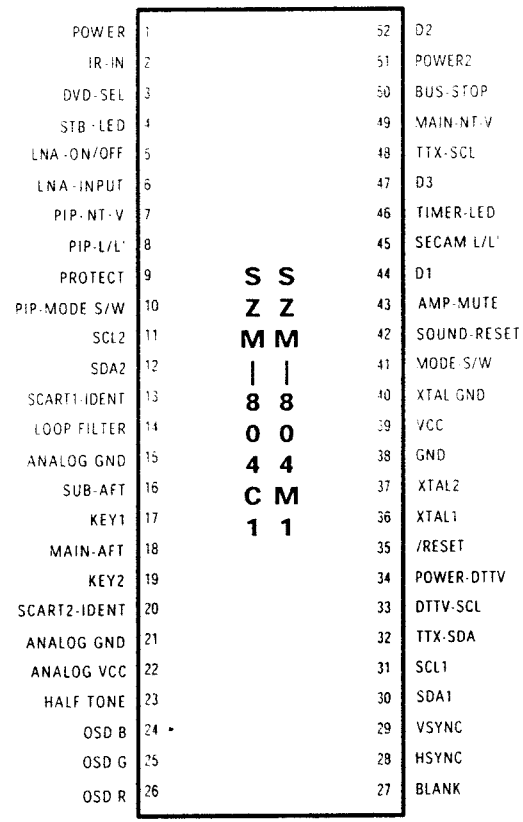

4-9-2 Micom Pins

PIN NO.	ITEM	FUNCTION	OUT VOLT
1	POWER	POWER ON/OFF RELAY CONTROL	H--> L
2	IR IN	REMOCON INPUT	4.7V
3	DVD-SEL	DVD SELECTION OUTPUT	4.7V
4	STB-LED	STAND-BY LED OUTPUT	4.6V
5	LNA-ON/OFF	LNA CONTROL OUTPUT	L
6	LNA-INPUT	LNA INPUT	L
7	PIP-NT-V	PIP VIDEO SAW FILTER SWITCH	L
8	PIP-L/L'	PIP SECAM SYSTEM SWITCH	L
9	PROTECT	PROTECT PORT	L
10	PIP-MODE S/W	PIP SECAM MODE SWITCH	L
11	SCL 2	CLOCK BUS LINE	4.5V
12	SDA 2	DATA BUS LINE	4.5V
13	SCART1-IDENT	SCART1 IDENT INPUT PORT	L/H
14	LOOP FILTER	LOOP FILTER	L
15	ANALOG GND	GND	L
16	SUB-AFT	SUB AUTO FINE TURNING CONTROL	2.3V
17	KEY 1	KEY SCAN 1	4.7V
18	MAIN-AFT	MAIN TUNER AFT	2.3V
19	KEY 2	KEY SCAN 2	4.8V
20	SCART2-IDENT	SCART2 IDENT INPUT PORT	H
21	ANALOG GND	GND	L
22	ANALOG VCC	VCC	5V
23	HALF TONE	SIGNAL FOR OSC-FREQUENCY OSD CONTROL	L
24	OSD B	ON SCREEN DISPLAY BLUE OUTPUT	L/H
25	OSD G	ON SCREEN DISPLAY GREEN OUTPUT	L/H
26	OSD R	ON SCREEN DISPLAY RED OUTPUT	L/H

PIN NO.	ITEM	FUNCTION	OUT VOLT
27	BLANK	OSD BLAKING SIGNAL OUTPUT	L/H
28	HSYNC	HORIZONTAL SYNC INPUT	4.5V
29	VSYNC	VERTICAL SYNC INPUT	4.6V
30	SDA1	DATA BUS LINE	4.5V
31	SCL1	CLOCK BUS LINE	4.5V
32	TTX-SDA	TELETEXT DATA BUS LINE	5V
33	DTTV-SCL	DTTV CLOCK LINE	L
34	POWER-DTTV	DTTV POWER CONTROL	L
35	/RESET	HARDWARE RESET	4.8V
36	XTAL1	CRYSTAL 1	2.3V
37	XTAL2	CRYSTAL 2	2.1V
38	GND	GND	L
39	VCC	VCC	5V
40	XTAL GND	CRYSTAL GND	L
41	MODE-S/W	MAIN SECAM MODE SWITCH	4.6V
42	SOUND-RESET	SOUND IC RESET	4.9V
43	AMP-MUTE	SOUND AMP. MUTE	L
44	D1	CONV. MODE CONTROL DATA1	L/H
45	SECAM L/L'	MAIN SECAM SYSTEM SWITCH	H
46	TIMER-LED	TIMER LED	4.6V
47	D3	CONV. MODE CONTROL DATA3	L/H
48	TTX-SCL	TELETEXT CLOCK BUS LINE	5V
49	MAIN-NT-V	MAIN VIDEO SAW FILTER SWITCH	L
50	BUS-STOP	I²C BUS STOP	5V
51	POWER2	PC POWER CONTROL	4.6V
52	D2	CONV. MODE CONTROL DATA2	L/H

4-9-3 PROSCAN MDL

PIN NO.	ITEM	FUNCTION	OUT VOLT
1	DVD-Y	DVD-Y INPUT	2.04V
2	GND	GND	GND
3	MAIN-Y/CVBS	Y/CVBS INPUT	1.28V
4	MAIN-C	C-INPUT	2.92V
5	GND	GND	GND
6	R/Pr	R/Pr INPUT	2.0V
7	G/Y	G/Y INPUT	2.0V
8	B/Pb	B/Pb INPUT	2.0V
9	F/B	FAST BLANK INPUT	0.16V
10	GND	GND	GND
11	HS1	1H-SYNC OUT	-
12	VS1	V-SYNC OUT	-
13	GND	GND	GND
14	SDA-2	SERIAL DATA LINE 2	3.0V
15	SCL-2	SERIAL CLOCK LINE 2	3.5V
16	5V-B	5V-B INPUT	5V
17	HD	H-DRIVE OUT	1.6V
18	H-BLK	H-BLANK INPUT	-
19	VD+	VERTICAL DRIVE (+VOLTAGE)	2.6V
20	VD-	VERTICAL DRIVE (-VOLTAGE)	2.6V
21	ABL	ABL INPUT	2.15V
22	V-BLK	V-BLANK INPUT	-
23	EW	EAST WEST OUT	2.5V
24	SC	N.C	-
25	GND	GND	GND
26	SYNC	V-SYNC OUT	N.C
27	SYNC	H-SYNC OUT	N.C
28	5V-A	5V-B INPUT	-
29	GND	GND	GND
30	TEST-Y	WHEN CG ADJ PATTERN INPUT	-

PIN NO.	ITEM	FUNCTION	OUT VOLT
31	DTV-Y	DTV-Y INPUT	-
32	DTV-Pb	DTV-Pb INPUT	-
33	DTV-Pr	DTV-Pr INPUT	-
34	-	N.C	-
35	-	N.C	-
36	GND	GND	GND
37	OSD-R	OSD-R INPUT	-
38	OSD-G	OSD-G INPUT	-
39	OSD-B	OSD-B INPUT	-
40	YS	BLANK(MICOM OUT)	-
41	YM	NOT USED	-
42	V-MUTE	VIDEO MUTE	4.72V
43	GND	GND	GND
44	9V	9V	9V
45	T/P-R	TTX/PIP-R	-
46	T/P-G	TTX/PIP-G	-
47	T/P-B	TTX/PIP-B	-
48	T/P-F/B	TTX/PIP-F/B	-
49	GND	GND	
50	R-OUT	R-OUT	-
51	G-OUT	G-OUT	-
52	B-OUT	B-OUT	-
53	GND	GND	GND
54	IK	IK OUT	3.65V
55	SPOT	SPOT OUT	-
56	GND	GND	GND
57	VM-Y	VM-Y OUT	5.42V
58	-	N.C	-

4-9-4 PIP MODULE

PIN NO.	ITEM	FUNCTION	OUT VOLT
1	SCL	SERIAL CLOCK LINE	4.7V
2	SDA	SERAL DATA LINE	4.7V
3	8V	8V INPIUT	8V
4	GND	GND	0V
5	CVBS	5V-D INPUT	-
6	GND	GND	0V
7	5V-D	5V-D INPUT	5V
8	GND	GND	0V
9	PIP-AGC	PIP-AGC OUTPUT	3.36V
10	PIP-MODE S/W	PIP SECAM MODE SWITCH	0V
11	12V	12V INPUT	12V
12	PIP-L/L'	SECAM SYSTEM SWITCH	0V
13	PIP-NT-V	PIP VIDEO SAW FILTER SWITCH	0V
14	SUB-AFT	SUB-AFT OUTPUT	4.37V
15	GND	GND	0V
16	IF-IN	IF INPUT	-
17	IF-AGC	N.C	-
18	V-SYNC	V-SYNC INPUT	-
19	H-SYNC	H-SYNC INPUT	-
20	F/B	FAST BLANK OUTPUT	2.46V
21	GND	GND	0V
22	B	B OUTPUT	0.66V
23	G	G OUTPUT	0.66V
24	R	R OUTPUT	0.66V

4-9-5 F/CONVERTER MODULE

PIN NO.	ITEM	FUNCTION	OUT VOLT
1	5V	5V INPUT	5V
2	GND	GND	GND
3	R-IN	PC R INPUT	-
4	G-IN	PC G INPUT	-
5	B-IN	PC B INPUT	-
6	GND	GND	GND
7	HS	PC H-SYNC INPUT	-
8	VS	PC V-SYNC INPUT	-
9	GND	GND	GND
10	SDA	SERIAL DATA LINE	-
11	SCL	SERIAL CLOCK LINE	-
12	GND	GND	GND
13	IR	INPUT REMOCON	2.5V
14	GND	GND	GND
15	R-OUT/Y3	PC Y3 OUT	-
16	N.C	N.C	-
17	B-OUT/C3	PC C3 OUT	-

4-9-6 SOUND MODULE

PIN NO.	ITEM	FUNCTION	OUT VOLT
1	AV1-RIN	SCART-R INPUT	-
2	AV1-LIN	SCART-L INPUT	-
3	GND	GND	0V
4	EXT-RIN	EXT-R INPUT	-
5	EXT-LIN	EXT-L INPUT	-
6	GND	GND	0V
7	AV2-RIN	AV2-R INPUT	-
8	AV2-LIN	AV2-L INPUT	-
9	GND	GND	0V
10	AV1-LOUT	SCART1-L OUTPUT	-
11	AV1-ROUT	SCART1-R OUTPUT	-
12	S-CONTROL0	EXT-SOUND CONTROL OUTPUT	0V/8V
13	S-CONTROL1	EXT-SOUND CONTROL OUTPUT	0V/8V
14	M-OUT-L	MONITOR-L OUTPUT	-
15	M-OUT-R	MONITOR-R OUTPUT	-
16	GND	GND	0V
17	GND	GND	0V
18	QSS-IN	QUASI-SPLIT SOUND INPUT	1.95V
19	GND	GND	0V
20	AM-IN	AM INPUT	2.53V
21	SDA	SERIAL DATA LINE	4.6V
22	SCL	SERIAL CLOCK LINE	4.6V
23	GND	GND	0V
24	5V-A	5V-A INPUT	5V
25	8V	8V-INPUT	8V
26	AV4-RIN	AV4-R INPUT	-
27	AV4-LIN	AV4-L INPUT	-
28	S-RESET	SOUND RESET INPUT	5V

PIN NO.	ITEM	FUNCTION	OUT VOLT
30	12V	12V INPUT	12V
31	GND	GND	0V
32	SURROUND	DOLBY SURROUND OUTPUT	5.6V
33	GND	GND	0V
34	CENTER	DOLBY CENTER OUTPUT	5.6V
35	GND	GND	0V
36	MAIN-R	MAIN-R OUTPUT	5.6V
37	MAIN-L	MAIN-L OUTPUT	5.6V
38	GND	GND	0V
39	NC	N.C	-
40	NC	N.C	-

4-9-7 H/V MODULE

PIN NO.	ITEM	FUNCTION	OUT VOLT
1	12V	12V INPUT	12V
2	GND	GND	GND
3	HD	H-DRIVE INPUT	1.6V
4	V-BLK	V-BLANK INPUT	0.72V
5	2H-BLK	2H-BLANK OUT	0.54V
6	GND	GND	GND
7	PROTECT	PROTECT	ACTIV H
8	FBT-DC	FBT DC FEED BACK	4.87V
9	X-RAY	X-RAY PROTECT F/B	2.10V
10	N.C	N.C	-
11	HV-REG	HV-REG	3.54V
12	HV-DRIVE	HIGH VOLTAGE DRIVE	0.32V
13	H-DRIVE	H-DRIVE OUT	25V
14	GND	GND	GND
15	HEATER	HEATER INPUT	AC[0.7V]
16	N.C	N.C	-
17	208V	208V INPUT	208V
18	N.C	N.C	-
19	GND	GND	GND
20	V2	V2 INPUT	
21	N.C	N.C	-
22	N.C	N.C	-
23	D-FOCUS	DYNAMIC FOCUS OUT	-
24	N.C	N.C	-
25	N.C	N.C	-
26	SCREEN	SCREEN INPUT	1356V

4-9-8 CONV- MODULE

PIN NO.	ITEM	FUNCTION	OUT VOLT
1	SDA	D2	-
2	SCL	D1	-
3	GND	GND	GND
4	BV	BLUE VERTICAL OUT	-
5	BH	BLUE HORIZONTAL OUT	-
6	GV	GREEN VERTICAL OUT	-
7	GH	GREEN HORIZONTAL OUT	-
8	RV	RED VERTICAL OUT	-
9	RH	RED HORIZONTAL OUT	-
10	-5.4V	-5.4V INPUT	-5.4V
11	5.4V	5.4V INPUT	-5.4V
12	V-BLK	V-BLK INPUT	-
13	GND	GND	GND
14	H-BLK	H-BLK INPUT	0.52V
15	COMP	COMP VIDEO OUTPUT (N.C)	N.C
16	IR	INPUT REMOCON	3V
17	CTRL	CTRL (N.C)	N.C
18	D3/SEL	D3	0.2V
19	B	WHEN TEST PATTERN B OUT	-
20	G(TEST)	WHEN TEST PATTERN G OUT	-
21	R	WHEN TEST PATTERN R OUT	-
22	SYNC	SYNC OUTPUT	4.41V

4-9-9 TTX-MODULE

PIN NO.	ITEM	FUNCTION	OUT VOLT
1	H-SYNC	HOR. SYNC INPUT	3.6V
2	V-SYNC	VER. SYNC INPUT	3.6V
3	NC	N.C	-
4	GND	GND	GND
5	F/B-OUT	FAST BLANK OUT	0V/1.4V
6	B-OUT	B OUTPUT	1.8V/2.4V
7	G-OUT	G OUTPUT	1.8V/2.4V
8	R-OUT	R OUTPUT	1.8V/2.4V
9	GND	GND	GND
10	5V-D	5V-D INPUT	5V
11	GND	GND	GND
12	12V	12V INPUT	12V
13	GND	GND	GND
14	F/B-IN	EXT. FATS BLANK INPUT	-
15	B-IN	EXT. B-INPUT	0.6V
16	G-IN	EXT. G-INPUT	0.6V
17	R-IN	EXT. R-INPUT	0.6V
18	GND	GND	GND
19	CVBS-IN	CVBS INPUT	1.1V
20	SCL	SERAL CLOCK LINE	5V
21	SDA	SERIAL DATA LINE	5V

MEMO

5-3 No Raster (Sound OK)

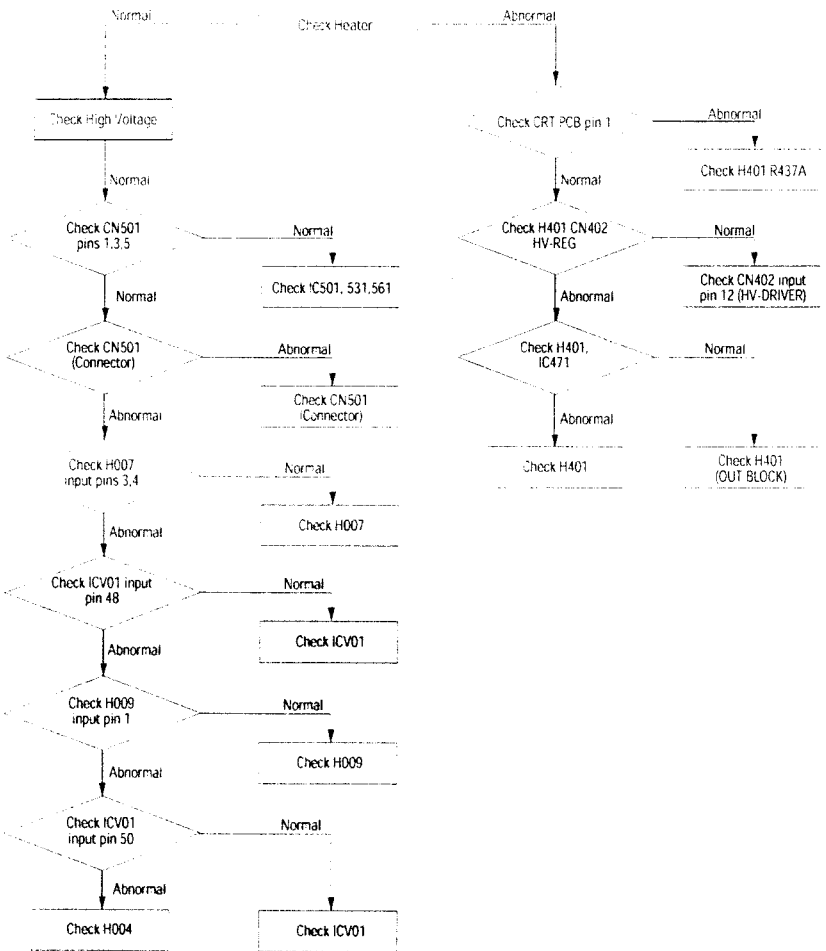

MEMO

6. Exploded View & Parts List

6-1 SP43J8

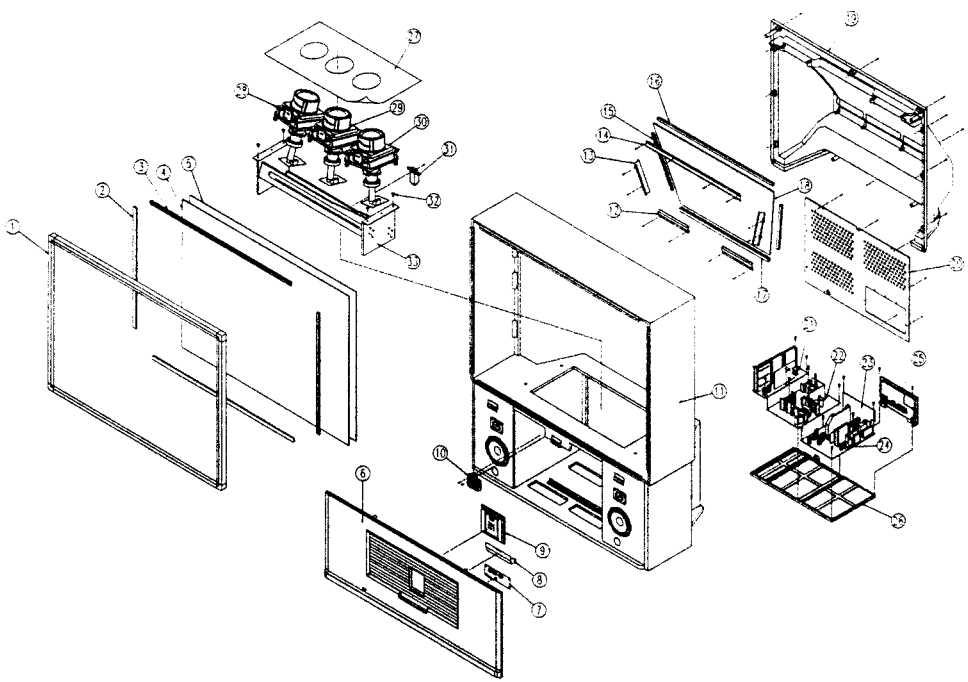

No	Code No	Description	Specification	Q'ty	Remark
1	AA91-00498A	ASSY CABINET MASK;-,HB,GRAY,G906+D902,DO,P51A		1	
2	AA60-00069E	SPACER-SCREEN;43,53,61J8,ABS,-,-,-,BLK,-,-,HB			2
3	AA60-00069D	SPACER-SCREEN;43,53,61J8,ABS,-,-,-,BLK,-,-,HB			2
4	AA67-00030A	SUN-SCREEN;-,43NEW,H/C,A/S,PMMA,T=93%,T2.0,910*692,-		1	
5	AA67-00028A	SCREEN-TINT;-,43NEW,-,PMMA,TINT=10%,T3.0,910*692,-		1	
6	0203-001279	TAPE-OPP MASKING;#232,T0.14,W15,L50000,YEL		4(M)	
7	AA91-00497G	ASSY-FRONT,BOT;-,VO G4309,HIPS,SVP-43J8SR		1	
8	AA91-00476D	ASSY-CONTROL;-,HB BLK,ABS DO,SVP-54J8SR		1	
9	AA95-00863A	ASSY-PCB,A/V FRONT;-,SVP-54J8SR,P51A,-,-,-		1	
10	AA64-01392C	DOOR-AV;43,54,62J8,ABS,HB,GRAY,-,-,LG807		1	
11	AA91-00496B	ASSY-WOOD,BOT;-,-,WOOD,SVP-43J8SR,J7		1	
12	AA64-01385B	CABINET-BACK,SIDE;43,54,62J8,-,HIPS,HB,BLK		2	
13	AA91-00495A	ASSY-WOOD,TOP;-,-,WOOD,SVP-43J8SR,J7		1	
14	6006-001094	SCREW-ASS'Y WOOD;WW,HH,+,M7,L32,ZPC(YEL),SWRCH18A		6	
15	AA91-00489B	ASSY-BRKT,MIRROR;-,-,SECC-1,T1.0,54J8		3	
16	AA63-60131F	SPACER-FELT;PCJ612R,FELT,-,-,-,BLK,T0.5,-,280X50		2	
17	AA67-00079A	MIRROR-BACK;43J8,GLASS,812*580*544(35)*3,-,-,T3.0,		1	
18	AA64-01378B	CABINET-BACK,TOP;43J8,-,HIPS,HB,BLK		1	
19	AA95-00692A	ASSY-PCB,CONV AMP -,SVP-53J5DR,P51A,-,-,-			
20	AA95-00691B	ASSY-PCB,SUB;-,SVP-53J5DR,P51A,-,-,-		1	
21	AA95-00695B	ASSY-PCB,TERMINAL;-,SVP-53J5DR,P51A,-,-,-		1	
22	AA94-02602G	ASSY PCB MAIN(OPT);SVP-43J8SR,P51A,KOREA,-		1	
23	AA61-00504B	HOLDER-CHASSIS;43,54,62J8,ABS,GRAY,VO,-,-		1	
24	AA64-01384B	CABINET-BACK,BOT;43,54,62J8,-,HIPS,VO,BLK		1	
25	AA64-01395B	INLAY-TERMINAL;43,54,62J8,PS SHEET,T0.5,-,BLK,-,-		1	
26	AA60-00072A	SPACER-COVER,DUST;43,53,61J8,FELT,		1	
27	AA94-02868A	ASSY CRT-(R);P16LSG03RJA,+380MG,7,BARE,SVP-43J8SR		1	
28	AA94-02870B	ASSY CRT-(G);P16LSG03HKA,+380MG,7,BARE,SVP-43J8SR		1	
29	AA94-02869A	ASSY CRT-(B);P16LSG03BMB,+380MG,7,BARE,SVP-43J8SR		1	
30	AA26-30006E	TRANS-FLYBACK;-,FWZ-50A001B(S),50KV		1	
31	6006-001094	SCREW-ASS'Y WOOD;WW,HH,+,M7,L32,ZPC(YEL),SWRCH18A		4	
32	AA61-00475B	BRACKET-CRT,MAIN;54,SECC,T1.6,-,-		1	
33	AA59-00171A	MODULE-FOCUS,PACK;SVP-5200,S300-P3,		1	

6-2 SP54J8

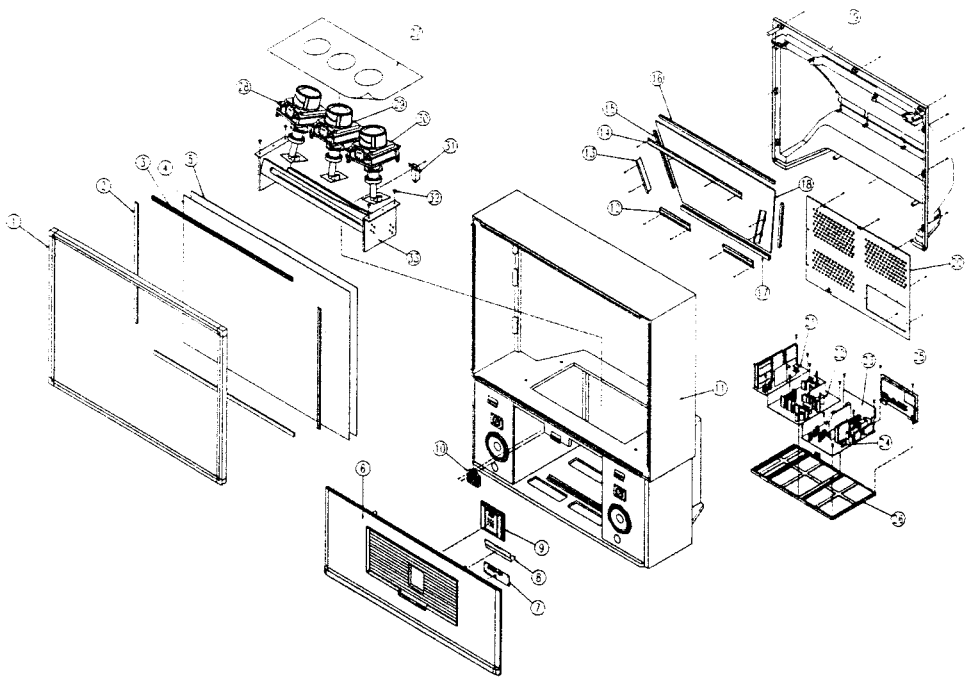

No	Code No	DescriptionSpecification	Q'ty	Remark
1	AA91-00478B	ASSY CABINET MASK,-,HB,GRAY,G906+D902 DO P53A	1	
2	AA60-00069C	SPACER-SCREEN;ABS,-,-,-,BLK,-,-,HB	2	
3	AA60-00069B	SPACER-SCREEN;ABS,-,-,-,BLK,-,-,HB	2	
4	AA67-00103A	SUN SCREEN;53,-,T2.0,1125*853,-,-,AR,HC,AS	1	
5	AA67-00027A	SCREEN-TINT;-,53,-,PMMA,TINT=10%,T3.0,1125*854,-	1	
6	0203-001279	TAPE-OPP MASKING,#232,T0.14,W15,L50000,YEL	4M	
7	AA91-00477G	ASSY-FRONT,BOT,-,VO G4309,HIPS,SVP-54J8SR	1	
8	AA91-00476D	ASSY-CONTROL;-,HB BLK,ABS DO,SVP-54J8SR	1	
9	AA95-00863B	ASSY-PCB,A/V FRONT;-,SVP-54J8M,P53A,-,-,-	1	
10	AA64-01392C	DOOR-AV;43,54,62J8,ABS,HB,GRAY,-,-,LG807	1	
11	AA91-00475B	ASSY-WOOD,BOT;-,-,WOOD,SVP-54J8SR,54J7	1	
12	AA64-01385B	CABINET-BACK,SIDE;43,54,62J8,-,HIPS,HB,BLK	2	
13	AA91-00474A	ASSY-WOOD,TOP;-,-,WOOD,SVP-54J8SR,54J7	1	
14	6006-001094	SCREW-ASS'Y 'WOOD,WW,HH,+,M7,L32,ZPC(YEL),SWRCH18A	8	
15	AA91-00489B	ASSY-BRKT,MIRROR;-,-,SECC-1 T1.0,54J8	4	
16	AA63-60131F	SPACER-FELT;,FELT,-,-,-,BLK,T0.5,-,280X50	2	
17	AA67-00080A	MIRROR-BACK,54J8,GLASS,940*686*673(132)*3,-,-,T3.0	1	
18	AA64-01379B	CABINET-BACK,TOP;54J8,-,HIPS,HB,BLK	1	
19	AA95-00448C	ASSY-PCB,CONV.AMP;-,SVP-53J5M,P53A,-,-,-	1	
20	AA95-00447B	ASSY-PCB,SUB;-,SVP-53J5M,P53A,-,-,-	1	
21	AA95-00444D	ASSY-PCB,TERMINAL;-,SVP-53J5M,P53A,-,-,KOREA	1	
22	AA94-01686L	ASSY PCB MAIN(OPT) SVP-54J8M,P53A,KOREA,-		
23	AA61-00504B	HOLDER-CHASSIS;43,54,62J8,ABS,GRAY,VO,-,-	1	
24	AA64-01384B	CABINET-BACK,BOT;43,54,62J8,-,HIPS,VO,BLK	1	
25	AA64-01395C	INLAY-TERMINAL;43,54,62J8,PS SHEET,T0.5,-,BLK,-,P5	1	
26	AA60-00072A	SPACER-COVER,DUST;43,53,61J8,FELT,	1	
27	AA94-03134A	ASSY CRT-(R) P16LSG03RJA,+380MG,7,BARE,SVP-54J8M,-		
28	AA94-03136A	ASSY CRT-(G) P16LSG03HKA,+380MG,7,BARE,SVP-54J8M,-		
29	AA94-03135A	ASSY CRT-(B) P16LSG03BMB,+380MG,7,BARE,SVP-54J8M,-		
30	AA26-30006E	TRANS-FLYBACK;-,FWZ-50A0018(S),50KV	1	
31	6006-001094	SCREW-ASS'Y WOOD;WW,HH,+,M7,L32,ZPC(YEL),SWRCH18A	4	
32	AA61-00475B	BRACKET-CRT,MAIN;54,SECC,T1.6,-,-	1	
33	AA59-00171A	MODULE-FOCUS,PACK;SVP-5200,S300-P3,	1	

7. Electrical Parts List

7-1 SP43J8HFX/SAP

Level	Loc. No.	Code No.	Description ; Specification	Remark
			ASSY PCB MAIN(OPT)	
1	*	AA94-03456H	ASSY PCB MAIN(OPT;SP43J8HFX/SAP,,S1A,SI	
2	C664	2401-001068	C AL,330uF,20%,50V,GP,5X12.5x40.10	
2	C665	2401-000737	C AL,220uF,20%,50V,GP,TP12x35.5,7	
2	CN801	3711-003974	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,STRAIG	
2	CNT01	3710-001298	CONNECTOR-SOCKET;3P,2R,2.54mm,STRAIGHT,	
2	CNT02	3710-001298	CONNECTOR-SOCKET;3P,2R,2.54mm,STRAIGHT,	
2	CS803	2401-003370	C AL,47uF,20%,450V,GP,5X,15X35.5,7	
2	H001	AA40-10005S	TUNER-P/S;TECC2945P;3BAND;PAL B/G TR,18	
2	IC101	AA96-00110C	ASSY H/S, , ,AA62 ,30013K,SI ,3050C,	
3		1203-000577	IC-VOLTAGE REGULATOR,3050,ZP,SIP, PLASTI	
3		6003-000333	SCREW-TAPTITE,RH, - ,2S,M3,L10,ZPC(YEL),SW	
3		AA62 ,30013K	HEATSINK ES, , , , 44/18, ,WHT,A6063 EX	
2	IC102	AA96-00110A	ASSY H/S, , ,AA62 ,30013K,SI ,3050C,	
3		1203-000203	IC-POSI.ADJUST REG.,3050,TO-220,SP, PLA	
3		6003-000333	SCREW-TAPTITE,RH, - ,2S,M3,L10,ZPC(YEL),SW	
3		AA62 ,30013K	HEATSINK ES, , , , 44/18, ,WHT,A6063 EX	
2	IC103	1204-001276	IC-SOUND PROCESSOR,TDA9810,DIP24P400MI	
2	IC502	AA96-00110A	ASSY H/S, , ,AA62 ,30013K,SI ,3050C,	
2	IC503	AA96-00110A	ASSY H/S, , ,AA62 ,30013K,SI ,3050C,	
2	IC504	AA96-00110A	ASSY H/S, , ,AA62 ,30013K,SI ,3050C,	
2	IC665	AA96-00038A	ASSY H/S ,SOUND AMP,AA62,30013E,TDA726	
3		0205-000129	GREASE,SILICON,SC102,,,JAPAN	S.N.A
3		1201-001026	IC-POWER AMP,7255,ZP,11P,19.6W,AL,DUAL,1	
3		6003-000333	SCREW-TAPTITE,RH, - ,2S,M3,L10,ZPC(YEL),SW	
3		AA62 ,30013E	HEAT SINK,ES, , , ,71.2,WHITE,SCREW-HOLE=1	S.N.A
2	F/CAB	AA39-00007B	F/CABLE, ,L150mm,1365#26	
2	L201	AA27-10001C	COIL-CHOKE, ,100uH, -K, 3.0A,ST,7.0D,H,K/R	
2	L603	AA29-00004A	FILTER-LINE NOISE, ,20UH,3A,AC80-260V,TO	
2	QZ107	AA96-50162F	ASSY H/S; ,POWER,AA62 ,30013E,2SA1011,30	
3		0502-000131	TR-POWER;2SA1011,D,PNP,1.2W,TO-220, ,60	
3		6003-000333	SCREW-TAPTITE,RH, - ,2S,M3,L10,ZPC(YEL),SW	
3		AA62 ,30013E	HEAT SINK,ES, , ,A6063 EXTR, , ,30(21) T02	
2	QZ108	AA96-50162C	ASSY H/S, ,AMP,AA62 ,30013E,2SC2344,30MM	
3		0502-000153	TR-POWER;2SC2344,D,NPN,1.2W,TO-220, ,60	
3		6003-000333	SCREW-TAPTITE,RH, - ,2S,M3,L10,ZPC(YEL),SW	
3		AA62 ,30013E	HEAT SINK,ES, , ,A6063 EXTR, , ,30(21) T02	
2	R913	2001-000786	R-CARBON,47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	RL801	3501-001053	RELAY-POWER,5Vdc,530mW,10A,1Form,A,15mS,5	
2	TS801	AA26-00019A	TRANS-SWITCHING, ,AC80~260V, ,US, ,4MH,B	
2	X901	2801-000224	CRYSTAL UNIT,32.768KHZ,20PPM,28-AAM,12.5	
2		AA95-00427B	ASSY SOUND; ,SP43J5P3S/XTT,,I51A,AA95-004	
3	C614	2401-000962	C AL,22uF,20%,50V,GP,TP5x11.5	
3	C615	2203-000595	C CERAMIC,CHIP;0.22nF,5%,50V,NP0,TP,2012	
3	C616	2203-000938	C CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,2012	
3	C617	2203-000142	C CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,2012	
3	C618	2203-000444	C CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,	
3	C619	2203-000444	C CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,	
3	C620	2401-000660	C AL,2.2uF,20%,50V,GP,TP5x11.5	
3	C621	2401-000660	C AL,2.2uF,20%,50V,GP,TP5x11.5	
3	C622	2203-000701	C CERAMIC,CHIP;0.002nF,0.25pF,50V,NP0,TP	
3	C623	2203-000701	C CERAMIC,CHIP;0.002nF,0.25pF,50V,NP0,TP	
3	C624	2203-001077	C CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,201	
3	C625	2203-001077	C CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,201	
3	C626	2401-000962	C AL,22uF,20%,50V,GP,TP5x11.5	
3	C627	2203-000938	C CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,2012	
3	C628	2203-000142	C CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,2012	
3	C629	2203-001077	C CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,201	
3	C630	2401-000480	C AL,10uF,20%,50V,GP,TP5x11.5	
3	C631	2203-000181	C CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
3	C632	2401-002229	C AL,470nF,20%,50V,WT,TP5x11.5	
3	C633	2401-002229	C AL,470nF,20%,50V,WT,TP5x11.5	
3	C634	2203-000784	C CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP,2012	
3	C635	2203-000784	C CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP,2012	
3	C636	2203-000181	C CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
3	C637	2401-000027	C AL,4.7uF,20%,50V,GP,TP5x11.5	
3	C638	2401-002235	C AL,10uF,20%,16V,GP,TP5x11mm,5mm	
3	C639	2401-002235	C AL,10uF,20%,16V,GP,TP5x11mm,5mm	
3	C640	2203-000938	C CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,2012	
3	C641	2203-000142	C CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,2012	
3	C642	2401-000480	C AL,10uF,20%,50V,GP,TP5x11.5	
3	C643	2401-000027	C AL,4.7uF,20%,50V,GP,TP5x11.5	
3	C644	2401-000027	C AL,4.7uF,20%,50V,GP,TP5x11.5	
3	C645	2401-000027	C AL,4.7uF,20%,50V,GP,TP5x11.5	
3	C646	2401-000027	C AL,4.7uF,20%,50V,GP,TP5x11.5	
3	C649	2401-002300	C AL,47uF,20%,50V,GP,TP6.3x11.5	
3	C650	2203-000979	C CERAMIC,CHIP,47nF,10%,50V,X7R,TP,2012	
3	C651	2401-000365	C AL,100uF,20%,50V,WT,TP,10x12.5mm,	
3	C653	2203-000784	C CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP,2012	
3	C654	2401-002229	C AL,470nF,20%,50V,WT,TP5x11.5	
3	C655	2203-000784	C CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP,2012	
3	C656	2401-002229	C AL,470nF,20%,50V,WT,TP5x11.5	
3	C657	2401-002229	C AL,470nF,20%,50V,WT,TP5x11.5	
3	C658	2203-000784	C CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP,2012	
3	C661	2203-000784	C CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP,2012	
3	C662	2401-002229	C AL,470nF,20%,50V,WT,TP5x11.5	
3	C663	2401-002229	C AL,470nF,20%,50V,WT,TP5x11.5	
3	C664	2203-000784	C CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP,2012	
3	C667	2203-000784	C CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP,2012	
3	C668	2401-002229	C AL,470nF,20%,50V,WT,TP5x11.5	
3	C669	2401-002229	C AL,470nF,20%,50V,WT,TP5x11.5	
3	C670	2203-000784	C CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP,2012	
3	C684	2401-000480	C AL,10uF,20%,50V,GP,TP5x11.5	
3	C688	2401-000962	C AL,22uF,20%,50V,GP,TP5x11.5	
3	C691	2401-000962	C AL,22uF,20%,50V,GP,TP5x11.5	
3	C692	2203-000260	C CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
3	C695	2203-000761	C CERAMIC,CHIP;330nF,10%,16V,X7R,TP,2012	
3	C696	2203-000170	C CERAMIC,CHIP;1.8nF,10%,50V,X7R,TP,2012	
3	C697	2203-000170	C CERAMIC,CHIP;1.8nF,10%,50V,X7R,TP,2012	
3	CB1	2401-000365	C AL,100uF,20%,50V,WT,TP,10x12.5mm,	
3	CD601	2203-000260	C CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
3	CD602	2203-000142	C CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,2012	
3	CD603	2401-000962	C AL,22uF,20%,50V,GP,TP5x11.5	
3	CD604	2203-000595	C CERAMIC,CHIP;0.22nF,5%,50V,NP0,TP,2012	
3	CD605	2203-000938	C CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,2012	
3	CD606	2401-000962	C AL,22uF,20%,50V,GP,TP5x11.5	
3	CD607	2203-000938	C CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,2012	
3	CD608	2203-000142	C CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,2012	
3	CD609	2203-000181	C CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
3	CD610	2401-000480	C AL,10uF,20%,50V,GP,TP5x11.5	
3	CD611	2203-000181	C CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
3	CD612	2401-000027	C AL,4.7uF,20%,50V,GP,TP5x11.5	
3	CD613	2401-000660	C AL,2.2uF,20%,50V,GP,TP5x11.5	
3	CD615	2401-000660	C AL,2.2uF,20%,50V,GP,TP5x11.5	
3	CD616	2203-000444	C CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,	
3	CD618	2203-000444	C CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,	
3	CD619	2401-002235	C AL,10uF,20%,16V,GP,TP5x11mm,5mm	
3	CD620	2401-002235	C AL,10uF,20%,16V,GP,TP5x11mm,5mm	
3	CD621	2203-000938	C CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,2012	
3	CD622	2203-000142	C CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,2012	
3	CD623	2401-000480	C AL,10uF,20%,50V,GP,TP5x11.5	
3	CD624	2203-000495	C CERAMIC,CHIP;2.2nF,10%,50V,X7R,TP,2012	
3	CD625	2401-000962	C AL,22uF,20%,50V,GP,TP5x11.5	
3	CD626	2203-000495	C CERAMIC,CHIP;2.2nF,10%,50V,X7R,TP,2012	
3	CD627	2401-000962	C AL,22uF,20%,50V,GP,TP5x11.5	
3	CD628	2203-000260	C CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
3	CD629	2401-000365	C AL,100uF,20%,50V,WT,TP,10x12.5mm,	
3	CD630	2203-000761	C CERAMIC,CHIP;330nF,10%,16V,X7R,TP,2012	
3	CDB1	2401-000365	C AL,100uF,20%,50V,WT,TP,10x12.5mm,	
3	CN601A	3711-003626	CONNECTOR-HEADER;NOWALL,20P,1R,2.5mm,ANG	
3	CN602A	3711-003626	CONNECTOR-HEADER;NOWALL,20P,1R,2.5mm,ANG	
3	IC601	1204-001689	IC-SOUND PROCESSOR;MSP3410D-C5,PLCC,68P,	
3	IC604	1201-000541	IC-OP AMP;062,SOP8P153MIL,DUAL,6V/mVP	

Level	Loc. No.	Code No.	Description ; Specification	Remark
3	CD601	1204-001358	C-DECODER;DPL3518A-A2,PLCC,68P, PLASTI	
3	CD602	1201-000541	IC-OP AMP;062,SOP8P153MIL,DUAL,6V/mVP	
3	L601	2701-000170	INDUCTOR-AXIAL;3.9uH,10%,3x7mm	
3	L602	2701-000170	INDUCTOR-AXIAL;3.9uH,10%,3x7mm	
3	L603	2701-000112	INDUCTOR-AXIAL;100uH,10%,3x7mm	
3	LD601	2701-000170	INDUCTOR-AXIAL;3.9uH,10%,3x7mm	
3	LD602	2701-000112	INDUCTOR-AXIAL;100uH,10%,3x7mm	
3	LD603	2701-000170	INDUCTOR-AXIAL;3.9uH,10%,3x7mm	
3	PCB	AA41-00087A	PCB-AUDIO;PL151A,ZL,FR-4,180X245X1.6T,3A	S.N.A
3	Q606	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
3	Q607	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
3	R601	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
3	R602	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
3	R610	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R611	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R614	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
3	R617	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP,2012	
3	R618	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP,2012	
3	R619	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R620	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R621	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R622	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R623	2007-000477	R-CHIP;1MOHM,5%,1/10W,DA,TP,2012	
3	R624	2007-000477	R-CHIP;1MOHM,5%,1/10W,DA,TP,2012	
3	R625	2007-000477	R-CHIP;1MOHM,5%,1/10W,DA,TP,2012	
3	R626	2007-000477	R-CHIP;1MOHM,5%,1/10W,DA,TP,2012	
3	R632	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP,2012	
3	R633	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP,2012	
3	R634	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP,2012	
3	R635	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP,2012	
3	R636	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP,2012	
3	R637	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP,2012	
3	R638	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP,2012	
3	R660	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
3	R661	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
3	R664	2007-001177	R-CHIP;8.2KOHM,5%,1/10W,DA,TP,2012	
3	R665	2007-000774	R-CHIP;33KOHM,5%,1/10W,DA,TP,2012	
3	R666	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
3	R669	2007-001177	R-CHIP;8.2KOHM,5%,1/10W,DA,TP,2012	
3	R670	2007-000774	R-CHIP;33KOHM,5%,1/10W,DA,TP,2012	
3	R672	2007-000586	R-CHIP;22KOHM,5%,1/10W,DA,TP,2012	
3	R673	2007-000586	R-CHIP;22KOHM,5%,1/10W,DA,TP,2012	
3	R674	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
3	R675	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
3	RB1	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP,2012	
3	RB2	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP,2012	
3	RB3	2007-000328	R-CHIP;11KOHM,5%,1/10W,DA,TP,2012	
3	RB4	2007-000328	R-CHIP;11KOHM,5%,1/10W,DA,TP,2012	
3	RD601	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
3	RD602	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
3	RD604	2007-001177	R-CHIP;8.2KOHM,5%,1/10W,DA,TP,2012	
3	RD605	2007-000774	R-CHIP;33KOHM,5%,1/10W,DA,TP,2012	
3	RD610	2007-001177	R-CHIP;8.2KOHM,5%,1/10W,DA,TP,2012	
3	RD611	2007-000774	R-CHIP;33KOHM,5%,1/10W,DA,TP,2012	
3	RD627	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
3	RD81	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP,2012	
3	RD82	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP,2012	
3	RD83	2007-000328	R-CHIP;11KOHM,5%,1/10W,DA,TP,2012	
3	RD84	2007-000328	R-CHIP;11KOHM,5%,1/10W,DA,TP,2012	
3	X601	2801-000186	CRYSTAL UNIT,18.432MHz,25ppm,28-AAM,8pF,	
3		AA63-40273A	SHIELD CASE, ,SPTE,T0.5, ,CX724AHD	
3		0202-000187	SOLDER WIRE FLUX, ,RS60S,D1.2,63Sn/37Pb	S.N.A
2		AA95-00519E	ASSY PCB;PROSCAN; ,SP53J,SHF,I51A,	
3	CNP001	3711-003543	CONNECTOR-HEADER;NOWALL,16P,1R,2.54MM,AN	
3	CNP002	3711-001283	CONNECTOR-HEADER;NOWALL,14P,1R,2.5mm,ANG	
3	CNP003	3711-001283	CONNECTOR-HEADER;NOWALL,14P,1R,2.5mm,ANG	
3	CNP004	3711-001283	CONNECTOR-HEADER;NOWALL,14P,1R,2.5mm,ANG	
3	XP101	2801-004019	CRYSTAL UNIT,20.25MHz,30ppm,28-AAM,13pF,	
3	XP601	2801-003811	CRYSTAL UNIT,24.576MHZ,20PPM,28-AAM,30PF	
3		AA96-20079H	ASSY PCB SUB,AUTO; ,AA95-00519E , ,V	S.N.A
4	CP101	2203-000938	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,2012	
4	CP102	2203-000938	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,2012	
4	CP103	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP,2012	
4	CP104	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP,2012	
4	CP106	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,	
4	CP109	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CP110	2401-001496	C-AL,47uF,20%,16V,GP,TP5x7.5	
4	CP111	2203-000575	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
4	CP112	2401-001496	C-AL,10uF,20%,50V,GP,TP6.3x7mm,5	
4	CP113	2203-001172	C-CERAMIC,CHIP;0.006nF,0.25pF,50V,NP0,TP	
4	CP114	2203-001172	C-CERAMIC,CHIP;0.006nF,0.25pF,50V,NP0,TP	
4	CP115	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CP116	2401-002209	C-AL,100uF,20%,16V,GP,TP6.3x7.5	
4	CP117	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CP118	2401-002209	C-AL,100uF,20%,16V,GP,TP6.3x7.5	
4	CP119	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CP120	2203-001002	C-CERAMIC,CHIP;0.047nF,5%,50V,NP0,TP,201	
4	CP121	2203-001002	C-CERAMIC,CHIP;0.047nF,5%,50V,NP0,TP,201	
4	CP122	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP,2012	
4	CP126	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CP127	2401-002209	C-AL,100uF,20%,16V,GP,TP6.3x7.5	
4	CP128	2401-002209	C-AL,100uF,20%,16V,GP,TP6.3x7.5	
4	CP129	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CP130	2401-002209	C-AL,100uF,20%,16V,GP,TP6.3x7.5	
4	CP131	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CP132	2401-001496	C-AL,10uF,20%,50V,GP,TP6.3x7mm,5	
4	CP133	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CP135	2203-000575	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,2012	
4	CP137	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CP139	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
4	CP141	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CP142	2203-000938	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,2012	
4	CP143	2203-000938	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,2012	
4	CP144	2203-000938	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,2012	
4	CP145	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP,2012	
4	CP301	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CP302	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CP303	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CP304	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CP305	2401-001496	C-AL,47uF,20%,16V,GP,TP5x7.5	
4	CP306	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CP307	2401-001496	C-AL,47uF,20%,16V,GP,TP5x7.5	
4	CP308	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CP309	2401-001496	C-AL,47uF,20%,16V,GP,TP5x7.5	
4	CP310	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CP311	2401-001496	C-AL,47uF,20%,16V,GP,TP5x7.5	
4	CP312	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CP313	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CP314	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CP315	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CP316	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CP317	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CP401	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CP402	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CP403	2401-002009	C-AL,100uF,20%,16V,GP,TP6.3x7.5	
4	CP404	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CP405	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CP406	2203-000142	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,2012	
4	CP407	2203-000239	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,2012	
4	CP408	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CP409	2203-000555	C-CERAMIC,CHIP;0.02nF,5%,50V,NP0,TP,2012	
4	CP410	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CP411	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CP412	2203-000555	C-CERAMIC,CHIP;0.02nF,5%,50V,NP0,TP,2012	
4	CP413	2203-000555	C-CERAMIC,CHIP;0.02nF,5%,50V,NP0,TP,2012	
4	CP414	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CP415	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CP416	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CP417	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CP418	2404-001029	C-TA,CHIP;10uF,20%,10V,GP,TP,3216,3.2	
4	CP419	2404-001029	C-TA,CHIP;10uF,20%,10V,GP,TP,3216,3.2	
4	CP420	2404-001029	C-TA,CHIP;10uF,20%,10V,GP,TP,3216,3.2	
4	CP501	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
4	CP502	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
4	CP503	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
4	CP504	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
4	CP505	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
4	CP506	2401-001496	C-AL,47uF,20%,16V,GP,TP5x7.5	
4	CP507	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CP508	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
4	CP509	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
4	CP510	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	

Level	Loc. No.	Code No.	Description ; Specification	Remark
4	CP511	2203-002494	C CERAMIC,CHIP 470nF,10%,16V,X7R,TP2012	
4	CP512	2203-002494	C CERAMIC,CHIP 470nF,10%,16V,X7R,TP2012	
4	CP513	2203-002494	C CERAMIC,CHIP 470nF,10%,16V,X7R,TP2012	
4	CP514	2203-002494	C CERAMIC,CHIP 470nF,10%,16V,X7R,TP2012	
4	CP515	2203-002494	C CERAMIC,CHIP 470nF,10%,16V,X7R,TP2012	
4	CP516	2203-002494	C CERAMIC,CHIP 470nF,10%,16V,X7R,TP2012	
4	CP517	2203-002494	C CERAMIC,CHIP 470nF,10%,16V,X7R,TP2012	
4	CP518	2401-000598	C AL,1uF,20%,50V,GP,TP,4x7.5	
4	CP519	2203-002494	C CERAMIC,CHIP 470nF,10%,16V,X7R,TP2012	
4	CP520	2203-002494	C CERAMIC,CHIP 470nF,10%,16V,X7R,TP2012	
4	CP521	2203-002494	C CERAMIC,CHIP 470nF,10%,16V,X7R,TP2012	
4	CP522	2203-002494	C CERAMIC,CHIP 470nF,10%,16V,X7R,TP2012	
4	CP523	2203-002494	C CERAMIC,CHIP 470nF,10%,16V,X7R,TP2012	
4	CP524	2203-000260	C CERAMIC,CHIP 10nF,10%,50V,X7R,TP2012	
4	CP525	2203-000181	C CERAMIC,CHIP 100nF,-80-20%,25V,Y5V,TP	
4	CP527	2203-000181	C CERAMIC,CHIP 100nF,-80-20%,25V,Y5V,TP	
4	CP528	2401-001496	C AL,47uF,20%,16V,GP,TP,5x7.5	
4	CP529	2203-000575	C CERAMIC,CHIP 220NF,10%,25V,X7R,TP2012	
4	CP530	2203-000575	C CERAMIC,CHIP 220NF,10%,25V,X7R,TP2012	
4	CP531	2203-000575	C CERAMIC,CHIP 220NF,10%,25V,X7R,TP2012	
4	CP532	2203-002494	C CERAMIC,CHIP 470nF,10%,16V,X7R,TP2012	
4	CP533	2401-000486	C AL,10uF,20%,50V,GP,TP6.3x7mm,5	
4	CP534	2203-000260	C CERAMIC,CHIP 10nF,10%,50V,X7R,TP2012	
4	CP535	2203-000260	C CERAMIC,CHIP 10nF,10%,50V,X7R,TP2012	
4	CP536	2203-000260	C CERAMIC,CHIP 10nF,10%,50V,X7R,TP2012	
4	CP537	2203-000260	C CERAMIC,CHIP 10nF,10%,50V,X7R,TP2012	
4	CP538	2203-000260	C CERAMIC,CHIP 10nF,10%,50V,X7R,TP2012	
4	CP539	2203-000260	C CERAMIC,CHIP 10nF,10%,50V,X7R,TP2012	
4	CP540	2401-000486	C AL,10uF,20%,50V,GP,TP6.3x7mm,5	
4	CP541	2203-001002	C CERAMIC,CHIP 0.047nF,5%,50V,NP0,TP201	
4	CP542	2203-001002	C CERAMIC,CHIP 0.047nF,5%,50V,NP0,TP201	
4	CP545	2203-002494	C CERAMIC,CHIP 470nF,10%,16V,X7R,TP2012	
4	CP546	2203-000260	C CERAMIC,CHIP 10nF,10%,50V,X7R,TP2012	
4	CP547	2203-000260	C CERAMIC,CHIP 10nF,10%,50V,X7R,TP2012	
4	CP548	2203-000260	C CERAMIC,CHIP 10nF,10%,50V,X7R,TP2012	
4	CP549	2203-000181	C CERAMIC,CHIP 100nF,-80-20%,25V,Y5V,TP	
4	CP550	2203-000181	C CERAMIC,CHIP 100nF,-80-20%,25V,Y5V,TP	
4	CP551	2203-000181	C CERAMIC,CHIP 100nF,-80-20%,25V,Y5V,TP	
4	CP552	2401-001496	C AL,47uF,20%,16V,GP,TP,5x7.5	
4	CP553	2203-000181	C CERAMIC,CHIP 100nF,-80-20%,25V,Y5V,TP	
4	CP554	2203-000181	C CERAMIC,CHIP 100nF,-80-20%,25V,Y5V,TP	
4	CP555	2203-000181	C CERAMIC,CHIP 100nF,-80-20%,25V,Y5V,TP	
4	CP556	2203-000181	C CERAMIC,CHIP 100nF,-80-20%,25V,Y5V,TP	
4	CP559	2203-000181	C CERAMIC,CHIP 100nF,-80-20%,25V,Y5V,TP	
4	CP601	2203-001088	C CERAMIC,CHIP 0.005nF,0.25pF,50V,NP0,TP	
4	CP602	2203-001088	C CERAMIC,CHIP 0.005nF,0.25pF,50V,NP0,TP	
4	CP603	2203-002494	C CERAMIC,CHIP 470nF,10%,16V,X7R,TP2012	
4	CP604	2203-000938	C CERAMIC,CHIP 0.47nF,5%,50V,NP0,TP2012	
4	CP605	2203-000444	C CERAMIC,CHIP 1nF,10%,50V,X7R,TP2012,	
4	CP607	2203-000181	C CERAMIC,CHIP 100nF,-80-20%,25V,Y5V,TP,	
4	CP609	2203-000181	C CERAMIC,CHIP 100nF,-80-20%,25V,Y5V,TP,	
4	CP610	2203-000181	C CERAMIC,CHIP 100nF,-80-20%,25V,Y5V,TP,	
4	CP611	2203-000444	C CERAMIC,CHIP 1nF,10%,50V,X7R,TP2012,	
4	CP612	2203-000444	C CERAMIC,CHIP 1nF,10%,50V,X7R,TP2012,-	
4	CP613	2203-000444	C CERAMIC,CHIP 1nF,10%,50V,X7R,TP2012,-	
4	CP614	2203-000181	C CERAMIC,CHIP 100nF,-80-20%,25V,Y5V,TP,	
4	CP615	2203-000181	C CERAMIC,CHIP 100nF,-80-20%,25V,Y5V,TP,	
4	CP616	2203-001002	C CERAMIC,CHIP 0.047nF,5%,50V,NP0,TP201	
4	CP617	2203-000181	C CERAMIC,CHIP 100nF,-80-20%,25V,Y5V,TP,	
4	CP618	2203-000239	C CERAMIC,CHIP 0.1nF,5%,50V,NP0,TP2012	
4	CP619	2203-000181	C CERAMIC,CHIP 100nF,-80-20%,25V,Y5V,TP,	
4	CP620	2203-000181	C CERAMIC,CHIP 100nF,-80-20%,25V,Y5V,TP	
4	CP621	2203-000239	C CERAMIC,CHIP 0.1nF,5%,50V,NP0,TP2012	
4	CP622	2203-000142	C CERAMIC,CHIP 1.5nF,10%,50V,X7R,TP2012	
4	CP623	2203-000181	C CERAMIC,CHIP 100nF,-80-20%,25V,Y5V,TP,	
4	CP624	2401-001496	C AL,47uF,20%,16V,GP,TP,5x7.5	
4	CP625	2203-000181	C CERAMIC,CHIP 100nF,-80-20%,25V,Y5V,TP,	
4	CP626	2401-002009	C AL,100uF,20%,16V,GP,TP6.3x7.5	
4	CP627	2203-000181	C CERAMIC,CHIP 100nF,-80-20%,25V,Y5V,TP,	
4	CP628	2401-002009	C AL,100uF,20%,16V,GP,TP6.3x7.5	
4	CP629	2203-000181	C CERAMIC,CHIP 100nF,-80-20%,25V,Y5V,TP,	
4	CP630	2203-000181	C CERAMIC,CHIP 100nF,-80-20%,25V,Y5V,TP,	
4	CP631	2401-000598	C AL,1uF,20%,50V,GP,TP,4x7.5	
4	CP901	2404-001229	C TA,CHIP,4.7uF,20%,25V,GP,TP,3528	
4	CP902	2203-000181	C CERAMIC,CHIP 100nF,-80-20%,25V,Y5V,TP	
4	CP904	2203-001088	C CERAMIC,CHIP 0.005nF,0.25pF,50V,NP0,TP	
4	CP905	2203-002494	C CERAMIC,CHIP 470nF,10%,16V,X7R,TP2012	

Level	Loc. No.	Code No.	Description ; Specification	Remark
4	CP906	2203-000495	C CERAMIC,CHIP 2.2nF,10%,50V,X7R,TP2012	
4	DP501	0403-001117	DIODE ZENER,RLZ12B,5%,500mW,LL-34,TP	
4	DP502	0403-001117	DIODE ZENER,RLZ12B,5%,500mW,LL-34,TP	
4	DP503	0403-001117	DIODE ZENER,RLZ12B,5%,500mW,LL-34,TP	
4	DP504	0403-000620	DIODE ZENER,RLZ5.6B,5.6,500mW,LL-34,TP	
4	DP505	0403-000620	DIODE ZENER,RLZ5.6B,5.6,500mW,LL-34,TP	
4	DP601	0401-000133	DIODE SWITCHING,RLS4148,100V,200mA,SOD-8	
4	DP602	0403-000620	DIODE ZENER,RLZ5.6B,5.6,500mW,LL-34,TP	
4	DP603	0401-000133	DIODE SWITCHING,RLS4148,100V,200mA,SOD-8	
4	DP604	0401-000160	DIODE SWITCHING,ISS314,30V,100mA,USC,TP	
4	DP605	0401-000160	DIODE SWITCHING,ISS314,30V,100mA,USC,TP	
4	DP606	0401-000133	DIODE SWITCHING,RLS4148,100V,200mA,SOD-8	
4	DP607	0403-000620	DIODE ZENER,RLZ5.6B,5.6,500mW,LL-34,TP	
4	DP901	0401-000133	DIODE SWITCHING,RLS4148,100V,200mA,SOD-8	
4	DP902	0401-000133	DIODE SWITCHING,RLS4148,100V,200mA,SOD-8	
4	DP903	0401-000133	DIODE SWITCHING,RLS4148,100V,200mA,SOD-8	
4	DP904	0401-000133	DIODE SWITCHING,RLS4148,100V,200mA,SOD-8	
4	FP101	2901-001120	FILTER-EMI SMD,25V,100mA,-,3.2x1.6x1,T	
4	FP102	2901-001120	FILTER-EMI SMD,25V,100mA,-,3.2x1.6x1,T	
4	FP301	2901-001120	FILTER-EMI SMD,25V,100mA,-,3.2x1.6x1,T	
4	FP901	2901-000226	FILTER-EMI SMD,25V,0.3A,-,100pF,3.2x1.25	
4	FP902	2901-000226	FILTER-EMI SMD,25V,0.3A,-,100pF,3.2x1.25	
4	FP903	2901-000226	FILTER-EMI SMD,25V,0.3A,-,100pF,3.2x1.25	
4	FP904	2901-000226	FILTER-EMI SMD,25V,0.3A,-,100pF,3.2x1.25	
4	FP905	2901-000226	FILTER-EMI SMD,25V,0.3A,-,100pF,3.2x1.25	
4	FP906	2901-000226	FILTER-EMI SMD,25V,0.3A,-,100pF,3.2x1.25	
4	FP907	2901-000226	FILTER-EMI SMD,25V,0.3A,-,100pF,3.2x1.25	
4	FP908	2901-000226	FILTER-EMI SMD,25V,0.3A,-,100pF,3.2x1.25	
4	ICP101	1204-001362	IC VIDEO PROCESS,VPC3215C-B8,PLCC,43P,-	
4	ICP103	1205-001172	IC INTERFACE,CIP3250A-B1,PLCC,68P,PLAS	
4	ICP301	1204-001623	IC VERTICAL PROCESSO,SDA9400,QFP,64P,-,P	
4	ICP302	1203-001419	IC VOLTAGE REGULATOR,4931,TO-252,3P,5.6x	
4	ICP401	1002-001045	IC D/A CONVERTER,9290,8BIT,PLCC,68P	
4	ICP501	1204-001550	IC VIDEO PROCESS,CXA2101AQ,QFP,80P,PLA	
4	ICP601	1204-001372	IC HOR/VER PROCESSO,SDA9361,QFP,44P,-,P	
4	ICP901	1202-000001	IC VOLTAGE COMP,7533,TO-92,3P,SINGLE,	
4	LP101	3301-001324	CORE FERRITE BEAD,AB,15OHM,2X1.25X0.9MM,	S.N.A
4	LP102	3301-001324	CORE FERRITE BEAD,AB,15OHM,2X1.25X0.9MM,	S.N.A
4	LP103	3301-001324	CORE FERRITE BEAD,AB,15OHM,2X1.25X0.9MM,	S.N.A
4	LP105	3301-001324	CORE FERRITE BEAD,AB,15OHM,2X1.25X0.9MM,	S.N.A
4	LP106	3301-001324	CORE FERRITE BEAD,AB,15OHM,2X1.25X0.9MM,	S.N.A
4	LP107	3301-001324	CORE FERRITE BEAD,AB,15OHM,2X1.25X0.9MM,	S.N.A
4	LP301	3301-001324	CORE FERRITE BEAD,AB,15OHM,2X1.25X0.9MM,	S.N.A
4	LP302	3301-001324	CORE FERRITE BEAD,AB,15OHM,2X1.25X0.9MM,	S.N.A
4	LP303	3301-001324	CORE FERRITE BEAD,AB,15OHM,2X1.25X0.9MM,	S.N.A
4	LP401	3301-001324	CORE FERRITE BEAD,AB,15OHM,2X1.25X0.9MM,	S.N.A
4	LP402	3301-001324	CORE FERRITE BEAD,AB,15OHM,2X1.25X0.9MM,	S.N.A
4	LP403	3301-001324	CORE FERRITE BEAD,AB,15OHM,2X1.25X0.9MM,	S.N.A
4	LP404	3301-001324	CORE FERRITE BEAD,AB,15OHM,2X1.25X0.9MM,	S.N.A
4	LP601	3301-001324	CORE FERRITE BEAD,AB,15OHM,2X1.25X0.9MM,	S.N.A
4	LP602	3301-001324	CORE FERRITE BEAD,AB,15OHM,2X1.25X0.9MM,	S.N.A
4	LP603	2703-001717	INDUCTOR-SMD,1.2uH,5%,3.2x2.5x2.2mm	
4	LP901	3301-001186	CORE FERRITE BEAD,AB,600ohm,3.2x1.6x1.3m	S.N.A
4	LP902	3301-001186	CORE FERRITE BEAD,AB,600ohm,3.2x1.6x1.3m	S.N.A
4	LP903	3301-001324	CORE FERRITE BEAD,AB,15OHM,2X1.25X0.9MM,	S.N.A
4	LP904	3301-001184	CORE FERRITE BEAD,AB,1.3kohm,4.5x3.2x1.3	S.N.A
4	LP905	3301-001184	CORE FERRITE BEAD,AB,1.3kohm,4.5x3.2x1.3	S.N.A
4	LP906	3301-001184	CORE FERRITE BEAD,AB,1.3kohm,4.5x3.2x1.3	S.N.A
4	QP501	0501-000280	TR SMALL SIGNAL,KSA1182,PNP,150mW,SOT-23	
4	QP502	0501-000344	TR SMALL SIGNAL,KSC1623-G,NPN,200mW,SOT	
4	QP503	0501-000344	TR SMALL SIGNAL,KSC1623-G,NPN,200mW,SOT-	
4	QP504	0501-000280	TR SMALL SIGNAL,KSA1182,PNP,150mW,SOT-23	
4	QP505	0501-000280	TR SMALL SIGNAL,KSA1182,PNP,150mW,SOT-23	
4	QP506	0501-000280	TR SMALL SIGNAL,KSA1182,PNP,150mW,SOT-23	
4	QP508	0501-000344	TR SMALL SIGNAL,KSC1623-G,NPN,200mW,SOT-	
4	QP602	0501-000344	TR SMALL SIGNAL,KSC1623-G,NPN,200mW,SOT-	
4	QP902	0501-000280	TR SMALL SIGNAL,KSA1182,PNP,150mW,SOT-23	
4	RP101	2007-000029	R CHIP,0OHM,5%,1/10W,DA,TP2012	
4	RP102	2007-000947	R CHIP,47OHM,5%,1/10W,DA,TP2012	
4	RP106	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP112	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP113	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP114	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP115	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP117	2007-000029	R CHIP,0OHM,5%,1/10W,DA,TP2012	
4	RP134	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP135	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	

Level	Loc. No.	Code No.	Description ; Specification	Remark
4	RP136	2011-000585	R NETWORK,47ohm,5%,63mW,L,CHIP,8P,TP	
4	RP137	2011-000585	R NETWORK,47ohm,5%,63mW,L,CHIP,8P,TP	
4	RP138	2011-000585	R NETWORK,47ohm,5%,63mW,L,CHIP,8P,TP	
4	RP139	2011-000585	R NETWORK,47ohm,5%,63mW,L,CHIP,8P,TP	
4	RP140	2011-000585	R NETWORK,47ohm,5%,63mW,L,CHIP,8P,TP	
4	RP141	2011-000585	R NETWORK,47ohm,5%,63mW,L,CHIP,8P,TP	
4	RP142	2011-000585	R NETWORK,47ohm,5%,63mW,L,CHIP,8P,TP	
4	RP143	2011-000585	R NETWORK,47ohm,5%,63mW,L,CHIP,8P,TP	
4	RP153	2007-000401	R CHIP,150OHM,5%,1/10W,DA,TP2012	
4	RP154	2007-000308	R CHIP,10OHM,5%,1/10W,DA,TP2012	
4	RP155	2007-000947	R CHIP,47OHM,5%,1/10W,DA,TP2012	
4	RP156	2007-000947	R CHIP,47OHM,5%,1/10W,DA,TP2012	
4	RP157	2007-000947	R CHIP,47OHM,5%,1/10W,DA,TP2012	
4	RP159	2007-001166	R CHIP,75OHM,5%,1/10W,DA,TP2012	
4	RP161	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP301	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP302	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP303	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP304	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP305	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP401	2011-000585	R NETWORK,47ohm,5%,63mW,L,CHIP,8P,TP	
4	RP402	2011-000585	R NETWORK,47ohm,5%,63mW,L,CHIP,8P,TP	
4	RP403	2011-000585	R NETWORK,47ohm,5%,63mW,L,CHIP,8P,TP	
4	RP404	2011-000585	R NETWORK,47ohm,5%,63mW,L,CHIP,8P,TP	
4	RP405	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP406	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP407	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP408	2007-001055	R CHIP,6.2KOHM,5%,1/10W,DA,TP2012	
4	RP409	2007-000401	R CHIP,150OHM,5%,1/10W,DA,TP2012	
4	RP411	2007-001166	R CHIP,75OHM,5%,1/10W,DA,TP2012	
4	RP412	2007-001166	R CHIP,75OHM,5%,1/10W,DA,TP2012	
4	RP413	2007-000401	R CHIP,150OHM,5%,1/10W,DA,TP2012	
4	RP415	2007-001166	R CHIP,75OHM,5%,1/10W,DA,TP2012	
4	RP416	2007-001166	R CHIP,75OHM,5%,1/10W,DA,TP2012	
4	RP417	2007-000380	R CHIP,13KOHM,5%,1/10W,DA,TP2012	
4	RP418	2007-000401	R CHIP,150OHM,5%,1/10W,DA,TP2012	
4	RP419	2007-001166	R CHIP,75OHM,5%,1/10W,DA,TP2012	
4	RP421	2007-001166	R CHIP,75OHM,5%,1/10W,DA,TP2012	
4	RP422	2007-000300	R CHIP,10KOHM,5%,1/10W,DA,TP2012	
4	RP423	2007-000401	R CHIP,150OHM,5%,1/10W,DA,TP2012	
4	RP501	2007-000029	R CHIP,0OHM,5%,1/10W,DA,TP2012	
4	RP502	2007-000029	R CHIP,0OHM,5%,1/10W,DA,TP2012	
4	RP503	2007-000029	R CHIP,0OHM,5%,1/10W,DA,TP2012	
4	RP504	2007-000030	R CHIP,560OHM,5%,1/10W,DA,TP2012	
4	RP505	2007-000672	R CHIP,220OHM,5%,1/10W,DA,TP2012	
4	RP506	2007-000493	R CHIP,2.2KOHM,5%,1/10W,DA,TP2012	
4	RP507	2007-001166	R CHIP,75OHM,5%,1/10W,DA,TP2012	
4	RP509	2007-000931	R CHIP,470OHM,5%,1/10W,DA,TP2012	
4	RP510	2007-000938	R CHIP,47KOHM,1%,1/10W,DA,TP2012	
4	RP513	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP514	2007-000210	R CHIP,1.1KOHM,5%,1/10W,DA,TP2012	
4	RP515	2007-000468	R CHIP,1KOHM,5%,1/10W,DA,TP2012	
4	RP516	2007-000468	R CHIP,1KOHM,5%,1/10W,DA,TP2012	
4	RP517	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP518	2007-000210	R CHIP,1.1KOHM,5%,1/10W,DA,TP2012	
4	RP519	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP521	2007-000210	R CHIP,1.1KOHM,5%,1/10W,DA,TP2012	
4	RP522	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP523	2007-000210	R CHIP,1.1KOHM,5%,1/10W,DA,TP2012	
4	RP524	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP525	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP526	2007-000210	R CHIP,1.1KOHM,5%,1/10W,DA,TP2012	
4	RP527	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP528	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP529	2007-000210	R CHIP,1.1KOHM,5%,1/10W,DA,TP2012	
4	RP530	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP537	2007-000689	R CHIP,3.3MOHM,5%,1/10W,DA,TP2012	
4	RP542	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP543	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP544	2007-000029	R CHIP,0OHM,5%,1/10W,DA,TP2012	
4	RP546	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP547	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP549	2007-000671	R CHIP,2KOHM,5%,1/10W,DA,TP2012	
4	RP550	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP553	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP554	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	

Level	Loc. No.	Code No.	Description ; Specification	Remark
4	RP555	2007-000582	R CHIP,22KOHM,1%,1/10W,DA,TP2012	
4	RP556	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP560	2007-000468	R CHIP,1KOHM,5%,1/10W,DA,TP2012	
4	RP562	2007-000468	R CHIP,1KOHM,5%,1/10W,DA,TP2012	
4	RP565	2007-000029	R CHIP,0OHM,5%,1/10W,DA,TP2012	
4	RP566	2007-000029	R CHIP,0OHM,5%,1/10W,DA,TP2012	
4	RP567	2007-000029	R CHIP,0OHM,5%,1/10W,DA,TP2012	
4	RP568	2007-000029	R CHIP,0OHM,5%,1/10W,DA,TP2012	
4	RP569	2007-000029	R CHIP,0OHM,5%,1/10W,DA,TP2012	
4	RP570	2007-000300	R CHIP,10KOHM,5%,1/10W,DA,TP2012	
4	RP571	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP601	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP602	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP603	2007-001208	R CHIP,82KOHM,5%,1/10W,DA,TP2012	
4	RP604	2007-000947	R CHIP,47OHM,5%,1/10W,DA,TP2012	
4	RP605	2007-000518	R CHIP,2.7KOHM,5%,1/10W,DA,TP2012	
4	RP606	2007-000518	R CHIP,2.7KOHM,5%,1/10W,DA,TP2012	
4	RP609	2007-000872	R CHIP,4.7KOHM,5%,1/10W,DA,TP2012	
4	RP611	2007-000468	R CHIP,1KOHM,5%,1/10W,DA,TP2012	
4	RP613	2007-000941	R CHIP,47KOHM,5%,1/10W,DA,TP2012	
4	RP614	2007-000001	R CHIP,68KOHM,5%,1/10W,DA,TP2012	
4	RP619	2007-000468	R CHIP,1KOHM,5%,1/10W,DA,TP2012	
4	RP620	2007-000947	R CHIP,47OHM,5%,1/10W,DA,TP2012	
4	RP621	2007-000947	R CHIP,47OHM,5%,1/10W,DA,TP2012	
4	RP622	2007-000468	R CHIP,1KOHM,5%,1/10W,DA,TP2012	
4	RP623	2007-000822	R CHIP,390OHM,5%,1/10W,DA,TP2012	
4	RP624	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP625	2007-000872	R CHIP,4.7KOHM,5%,1/10W,DA,TP2012	
4	RP626	2007-000931	R CHIP,470OHM,5%,1/10W,DA,TP2012	
4	RP627	2007-000872	R CHIP,4.7KOHM,5%,1/10W,DA,TP2012	
4	RP628	2007-000267	R CHIP,1.8KOHM,5%,1/10W,DA,TP2012	
4	RP629	2007-000872	R CHIP,4.7KOHM,5%,1/10W,DA,TP2012	
4	RP630	2007-000468	R CHIP,1KOHM,5%,1/10W,DA,TP2012	
4	RP631	2007-000872	R CHIP,4.7KOHM,5%,1/10W,DA,TP2012	
4	RP709	2007-000029	R CHIP,0OHM,5%,1/10W,DA,TP2012	
4	RP719	2007-000029	R CHIP,0OHM,5%,1/10W,DA,TP2012	
4	RP727	2007-000029	R CHIP,0OHM,5%,1/10W,DA,TP2012	
4	RP735	2007-000029	R CHIP,0OHM,5%,1/10W,DA,TP2012	
4	RP736	2007-000029	R CHIP,0OHM,5%,1/10W,DA,TP2012	
4	RP737	2007-000029	R CHIP,0OHM,5%,1/10W,DA,TP2012	
4	RP738	2007-000029	R CHIP,0OHM,5%,1/10W,DA,TP2012	
4	RP901	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP904	2007-000029	R CHIP,0OHM,5%,1/10W,DA,TP2012	
4	RP907	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP908	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP912	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP913	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP914	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP915	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP916	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP917	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP918	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP920	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP921	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP924	2007-000029	R CHIP,0OHM,5%,1/10W,DA,TP2012	
4	RP925	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP926	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP927	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP929	2007-000029	R CHIP,0OHM,5%,1/10W,DA,TP2012	
4	RP931	2007-000029	R CHIP,0OHM,5%,1/10W,DA,TP2012	
4	RP933	2007-000029	R CHIP,0OHM,5%,1/10W,DA,TP2012	
4	RP935	2007-000029	R CHIP,0OHM,5%,1/10W,DA,TP2012	
4	RP936	2007-000468	R CHIP,1KOHM,5%,1/10W,DA,TP2012	
4	RP943	2007-000468	R CHIP,1KOHM,5%,1/10W,DA,TP2012	
4	RP944	2007-000941	R CHIP,47KOHM,5%,1/10W,DA,TP2012	
4	RP945	2007-000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP980	2007-000029	R CHIP,0OHM,5%,1/10W,DA,TP2012	
4		AA41-002338	PCB-PROSCAN;SVP-53JSPFR,4,4L,B,1.6T,245	S.N.A
3		AA63-40272A	SHIELD CASE;-,SPTE,T0.5,-,CX724AHD	S.N.A
2		AA95-00529A	ASSY PCB,PIP;-,SP43J5HP,J51A,-,-	
3	CNP01	3711-002709	CONNECTOR HEADER,NOWALL,12P,1R,2.5MM,ANG	
3	CNP03	3711-002709	CONNECTOR HEADER,NOWALL,12P,1R,2.5MM,ANG	
3	ICP101	1204-000630	IC PAL/NTSC DECODER,TDA9160A,DIP,32P,400	
3	ICP102	1204-000560	IC DEMODULATOR,TDA9815,DIP,32P,400MIL,PL	
3	RP126	2103-000665	VR-SEMI,20Kohm,25%,1/5W,SIDE	
3	TP101	AA26-10004E	TRANS IF;-,7MC,VIF,-,7mm,8pF,116.7MHz,S	

Level	Loc. No.	Code No.	Description ; Specification	Remark
..3	CP102	2904-000253	FILTER SAW AV;38.9MHz,DIP10K,ST,18dB,B/G	
..3		AA99-20066Z	ASSY PCB SUB.AUTO;-,AA95-00520A,-,V	S.N.A
...4	CP101	2203-000221	C CERAMIC,CHIP;100nF,20%,50V,Y5V,TP3216	
...4	CP102	2401-000922	C AL;22uF,20%,16V,GP,TP,5x5.5	
...4	CP103	2203-000429	C CERAMIC,CHIP;0.018nF,5%,50V,NP0,TP201	
...4	CP104	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
...4	CP105	2203-000717	C CERAMIC,CHIP;3.3nF,10%,50V,X7R,TP3216	
...4	CP106	2203-000221	C CERAMIC,CHIP;100nF,20%,50V,Y5V,TP3216	
...4	CP107	2203-000221	C CERAMIC,CHIP;100nF,20%,50V,Y5V,TP3216	
...4	CP108	2203-000221	C CERAMIC,CHIP;100nF,20%,50V,Y5V,TP3216	
...4	CP109	2401-001840	C AL;100uF,20%,16V,GP,TP,6.3x11.5	
...4	CP110	2203-000221	C CERAMIC,CHIP;100nF,20%,50V,Y5V,TP3216	
...4	CP111	2203-000715	C CERAMIC,CHIP;3.3nF,10%,50V,X7R,TP2012	
...4	CP112	2401-000660	C AL;2.2uF,20%,50V,GP,TP,5x11.5	
...4	CP114	2203-000221	C CERAMIC,CHIP;100nF,20%,50V,Y5V,TP3216	
...4	CP115	2203-000221	C CERAMIC,CHIP;100nF,20%,50V,Y5V,TP3216	
...4	CP116	2203-000753	C CERAMIC,CHIP;330nF,-80-20%,50V,Y5V,TP	
...4	CP117	2401-002144	C AL;47uF,20%,16V,GP,TP,5x11.5	
...4	CP118	2203-000221	C CERAMIC,CHIP;100nF,20%,50V,Y5V,TP3216	
...4	CP119	2201-000692	C CERAMIC,DISC;0.008nF,0.5pF,50V,[illegible],TP4	
...4	CP120	2203-000578	C CERAMIC,CHIP;220nF,20%,50V,Y5V,TP3216	
...4	CP121	2401-000660	C AL;2.2uF,20%,50V,GP,TP,5x11.5	
...4	CP123	2203-000260	C CERAMIC,CHIP;10nF,10%,50V,X7R,TP2012	
...4	CP124	2401-000660	C AL;2.2uF,20%,50V,GP,TP,5x11.5	
...4	CP125	2203-000260	C CERAMIC,CHIP;10nF,10%,50V,X7R,TP2012	
...4	CP126	2401-001840	C AL;100uF,20%,16V,GP,TP,6.3x11.5	
...4	CP127	2203-000221	C CERAMIC,CHIP;100nF,20%,50V,Y5V,TP3216	
...4	CP129	2203-000260	C CERAMIC,CHIP;10nF,10%,50V,X7R,TP2012	
...4	CP130	2203-000239	C CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP2012	
...4	CP131	2201-000692	C CERAMIC,DISC;0.008nF,0.5pF,50V,[illegible],TP4	
...4	CP132	2203-000239	C CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP2012	
...4	CP133	2203-000221	C CERAMIC,CHIP;100nF,20%,50V,Y5V,TP3216	
...4	CP134	2401-001840	C AL;100uF,20%,16V,GP,TP,6.3x11.5	
...4	CP135	2401-002144	C AL;47uF,20%,16V,GP,TP,5x11.5	
...4	CP136	2203-000260	C CERAMIC,CHIP;10nF,10%,50V,X7R,TP2012	
...4	CP137	2203-000938	C CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP2012	
...4	CP142	2401-000199	C AL;1000uF,20%,6.3V,GP,TP,10x12.5	
...4	CP143	2401-002144	C AL;47uF,20%,16V,GP,TP,5x11.5	
...4	CP144	2203-000221	C CERAMIC,CHIP;100nF,20%,50V,Y5V,TP3216	
...4	CP145	2203-000221	C CERAMIC,CHIP;100nF,20%,50V,Y5V,TP3216	
...4	CP201	2203-000325	C CERAMIC,CHIP;12nF,10%,50V,X7R,TP3216,	
...4	CP203	2401-002144	C AL;47uF,20%,16V,GP,TP,5x11.5	
...4	CP204	2203-000221	C CERAMIC,CHIP;100nF,20%,50V,Y5V,TP3216	
...4	CP205	2401-001840	C AL;100uF,20%,16V,GP,TP,6.3x11.5	
...4	CP206	2203-000221	C CERAMIC,CHIP;100nF,20%,50V,Y5V,TP3216	
...4	CP207	2401-001840	C AL;100uF,20%,16V,GP,TP,6.3x11.5	
...4	CP208	2203-000221	C CERAMIC,CHIP;100nF,20%,50V,Y5V,TP3216	
...4	CP209	2401-001914	C AL;1uF,20%,50V,BP,TP,5x11.5	
...4	CP210	2401-001840	C AL;100uF,20%,16V,GP,TP,6.3x11.5	
...4	CP211	2401-000603	C AL;1uF,20%,50V,GP,TP,5x11.5	
...4	CP213	2401-000603	C AL;1uF,20%,50V,GP,TP,5x11.5	
...4	CP214	2203-000578	C CERAMIC,CHIP;220nF,20%,50V,Y5V,TP3216	
...4	CP215	2401-000603	C AL;1uF,20%,50V,GP,TP,5x11.5	
...4	CP216	2203-000221	C CERAMIC,CHIP;100nF,20%,50V,Y5V,TP3216	
...4	CP217	2203-000578	C CERAMIC,CHIP;220nF,20%,50V,Y5V,TP3216	
...4	CP218	2203-002085	C CERAMIC,CHIP;56nF,10%,50V,X7R,TP2012,	
...4	CP219	2203-000495	C CERAMIC,CHIP;2.2nF,10%,50V,X7R,TP2012	
...4	CP220	2203-000578	C CERAMIC,CHIP;220nF,20%,50V,Y5V,TP3216	
...4	CP221	2203-000221	C CERAMIC,CHIP;100nF,20%,50V,Y5V,TP3216	
...4	CP301	2401-001840	C AL;100uF,20%,16V,GP,TP,6.3x11.5	
...4	CP302	2203-000221	C CERAMIC,CHIP;100nF,20%,50V,Y5V,TP3216	
...4	CP303	2401-001840	C AL;100uF,20%,16V,GP,TP,6.3x11.5	
...4	CP304	2203-000221	C CERAMIC,CHIP;100nF,20%,50V,Y5V,TP3216	
...4	CP305	2203-001077	C CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP201	
...4	CP306	2203-001077	C CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP201	
...4	DP101	0401-000160	DIODE-SWITCHING;JSS314,30V,100mA,USC,TP	
...4	DP103	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
...4	DP105	0401-000160	DIODE-SWITCHING;JSS314,30V,100mA,USC,TP	
...4	DP201	0403-000334	DIODE-ZENER;UZ2.7BSA,2.7V,2.54-2.75V,500	
...4	ICP103	AA13-20004A	IC HYBRID;-,PAP102T,SIP,6P,PRE-AMP,TP	
...4	ICP105	1204-000635	IC PICTURE PROCESS;SDA9189X,SOP,32P,350M	
...4	ICP301	1002-000206	IC A/D CONVERTER;SDA9187-2X,5BIT,SOP,28P	
...4	LP102	2701-000219	INDUCTOR AXIAL;820nH,10%,2.5x3.4mm	
...4	LP103	2701-000114	INDUCTOR AXIAL;10uH,10%,2.5x3.4mm	
...4	LP104	2701-000114	INDUCTOR AXIAL;10uH,10%,2.5x3.4mm	
...4	LP105	2701-000114	INDUCTOR AXIAL;10uH,10%,2.5x3.4mm	
...4	LP201	2701-000197	INDUCTOR AXIAL;5.6uH,10%,2.5x3.4mm	

Level	Loc. No.	Code No.	Description ; Specification	Remark
...4	LP301	2701-000114	INDUCTOR AXIAL;10uH,10%,2.5x3.4mm	
...4	PCB	AA41-11003A	PCB PIP;SCT53A,2L,FR-4,330x245x1.6T,A6	S.N.A
...4	QP104	0501-000342	TR-SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT	
...4	QP105	0501-000342	TR-SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT	
...4	QP106	0501-000342	TR-SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT	
...4	QP201	0501-000342	TR-SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT	
...4	QP202	0501-000342	TR-SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT	
...4	QP203	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
...4	QP204	0501-000342	TR-SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT	
...4	QP205	0501-000342	TR-SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT	
...4	QP206	0501-000342	TR-SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT	
...4	QP302	0501-000342	TR-SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT	
...4	QP303	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
...4	QP304	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
...4	QP305	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
...4	RC129	2007-000586	R-CHIP;22KOHM,5%,1/10W,DA,TP2012	
...4	RP101	2007-001208	R-CHIP;82KOHM,5%,1/10W,DA,TP2012	
...4	RP104	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
...4	RP105	2007-000328	R-CHIP;11KOHM,5%,1/10W,DA,TP2012	
...4	RP106	2007-000774	R-CHIP;33KOHM,5%,1/10W,DA,TP2012	
...4	RP107	2007-000409	R-CHIP;15KOHM,5%,1/10W,DA,TP2012	
...4	RP108	2007-000493	R-CHIP;2.2KOHM,5%,1/10W,DA,TP2012	
...4	RP109	2007-000830	R-CHIP;39KOHM,5%,1/10W,DA,TP2012	
...4	RP110	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP2012	
...4	RP111	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
...4	RP112	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP2012	
...4	RP113	2007-000774	R-CHIP;33KOHM,5%,1/10W,DA,TP2012	
...4	RP114	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP115	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP116	2007-000493	R-CHIP;2.2KOHM,5%,1/10W,DA,TP2012	
...4	RP118	2001-000117	R-CARBON(S);68OHM,5%,1/2W,AA,TP,2.4X6.4M	
...4	RP119	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP2012	
...4	RP122	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP2012	
...4	RP123	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP2012	
...4	RP124	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP2012	
...4	RP125	2007-000401	R-CHIP;150OHM,5%,1/10W,DA,TP2012	
...4	RP127	2007-000030	R-CHIP;560OHM,5%,1/10W,DA,TP2012	
...4	RP128	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP2012	
...4	RP130	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
...4	RP131	2007-000586	R-CHIP;22KOHM,5%,1/10W,DA,TP2012	
...4	RP132	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
...4	RP135	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
...4	RP136	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
...4	RP137	2007-001039	R-CHIP;56KOHM,5%,1/10W,DA,TP2012	
...4	RP138	2007-000586	R-CHIP;22KOHM,5%,1/10W,DA,TP2012	
...4	RP140	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
...4	RP201	2007-001039	R-CHIP;56KOHM,5%,1/10W,DA,TP2012	
...4	RP202	2007-000401	R-CHIP;150OHM,5%,1/10W,DA,TP2012	
...4	RP203	2007-000703	R-CHIP;3.6KOHM,5%,1/10W,DA,TP2012	
...4	RP204	2007-000693	R-CHIP;22OHM,5%,1/10W,DA,TP2012	
...4	RP205	2007-000477	R-CHIP;1MOHM,5%,1/10W,DA,TP2012	
...4	RP206	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP2012	
...4	RP207	2007-001009	R-CHIP;51KOHM,5%,1/10W,DA,TP2012	
...4	RP208	2007-000774	R-CHIP;33KOHM,5%,1/10W,DA,TP2012	
...4	RP209	2007-000401	R-CHIP;150OHM,5%,1/10W,DA,TP2012	
...4	RP210	2007-000221	R-CHIP;1.2KOHM,5%,1/10W,DA,TP2012	
...4	RP211	2007-001001	R-CHIP;510OHM,5%,1/10W,DA,TP2012	
...4	RP212	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP2012	
...4	RP213	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
...4	RP215	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
...4	RP216	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
...4	RP217	2007-000409	R-CHIP;15KOHM,5%,1/10W,DA,TP2012	
...4	RP301	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP303	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
...4	RP304	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP307	2007-000518	R-CHIP;2.7KOHM,5%,1/10W,DA,TP2012	
...4	RP308	2007-000401	R-CHIP;150OHM,5%,1/10W,DA,TP2012	
...4	RP309	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP2012	
...4	RP310	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP2012	
...4	RP311	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP2012	
...4	RP312	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP2012	
...4	RP313	2007-000798	R-CHIP;360OHM,5%,1/10W,DA,TP2012	
...4	RP314	2007-000798	R-CHIP;360OHM,5%,1/10W,DA,TP2012	
...4	RP315	2007-000798	R-CHIP;360OHM,5%,1/10W,DA,TP2012	
...4	RP316	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
...4	RP317	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
...4	XP101	2801-000235	CRYSTAL UNIT;3.579545MHz,40ppm,28-AAM,S,	

Level	Loc. No.	Code No.	Description ; Specification	Remark
...4	XP102	2801-000274	CRYSTAL UNIT;4.433619MHZ,30PPM,28-AAM,20	
...4	XP301	2802-000121	RESONATOR-CERAMIC;20.48MHz,0.5%,TP,10.0x	
..3		AA63-40013A	SHIELD CASE;-,SPTE,T0.5,SCT51A,WZ74	S.N.A
..3		0202-000187	SOLDER WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
.2		AA95-00644A	ASSY PCB,TTX;-,SP43J5HFJ51A,-,ENG VER	
..3	CNT01	3711-002709	CONNECTOR-HEADER;NOWALL,12P,1R,2.5MM,ANG	
..3	CNT02	3711-002707	CONNECTOR-HEADER;NOWALL,9P,1R,2.5mm,ANGL	
..3	ICT01	AA13-00046A	IC MCU;SDA545x OTP 13B,OTP,ST,54K,-,D	
..3	ICT02	1103-001209	IC EEPROM;AT24C04-PC27,C,512Kx8Bit,DIP,8	
..3	ICT04	1001-000223	IC VIDEO SWITCH;TEA5114A,-,DIP,16P,334MI	
..3	XT01	2801-000724	CRYSTAL UNIT;6MHz,50ppm,28-AAM,20pF,40ohm	
..3		AA99-20079Q	ASSY PCB SUB.AUTO;-,AA99-30187G,-,V	S.N.A
...4	CT01	2401-002009	C AL;100uF,20%,16V,GP,TP,6.3x7.5	
...4	CT02	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
...4	CT03	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
...4	CT04	2203-000818	C CERAMIC,CHIP;0.033nF,5%,50V,NP0,TP201	
...4	CT05	2203-000818	C CERAMIC,CHIP;0.033nF,5%,50V,NP0,TP201	
...4	CT06	2401-000486	C AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
...4	CT07	2203-000802	C CERAMIC,CHIP;33nF,10%,50V,X7R,TP2012	
...4	CT08	2401-002009	C AL;100uF,20%,16V,GP,TP,6.3x7.5	
...4	CT09	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
...4	CT10	2203-000260	C CERAMIC,CHIP;10nF,10%,50V,X7R,TP2012	
...4	CT12	2203-000802	C CERAMIC,CHIP;33nF,10%,50V,X7R,TP2012	
...4	CT13	2401-002009	C AL;100uF,20%,16V,GP,TP,6.3x7.5	
...4	CT14	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
...4	CT15	2203-000575	C CERAMIC,CHIP;220NF,10%,25V,X7R,TP2012	
...4	CT16	2203-000575	C CERAMIC,CHIP;220NF,10%,25V,X7R,TP2012	
...4	CT17	2203-000575	C CERAMIC,CHIP;220NF,10%,25V,X7R,TP2012	
...4	CT18	2203-000575	C CERAMIC,CHIP;220NF,10%,25V,X7R,TP2012	
...4	CT19	2203-000575	C CERAMIC,CHIP;220NF,10%,25V,X7R,TP2012	
...4	CT20	2203-000575	C CERAMIC,CHIP;220NF,10%,25V,X7R,TP2012	
...4	CT21	2401-000302	C AL;100uF,20%,25V,GP,TP,6.3x11.5	
...4	CT22	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
...4	CT23	2401-002009	C AL;100uF,20%,16V,GP,TP,6.3x7.5	
...4	CT24	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
...4	DZT01	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
...4	DZT02	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
...4	ICT03	1203-000515	IC VOL. DETECTOR;7042,TO-92,3P,177MIL,PL	
...4	ICT05	0801-000410	IC CMOS LOGIC;74HC32,OR GATE,SOP,14P,150	
...4	JT03	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
...4	LT01	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
...4	LT02	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
...4	LT03	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
...4	LT04	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
...4	LT05	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
...4	PCB	AA41-00276A	PCB-TTX;SP43J5MF,FR-4,2L,A,1.6T,180x24	S.N.A
...4	RT01	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RT02	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RT03	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RT04	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP2012	
...4	RT05	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP2012	
...4	RT06	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP2012	
...4	RT07	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
...4	RT08	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
...4	RT09	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
...4	RT10	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP2012	
...4	RT11	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP2012	
...4	RT12	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP2012	
...4	RT13	2007-000518	R-CHIP;2.7KOHM,5%,1/10W,DA,TP2012	
...4	RT14	2007-000653	R-CHIP;27KOHM,5%,1/10W,DA,TP2012	
...4	RT15	2007-000477	R-CHIP;1MOHM,5%,1/10W,DA,TP2012	
...4	RT16	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RT18	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP2012	
...4	RT22	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP2012	
...4	RT26	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RT27	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RT28	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RT29	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RT30	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RT31	2007-000672	R-CHIP;220OHM,5%,1/10W,DA,TP2012	
...4	RT32	2007-000728	R-CHIP;300OHM,5%,1/10W,DA,TP2012	
...4	RT33	2007-000572	R-CHIP;220OHM,5%,1/10W,DA,TP2012	
...4	RT34	2007-000728	R-CHIP;300OHM,5%,1/10W,DA,TP2012	
...4	RT35	2007-000572	R-CHIP;220OHM,5%,1/10W,DA,TP2012	
...4	RT36	2007-000728	R-CHIP;300OHM,5%,1/10W,DA,TP2012	
..3		0202-000187	SOLDER WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A

Level	Loc. No.	Code No.	Description ; Specification	Remark
..3		0202-001004	SOLDER CREAM;SQ-2030M,SZH-1,S63A,D0.04,5	S.N.A
..3		AA63-40014A	SHIELD CASE;T,-,SPTE,T0.5,SCT51A,-	S.N.A
.2		AA59-00171A	MODULE FOCUS PACK;SVP-5200,S300,P3,-	
.2		AA99-30210N	ASSY PCB ROBOT;-,AA94-03459H,-,ER	S.N.A
..3	CN201	3711-003051	CONNECTOR-HEADER;BOX,8P,1R,2.5mm,STRAGHT	
..3	CN202	3711-003052	CONNECTOR-HEADER;BOX,10P,1R,2.5mm,STRAGH	
..3	CN501	3711-003051	CONNECTOR-HEADER;BOX,8P,1R,2.5mm,STRAGHT	
..3	CNY01	3711-003973	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,STRAIG	
..3	CS810	2201-000446	C CERAMIC,DISC;3.3nF,20%,400V,Y5U,TP,15x	
..3	CS811	2201-000446	C CERAMIC,DISC;3.3nF,20%,400V,Y5U,TP,15x	
..3	DS801	0402-000102	DIODE-BRIDGE;D2SB60,600V,1.5A,-	
..3	FI101	2904-000253	FILTER SAW AV;38.9MHz,DIP10K,ST,18dB,B/G	
..3	FI102	2904-001010	FILTER SAW AV;32.9-33.4MHz,SIP5P,ST,14.4	
..3	H002	AA40-10006T	TUNER F/S;TECC2849PG29A(S),PAL-B/G,TR,19	
..3	IC501	AA96-00111L	ASSY-H/S;-,AA62-30013L,KA78R12,	
...4		1203-000165	IC POS.ADJUST REG.;78R12,TO-220,3P,-,-	
...4		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
...4		AA62-30013L	HEATSINK-ES,-,-,-,44/22,-,WHT,-,-	
..3	IC807	AA96-50147A	ASSY-H/S;-,TR,AA62-30012B,KA7805A,-	S.N.A
...4		1203-000274	IC POS.FIXED REG.;7805,TO-220,3P,-,PLAS	
...4		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
...4		AA62-30012B	HEAT SINK-ES;-,A6063,EXTR,-,-,45(16),T02	S.N.A
..3	IC901	AA09-00093A	IC MICOM;Z9035612PSC,R50P3,SP43J5HF,52P	
..3	IC902	1103-001106	IC EEPROM;C81DC,1028x8Bit,DIP,8P,300MIL,	
..3	ICS801	AA13-00024A	IC HYBRID;-,TNY253P,-,8PIN,-,-	
..3	ICS802	0604-001032	PHOTO-COUPLER;TR,170-260%,300mW,DIP-4,ST	
..3		AA99-10205F	ASSY PCB MAIN,AUTO;-,AA99-30210N,-,V	S.N.A
...4	C103	2201-000119	C CERAMIC,DISC;100nF,-80-20%,50V,Y5V,TP	
...4	C104	2401-001840	C AL;100uF,20%,16V,GP,TP,6.3x11.5	
...4	C105	2401-000302	C AL;100uF,20%,25V,GP,TP,6.3x11.5	
...4	C107	2305-000665	C FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
...4	C109	2201-000119	C CERAMIC,DISC;100nF,-80-20%,50V,Y5V,TP	
...4	C110	2401-001840	C AL;100uF,20%,16V,GP,TP,6.3x11.5	
...4	C119	2201-000119	C CERAMIC,DISC;100nF,-80-20%,50V,Y5V,TP	
...4	C121	2305-000665	C FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
...4	C125	2401-000603	C AL;1uF,20%,50V,GP,TP,5x11.5	
...4	C126	2201-000119	C CERAMIC,DISC;100nF,-80-20%,50V,Y5V,TP	
...4	C130	2201-000119	C CERAMIC,DISC;100nF,-80-20%,50V,Y5V,TP	
...4	C131	2305-000665	C FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
...4	C132	2305-000665	C FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
...4	C133	2401-001363	C AL;470uF,20%,16V,GP,TP,10x12.5,5	
...4	C134	2401-002273	C AL;220uF,20%,25V,HR,TP,10x20mm,5m	
...4	C135	2401-000287	C AL;100uF,20%,16V,WT,TP,6.3x11,5	
...4	C136	2401-000027	C AL;4.7uF,20%,50V,GP,TP,5x11.5	
...4	C137	2401-002212	C AL;10uF,20%,25V,WT,TP,5x11.5	
...4	C138	2305-000665	C FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
...4	C139	2201-000180	C CERAMIC,DISC;10nF,10%,50V,Y5V,TP,7x3.5	
...4	C140	2201-000292	C CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
...4	C141	2201-000292	C CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
...4	C142	2305-000289	C FILM,MPEF;220nF,5%,63V,TP,-,5mm	
...4	C143	2401-000667	C AL;2.2uF,20%,50V,WT,TP,5x11.5	
...4	C144	2201-000180	C CERAMIC,DISC;10nF,10%,50V,Y5V,TP,7x3.5	
...4	C145	2305-000665	C FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
...4	C146	2305-000665	C FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
...4	C147	2401-000660	C AL;2.2uF,20%,50V,GP,TP,5x11.5	
...4	C148	2305-000665	C FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
...4	C149	2401-000947	C AL;22uF,20%,35V,GP,TP,5x11.5	
...4	C180	2401-002300	C AL;47uF,20%,50V,GP,TP,6.3x11.5	
...4	C185	2401-001363	C AL;470uF,20%,16V,GP,TP,10x12.5,5	
...4	C191	2401-002619	C AL;47uF,20%,25V,GP,TP,5x11.5	
...4	C501	2305-000665	C FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
...4	C502	2401-001397	C AL;470uF,20%,25V,GP,TP,10x16.5	
...4	C503	2305-000665	C FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
...4	C504	2401-000832	C AL;220uF,20%,25V,GP,TP,8x11.5,5	
...4	C505	2305-000665	C FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
...4	C506	2401-002594	C AL;220uF,20%,16V,GP,TP,8x11.5,5	
...4	C507	2305-000665	C FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
...4	C508	2401-002286	C AL;470uF,20%,16V,WT,TP,10x12.5,5	
...4	C509	2305-000665	C FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
...4	C510	2401-000133	C AL;1000uF,20%,16V,GP,TP,10x20,5	
...4	C511	2305-000665	C FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
...4	C512	2401-000689	C AL;2200uF,20%,16V,GP,TP,13x25,5	
...4	C519	2305-000665	C FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
...4	C520	2401-001397	C AL;470uF,20%,25V,GP,TP,10x16.5	
...4	C521	2305-000665	C FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
...4	C522	2401-002286	C AL;470uF,20%,16V,WT,TP,10x12.5,5	

Level	Loc. No.	Code No.	Description ; Specification	Remark
4	C523	2201-000292	C-CERAMIC,DISC,1nF,10%,50V,Y5P,TP,5x3.5	
4	C537	2305-000665	C-FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x5.0m	
4	C538	2401-001840	C-AL,100uF,20%,16V,GP,TP,6.3x11.5	
4	C539	2401-001840	C-AL,100uF,20%,16V,GP,TP,6.3x11.5	
4	C540	2305-000665	C-FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x5.0m	
4	C543	2201-000144	C-CERAMIC,DISC,0.1nF,5%,50V,NP0,TP,5x3	
4	C544	2401-002144	C-AL,47uF,20%,16V,GP,TP,5x11.5	
4	C601	2401-002299	C-AL,4.7uF,20%,50V,GP,TP,5x7.5	
4	C602	2401-002299	C-AL,4.7uF,20%,50V,GP,TP,5x7.5	
4	C566	2305-000665	C-FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x5.0m	
4	C567	2401-000603	C-AL,1uF,20%,50V,GP,TP,5x11.5	
4	C568	2401-000603	C-AL,1uF,20%,50V,GP,TP,5x11.5	
4	C569	2401-000962	C-AL,22uF,20%,50V,GP,TP,5x11.5	
4	C570	2401-000603	C-AL,1uF,20%,50V,GP,TP,5x11.5	
4	C571	2401-001537	C-AL,47uF,20%,25V,GP,TP,6.3x7mm,5mm	
4	C576	2401-001192	C-AL,33uF,20%,50V,GP,TP,6.3x11.5	
4	C586	2201-000411	C-CERAMIC,DISC,0.27nF,10%,50V,Y5P,TP,4x3	
4	C587	2201-000411	C-CERAMIC,DISC,0.27nF,10%,50V,Y5P,TP,4x3	
4	C588	2401-000192	C-AL,1000uF,20%,50V,GP,TP,16x25,7.5	
4	C589	2305-000665	C-FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x5.0m	
4	C590	2305-000665	C-FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x5.0m	
4	C691	2401-000192	C-AL,1000uF,20%,50V,GP,TP,16x25,7.5	
4	C701	2401-000027	C-AL,4.7uF,20%,50V,GP,TP,5x11.5	
4	C801	2401-002300	C-AL,47uF,20%,50V,GP,TP,6.3x11.5	
4	C901	2202-000796	C-CERAMIC,MLC-AXIAL,1NF,10%,50V,Y5P,TP,3	
4	C905	2401-001496	C-AL,47uF,20%,16V,GP,TP,5x7.5	
4	C906	2305-000149	C-FILM,MPEF,100nF,5%,100V,TP,12x12.5x6.5	
4	C908	2201-000292	C-CERAMIC,DISC,1nF,10%,50V,Y5P,TP,5x3.5.	
4	C909	2201-000292	C-CERAMIC,DISC,1nF,10%,50V,Y5P,TP,5x3.5.	
4	C912	2201-000119	C-CERAMIC,DISC,100nF,+80-20%,50V,Y5V,TP	
4	C913	2201-000193	C-CERAMIC,DISC,0.01nF,0.25pF,50V,NP0,TP	
4	C914	2201-000573	C-CERAMIC,DISC,0.047nF,5%,50V,NP0,TP,5x3	
4	C915	2201-000119	C-CERAMIC,DISC,100nF,+80-20%,50V,Y5V,TP	
4	C916	2401-002042	C-AL,220uF,20%,10V,GP,TP,6.3x11.5	
4	C917	2401-002144	C-AL,47uF,20%,16V,GP,TP,5x11.5	
4	C918	2201-000119	C-CERAMIC,DISC,100nF,+80-20%,50V,Y5V,TP	
4	C919	2401-000480	C-AL,10uF,20%,50V,GP,TP,5x11.5	
4	C920	2201-000119	C-CERAMIC,DISC,100nF,+80-20%,50V,Y5V,TP	
4	C925	2201-000119	C-CERAMIC,DISC,100nF,+80-20%,50V,Y5V,TP	
4	C926	2401-000480	C-AL,10uF,20%,50V,GP,TP,5x11.5	
4	C927	2202-000251	C-CERAMIC,MLC-AXIAL,330pF,10%,50V,Y5P,TP	
4	C928	2202-000796	C-CERAMIC,MLC-AXIAL,1NF,10%,50V,Y5P,TP,3	
4	CN003	3711-002642	CONNECTOR-HEADER,BOX,3P,1R,2.5MM,STRAIGH	
4	CN402	3711-002642	CONNECTOR-HEADER,BOX,3P,1R,2.5MM,STRAIGH	
4	CN403	3711-002642	CONNECTOR-HEADER,BOX,3P,1R,2.5MM,STRAIGH	
4	CN404	3711-002642	CONNECTOR-HEADER,BOX,3P,1R,2.5MM,STRAIGH	
4	CN601	3711-002643	CONNECTOR-HEADER,BOX,4P,1R,2.5MM,STRAIGH	
4	CS801	2201-000332	C-CERAMIC,DISC,2.2nF,20%,250V,Y5U,TP,9x4	
4	CS802	2201-000332	C-CERAMIC,DISC,2.2nF,20%,250V,Y5U,TP,9x4	
4	CS804	2201-000119	C-CERAMIC,DISC,100nF,+80-20%,50V,Y5V,TP	
4	CS805	2401-002286	C-AL,470uF,20%,16V,WT,TP,10x12.5,5	
4	CS807	2201-000119	C-CERAMIC,DISC,100nF,+80-20%,50V,Y5V,TP	
4	CS808	2401-002286	C-AL,470uF,20%,16V,WT,TP,10x12.5,5	
4	CS809	2201-000556	C-CERAMIC,DISC,0.47nF,10%,500V,Y5P,TP,5.	
4	CS812	2201-002076	C-CERAMIC,DISC,0.068nF,5%,1kV,SL,TP,8x4m	
4	CZ144	2401-000480	C-AL,10uF,20%,50V,GP,TP,5x11.5	
4	CZ146	2401-000832	C-AL,220uF,20%,25V,GP,TP,8x11.5,5	
4	CZ147	2201-000193	C-CERAMIC,DISC,0.01nF,0.25pF,50V,NP0,TP	
4	CZ148	2201-000193	C-CERAMIC,DISC,0.01nF,0.25pF,50V,NP0,TP	
4	CZ149	2201-000516	C-CERAMIC,DISC,4.7nF,+100-0%,500V,Y5U,TP	
4	CZ150	2201-000516	C-CERAMIC,DISC,4.7nF,+100-0%,500V,Y5U,TP	
4	CZ151	2401-001513	C-AL,47uF,20%,16V,WT,TP,5x11.5	
4	CZ152	2401-001157	C-AL,33uF,20%,160V,GP,TP,12.5x20.5	
4	CZ153	2401-001513	C-AL,47uF,20%,16V,WT,TP,5x11.5	
4	CZ155	2201-000604	C-CERAMIC,DISC,0.056nF,+100-0%,500V,SL,T	
4	CZ167	2401-001220	C-AL,4.7uF,20%,160V,GP,TP,8x11.5,5	
4	CZ167A	2401-001220	C-AL,4.7uF,20%,160V,GP,TP,8x11.5,5	
4	D101	0401-001088	DIODE-SWITCHING,BAW76,50V,300mA,DO-35,TP	
4	D102	0401-001088	DIODE-SWITCHING,BAW76,50V,300mA,DO-35,TP	
4	D103	0401-001088	DIODE-SWITCHING,BAW76,50V,300mA,DO-35,TP	
4	D501	0401-000005	DIODE-SWITCHING,1N4148,100V,200mA,DO-35,	
4	D664	0402-000546	DIODE-RECTIFIER,TVR10G,400V,1.0A,DO-41,T	
4	D665	0401-000005	DIODE-SWITCHING,1N4148,100V,200mA,DO-35,	
4	D666	0401-000005	DIODE-SWITCHING,1N4148,100V,200mA,DO-35,	
4	D667	0401-000005	DIODE-SWITCHING,1N4148,100V,200mA,DO-35,	
4	D668	0401-000005	DIODE-SWITCHING,1N4148,100V,200mA,DO-35,	
4	D669	0401-000005	DIODE-SWITCHING,1N4148,100V,200mA,DO-35,	

Level	Loc. No.	Code No.	Description ; Specification	Remark
4	D701	0401-000005	DIODE-SWITCHING,1N4148,100V,200mA,DO-35	
4	D702	0401-000005	DIODE-SWITCHING,1N4148,100V,200mA,DO-35.	
4	D703	0401-000005	DIODE-SWITCHING,1N4148,100V,200mA,DO-35	
4	D901	0401-000005	DIODE-SWITCHING,1N4148,100V,200mA,DO-35.	
4	D902	0401-000005	DIODE-SWITCHING,1N4148,100V,200mA,DO-35.	
4	D903	0401-000005	DIODE-SWITCHING,1N4148,100V,200mA,DO-35	
4	D904	0401-000005	DIODE-SWITCHING,1N4148,100V,200mA,DO-35	
4	D905	0401-000005	DIODE-SWITCHING,1N4148,100V,200mA,DO-35.	
4	D906	0401-000005	DIODE-SWITCHING,1N4148,100V,200mA,DO-35	
4	D907	0401-000005	DIODE-SWITCHING,1N4148,100V,200mA,DO-35.	
4	DS802	1405-000152	VARISTOR,560V,2500A,14x8.5mm,TP	
4	DS803	0403-001322	DIODE-ZENER,MTZJ8.2B,7.78-8.19V,500mW,DO	
4	DS804	0403-001318	DIODE-ZENER,MTZJ4.3B,4.17-4.43V,500mW,DO	
4	DS805	0402-000534	DIODE-RECTIFIER,RG10V,400V,1.2A,DO-201,T	
4	DS806	1405-001030	VARISTOR,120V,2500A,14x8.5mm,TP	
4	DS807	0402-000546	DIODE-RECTIFIER,TVR10G,400V,1.0A,DO-41,T	
4	DS808	1405-000152	VARISTOR,560V,2500A,14x8.5mm,TP	
4	DS809	0404-001056	DIODE-SCHOTTKY,RK16,60V,1.5A,DO-204AC,TP	
4	DS810	1405-000152	VARISTOR,560V,2500A,14x8.5mm,TP	
4	DZ116	0401-000005	DIODE-SWITCHING,1N4148,100V,200mA,DO-35,	
4	DZ117	0401-000005	DIODE-SWITCHING,1N4148,100V,200mA,DO-35,	
4	DZ118	0402-000546	DIODE-RECTIFIER,TVR10G,400V,1.0A,DO-41,T	
4	DZ119	0401-000005	DIODE-SWITCHING,1N4148,100V,200mA,DO-35,	
4	DZ120	0402-000546	DIODE-RECTIFIER,TVR10G,400V,1.0A,DO-41,T	
4	DZ121	0402-000546	DIODE-RECTIFIER,TVR10G,400V,1.0A,DO-41,T	
4	DZ501	0403-000508	DIODE-ZENER,MTZJ5.6B,5.6V,5.45-5.73V,500	
4	DZ502	0403-000508	DIODE-ZENER,MTZJ5.6B,5.6V,5.45-5.73V,500	
4	DZ503	0403-000720	DIODE-ZENER,MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ504	0403-000720	DIODE-ZENER,MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ505	0403-000720	DIODE-ZENER,MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ506	0403-000508	DIODE-ZENER,MTZJ5.6B,5.6V,5.45-5.73V,500	
4	DZ507	0403-000510	DIODE-ZENER,MTZJ6.2B,6.2V,5.96-6.27V,500	
4	DZ508	0403-000510	DIODE-ZENER,MTZJ6.2B,6.2V,5.96-6.27V,500	
4	DZ665	0403-001039	DIODE-ZENER,MA2560,56V,52-60V,1W,DO-41,T	
4	DZ666	0403-001325	DIODE-ZENER,MTZJ15C,14.35-15.09V,500mW,D	
4	DZ667	0403-001319	DIODE-ZENER,MTZJ4.7C,4.68-4.93V,500mW,DO	
4	DZ701	0403-001140	DIODE-ZENER,RD10ESAB,T4,10V,9.19-10.30V	
4	DZ901	0403-000700	DIODE-ZENER,TZP33A,33V,31-35V,1W,DO-41,T	
4	DZ901	0403-000508	DIODE-ZENER,MTZJ5.6B,5.6V,5.45-5.73V,500	
4	DZ902	0403-000508	DIODE-ZENER,MTZJ5.6B,5.6V,5.45-5.73V,500	
4	DZ903	0403-000508	DIODE-ZENER,MTZJ5.6B,5.6V,5.45-5.73V,500	
4	DZ904	0403-000508	DIODE-ZENER,MTZJ5.6B,5.6V,5.45-5.73V,500	
4	DZ905	0403-000510	DIODE-ZENER,MTZJ6.2B,6.2V,5.96-6.27V,500	
4	DZ906	0403-000510	DIODE-ZENER,MTZJ6.2B,6.2V,5.96-6.27V,500	
4	DZ907	0403-000510	DIODE-ZENER,MTZJ6.2B,6.2V,5.96-6.27V,500	
4	DZ911	0403-000510	DIODE-ZENER,MTZJ6.2B,6.2V,5.96-6.27V,500	
4	DZ912	0403-000508	DIODE-ZENER,MTZJ5.6B,5.6V,5.45-5.73V,500	
4	DZ914	0403-000508	DIODE-ZENER,MTZJ5.6B,5.6V,5.45-5.73V,500	
4	DZ915	0403-000508	DIODE-ZENER,MTZJ5.6B,5.6V,5.45-5.73V,500	
4	F901	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP-	
4	FI103	2903-000181	FILTER-CERAMIC,BR,5.5MHz,-,-,-,TP,TPS5.5	
4	FI104	2903-000129	FILTER-CERAMIC,BR,4.5MHz,-,-,-,TP-	
4	IC506	1203-000293	IC-POSI.FIXED REG.;7808,TO-220,3P,PLAS	
4	IC904	1203-000515	IC-VOL. DETECTOR;7042,TO-92,3P,177MIL,PL	
4	L101	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
4	L103	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
4	L106	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
4	L107	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
4	L108	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
4	L109	2701-000101	INDUCTOR-AXIAL;1.2uH,10%,2.5x3.4mm	
4	L110	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
4	L111	2701-000120	INDUCTOR-AXIAL;12uH,10%,2.5x3.4mm	
4	L112	2701-000299	INDUCTOR-AXIAL;13UH,10%,2.5X3.4MM	
4	L113	AA26-10006G	TRANS-IF;-,7mG,VIF,-,7mm,8pF,77.8MHz,ST	
4	L114	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
4	L115	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
4	L116	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
4	L117	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
4	L118	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
4	L501	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
4	L502	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
4	L503	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
4	L504	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
4	L505	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP	
4	L506	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
4	L507	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500.	
4	L514	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500.	

Level	Loc. No.	Code No.	Description ; Specification	Remark
4	L515	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500	
4	L601	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
4	L602	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
4	L604	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500.	
4	L901	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP	
4	L902	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
4	L903	2701-001040	INDUCTOR-AXIAL;10uH,10%,4.5x14mm	
4	L907	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500.	
4	L909	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
4	L910	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
4	L911	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
4	L912	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
4	LD901	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
4	LS801	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP	
4	LS802	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP	
4	LS803	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500.	
4	LZ112	2701-000002	INDUCTOR-AXIAL;100uH,10%,4.2x9.8mm	
4	PCB	AA41-00075B	PCB MAIN;SP43J7PF,FR-1,1L,B,1.6T,330X24	S.N.A
4	Q101	0504-000137	TR-DIGITAL;KSR1202,NPN,300mW,10K/10K,TO-	
4	Q102	0504-000123	TR-DIGITAL;KSR1010,NPN,300mW,10K,TO-92,T	
4	Q103	0501-000245	TR-SMALL SIGNAL;BC548C,NPN,500mW,TO-92,T	
4	Q104	0504-000123	TR-DIGITAL;KSR1010,NPN,300mW,10K,TO-92,T	
4	Q105	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
4	Q106	0504-000150	TR-DIGITAL;KSR2010,PNP,300mW,10K,TO-92,T	
4	Q107	0504-000123	TR-DIGITAL;KSR1010,NPN,300mW,10K,TO-92,T	
4	Q665	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
4	Q666	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
4	Q667	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
4	Q701	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
4	Q702	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
4	Q901	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
4	Q902	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
4	Q903	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
4	Q909	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
4	Q910	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
4	QS801	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1000mW,TO-	
4	QZ103	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
4	QZ104	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
4	QZ105	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
4	QZ106	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
4	R123	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R131	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R132	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R142	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R145	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R146	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R148	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R149	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R150	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R151	2001-000313	R-CARBON;11KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R152	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R153	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R154	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R155	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R156	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R157	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R158	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R159	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R160	2001-000796	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R161	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R162	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R163	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R164	2001-000490	R-CARBON;200OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R165	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R166	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R167	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R168	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R169	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R501	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
4	R502	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R503	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R504	2001-000405	R-CARBON;180OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R509	2008-000266	R-FUSIBLE(S);1ohm,5%,2W,AF,TP,3.9x10mm	
4	R510	2008-000266	R-FUSIBLE(S);1ohm,5%,2W,AF,TP,3.9x10mm	
4	R511	2008-001116	R-FUSIBLE(S);0.68ohm,10%,2W,AG,TP,3.9x12	
4	R512	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	

Level	Loc. No.	Code No.	Description ; Specification	Remark
4	R524	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R525	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R526	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R531	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R532	2001-000037	R-CARBON(S);330OHM,5%,1/2W,AA,TP,2.4X6.4	
4	R533	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R601	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4	
4	R602	2001-000605	R-CARBON;3.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R603	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R661	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6	
4	R662	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
4	R665	2001-001188	R-CARBON(S);8.2KOHM,5%,1/2W,AA,TP,2.4X6.	
4	R666	2001-001188	R-CARBON(S);8.2KOHM,5%,1/2W,AA,TP,2.4X6.	
4	R668	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
4	R669	2001-001144	R-CARBON(S);4.7KOHM,5%,1/2W,AA,TP,2.4X6.	
4	R670	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
4	R671	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
4	R672	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
4	R673	2001-000411	R-CARBON;18KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R674	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R675	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
4	R676	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R677	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R678	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R679	2001-001071	R-CARBON(S);12KOHM,5%,1/2W,AA,TP,2.4X6.4	
4	R680	2001-001000	R-CARBON;82KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R681	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
4	R682	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP,2.5x6.	
4	R683	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP,2.5x6.	
4	R684	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
4	R685	2004-001390	R-METAL(S);1Kohm,2%,1/2W,AA,TP,2.4x6.4mm	
4	R686	2004-001390	R-METAL(S);1Kohm,2%,1/2W,AA,TP,2.4x6.4mm	
4	R687	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
4	R689	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
4	R690	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R701	2001-000796	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R702	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R703	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R704	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R801	2003-001098	R-METAL OXIDE(S);22Kohm,5%,3W,AA,TP,6x16	
4	R901	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R903	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R904	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R905	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R906	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R907	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R908	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R909	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R910	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R912	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R914	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R915	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R916	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R917	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R918	2001-000832	R-CARBON;510OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R919	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R921	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R922	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R923	2001-000796	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R924	2001-000796	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R925	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R926	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R930	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R931	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R932	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R945	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R946	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R947	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R948	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R949	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R950	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R951	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R952	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R953	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R954	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R955	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	

Level	Loc. No.	Code No.	Description ; Specification	Remark
4	R558	2001-000291	R-CARBON;100OHM,5%,1/8W,AA,TP1.8X3.2VM	
4	R559	2001-000291	R-CARBON;100OHM,5%,1/8W,AA,TP1.8X3.2VM	
4	R560	2001-000291	R-CARBON;100OHM,5%,1/8W,AA,TP1.8X3.2VM	
4	R561	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP1.8X3.2M	
4	R562	2001-000864	R-CARBON,56KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R567	2001-000429	R-CARBON,1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R568	2001-000429	R-CARBON,1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R570	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP1.8X3.2M	
4	R571	2001-000790	R-CARBON;470OHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R574	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP1.8X3.2M	
4	R577	2001-001062	R-CARBON(S),10MOHM,5%,1/2W,AA,TP2.4X6.4	
4	R579	2001-000281	R-CARBON,100OHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R580	2001-000290	R-CARBON,10KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R581	2001-000577	R-CARBON,2KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R582	2001-000577	R-CARBON,2KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R583	2001-000577	R-CARBON,2KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R584	2001-000429	R-CARBON,1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R585	2001-000786	R-CARBON,47KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R586	2001-000429	R-CARBON,1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R587	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R588	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R589	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R590	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R591	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R592	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP1.8X3.2M	
4	R593	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R594	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP1.8X3.2MM	
4	RD901	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP1.8X3.2MM	
4	RD903	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP1.8X3.2M	
4	RF802	2008-000294	R-FUSIBLE(S),33ohm,5%,2W,AF,TP3.9x10mm	
4	RS801	2003-002194	R-METAL OXIDE(S),1.8KOHM,5%,1W,AF,TP2.5	
4	RS802	2001-001192	R-CARBON(S),820OHM,5%,1/2W,AA,TP2.4X6.4	
4	RS803	2001-001159	R-CARBON(S),5100HM,5%,1/2W,AA,TP2.4X6.4	
4	RS804	2001-001182	R-CARBON(S),7.5KOHM,5%,1/2W,AA,TP2.4X6	
4	RS805	2001-001107	R-CARBON(S),220ohm,5%,1/2W,AA,TP2.4x6.4	
4	RS806	2001-001159	R-CARBON(S),5100HM,5%,1/2W,AA,TP2.4X6.4	
4	RS807	2001-000739	R-CARBON;4.7KOHM,5%,1/8W,AA,TP1.8X3.2M	
4	RZ153	2008-001086	R-FUSIBLE(S),3.3ohm,5%,2W,AC,TP3.5x12mm	
4	RZ154	2003-000532	R-METAL OXIDE(S),1.8ohm,5%,2W,AF,TP4x12m	
4	RZ156	2001-001159	R-CARBON(S),5100HM,5%,1/2W,AA,TP2.4X6.4	
4	RZ165	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	RZ166	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP1.8X3.2M	
4	RZ167	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP1.8X3.2M	
4	RZ167A	2001-000654	R-CARBON;270OHM,5%,1/8W,AA,TP1.8X3.2MM	
4	RZ168	2003-002157	R-METAL OXIDE,220OHM,5%,2W,AG,TP5X16MM	
4	RZ169	2001-000019	R-CARBON(S),100HM,5%,1/2W,AA,TP2.4X6.4M	
4	RZ170	2001-000666	R-CARBON;330HM,5%,1/8W,AA,TP1.8X3.2MM	
4	RZ171	2001-000666	R-CARBON;330HM,5%,1/8W,AA,TP1.8X3.2MM	
4	RZ172	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP1.8X3.2M	
4	RZ173	2001-001139	R-CARBON(S);39KOHM,5%,1/2W,AA,TP2.4X6.4	
4	RZ174	2001-001139	R-CARBON(S);39KOHM,5%,1/2W,AA,TP2.4X6.4	
4	RZ175	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP1.8X3.2M	
4	RZ176	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP1.8X3.2M	
4	RZ177	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	RZ178	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP1.8X3.2M	
4	RZ179	2003-000713	R-METAL OXIDE(S),47ohm,5%,2W,AF,TP4x12m	
4	RZ180	2001-001100	R-CARBON(S),2.7OHM,5%,1/2W,AA,TP2.4X6.4	
4	RZ181	2001-001100	R-CARBON(S),2.7OHM,5%,1/2W,AA,TP2.4X6.4	
4	RZ182	2003-000713	R-METAL OXIDE(S),47ohm,5%,2W,AF,TP4x12m	
4	RZ183	2003-002157	R-METAL OXIDE,220OHM,5%,2W,AG,TP5X16MM	
4	RZ184	2003-002157	R-METAL OXIDE,220OHM,5%,2W,AG,TP5X16MM	
4	VR101	2103-000672	VR-SEMI,20Kohm,25%,1/5W,TOP	
2		AA95-00007A	ASSY F/CONVERTER;,SVP-434JM,KPT51A,NTSC	
3	CON01	3711-002709	CONNECTOR HEADER;NOWALL,12P1R,2.5MM,ANG	
3	CON02	3711-002703	CONNECTOR HEADER;NOWALL,5P1R,2.5mm,ANGL	
3	IC03	AA13-30021C	IC MCU;Z90234-R3911,52M-374RC,ST,24K,	
3	IC04	1103-001208	IC EEPROM;AT24C02 PC27 C,256x8bit,DIP8P	
3	S/CASE	AA63-40037A	SHIELD-CASE;,SPTE,T0.5,SCT12A,	S.N.A
3	XTR01	2804-001213	OSCILLATOR CLOCK,80MHz,100ppm,10TTL & CM	
3		AA99-20043V	ASSY PCB SUB,AUTO; AA95-00007A ,,,V	S.N.A
4	CF10	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
4	CF11	2401-001840	C-AL,100uF,20%,16V,GP,TP6.3x11.5	
4	CF12	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF13	2401-001513	C-AL,47uF,20%,16V,WT,TP,5x11.5	
4	CF14	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF15	2203-000429	C-CERAMIC,CHIP;0.018nF,5%,50V,NP0,TP,201	
4	CF16	2203-000634	C-CERAMIC,CHIP;0.022nF,5%,50V,NP0,TP,201	
4	CF17	2203-000429	C-CERAMIC,CHIP;0.018nF,5%,50V,NP0,TP,201	
4	CF18	2203-000683	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,201	
4	CF19	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF21	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF22	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF23	2401-001513	C-AL,47uF,20%,16V,WT,TP,5x11.5	
4	CF24	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF25	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF26	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF27	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF29	2401-001513	C-AL,47uF,20%,16V,WT,TP,5x11.5	
4	CF29	2401-001513	C-AL,47uF,20%,16V,WT,TP,5x11.5	
4	CF30	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF31	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF32	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF33	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF34	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF35	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF37	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF38	2401-001513	C-AL,47uF,20%,16V,WT,TP,5x11.5	
4	CF39	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF40	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF41	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF42	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF44	2404-000151	C-TA,CHIP;1uF,20%,16V,,,TP,3216,	
4	CF45	2203-001158	C-CERAMIC,CHIP;0.068nF,5%,50V,NP0,TP,201	
4	CF46	2404-000151	C-TA,CHIP;1uF,20%,16V,,,TP,3216,	
4	CF47	2203-001158	C-CERAMIC,CHIP;0.068nF,5%,50V,NP0,TP,201	
4	CF48	2404-000151	C-TA,CHIP;1uF,20%,16V,,TP,3216,	
4	CF49	2203-001158	C-CERAMIC,CHIP;0.068nF,5%,50V,NP0,TP,201	
4	CF50	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF51	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF52	2203-000316	C-CERAMIC,CHIP;0.12nF,5%,50V,NP0,TP,2012	
4	CF53	2203-000316	C-CERAMIC,CHIP;0.12nF,5%,50V,NP0,TP,2012	
4	CF54	2402-000173	C-AL,SMD;4.7uF,20%,35V,GP,TP4.3x4.3x5	
4	CF55	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF56	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
4	CF57	2402-000173	C-AL,SMD;4.7uF,20%,35V,GP,TP4.3x4.3x5	
4	CF58	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF60	2401-001840	C-AL,100uF,20%,16V,GP,TP6.3x11.5	
4	CF61	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF62	2401-001513	C-AL,47uF,20%,16V,WT,TP,5x11.5	
4	CF63	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF64	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF65	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF66	2401-001513	C-AL,47uF,20%,16V,WT,TP,5x11.5	
4	CF67	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF68	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF69	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF70	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF71	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF72	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF75	2401-001840	C-AL,100uF,20%,16V,GP,TP6.3x11.5	
4	CF76	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF77	2203-000429	C-CERAMIC,CHIP;0.018nF,5%,50V,NP0,TP,201	
4	CF78	2203-000429	C-CERAMIC,CHIP;0.018nF,5%,50V,NP0,TP,201	
4	CF79	2401-000027	C-AL;4.7uF,20%,50V,GP,TP5x11.5	
4	CF80	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF81	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF84	2203-000858	C-CERAMIC,CHIP;0.039nF,5%,50V,NP0,TP,201	
4	CF85	2203-000839	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,2012	
4	CF86	2203-000858	C-CERAMIC,CHIP;0.039nF,5%,50V,NP0,TP,201	
4	CF87	2203-000839	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,2012	
4	CF88	2203-000858	C-CERAMIC,CHIP;0.039nF,5%,50V,NP0,TP,201	
4	CF89	2203-000839	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,2012	
4	DF01	0401-000008	DIODE SWITCHING,DAN217,80V,100mA,SOT-23,	
4	DF02	0401-000008	DIODE SWITCHING,DAN217,80V,100mA,SOT-23,	
4	DF03	0401-000008	DIODE SWITCHING,DAN217,80V,100mA,SOT-23,	
4	FF13	2901-000226	FILTER-EMI SMD;25V,0.3A,,,100pF,3.2x1.25	
4	FF14	2901-000226	FILTER-EMI SMD;25V,0.3A,,,100pF,3.2x1.25	
4	FF15	2901-000233	FILTER-EMI SMD;50V,0.3A,,,330pF,4.5x3.2x	
4	FF16	2901-000233	FILTER-EMI SMD;50V,0.3A,,,330pF,4.5x3.2x	
4	FF17	2901-000233	FILTER-EMI SMD;50V,0.3A,,,330pF,4.5x3.2x	
4	IC01	1204-001406	IC-VIDEO PROCESS,FS310KBC,DIP,128P,1100M	
4	IC02	1105-001270	IC-DRAM;72V161621,2x524Kx16BIT,TSOP	
4	IC05	1203-001419	IC VOLTAGE REGULATOR;4931,TO-252,3P,6x	
4	LF10	2901-000297	FILTER-EMI ON BOARD;,,3A,,,,3.5x5.TP,	

Level	Loc. No.	Code No.	Description ; Specification	Remark
4	LF11	2701-000116	INDUCTOR AXIAL;10uH,10%,4.2x9.8mm	
4	LF12	2701-000115	INDUCTOR AXIAL;10uH,10%,3x7mm	
4	LF13	2701-000115	INDUCTOR AXIAL;10uH,10%,3x7mm	
4	LF14	2701-000115	INDUCTOR AXIAL;10uH,10%,3x7mm	
4	LF15	2701-000115	INDUCTOR AXIAL;10uH,10%,3x7mm	
4	LF16	2701-000149	INDUCTOR AXIAL;2.7uH,10%,2.5x3.4mm	
4	LF17	2701-000149	INDUCTOR AXIAL;2.7uH,10%,2.5x3.4mm	
4	LF18	2701-000149	INDUCTOR AXIAL;2.7uH,10%,2.5x3.4mm	
4	PCB	AA41-10997B	PCB FORMAT CONNERTER,KPM,S1A,4LFR,4.245X	S.N.A
4	R611	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	R612	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	R613	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	R615	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	R616	2007-000477	R-CHIP;1MOHM,5%,1/10W,DA,TP,2012	
4	R617	2007-000477	R-CHIP;1MOHM,5%,1/10W,DA,TP,2012	
4	R618	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
4	R619	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
4	R621	2007-000542	R-CHIP;270OHM,5%,1/10W,DA,TP,2012	
4	R622	3007-001118	R-CHIP;680OHM,5%,1/10W,DA,TP,2012	
4	R623	2007-000401	R-CHIP;150OHM,5%,1/10W,DA,TP,2012	
4	R624	2007-000401	R-CHIP;150OHM,5%,1/10W,DA,TP,2012	
4	R625	2007-000518	R-CHIP;2.7KOHM,5%,1/10W,DA,TP,2012	
4	R626	2007-000518	R-CHIP;2.7KOHM,5%,1/10W,DA,TP,2012	
4	R627	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	R629	2007-000781	R-CHIP;330HM,5%,1/10W,DA,TP,2012	
4	R630	2007-000781	R-CHIP;330HM,5%,1/10W,DA,TP,2012	
4	R631	2007-000781	R-CHIP;330HM,5%,1/10W,DA,TP,2012	
4	R632	2007-000781	R-CHIP;330HM,5%,1/10W,DA,TP,2012	
4	R633	2007-000781	R-CHIP;330HM,5%,1/10W,DA,TP,2012	
4	R634	2007-000781	R-CHIP;330HM,5%,1/10W,DA,TP,2012	
4	R635	2007-000781	R-CHIP;330HM,5%,1/10W,DA,TP,2012	
4	R636	2007-000781	R-CHIP;330HM,5%,1/10W,DA,TP,2012	
4	R637	2007-000781	R-CHIP;330HM,5%,1/10W,DA,TP,2012	
4	R638	2007-000781	R-CHIP;330HM,5%,1/10W,DA,TP,2012	
4	R639	2007-000781	R-CHIP;330HM,5%,1/10W,DA,TP,2012	
4	R640	2007-000781	R-CHIP;330HM,5%,1/10W,DA,TP,2012	
4	R641	2007-000781	R-CHIP;330HM,5%,1/10W,DA,TP,2012	
4	R642	2007-000781	R-CHIP;330HM,5%,1/10W,DA,TP,2012	
4	R643	2007-000781	R-CHIP;330HM,5%,1/10W,DA,TP,2012	
4	R644	2007-000781	R-CHIP;330HM,5%,1/10W,DA,TP,2012	
4	R645	2007-000781	R-CHIP;330HM,5%,1/10W,DA,TP,2012	
4	R646	2007-000781	R-CHIP;330HM,5%,1/10W,DA,TP,2012	
4	R647	2007-000781	R-CHIP;330HM,5%,1/10W,DA,TP,2012	
4	R648	2007-000781	R-CHIP;330HM,5%,1/10W,DA,TP,2012	
4	R649	2007-000781	R-CHIP;330HM,5%,1/10W,DA,TP,2012	
4	R651	2007-000781	R-CHIP;330HM,5%,1/10W,DA,TP,2012	
4	R652	2007-000781	R-CHIP;330HM,5%,1/10W,DA,TP,2012	
4	R653	2007-000781	R-CHIP;330HM,5%,1/10W,DA,TP,2012	
4	R654	2007-000781	R-CHIP;330HM,5%,1/10W,DA,TP,2012	
4	R655	2007-000781	R-CHIP;330HM,5%,1/10W,DA,TP,2012	
4	R656	2007-000781	R-CHIP;330HM,5%,1/10W,DA,TP,2012	
4	R657	2007-000781	R-CHIP;330HM,5%,1/10W,DA,TP,2012	
4	R658	2007-000781	R-CHIP;330HM,5%,1/10W,DA,TP,2012	
4	R659	2007-000781	R-CHIP;330HM,5%,1/10W,DA,TP,2012	
4	R660	2007-000781	R-CHIP;330HM,5%,1/10W,DA,TP,2012	
4	R661	2007-000781	R-CHIP;330HM,5%,1/10W,DA,TP,2012	
4	R662	2007-000781	R-CHIP;330HM,5%,1/10W,DA,TP,2012	
4	R664	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	R666	2007-000781	R-CHIP;330HM,5%,1/10W,DA,TP,2012	
4	R667	2007-000781	R-CHIP;330HM,5%,1/10W,DA,TP,2012	
4	R668	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	R670	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
4	R671	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
4	R672	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
4	R673	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
4	R674	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
4	R675	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
4	R676	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
4	R678	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
4	R679	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
4	R680	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
4	R681	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
4	R682	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	R683	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
4	R684	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
4	R685	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
4	R686	2007-001166	R-CHIP,750HM,5%,1/10W,DA,TP,2012	

Level	Loc. No.	Code No.	Description ; Specification	Remark
4	R687	2007-001166	R-CHIP,750HM,5%,1/10W,DA,TP,2012	
4	R688	2007-001166	R-CHIP,750HM,5%,1/10W,DA,TP,2012	
4	XTR02	2801-000152	CRYSTAL,UNIT,14.31818MHz,40ppm,28 AAM,16	
4	XTR04	2801-000724	CRYSTAL,UNIT,6MHz,50ppm,28 AAM,20pF,40oh	
2		AA39-20577A	LEAD CONNECTOR ASSY,SCP,YFH806 06,800	
2		AA39-20010C	LEAD CONNECTOR ASSY,,1P,YFH800 01,S,600,	
2		3301-001201	CORE FERRITE,AE,21x11x32mm,1500,28OG	
2		0202-000187	SOLDER WIRE FLUX ,RS60S,D1.2,63Sn/37Pb	S.N.A
2		AA65-30109A	CLAMP FBT,NYLON 66,V2,BLK,,,,	S.N.A
2		AA65-30105A	CLAMP WIRE,NYLON 66,V2,NTR,15MM,ALL MODE	S.N.A
2		AA65-30104B	CLAMP WIRE,NYLON 66,V2,BLK,W2.25,ALL MOD	S.N.A
2		AA65-30013A	CLAMP WIRE,NYLON 66,V0,NTR,DAWH 45N,,,	S.N.A

ASSY-WOOD

Level	Loc. No.	Code No.	Description ; Specification	Remark
1	*	AA91-00621A	ASSY WOOD ;WOOC 43M21 58,SVP-43JBSR,J7	
2	AWTAWB6006.001094		SCREW ASS'Y WOOD;WW,HH,+ M7,L32,ZPO(YEL)	S.N.A
2		AA91-00495A	ASSY WOOD,TOP ;WOOD,SVP 43JBSR,J7	
3	CWTHCWAA60-10051A		SCREW WOOD;PH,+ M4,L16,ZPO(BLK),SWRCH18A	
3		AA64-01398A	CABINET WOOD,TOP 43JB ,WOOD,,,	S.N.A
3		AA61-00510E	HOLDER SCREEN;43JB,ABS,BLK,HB,,,	
3		AA61-00510D	HOLDER SCREEN;43JB,ABS,BLK,HB,,,	
3		AA61-00507B	HOLDER CABINET,WOOD;43,54,62,JB,ABS,BLK,H	
2		AA91-00496A	ASSY WOOD,BOT; ,WOOD,SVP 43JBSR,J7	
3	CASCWB AA60-10051A		SCREW WOOD;PH,+ M4,L16,ZPO(BLK),SWRCH18A	
3	HCMCWBAA60-10051A		SCREW WOOD;PH,+ M4,L16,ZPO(BLK),SWRCH18A	
3	HW-CWBAA60-10051B		SCREW WOOD;RH,+ M3.5,L11,ZPO(YEL),SWRCH-1	
3	SPKCWB AA60-10051A		SCREW WOOD;PH,+ M4,L16,ZPO(BLK),SWRCH18A	
3		AA61-00509B	HOLDER,JERSEY;43,54,62,JB,ABS,BLK,HB,,,	
3		AA61-00533B	BRACKET GRILLE,43,54,62,JB,SECC T.1.0,5,	
3		AA63-00347B	COVER DUCT;43JB,+HPS, +HB,BLK,	
3		AA98-00049A	ASSY LEAD,CON; LEAD CON,CORE,AA39-20505	
4		3301-001201	CORE FERRITE,AE,21x11x32mm,1500,28OG	
5		AA39-00086A	LEAD CONNECTOR ASSY;,2,2UF,REC,REC,200V,UL	
3		AA60-00043A	SPACER SPEAKER;FELT,T2, ,43JB,	
3		AA64-01401A	CABINET WOOD,BOT 43JB ,WOOD,	S.N.A
3		AA61-00506B	HOLDER CRT,MAIN,43,54,62JB,HPS,BLK+HB	
3		3001-000279	SPEAKER;30W,8ohm,91dB,20Hz	
3		3001-001107	SPEAKER;20W,8ohm,95dB,1300Hz	
3		AA60-00078A	SPACER DUAL LOCK,54JB,x250,40X25	
3		AA61-00094C	HOLDER RAIL ,PC,533R,ABS,HB,BLK,490	
3		AA61-00097A	HOLDER WIRE ,,,NYLON 6/6,,,NTR,	
3		AA61-00458A	CASTER;,,,TP4015-05,NYL,OH47,,,SR4	S.N.A

ASSY-POWER,CORD

Level	Loc. No.	Code No.	Description ; Specification	Remark
⚠ 1	*	AA96-20109E	ASSY POWER,CORD;,,CP2/ND(4.0),H/C50mm,KK	
2		3811-000401	WIRE-PVC CU,BCWA,300V/ROLL,17/0.16mm,#22	S.N.A
2		AA39-10005X	POWER CORD;,,KP419C,KLCE,2P,2.29M,T,3P,	S.N.A
2		AA61-20294A	HOLDER;,P CORD,PPVO,BLK,NE 002	S.N.A

ASSY PCB CRT

Level	Loc. No.	Code No.	Description ; Specification	Remark
1	*	AA95-00923A	ASSY PCB CRT,,,51A,43/54,PAL	
2	BDW CN	AA39-20009C	LEAD CONNECTOR ASSY;,1P,YFH800 01,700,16	
2	C511	2201-002117	C-CERAMIC,DISC,4.7nF,20%,3kV,Y5U,TP,16x6	
2	C541	2201-002117	C-CERAMIC,DISC,4.7nF,20%,3kV,Y5U,TP,16x6	
2	C571	2201-002117	C-CERAMIC,DISC,4.7nF,20%,3kV,Y5U,TP,16x6	
2	CN501	3711-003051	CONNECTOR HEADER;BOX,8P,1R,2.5mm,STRAGHT	
2	CN502	3711-003052	CONNECTOR HEADER;BOX,10P,1R,2.5mm,STRAGH	
2	CN502B	3711-003052	CONNECTOR HEADER;BOX,10P,1R,2.5mm,STRAGH	
2	CN503	3711-003052	CONNECTOR HEADER;BOX,10P,1R,2.5mm,STRAGH	
2	CN503B	3711-003052	CONNECTOR HEADER;BOX,10P,1R,2.5mm,STRAGH	
2	CNW401	AA39-20027B	LEAD CONNECTOR ASSY;,6P,67095,60R,S,400,	
2	CNW501	AA39-00127A	LEAD CONNECTOR ASSY;,8P,35155,080,S,400	
2	CNW502	AA39-00112A	LEAD CONNECTOR ASSY;,10P,35155,1000,S,30	
2	CNW503	AA39-00112A	LEAD CONNECTOR ASSY;,10P,35155,1000,S,30	
2	FOCUS	AA39-20115A	LEAD CONNECTOR ASSY;,1P,BUSHING,500,3239	

Level	Loc. No.	Code No.	Description ; Specification	Remark
1	2	FOCUS	AA39-20115A	LEAD CONNECTOR ASSY,1P,BLS=NC,600,2039	
1	2	FOCUS	AA39-20115B	LEAD CONNECTOR ASSY,,1P,BLS=NC,,,600MM	
	2	GBW-GN	3811-000446	WIRE PVC CU,TCWA,600V,ROLL,17 0.16mm,#22	S.N.A
	2	GBW-SC	3811-000480	WIRE PVC CU,BCWA,1KV,ROLL,17 0.16mm,#22	S.N.A
	2	GDW-GN	AA39-20005D	LEAD CONNECTOR ASSY,,1P,YFH-800-01,500,16	
	2	GRW-GN	3811-000446	WIRE PVC CU,TCWA,600V,ROLL,17 0.16mm,#22	S.N.A
	2	GRW-SC	3811-000480	WIRE PVC CU,BCWA,1KV,ROLL,17 0.16mm,#22	S.N.A
	2	IC501	AA96-50151B	ASSY H/S, ,AMPAA61,10060A,TDA6111Q,	
	3		1201-001131	C-VIDEO AMP,5111,SIP9P, SINGLE, PLAS	
	3		9001-000057	SCREW-MACHINE,RH, - M3L6,ZPCSLI,SWRCH-1	
	3		9021-000222	NUT-HEXAGON,2C,M3,ZPC(YEL),SM,290 1	S.N.A
	3		AA61-10060A	BRACKET,TR, , ,CUS-1 1/2H,T0.5	S.N.A
	2	IC531	AA96-50151B	ASSY H/S, ,AMPAA61,10060A,TDA6111Q,	
	2	IC561	AA96-50151B	ASSY H/S, ,AMPAA61,10060A,TDA6111Q,	
	2	PCB	AA41-00357B	PCB,CRT,PC,5333,FR-1,1L,B,1.6T,2OZ,46	S.N.A
	2	RDW-GN	AA39-20009F	LEAD CONNECTOR ASSY,,1P,YFH-800-01,200,16	
	2	SG502	AA27-00084A	COIL,S,23, , , , , ,S 23.5000Mohm	
	2	SG532	AA27-00084A	COIL,S,23, , , , , ,S 23.5000Mohm	
	2	SG562	AA27-00084A	COIL,S,23, , , , , ,S 23.5000Mohm	
	2	VS01	3704-001019	SOCKET,CRT,10P,29.1P,3S,SP,AU,30L,	
	2	VS31	3704-001019	SOCKET,CRT,10P,29.1P,3S,SP,AU,30L,	
	2	VS61	3704-001019	SOCKET,CRT,10P,29.1P,3S,SP,AU,30L,	
	2	VRS01	2101-000321	VR-ROTARY,1Mohm, ,,0.6W,SIDE	
	2	VRS31	2101-000321	VR-ROTARY,1Mohm, ,,0.6W,SIDE	
	2	VRS61	2101-000321	VR-ROTARY,1Mohm, ,,0.6W,SIDE	
	2		AA99-20089J	ASSY PCB SUB,AUTO; AA95-00923A ,,,V	S.N.A
	3	C502	2401-000027	C AL,4.7uF,20%,,50V,GP,TP,5x11.5	
	3	C503	2201-000119	C CERAMIC,DISC,100nF,-80-20%,,50V,Y5V,TP,	
	3	C504	2401-001537	C AL,47uF,20%,,25V,GP,TP,6.3x7mm,5mm	
	3	C505	2305-000149	C FILM,MPEF,100nF,5%,,100V,TP,12x12.5x6.5	
	3	C506	2401-000430	C AL,10uF,20%,,250V,GP,TP,10x16mm,5m	
	3	C507	2305-000154	C FILM,MPEF,100nF,5%,,400V,TP,21.5x6.5x11	
	3	C510	2401-000430	C AL,10uF,20%,,250V,GP,TP,10x16mm,5m	
	3	C512	2401-000133	C AL,1000uF,20%,,16V,GP,TP,10x20.5	
	3	C513	2201-000983	C CERAMIC,DISC,1nF,10%,,2kV,Y5P,TP,5x5.7	
	3	C514	2201-000599	C CERAMIC,DISC,0.56nF,10%,,500V,Y5P,TP,5,	
	3	C532	2401-000027	C AL,4.7uF,20%,,50V,GP,TP,5x11.5	
	3	C533	2201-000119	C CERAMIC,DISC,100nF,-80-20%,,50V,Y5V,TP	
	3	C534	2401-001537	C AL,47uF,20%,,25V,GP,TP,6.3x7mm,5mm	
	3	C535	2305-000149	C FILM,MPEF,100nF,5%,,100V,TP,12x12.5x6.5	
	3	C536	2401-000430	C AL,10uF,20%,,250V,GP,TP,10x16mm,5m	
	3	C537	2305-000154	C FILM,MPEF,100nF,5%,,400V,TP,21.5x6.5x11	
	3	C540	2401-000430	C AL,10uF,20%,,250V,GP,TP,10x16mm,5m	
	3	C542	2201-000983	C CERAMIC,DISC,1nF,10%,,2kV,Y5P,TP,5x5.7	
	3	C543	2201-000599	C CERAMIC,DISC,0.56nF,10%,,500V,Y5P,TP,5,	
	3	C562	2401-000027	C AL,4.7uF,20%,,50V,GP,TP,5x11.5	
	3	C563	2201-000119	C CERAMIC,DISC,100nF,-80-20%,,50V,Y5V,TP,	
	3	C564	2401-001537	C AL,47uF,20%,,25V,GP,TP,6.3x7mm,5mm	
	3	C565	2305-000149	C FILM,MPEF,100nF,5%,,100V,TP,12x12.5x6.5	
	3	C566	2401-000430	C AL,10uF,20%,,250V,GP,TP,10x16mm,5m	
	3	C567	2305-000154	C FILM,MPEF,100nF,5%,,400V,TP,21.5x6.5x11	
	3	C570	2401-000430	C AL,10uF,20%,,250V,GP,TP,10x16mm,5m	
	3	C572	2201-000983	C CERAMIC,DISC,1nF,10%,,2kV,Y5P,TP,5x5.7	
	3	C573	2201-000599	C CERAMIC,DISC,0.56nF,10%,,500V,Y5P,TP,5,	
	3	CN401	3711-002645	CONNECTOR HEADER,BOX,6P,1R,2.5MM,STRAIGH	
	3	D501	0402-000546	DIODE RECTIFIER,TVR10G,400V,1.0A,DO-41,T	
	3	D502	0402-000546	DIODE RECTIFIER,TVR10G,400V,1.0A,DO-41,T	
	3	D503	0402-000493	DIODE RECTIFIER,1RSGU41,400V,1.5A,DO-15L	
	3	D504	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
	3	D509	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
	3	D510	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
	3	D531	0402-000546	DIODE RECTIFIER,TVR10G,400V,1.0A,DO-41,T	
	3	D532	0402-000546	DIODE RECTIFIER,TVR10G,400V,1.0A,DO-41,T	
	3	D533	0402-000493	DIODE RECTIFIER,1RSGU41,400V,1.5A,DO-15L	
	3	D561	0402-000546	DIODE RECTIFIER,TVR10G,400V,1.0A,DO-41,T	
	3	D562	0402-000546	DIODE RECTIFIER,TVR10G,400V,1.0A,DO-41,T	
	3	D563	0402-000493	DIODE RECTIFIER,1RSGU41,400V,1.5A,DO-15L	
	3	DZ501	0403-000334	DIODE ZENER,UZ2.7BSA,2.7V,2.5W,2.7V,500	
	3	DZ502	0403-000508	DIODE ZENER,MTZJS,6B,5.6V,5.45,5.73V,500	
	3	DZ503	0403-000708	DIODE ZENER,MTZJ,13B,13V,12.55,13.27V,500	
	3	DZ531	0403-000334	DIODE ZENER,UZ2.7BSA,2.7V,2.5W,2.7V,500	
	3	DZ532	0403-000508	DIODE ZENER,MTZJS,6B,5.6V,5.45,5.73V,500	
	3	DZ533	0403-000708	DIODE ZENER,MTZJ,13B,13V,12.55,13.27V,500	
	3	DZ561	0403-000334	DIODE ZENER,UZ2.7BSA,2.7V,2.5W,2.7V,500	
	3	DZ562	0403-000508	DIODE ZENER,MTZJS,6B,5.6V,5.45,5.73V,500	
	3	DZ563	0403-000708	DIODE ZENER,MTZJ,13B,13V,12.55,13.27V,500	
	3	L501	2701-000114	INDUCTOR-AXIAL,10uH,10%,2.5x3.4mm	

Level	Loc. No.	Code No.	Description ; Specification	Remark
3	L531	2701-000114	INDUCTOR-AXIAL,10uH,10%,2.5x3.4mm	
3	L561	2701-000114	INDUCTOR-AXIAL,10uH,10%,2.5x3.4mm	
3	Q501	0502-000006	TR-POWER,KSC1507,NPN,15W,TO-220,TP120-	
3	Q502	0501-000389	TR-SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q504	0501-000283	TR-SMALL SIGNAL,KSA539,PNP,400mW,TO-92,T	
3	Q531	0502-000006	TR-POWER,KSC1507,NPN,15W,TO-220,TP120-	
3	Q533	0501-000283	TR-SMALL SIGNAL,KSA539,PNP,400mW,TO-92,T	
3	Q561	0502-000006	TR-POWER,KSC1507,NPN,15W,TO-220,TP120-	
3	Q563	0501-000283	TR-SMALL SIGNAL,KSA539,PNP,400mW,TO-92,T	
3	R500	2001-000449	R-CARBON,2.2KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R502	2001-000995	R-CARBON,820OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R503	2001-000429	R-CARBON,1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R504	2001-000006	R-CARBON,2.4KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R505	2001-000362	R-CARBON,150OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R506	2001-001088	R-CARBON(S),1KOHM,5%,1/2W,AA,TP2.4X6.4M	
3	R507	2001-000429	R-CARBON,1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R508	3003-000738	R-METAL OXIDE(S),56Kohm,5%,2W,AA,TP4x12	
3	R509	2001-000734	R-CARBON,4.7KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R510	2001-000864	R-CARBON,56KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R511	2001-000009	R-CARBON,20KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R513	2008-000252	R-FUSIBLE(S),0.47ohm,10%,1/2W,AF,TP2.5x	
3	R514	2001-001122	R-CARBON(S),3.9KOHM,5%,1/2W,AA,TP2.4X6.	
3	R515	2002-001017	R-COMPOSITION,1Kohm,10%,1/2W,AA,TP3.7x9	
3	R516	2001-000009	R-CARBON,20KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R517	2001-000085	R-CARBON(S),100KOHM,5%,1/2W,AA,TP2.4X6	
3	R518	2002-001021	R-COMPOSITION,560KOHM,10%,1/2W,AA,TP3.7	
3	R519	2002-001021	R-COMPOSITION,560KOHM,10%,1/2W,AA,TP3.7	
3	R520	2001-000066	R-CARBON(S),10KOHM,5%,1/2W,AA,TP2.4X6.4	
3	R521	2001-001052	R-CARBON(S),1.5MOHM,5%,1/2W,AA,TP2.4X6.	
3	R522	2002-001006	R-COMPOSITION,4.7Kohm,5%,1/2W,AA,TP3.7x	
3	R523	2002-001006	R-COMPOSITION,4.7Kohm,5%,1/2W,AA,TP3.7x	
3	R524	2001-000028	R-CARBON(S),1000HM,5%,1/2W,AA,TP2.4X6.4M	
3	R526	2001-000539	R-CARBON,24KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R527	2001-000577	R-CARBON,2KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R528	2001-001015	R-CARBON,9.1KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R529	2002-001021	R-COMPOSITION,560KOHM,10%,1/2W,AA,TP3.7	
3	R532	2001-000429	R-CARBON,1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R533	2001-000429	R-CARBON,1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R536	2001-001088	R-CARBON(S),1KOHM,5%,1/2W,AA,TP2.4X6.4M	
3	R537	2001-000429	R-CARBON,1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R538	3003-000738	R-METAL OXIDE(S),56Kohm,5%,2W,AA,TP4x12	
3	R540	2001-000660	R-CARBON,33KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R541	2001-000009	R-CARBON,20KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R543	2008-000252	R-FUSIBLE(S),0.47ohm,10%,1/2W,AF,TP2.5x	
3	R544	2001-001122	R-CARBON(S),3.9KOHM,5%,1/2W,AA,TP2.4X6.	
3	R545	2002-001017	R-COMPOSITION,1Kohm,10%,1/2W,AA,TP3.7x9	
3	R546	2001-000009	R-CARBON,20KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R547	2001-000085	R-CARBON(S),100KOHM,5%,1/2W,AA,TP2.4X6.	
3	R548	2002-001021	R-COMPOSITION,560KOHM,10%,1/2W,AA,TP3.7	
3	R549	2002-001021	R-COMPOSITION,560KOHM,10%,1/2W,AA,TP3.7	
3	R550	2001-000066	R-CARBON(S),10KOHM,5%,1/2W,AA,TP2.4X6.4	
3	R551	2001-001052	R-CARBON(S),1.5MOHM,5%,1/2W,AA,TP2.4X6.	
3	R552	2002-001006	R-COMPOSITION,4.7Kohm,5%,1/2W,AA,TP3.7x	
3	R553	2002-001006	R-COMPOSITION,4.7Kohm,5%,1/2W,AA,TP3.7x	
3	R554	2001-000028	R-CARBON(S),1000HM,5%,1/2W,AA,TP2.4X6.4	
3	R555	2001-000734	R-CARBON,4.7KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R556	2001-000472	R-CARBON,2.7KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R557	2001-000362	R-CARBON,150OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R559	2002-001015	R-COMPOSITION,47Kohm,5%,1/2W,AA,TP3.7x9	
3	R562	2001-000232	R-CARBON,1.3KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R563	2001-000429	R-CARBON,1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R564	2001-001031	R-CARBON,91KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R566	2001-001088	R-CARBON(S),1KOHM,5%,1/2W,AA,TP2.4X6.4M	
3	R567	2001-000429	R-CARBON,1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R568	2001-000734	R-CARBON,4.7KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R569	2001-000006	R-CARBON,2.4KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R570	2001-000362	R-CARBON,150OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R571	2001-000281	R-CARBON,1000HM,5%,1/8W,AA,TP1.8X3.2MM	
3	R572	3003-000738	R-METAL OXIDE(S),56Kohm,5%,2W,AA,TP4x12	
3	R573	2008-000252	R-FUSIBLE(S),0.47ohm,10%,1/2W,AF,TP2.5x	
3	R574	2001-001122	R-CARBON(S),3.9KOHM,5%,1/2W,AA,TP2.4X6.	
3	R575	2002-001017	R-COMPOSITION,1Kohm,10%,1/2W,AA,TP3.7x9	
3	R576	2001-000009	R-CARBON,20KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R577	2001-000085	R-CARBON(S),100KOHM,5%,1/2W,AA,TP2.4X6.	
3	R578	2002-001021	R-COMPOSITION,560KOHM,10%,1/2W,AA,TP3.7	
3	R579	2002-001021	R-COMPOSITION,560KOHM,10%,1/2W,AA,TP3.7	
3	R580	2001-000066	R-CARBON(S),10KOHM,5%,1/2W,AA,TP2.4X6.4	

Level	Loc. No.	Code No.	Description ; Specification	Remark
3	R581	2001-001052	R-CARBON(S),1.5MOHM,5%,1/2W,AA,TP2.4X6.	
3	R582	2002-001006	R-COMPOSITION,4.7Kohm,5%,1/2W,AA,TP3.7x	
3	R583	2002-001006	R-COMPOSITION,4.7Kohm,5%,1/2W,AA,TP3.7x	
3	R584	2001-000028	R-CARBON(S),1000HM,5%,1/2W,AA,TP2.4X6.4	
3	R589	2002-001015	R-COMPOSITION,47Kohm,5%,1/2W,AA,TP3.7x9	
3	SG351	4715-001036	SURGE ABSORBER,500V,20%, ,,TP	
3	SG501	4715-001036	SURGE ABSORBER,500V,20%, ,,TP	
3	SG503	4715-001036	SURGE ABSORBER,500V,20%, ,,TP	
3	SG533	4715-001036	SURGE ABSORBER,500V,20%, ,,TP	
3	SG561	4715-001036	SURGE ABSORBER,500V,20%, ,,TP	
3	SG563	4715-001036	SURGE ABSORBER,500V,20%, ,,TP	
2		AA63-10002A	BAND-TIE, ,NYLON66,V2, , ,L100,NTR,	S.N.A
2		0202-000187	SOLDER-WIRE,FLUX, ,RS60S,D1.2,63Sn/37Pb	S.N.A

ASSY-A/V FRONT

1		AA65-00913A	ASSY A/V FRONT, ,SP43,4PF,J51B, , ,MVT	
2	CNW02	AA39-20002J	LEAD CONNECTOR ASSY,,12P,67096-012,S,100	
2	CNY01	3711-003641	CONNECTOR HEADER,BOX,12P,1R,2.5mm,STRAIG	
2	CP01	2202-000263	C CERAMIC,MLC AXIAL,470pF,10%,50V,Y5P,TP	
2	CP02	2202-000263	C CERAMIC,MLC AXIAL,470pF,10%,50V,Y5P,TP	
2	CP03	2202-000263	C CERAMIC,MLC AXIAL,470pF,10%,50V,Y5P,TP	
2	CP04	2401-002009	C AL,100uF,20%,,16V,GP,TP,6.3x7.5	
2	CP05	2401-002009	C AL,100uF,20%,,16V,GP,TP,6.3x7.5	
2	CP06	2401-002009	C AL,100uF,20%,,16V,GP,TP,6.3x7.5	
2	CP07	2401-002009	C AL,100uF,20%,,16V,GP,TP,6.3x7.5	
2	CP08	2401-002009	C AL,100uF,20%,,16V,GP,TP,6.3x7.5	
2	CP09	2202-000121	C CERAMIC,MLC AXIAL,100pF,10%,50V,Y5P,TP	
2	CP10	2202-000121	C CERAMIC,MLC AXIAL,100pF,10%,50V,Y5P,TP	
2	DZ01	0403-000510	DIODE ZENER,MTZJ6.2B,6.2V,5.96,6.27V,500	
2	DZ02	0403-000510	DIODE ZENER,MTZJ6.2B,6.2V,5.96,6.27V,500	
2	JK02	3722-001154	JACK RCA,3P,3.4mm,SN,WH,YE,RE,#16,22	
2	JK101	3722-000544	JACK VHS,4P,11.5mm,AG,BLK,N	
2	PCB	AA41-00375A	PCB A/V FRONT,SP43,SHIFRD, ,TLA,1.6T,24	S.N.A
2	RP01	3001-000273	R CARBON,100KOHM,5%,1/8W,AA,TP1.8X3.2MM	
2	RP02	3001-000969	R CARBON,750HM,5%,1/8W,AA,TP1.8X3.2MM	
2	RP03	3001-000273	R CARBON,100KOHM,5%,1/8W,AA,TP1.8X3.2MM	
2	RP04	3001-000969	R CARBON,750HM,5%,1/8W,AA,TP1.8X3.2MM,AA,TP4x12	
2	RP05	3001-000969	R CARBON,750HM,5%,1/8W,AA,TP1.8X3.2MM	
2		3301-001201	CORE-FERRITE,AE,21x11x32mm,1500,290G	
2		AA63-10002A	BAND-TIE, ,NYLON66,V2, , ,L100,NTR,	S.N.A
2		AA98-6000U	ASSY SUB,PART,APTS1A,A/V, ,ALL	S.N.A
3		0202-000187	SOLDER-WIRE,FLUX, ,RS60S,D1.2,63Sn/37Pb	S.N.A

ASSY-PCB,SUB

1		AA65-00425B	ASSY-PCB,SUB, ,SPS1,SHF,J51A,PAL, ,	
2	C430	2301-001219	C FILM,MPE,PPF,3.9nF,5%,1.6KV,TP,29x8.5x	
2	C431	2305-000326	C FILM,MPEF,4.7nF,5%,1.6KV,TP,28.5x16x9m	
2	C432	2305-000267	C FILM,MPEF,8.2nF,5%,1.6KV,TP,28.5x18.5x	
2	C436	2305-000215	C FILM,MPEF,560nF,5%,400V,TP,26~22.5~14,	
2	C438	2305-000267	C FILM,MPEF,8.2nF,5%,1.6KV,TP,28.5x18.5x	
2	C471	2301-001091	C FILM,MPEF,470nF,5%,400V,TP,25x21.5x14	
2	C473	2305-000322	C FILM,MPEF,12nF,5%,1.6KV,TP,29x20.5x13,	
2	C474	2305-000326	C FILM,MPEF,4.7nF,5%,1.6KV,TP,28.5x16x9m	
2	C477	2301-000213	C FILM,PEF,220nF,5%,250V,TP,21.5x11.7.5	
2	C801	2305-000321	C FILM,MPEF,470NF,5%,275VTP, ,22.5	
2	C802	2305-000321	C FILM,MPEF,470NF,5%,275VTP, ,22.5	
2	C812	2401-003465	C AL,680UF,20%,,450V,GP,BK,35X60MM,2	
2	C831	2305-000323	C FILM,MPEF,2.2nF,5%,1.6KV,TP,28.5x15.5x	
2	C852	2401-002225	C AL,3300uF,20%,50V,WT,BK,22x41.7.5	
2	C865	2401-000737	C AL,2200uF,20%,50V,GP,TP,18x35.5,7	
2	C868	2401-000737	C AL,2200uF,20%,50V,GP,TP,18x35.5,7	
2	C875	2401-002251	C AL,470uF,20%,200V,GP,BK,25x40mm,1	
2	C876	2401-000787	C AL,220uF,20%,160V,GP,TP,16x31.5mm	
2	C891	2201-000987	C CERAMIC,DISC,2.2nF,20%,400V,Y5U,TP,12,	
2	C892	2201-000987	C CERAMIC,DISC,2.2nF,20%,400V,Y5U,TP,12	
2	CN201	AA39-00128A	LEAD CONNECTOR ASSY,,8P,YBNH250-08,35155	
2	CN202	AA39-00115A	LEAD CONNECTOR ASSY,,10P,YBNH250-10,3515	
2	CN203	3711-003052	CONNECTOR HEADER,BOX,10P,1R,2.5mm,STRAIGH	
2	CN401	3711-003051	CONNECTOR HEADER,BOX,8P,1R,2.5mm,STRAIGHT	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	CN402	3711-003974	CONNECTOR HEADER,BOX,12P,1R,2.5mm,STRAIG	
2	CN801	AA39-00116A	LEAD CONNECTOR ASSY,,12P,YBNH250-12,3515	
2	CN802	3711-003051	CONNECTOR HEADER,BOX,8P,1R,2.5mm,STRAIGHT	
2	CNW406	AA39-00009A	LEAD CONNECTOR ASSY,,3G,3P,YFH-800-03,S,2	
2	CNW909	AA39-20061G	LEAD CONNECTOR ASSY,,3P,YFH-800-03,S,100M	
2	D464	0402-000236	DIODE-RECTIFIER,GI824,400V,5A, ,TP	
2	D804	AA96-50310A	ASSY H/S, ,POWER,AA62-30150C,RBV606,	
3		AA62-30150C	HEAT SINK-ES, ,A6063 EXTR, ,WHT,40(24-S)	
3		AA60-30003A	WASHER-, , , ,T1.5, ,SBHG 1,	S.N.A
3		9003-000333	SCREW-TAPTITE,RH, - 2S,M3.1L10,ZPC(YEL),SW	
3		0402-000549	DIODE-BRIDGE,RBV606,600V,6A, ,BK	
3		0205-000129	GREASE-SILICON,SC102,,,JAPAN	S.N.A
2	D810	0402-000250	DIODE-RECTIFIER,RC4C,1000V,1A	
2	D854	AA96-00111C	ASSY H/S, ,AA62-30013L,FML,G12S,	
3		0402-000235	DIODE-RECTIFIER,FML,G12S,200V,5A	
3		9003-000333	SCREW-TAPTITE,RH, - 2S,M3.1L10,ZPC(YEL),SW	
3		AA62-30013L	HEATSINK-ES, , , , ,44/22, ,WHT, ,	
2	D871	AA96-00032A	ASSY H/S, , ,AA62-30173B,FML(G12,FM)G26	
3		0402-000235	DIODE-RECTIFIER,FML,G12S,200V,5A	
3		0402-000231	DIODE-RECTIFIER,FMG,G26S,600V,4A,TO-220F	
3		AA62-30173B	HEAT SINK,ES, , ,T1.0,WHT, ,ALL, , ,9X2	
3		9003-000333	SCREW-TAPTITE,RH, - 2S,M3.1L10,ZPC(YEL),SW	
3		0205-000129	GREASE-SILICON,SC102,,,JAPAN	S.N.A
2	DZ481	0403-001327	DIODE ZENER,MTZJ,18A,16.22~17.05V,500mW,D	
2	F801	3601-001007	FUSE-CARTRIDGE,250V,6.3A,TIME LAG,GLASS,	
2	F802	3601-001137	FUSE-AXIAL,LEAD,250V,6A,SLOW BLOW,GLASS,	
2	F804	3601-001007	FUSE-CARTRIDGE,250V,6.3A,TIME LAG,GLASS,	
2	IC301	AA96-50381A	ASSY H/S, , ,AA62-30180B,LA7845,	
3		0205-000129	GREASE-SILICON,SC102,,,JAPAN	S.N.A
3		1204-000517	IC-VERTIVAL DEF,LA7845,SIP7P, ,PLASTIC	
3		9003-000333	SCREW-TAPTITE,RH, - 2S,M3.1L10,ZPC(YEL),SW	
3		AA62-30180B	HEAT SINK-ES, ,A6063 EXTR,,2,WHT,70MM,	
2	IC421	1203-000165	IC-POSI.ADJUST-REG, ,78R12,TO-220,3P,	
2	IC430	1203-000162	IC-POSI.ADJUST-REG, ,317,TO-220,3P, ,PLAS	
2	IC431	1201-000191	IC-OP AMP,4558,DIP8P,300MIL,DUAL,2CH,7mV	
2	IC801	AA96-00035A	ASSY H/S, ,POWER,AA62-30181P,STR-F6656,	
3		0205-000129	GREASE-SILICON,SC102,,,JAPAN	S.N.A
3		9003-000333	SCREW-TAPTITE,RH, - 2S,M3.1L10,ZPC(YEL),SW	
3		AA13-00018A	IC-HYBRID, ,STR-F6656,LF1351,5PIN,	
3		AA62-30181P	HEAT SINK,ES, , ,T1.0,WHITE,SCREW-HOLE(2	
2	IC804	1203-001400	IC-POWER-PRESCALER,SE110N,TO-220F,SP,3P	
2	IC806	0604-001032	PHOTO-COUPLER,TR,170-260%,300mW,DIP-4,ST	
2	L431	AA27-30003M	COIL-LINEARITY, ,5uH,OWA14x15,USRC0,1x5	
2	L432	AA27-40001U	COIL-HORIZ,WIDTH, ,220uH,DR1420,P10,12x1	
2	L482	3301-000374	CORE-FERRITE-BEAD,AA,3.5x1.0x9.0mm, ,	
2	L800	AA29-30002L	FILTER-LINE NOISE, ,10mH,MIN,3A,AC90~260V	
2	L801	AA29-30000F	FILTER-LINE NOISE, ,6mH,2.45A, ,	
2	L803	AA29-00008A	FILTER-LINE NOISE,35,6MH,3A, ,6MH,MIN,3A,	
2	L854	AA27-10001C	COIL-CHOKE, ,100uH,K, ,5.0A,ST,700UH,KIR	
2	L860	AA27-10001C	COIL-CHOKE, ,100uH,K, ,5.0A,ST,700UH,KIR	
2	L862	AA27-10001C	COIL-CHOKE, ,100uH,K, ,5.0A,ST,700UH,KIR	
2	L872	AA27-10001C	COIL-CHOKE, ,100uH,K, ,5.0A,ST,700UH,KIR	
2	L874	AA27-10002L	COIL-CHOKE, ,24UH,K, ,2A, ,24UH K,10X10M	
2	PCB	AA41-00197C	PCB,PC,5533R,CEM-1,1L,C,1.6T,330X24	S.N.A
2	Q431	AA96-00330E	ASSY H/S, ,H-OUT,AA62-30173C,2SC5446,F	
3		AA02-00007A	MICA,DPM-04,MICA,22x29x0.15mm	
3		AA62-30173C	HEAT SINK-ES, , ,T1.0,WHITE,SCREW-HOLE(2	
3		AA60-30001A	WASHER-PLATE,M3,ID3.5,15X8.5,T1.0, ,SBHG	S.N.A
3		9003-000333	SCREW-TAPTITE,RH, - 2S,M3.1L10,ZPC(YEL),SW	
3		0502-001175	TR-POWER,2SC5446,NPN,200000mW,TO-3PL,BK	
3		0402-001296	DIODE-RECTIFIER,FMP-3FU,1.5KV,5A,TO-3PF,	
3		0205-000129	GREASE-SILICON,SC102,,,JAPAN	S.N.A
2	Q433	AA96-50407A	ASSY H/S, , ,AA62-30154G,KSD737Y,	
3		0205-000129	GREASE-SILICON,SC102,,,JAPAN	S.N.A
3		0502-000298	TR-POWER,KSD73,NPN,30000mW,TO-220,TP12	
3		9003-000333	SCREW-TAPTITE,RH, - 2S,M3.1L10,ZPC(YEL),SW	
3		AA62-30154G	HEAT SINK-ES, ,A6063 EXTR, ,WHT,50(16), ,	
2	Q441	AA96-50380F	ASSY H/S, , ,AA62-30180D,2SD921,	
3		0205-000129	GREASE-SILICON,SC102,,,JAPAN	S.N.A
3		0502-001104	TR-POWER,2SD921,NPN,80W,TO-3P,BK,700-	
3		9003-000333	SCREW-TAPTITE,RH, - 2S,M3.1L10,ZPC(YEL),SW	
3		AA62-30180D	HEAT SINK-ES, ,A6063 EXTR,2,WHT,50mm, ,	
2	Q472	0505-000156	FET-SILICON,RF620,N,200V,5A,0.8ohm,50W,	
2	Q473	AA96-00037A	ASSY H/S, , ,AA62-30181N,2SC4125,RF56	
3		0502-001100	TR-POWER,2SC4125,NPN,70W,TO-3PML,BK,8	
3		AA62-30181N	HEAT SINK-ES, , ,T1.0,WHITE,SCREW-HOLE(2	

Level	Loc. No.	Code No.	Description ; Specification	Remark
3		VA60-30001A	WASHER PLATE;MB,Ø3.5,15X8.5,T1.0,...SBHG	S.N.A
3		3003-000333	SCREW-TAPTITE;RH,+,2S,M3.1X10,ZPC(YEL),SW	
3		0505-001202	FET;SILICON,;RFS640A,N,200V,9.8A,0.18ohm	
3		0205-000129	GREASE;SILICON,SC102,,,JAPAN	S.N.A
2	R440	2008-001091	R FUSIBLE(S);0.47OHM,10%,1/2W,AC,BK,2.5X	
2	R442	2008-000189	R FUSIBLE;0.47ohm,10%,2W,AA,TP5X15.5mm	
2	R445	2008-001091	R FUSIBLE(S);0.47OHM,10%,1/2W,AC,BK,2.5X	
2	R803	1404-001195	THERMISTOR;NTC,5.1ohm,15%,2900,27mW/C,BK	
2	R815	2003-002162	R METAL OXIDE(S);15KOHM,5%,3W,AG,TP5X16	
2	R815A	2003-002162	R METAL OXIDE(S);15KOHM,5%,3W,AG,TP5X15	
2	R817	2009-001096	R METAL PLATE;0.07ohm,5%,5W,CL,BK,5x14x1	
2	R841	2008-001096	R FUSIBLE(S);3.3OHM,5%,1/2W,AC,BK,2.5X6	
2	T431	AA26-50001L	TRANS;HORIZ DRIVE,,29mH,105ur,4uH,ER28x	
2	T432	AA26-50051A	TRANS,,1.2mH,,,ER4445,5K,1.2mH	
2	T444	AA26-30005A	TRANS;FLYBACK,,FWZ,50A001,50-108V	
2	T461	AA26-50001V	TRANS;HORIZ DRIVE,,,8.0mH,113uH,4uH,EI30	
2	T481	AA26-50001W	TRANS;HORIZ DRIVE,,,830uH,23uH,4uH,EI-30	
2	T902	AA26-00006A	TRANS;SWITCHING,,90~260V,110V/34V/-30V	
2		AA65-30110A	CLAMP WIRE;NYLON 66,V2,BLK,PAL TYI,ALL M	S.N.A
2		0202-000187	SOLDER WIRE;FLUX,,RS60S,D1.2.63Sn/37Pb	S.N.A
2		AA62-00010A	HEAT SINK,,,,T1.0,SILVER,H/S;NK & SHIEL	S.N.A
2		AA65-30109A	CLAMP;FBT,NYLON-66,V2,BLK,,,,	S.N.A
2		AA65-30105B	CLAMP WIRE;NYLON 66,V2,NTR,25MM,ALL MODE	S.N.A
2		AA99-20069B	ASSY;PCB SUB,AUTO;,AA66-00425B,,,,V	S.N.A
3	C301	2305-000149	C FILM,MPEF,100nF,5%,100V,TP,12x12.5x6.5	
3	C302	2201-000292	C CERAMIC,DISC,1nF,10%,50V,YSP,TP5x3.5,	
3	C303	2305-000149	C FILM,MPEF,100nF,5%,100V,TP,12x12.5x6.5	
3	C304	2201-000222	C CERAMIC,DISC,1nF,10%,50V,YSP,TP5x3.5,	
3	C305	2201-002022	C CERAMIC,DISC,0.005nF,0.25pF,500V,NP0,T	
3	C307	2401-000365	C AL,100uF,20%,50V,WT,TP10x12.5mm,	
3	C308	2401-000365	C AL,100uF,20%,50V,WT,TP10x12.5mm,	
3	C309	2305-000285	C FILM,MPEF,220NF,5%,100V,TP,10.5X5.5X15	
3	C311	2305-000149	C FILM,MPEF,100nF,5%,100V,TP,12x12.5x6.5	
3	C412	2301-000383	C FILM,PEF,10nF,5%,50V,TP,6x7x3.2mm,5mm	
3	C413	2401-000360	C AL,100uF,20%,50V,GP,TP8x11.5,5	
3	C417	2401-001397	C AL,470uF,20%,25V,GP,TP10x16.5	
3	C418	2401-000350	C AL,100uF,20%,50V,GP,TP8x11.5,5	
3	C419	2201-000180	C CERAMIC,DISC,10nF,10%,50V,Y5V,TP,7x3.5	
3	C426	2401-000360	C AL,100uF,20%,50V,GP,TP8x11.5,5	
3	C427	2401-002300	C AL,47uF,20%,50V,GP,TP6.3x11.5	
3	C428	2306-000122	C FILM,MPPF,100nF,5%,50V,TP,7.3x4.0x5.0m	
3	C437	2401-003114	C AL,4.7uF,20%,250V,WT,TP10x16.5	
3	C441	2401-000262	C AL,100uF,20%,160V,HR,TP16x25,7.5	
3	C445	2401-001622	C AL,6.8uF,20%,50V,BP,TP,16x25mm,7,	
3	C450	2401-000262	C AL,100uF,20%,160V,HR,TP16x25,7.5	
3	C451	2401-001160	C AL,33uF,20%,160V,GP,,,16x35mm,7.5	
3	C452	2201-000132	C CERAMIC,DISC,0.1nF,10%,500V,YSP,TP6.5	
3	C453	2401-002288	C AL,470uF,20%,25V,WT,TP,10x20.5	
3	C454	2401-001429	C AL,470uF,20%,50V,GP,TP,13x20,5	
3	C455	2201-000132	C CERAMIC,DISC,0.1nF,10%,500V,YSP,TP6.5	
3	C457	2201-000132	C CERAMIC,DISC,0.1nF,10%,500V,YSP,TP6.5	
3	C458	2401-002288	C AL,470uF,20%,25V,WT,TP,10x20.5	
3	C467	2401-000360	C AL,100uF,20%,50V,GP,TP8x11.5,5	
3	C468	2201-000119	C CERAMIC,DISC,100nF,-80-20%,50V,Y5V,TP,	
3	C469	2201-000180	C CERAMIC,DISC,10nF,10%,50V,Y5V,TP,7x3.5	
3	C472	2401-000262	C AL,100uF,20%,160V,HR,TP16x25,7.5	
3	C476	2401-000647	C AL,2.2uF,20%,50V,BP,TP,5x11,5	
3	C478	2301-000020	C FILM,PEF,27nF,5%,100V,TP,7.3x4x12.5mm,	
3	C479	2301-000200	C FILM,PEF,2.2nF,5%,200V,TP,11.0x6.0x9.0	
3	C483	2401-000660	C AL,2.2uF,20%,50V,GP,TP5x11,5	
3	C484	2201-000132	C CERAMIC,DISC,0.1nF,10%,500V,YSP,TP6.5	
3	C809	2201-000551	C CERAMIC,DISC,0.47nF,10%,1kV,YSP,TP6.3	
3	C814	2201-002041	C CERAMIC,DISC,0.82nF,10%,2kV,YSP,TP9x5	
3	C815	2201-000406	C CERAMIC,DISC,0.27nF,10%,2kV,YSP,TP6.3	
3	C816	2201-000332	C CERAMIC,DISC,2.2nF,20%,250V,YSU,TP,9x4	
3	C817	2201-000332	C CERAMIC,DISC,2.2nF,20%,250V,YSU,TP,9x4	
3	C818	2201-001216	C FILM,PPF,47nF,5%,630V,TP,20x14.5x22.7,	
3	C819	2201-000332	C CERAMIC,DISC,2.2nF,20%,250V,YSU,TP,9x4	
3	C833	2201-000292	C CERAMIC,DISC,1nF,10%,50V,YSP,TP5x3.5,	
3	C834	2401-003028	C AL,100uF,20%,25V,WT,TP6.3x11.5	
3	C851	2201-000551	C CERAMIC,DISC,0.47nF,10%,1kV,YSP,TP6.3	
3	C852	2401-000133	C AL,1000uF,20%,16V,GP,TP,10x20.5	
3	C854	2201-000551	C CERAMIC,DISC,0.47nF,10%,1kV,YSP,TP6.3	
3	C855	2401-003141	C AL,2200uF,20%,25V,WT,TP,13x25,5mm	
3	C857	2401-000133	C AL,1000uF,20%,16V,GP,TP10x20.5	
3	C861	2201-000551	C CERAMIC,DISC,0.47nF,10%,1kV,YSP,TP6.3	
3	C864	2201-000551	C CERAMIC,DISC,0.47nF,10%,1kV,YSP,TP6.3	
3	C866	2401-000192	C AL,1000uF,20%,50V,GP,TP,16x25,7.5	
3	C869	2401-000192	C AL,1000uF,20%,50V,GP,TP,16x25,7.5	
2	C871	2201-000551	C CERAMIC,DISC,0.47nF,10%,1kV,YSP,TP6.3	
2	C872	2401-000703	C AL,2200uF,20%,25V,GP,,12.5x25mm,	
3	C873	2401-001998	C AL,1000uF,20%,25V,GP,TP,10x20,5mm	
3	C874	2201-000551	C CERAMIC,DISC,0.47nF,10%,1kV,YSP,TP6.3	
3	C877	2305-000427	C FILM,MPEF,47nF,5%,100V,TP,7.5x12.5x3.5	
3	D302	0402-000546	DIODE;RECTIFIER,TVR10C,400V,1.0A,DO-41,T	
3	D433	0402-000537	DIODE;RECTIFIER,RH-1A,600V,0.6A,DO-204AC	
3	D435	0402-000132	DIODE;RECTIFIER,1N4004,400V,1A,DO-41,TP	
3	D436	0401-000005	DIODE;SWITCHING,1N4148,100V,200mA,DO-35	
3	D438	0402-000546	DIODE;RECTIFIER,TVR10C,400V,1.0A,DO-41,T	
3	D440	0402-000534	DIODE;RECTIFIER;RG10V,400V,1.2A,DO-201,T	
3	D441	0402-000534	DIODE;RECTIFIER;RG10V,400V,1.2A,DO-201,T	
3	D444	0402-000546	DIODE;RECTIFIER,TVR10C,400V,1.0A,DO-41,T	
3	D445	0402-000534	DIODE;RECTIFIER;RG10V,400V,1.2A,DO-201,T	
3	D472	0402-000546	DIODE;RECTIFIER,TVR10C,400V,1.0A,DO-41,T	
3	D474	0402-000546	DIODE;RECTIFIER,TVR10C,400V,1.0A,DO-41,T	
3	D801	1405-000187	VARISTOR;750V,1250A,12.5x7mm,TP	
3	D802	1405-000187	VARISTOR;750V,1250A,12.5x7mm,TP	
3	D834	0402-000546	DIODE;RECTIFIER,TVR10C,400V,1.0A,DO-41,T	
3	D843	0402-000546	DIODE;RECTIFIER,TVR10C,400V,1.0A,DO-41,T	
3	D851	0402-000493	DIODE;RECTIFIER,1RSGJ41,400V,1.5A,DO-15L	
3	DZ301	0403-001328	DIODE;ZENER,MTZJ,22A,20.15-21.20V,500mW,D	
3	DZ304	0403-001327	DIODE;ZENER,MTZJ,18A,16.22-17.06V,500mW,D	
3	DZ305	0403-001329	DIODE;ZENER,MTZJ,24B,22.61-23.77V,500mW,D	
3	DZ306	0403-001167	DIODE;ZENER,MTZJ,30D,30V,29.02-30.51V,500	
3	DZ307	0403-001329	DIODE;ZENER,MTZJ,24B,22.61-23.77V,500mW,D	
3	DZ413	0403-001319	DIODE;ZENER,MTZJ,4.7C,4.68-4.93V,500mW,DO	
3	DZ473	0403-000720	DIODE;ZENER,MTZJ,9.1B,9.1V,8.57-9.01V,500	
3	DZ842	0403-000700	DIODE;ZENER,TZP33A,33V,31-35V,1W,DO-41,T	
3	DZ858	0403-001325	DIODE;ZENER,MTZJ,15C,14.35-15.09V,500mW,D	
3	F801A	3602-000114	FUSE HOLDER;,,,30mohm	
3	F801B	3602-000114	FUSE HOLDER;,,,30mohm	
3	F804A	3602-000114	FUSE HOLDER;,,,30mohm	
3	F804B	3602-000114	FUSE HOLDER;,,,30mohm	
3	F805	3601-001086	FUSE;AXIAL LEAD,125V,5A,FAST ACTING,GLAS	
3	F806	3601-001065	FUSE;AXIAL LEAD,125V,3.5A,FAST ACTING,CE	
3	F854	3601-001086	FUSE;AXIAL LEAD,125V,5A,FAST ACTING,GLAS	
3	F855	3601-001163	FUSE;AXIAL LEAD,125V,7A,,EPOXY,2.4X7.1M	
3	F871	3601-001086	FUSE;AXIAL LEAD,125V,5A,FAST ACTING,GLAS	
3	L481	3301-000287	CORE;FERRITE BEAD,AA,3.5x1.0x6.0mm,1500,	
3	L483	2501-000299	FILTER;EMI ON BOARD;,6A,UL/CSA,,9x7.5,	
3	L492	2701-000115	INDUCTOR;AXIAL,10uH,10%,,3x7mm	
3	L493	2501-000297	FILTER;EMI ON BOARD;,3A,,,3.5x5,TP,	
3	L494	3301-000287	CORE;FERRITE BEAD,AA,3.5x1.0x6.0mm,1500,	
3	L495	2501-000297	FILTER;EMI ON BOARD;,3A,,,3.5x5,TP,	
3	L806	2501-000297	FILTER;EMI ON BOARD;,3A,,,3.5x5,TP,	
3	L807	2501-000297	FILTER;EMI ON BOARD;,3A,,,3.5x5,TP,	
3	L808	3301-000287	CORE;FERRITE BEAD,AA,3.5x1.0x6.0mm,1500,	
3	L810	2501-000297	FILTER;EMI ON BOARD;,3A,,,3.5x5,TP,	
3	L811	2501-000297	FILTER;EMI ON BOARD;,3A,,,3.5x5,TP,	
3	L812	2501-000297	FILTER;EMI ON BOARD;,3A,,,3.5x5,TP,	
3	L813	2501-000297	FILTER;EMI ON BOARD;,3A,,,3.5x5,TP,	
3	L814	3301-000287	CORE;FERRITE BEAD,AA,3.5x1.0x6.0mm,1500,	
3	L815	2501-000297	FILTER;EMI ON BOARD;,3A,,,3.5x5,TP,	
3	L816	2501-000297	FILTER;EMI ON BOARD;,3A,,,3.5x5,TP,	
3	L831	3301-000287	CORE;FERRITE BEAD,AA,3.5x1.0x6.0mm,1500,	
3	L832	3301-000287	CORE;FERRITE BEAD,AA,3.5x1.0x6.0mm,1500,	
3	L851	2501-000297	FILTER;EMI ON BOARD;,3A,,,3.5x5,TP,	
3	L857	3301-000287	CORE;FERRITE BEAD,AA,3.5x1.0x6.0mm,1500,	
3	L859	3301-000287	CORE;FERRITE BEAD,AA,3.5x1.0x6.0mm,1500,	
3	Q301	0501-000389	TR;SMALL SIGNAL,KSC815,NPN,,400mW,TO-92,T	
3	Q432	0501-000283	TR;SMALL SIGNAL,KSA539,PNP,400mW,TO-92,T	
3	R301	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP2.5x6.	
3	R302	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP2.5x6	
3	R303	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP2.4x6.	
3	R305	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP2.4x6.	
3	R306	2003-001036	R METAL OXIDE(S);3.3ohm,5%,2W,AF,TP,3.9x	
3	R307	2003-001036	R METAL OXIDE(S);3.3ohm,5%,2W,AF,TP,3.9x	
3	R308	2001-000016	R CARBON(S);10HM,5%,1/2W,AA,TP2.4X6.4MM	
3	R310	2003-002150	R METAL OXIDE,270OHM,5%,2W,AG,TP8X16MM	
3	R312	2001-000290	R CARBON;10KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R313	2001-000761	R CARBON;430OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R314	2001-000761	R CARBON,430OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R332	2001-001107	R CARBON(S);220ohm,5%,1/2W,AA,TP2.4x6.4	
3	R333	2001-001107	R CARBON(S);220ohm,5%,1/2W,AA,TP2.4x6.4	

Level	Loc. No.	Code No.	Description ; Specification	Remark
3	R334	2001-001107	R CARBON(S);220ohm,5%,1/2W,AA,TP2.4x6.4	
3	R405	2009-001109	R TEMPERATURE;140ohm,5%,1/4W,AA,TP2.3x6	
3	R406	2004-001983	R METAL(S);2.49Kohm,1%,1/2W,AA,TP2.4x6.	
3	R407	2004-001997	R METAL(S);43.2Kohm,1%,1/2W,AA,TP2.5x6.	
3	R408	2004-001402	R METAL(S);6.8Kohm,1%,1/2W,AA,TP2.4x6.4	
3	R409	2001-001178	R CARBON(S);680OHM,5%,1/2W,AA,TP2.4X6.4	
3	R410	2001-000052	R CARBON(S);3.3KOHM,5%,1/2W,AA,TP2.4X6.	
3	R412	2001-000362	R CARBON;150OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R419	2001-000200	R CARBON;10KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R424	2008-000299	R FUSIBLE(S);4.7ohm,5%,2W,AF,TP3.9x10mm	
3	R426	2003-002153	R METAL OXIDE 4.7OHM,5%,2W,AG,TP6X16MM	
3	R427	2003-002152	R METAL OXIDE,10OHM,5%,2W,AG,TP6X15MM	
3	R427A	2003-002152	R METAL OXIDE,10OHM,5%,2W,AG,TP6X16MM	
3	R428	2002-001017	R COMPOSITION;1Kohm,10%,1/2W,AA,TP3.7x9	
3	R428A	2002-001017	R COMPOSITION;1Kohm,10%,1/2W,AA,TP3.7x9	
3	R429	2003-000586	R METAL OXIDE(S);2.2Kohm,5%,2W,AF,TP4x12	
3	R430	2003-000586	R METAL OXIDE(S);2.2Kohm,5%,2W,AF,TP4x12	
3	R433	2001-001155	R CARBON(S);5.6KOHM,5%,1/2W,AA,TP2.4X6.	
3	R434	2001-001093	R CARBON(S);2.2KOHM,5%,1/2W,AA,TP2.4X6.	
3	R441	2008-000189	R FUSIBLE;0.47ohm,10%,2W,AA,TP5x15.5mm	
3	R444	2003-000995	R METAL OXIDE(S);3.3Kohm,5%,2W,AF,TP,3.9	
3	R462	2003-002026	R METAL OXIDE(S);4.7ohm,5%,1W,AF,TP2.5x	
3	R463	2003-001024	R METAL OXIDE(S);150ohm,5%,2W,AF,TP3.9x	
3	R464	2003-002158	R METAL OXIDE,0.68OHM,5%,1W,AG,TP4.3X12	
3	R465	2001-001043	R CARBON(S);OHM-5%,1/2W,AA,TP2.4X6.4MM	
3	R466	2004-001386	R METAL(S);16.9Kohm,1%,1/2W,AA,TP2.4x6.	
3	R467	2004-001986	R METAL(S);35.7Kohm,1%,1/2W,AA,TP2.4x6.	
3	R468	2001-001122	R CARBON(S);3.9KOHM,5%,1/2W,AA,TP2.4X6.	
3	R469	2004-001390	R METAL(S);1Kohm,2%,1/2W,AA,TP2.4x6.4mm	
3	R470	2001-000028	R CARBON(S);100OHM,5%,1/2W,AA,TP2.4X6.4	
3	R471	2004-002011	R METAL(S);110Kohm,1%,1/2W,AA,TP2.4x6.4	
3	R472	2008-000252	R FUSIBLE(S);0.47ohm,10%,1/2W,AF,TP2.5x	
3	R473	2004-001395	R METAL(S);130Kohm,2%,1/2W,AA,TP2.4x6.4	
3	R486	2003-002014	R METAL OXIDE(S);0.5OHM,5%,2W,AF,TP3.9X	
3	R488	2001-000273	R CARBON;100KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R808	2001-000002	R CARBON(S);200KOHM,5%,1/2W,AA,TP6.4X2	
3	R808A	2001-000002	R CARBON(S);200KOHM,5%,1/2W,AA,TP6.4X2	
3	R810	2002-001010	R COMPOSITION;1.8Mohm,5%,1/2W,AA,TP,3.7x	
3	R812	2003-002151	R METAL OXIDE,18KOHM,5%,2W,AG,TP5X16MM	
3	R814	2003-002151	R METAL OXIDE,18KOHM,5%,2W,AG,TP5X16MM	
3	R816	2004-004029	R-METAL(S);10Kohm,1%,1/2W,AA,TP2.5x6.5m	
3	R825	2002-001010	R COMPOSITION;1.8Mohm,5%,1/2W,AA,TP,3.7x	
3	R832	2001-001178	R CARBON(S);680OHM,5%,1/2W,AA,TP2.4X6.4	
3	R834	2001-001097	R CARBON(S);2.4KOHM,5%,1/2W,AA,TP2.4X6.	
3	R837	2001-001097	R CARBON(S);2.4KOHM,5%,1/2W,AA,TP2.4X6.	
3	R838	2001-001097	R CARBON(S);2.4KOHM,5%,1/2W,AA,TP2.4X6.	
3	R855	2001-001196	R CARBON(S);9.1KOHM,5%,1/2W,AA,TP2.4X6.	
3	R856	2001-001155	R CARBON(S);5.6KOHM,5%,1/2W,AA,TP2.4X6.	
3	R857	2001-001155	R CARBON(S);5.6KOHM,5%,1/2W,AA,TP2.4X6.	
3	R871	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP2.4X6.4M	
3	R872	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP2.4X6.4M	
3	R873	2001-001097	R CARBON(S);2.4KOHM,5%,1/2W,AA,TP2.4X6.	
3	R891	2002-001012	R COMPOSITION;8.2Mohm,5%,1/2W,AA,TP,3.7x	
3	VR471	2103-001024	VR SEMI;50Kohm,25%,0.3W,TOP	
2		0403-001325	DIODE;ZENER,MTZJ,15C,14.35-15.09V,500mW,D	
2		6003-001023	SCREW-TAPTITE,RWH,+,BJM3.1L10,ZPC(YEL),SW	

ASSY-FRONT,BOT

1	*	AA91-00497H	ASSY;FRONT,BOT,VO G4309,PAL,HIPS,SP43,U8	
2	PFOCFB	6002-000522	SCREW-TAPPING,PH,+,2,M4.1L15,ZPC(BLK),SWR	
2		AA64-70124C	BADGE;BRAND,AL,225D,0,SILVER,L+70,SAMSUNG	
2		AA64-013960	INLAY;AV,43,54,62,B/PS,SHEET,T0.5,,,BLK	S.N.A
2		AA64-013986	PANEL;FRONT,DECORATION,43,54,62,B/HIPS,V	
2		AA64-013810	CABINET-FRONT,SDT,43,U8/HIPS,VO,G4309	
2		AA60-00080A	SPACER-FELT,43,54,U8,FELT,,,,,T0.35,	S.N.A
2		AA60-000798	SPACER;JERSEY,43,U8,JERSEY,GRAY,SP,700G	S.N.A
2		AA60-00077A	SPACER;DUAL,LOCK,54,U8,/P50,,,,,,,,,,4	S.N.A

ASSY-CONTROL

1	*	AA91-00476F	ASSY;CONTROL,-B,BLK,ABS,PAL,,I51A,SP54,U8	
2	BM-IVS	6003-001023	SCREW-TAPTITE;RWH,+,BJM3.1L10,ZPC(YEL),SW	
2	KNOPCW	AA61-60001J	SPRING;CS,,,SUS304,0.5,OD6,H12,N7	
2	PC-BM	6003-000334	SCREW-TAPTITE;RH,+,2S,M3.1L6,ZPC(YEL),SWR	
2	PCB-PC	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC,BLK,SWR	
2		AA64-013918	INDICATOR;LED,43,54,62,B,ACRYL,,SMOG	
2		AA64-01466F	WINDOW;CONTROL,43,54,62,B,ACRYL,SHEET,T3	
2		AA64-015003A	KNOB;CONTACT,54,U8,C3603,,,,,,,,,,	
2		AA98-00094A	ASSY;PCB,CONTROL,,SP43,U8HF,I51A	
2		AA98-00097A	ASSY;PCB,POWER S/W,,SP43,U8HF,,I51A,	
2		AA61-005618	BRACKET-MASTER,54,U8,SECC,T1.0,,,,,,,,,,	S.N.A
2		AA64-013878	PANEL;CONTROL,43,54,62,B,ABS,,,HB,,,KEY,	
2		AA64-013888	KNOB;CONTROL,43,54,62,B,ABS,,,BLK,,,HB,	
2		AA64-01389E	KNOB;POWER,43,54,62,B,ABS,GRAY,LG,,SCP,M	
2		AA64-013908	WINDOW;REMOCON,43,54,62,B,PC,,,,,,VO,	

ASSY CHASSIS PART

1	*	AA90-00635C	ASSY;CHASSIS PART,,I51A,43,U8	S.N.A
2	CON-HC	6003-001023	SCREW-TAPTITE;RWH,+,BJM3.1L10,ZPC(YEL),SW	
2	DF-FBT	6003-001023	SCREW-TAPTITE;RWH,+,BJM3.1L10,ZPC(YEL),SW	
2	DF-HC	6003-001023	SCREW-TAPTITE;RWH,+,BJM3.1L10,ZPC(YEL),SW	
2	PM-HC	6003-001023	SCREW-TAPTITE;RWH,+,BJM3.1L10,ZPC(YEL),SW	
2		AA61-005048	HOLDER;CHASSIS,43,54,62,B,ABS,GRAY,HC,,,	

ASSY CABINET

1	*	AA90-00534H	ASSY;CABINET,43,U8,SP43,,BHFX/SAP	S.N.A
2	AC-AFB	6002-000522	SCREW-TAPPING,TH,+,2,M4,L15,ZPC,BLK,,SWR	
2	AC-BCM	AA60-10011A	SCREW-TAPTITE,HH,+,PC,M4,L12,ZPC,BLK,,SW	
2	AV-CFD	6003-001023	SCREW-TAPTITE,RWH,+,BJM3.1L10,ZPC(YEL),SW	
2	BM-CBT	6003-001026	SCREW-TAPTITE,RH,+,B,M4,L15,ZPC,BLK,,SWR	
2	CBBAPT	6003-001019	SCREW-TAPTITE,RH,+,B,M4,L12,,ZPC,BLK,,SWR	
2	CBT-CW	AA63-60002V	SPACER-FELT,FELT,T0.3,,BLK,60X40,,,,,,,,,	S.N.A
2	CFB	AA65-00011C	CLAMP WIRE;ALL MODEL,NYLON 66,V2,NTR,25M	S.N.A
2	CW-CBT	6005-001003	SCREW-WOOD;HH,+,M4,L20,,ZPC,BLK,,SWRCH18A	S.N.A
2	CWBBCM	6005-001094	SCREW-ASS'Y-WOOD;WW,HH,+,M7,L32,,ZPC(YEL)	S.N.A
2	CWBCB8	6005-001003	SCREW-WOOD;HH,+,M4,L20,,ZPC,BLK,,SWRCH18A	S.N.A
2	CWBCBS	6005-001003	SCREW-WOOD;HH,+,M4,L20,,ZPC,BLK,,SWRCH18A	S.N.A
2	CWBCFB	6005-001003	SCREW-WOOD;HH,+,M4,L20,,ZPC,BLK,,SWRCH18A	S.N.A
2	CWBHC	6005-001003	SCREW-WOOD;HH,+,M4,L20,,ZPC,BLK,,SWRCH18A	S.N.A
2	PF-BCM	AA60-10011A	SCREW-TAPTITE,HH,+,PC,M4,L12,,ZPC,BLK,,SW	
2	HV-BCM	AA60-10011A	SCREW-TAPTITE,HH,+,PC,M4,L12,,ZPC,BLK,,SW	
2		AA64-604488	INLAY;COVER,SP,43,M/PS,T0.5,L40,,,,,,,,,	
2		AA67-00079A	MIRROR;BACK,43,U8,GLASS,812~580~5*4(35)~3	
2		AA67-00030A	SUN SCREEN,HC,,,43NEW,H/C,A/S,PMMA,T=63%	
2		AA65-30008A	CLAMP-CORD;PE,HB,BLK,,,,,,,,,,,,,,,,,,,,	S.N.A
2		AA64-013997	INLAY;TERMINAL,,T7,,BJPS,SHEET,T0.5,,,BLK	S.N.A
2		AA67-00115A	SCREEN-LENTI;43N,,,T1,908~690,,,TINT=1	
2		AA67-001158	SCREEN-FRESNEL;43N,,,T2.910~692,,,,,,,,,	
2		AA64-013982C	DOOR-AV;43,54,62,/B,ABS,HB,GRAY,LG-807P	S.N.A
2		AA91-00488B	ASSY;BRKT,MIRROR,,,,SECC,T1.1,0.54,U8	
3		AA60-00073A	SPACER-FELT,54,U8,FELT,,,,,,T1.0,,,210	S.N.A
3		AA61-005128	BRACKET-MIRROR;43,53,61,U8,SECC,T1.1,0,	S.N.A
2		AA61-00600A	SPRING;EARTH,43,U8,STS,,,,,,,,,,,,,,,,,0,	S.N.A
2		AA61-004758	BRACKET,CRT,MAIN,54,SECC,T1.6,	
2		AA60-00091N	SPACER-FELT,,FELT,70X10,,,,BLK,T1.0,,,,	S.N.A
2		AA60-00072B	SPACER;COVER,DUST,43,54,62,J9,SPONGE,94H	S.N.A
2		AA60-00069E	SPACER;SCREEN,43,53,61,J8,ABS,,,,BLK,	S.N.A
2		AA60-00069D	SPACER;SCREEN,43,53,61,J8,ABS,,,,BLK,	S.N.A
2		AA26-30006E	TRANS;FLYBACK,,FWZ,50A001B(S),50Khz	
2		AA61-005188	GUIDE;FLOW,54,J8,,I7,ABS,HB,BLK,	
2		AA64-013858	CABINET;BACK,SIDE,43,54,62,J8,,HIPS,HB,B	
2		AA64-013848	CABINET;BACK,BOT,43,54,62,J8,,HIPS,VO,BL	
2		AA64-013788	CABINET;BACK,TOP,43,J8,,HIPS,,HB,BLK	
2		AA63-60131F	SPACER;FELT,PC,/6129,FELT,,,,BLK,T0.5,	S.N.A
2		AA63-10007C	BAND;PP,,,,,W18,,,CLEAR,1G,	S.N.A
2		AA61-20285A	HOLDER;BOX,,3456,PPVO,WHT,	
2		AA61-00642A	SPRING;EARTH,MAIN,PRO,U7,J8,,*9,STS,67,	S.N.A

Level	Loc. No.	Code No.	Description ; Specification	Remark
			ASSY CRT-(G)	
1	*	AA94-02870B	ASSY CRT-(G);P16LSC03=KA-380MC,7,BARE,	
2	BC-AL	AA60-10011A	SCREW-TAPTITE,HH - PC,M4,L12,ZPC(BLK),SW	
2		AA91-00449A	ASSY BRACKET,CRT - SECC,T1.0,PJT	
2		AA61-00472B	BRACKET,CRT,S3,SECC,T1.6,	S-N-A
2		AA61-00479A	SPRING-WIRE,CRT,PJT,STS,	S-N-A
2		AA61-00615B	BRACKET-EARTH,S4,B,PBS,T0.5,	S-N-A
2		AA65-30114A	CLAMP-LOCK,NYLON 66,V2 NTR, PROJECTION	S-N-A
2		AA61-00555B	HOLDER-LANS,S3,B,PC ABS,BLK, GF20%	S-N-A
2		AA91-00476B	BRACKET-LENS,S3,SECC,T1.6,	S-N-A
2		AA64-01315B	CASE-COUPLER,GREEN,43,S3,S1,T2.0,AL SHE	S-N-A
2		AA29-30009F	TRANS-FLYBACK, FWZ 30A001C,55,30KV	
2		AA67-10071A	LENS-DELTA 77.79, GREEN,IC ELEMENT,	
2		AA67-10005A	LENS-ASSY, DELTA,CLEAR,S4388, ,77,	
2		AA91-00491A	ASSY-HOLDER,PACK, ,FILM PP RUBBER,S4,B	
2		AA60-00062B	SPACER-O.RING,S3,SILICON, ,GRAY,	S-N-A
2		AA39-00018A	LEAD-CONNECTOR ASSY,1P,YFH800-01,YRH187	
2		AA33-00006A	MAGNET-CONVERGENCE,JH-92LT-29A, ,29.1m:0	
			ASSY CRT-(B)	
1	*	AA94-02869A	ASSY CRT-(B);P16LSC03BMB,-380MC,7,BARE,	
2	BC-AL	AA60-10011A	SCREW-TAPTITE,HH - PC,M4,L12,ZPC(BLK),SW	
2		AA65-30114A	CLAMP-LOCK,NYLON 66,V2 NTR, PROJECTION	S-N-A
2		AA67-10005A	LENS-ASSY, DELTA,CLEAR,S4388, ,77,	
2		AA91-00449A	ASSY-BRACKET,CRT, ,SECC T1.0,PJT	
3		AA61-00473B	BRACKET,CRT,S3,SECC,T1.6,	S-N-A
3		AA61-00478A	SPRING-WIRE,CRT,PJT,STS,	S-N-A
3		AA61-00615B	BRACKET-EARTH,S4,B,PBS,T0.5,	S-N-A
2		AA91-00491A	ASSY-HOLDER,PACK, ,FILM PP RUBBER,S4,B	
3		AA60-00062B	SPACER-O.RING,S3,SILICON, ,GRAY,	S-N-A
3		AA61-00477B	HOLDER-PACK,43,S3,S1,B,PP, ,HB,	S-N-A
2		AA60-00074A	SPACER-DYP,JT,SILICON RUBBER, ,GRAY,	S-N-A
2		AA61-00602B	BRACKET-LENS,RB,PROJECTION,SECC, T1.6,	
2		AA67-10007A	LENS, ,DELTA,CLEAR,PJT, ,77.79,	
2		AA26-30006F	TRANS-FLYBACK, ,FWZ 50A001C,55,30KV	
2		AA64-01316B	CASE-COUPLER,BLUE,S3,T2.0,AL SHEET,	S-N-A
2		AA27-50005C	DEFLECTION-YOKE, ,DPD 4392AL,ST 3,PJT,CRT	
2		AA03-00202A	CRT-MONO,P16LSC03BMB, 7inch, , ,FLAT	S-N-A
2		AA61-00555B	HOLDER-LANS,S3,B,PC ABS,BLK, ,GF20%	S-N-A
2		AA60-00063B	SPACER-CLENS,S3,SILICON, , ,GRAY,	S-N-A
2		AA60-00061B	SPACER-CRT,S3,SILICON, , ,GRAY,	S-N-A
2		AA39-00018A	LEAD-CONNECTOR ASSY,1P,YFH800-01,YRH187	
2		AA33-00006A	MAGNET-CONVERGENCE,JH-92LT-U 036, ,29.1m,	
			ASSY CRT-(R)	
1	*	AA94-02868A	ASSY CRT-(R);P16LSC03RUA,-380MC,7,BARE,	
2	BC-AL	AA60-10011A	SCREW-TAPTITE,HH, -PC,M4,L12,ZPC(BLK),SW	
2		AA65-30114A	CLAMP-LOCK,NYLON 66,V2,NTR, ,PROJECTION,	S-N-A
2		AA64-01314B	CASE-COUPLER,RED,S3,T2.0,AL SHEET,	S-N-A
2		AA67-10005A	LENS-ASSY, ,DELTA,CLEAR,S4388, ,77,	
2		AA67-10008A	LENS, ,DELTA,RED,PJT, ,77.79,	
2		AA91-00448A	ASSY-BRACKET,CRT, , ,SECC T1.0,PJT	
3		AA61-00473B	BRACKET-CRT,S3,SECC,T1.6,	S-N-A
3		AA61-00478A	SPRING-WIRE,CRT,PJT,STS,	S-N-A
3		AA61-00615B	BRACKET-EARTH,S4,B,PBS,T0.5,	S-N-A
2		AA91-00491A	ASSY-HOLDER,PACK, ,FILM PP RUBBER,S4,B	
3		AA60-00062B	SPACER-O.RING,S3,SILICON, , ,GRAY,	S-N-A
3		AA61-00477B	HOLDER-PACK,43,S3,S1,B,PP, ,HB,	S-N-A
2		AA60-00074A	SPACER-DYP,JT,SILICON RUBBER, , ,GRAY,	S-N-A
2		AA26-30006F	TRANS-FLYBACK, ,FWZ 50A001C,55,30KV	
2		AA61-00602B	BRACKET-LENS,RB,PROJECTION,SECC, T1.6,	
2		AA27-50005C	DEFLECTION-YOKE, ,DPD 4392AL,ST 3,PJT,CRT	
2		AA03-00200A	CRT-MONO,P16LSC03RUA, 7inch, , ,FLAT	S-N-A
2		AA61-00555B	HOLDER-LANS,S3,B,PC ABS,BLK, ,GF20%	S-N-A
2		AA60-00063B	SPACER-CLENS,S3,SILICON, , ,GRAY,	S-N-A
2		AA60-00061B	SPACER-CRT,S3,SILICON, , ,GRAY,	S-N-A
2		AA39-00018A	LEAD-CONNECTOR ASSY,1P,YFH800-01,YRH187	
2		AA33-00006A	MAGNET-CONVERGENCE,JH-92LT-29A, ,29.1m:0	
			ASSY-PCB,CONV MDL	
1	*	AA99-00422B	ASSY-PCB,CONV MDL, ,SP43J,SHPJ51A,	
2	ZI63	2305-000299	C-FILM,MPEF,220nF,5%,63V,TP, 5mm	
2	CN101	3711-002709	CONNECTOR-HEADER,NOWALL,12P,1R,2.5MM,LANG	
2	CN102	3711-002709	CONNECTOR-HEADER,NOWALL,12P,1R,2.5MM,LANG	
2	CI13	1203-000641	IC-RESET,7442,TO-92,3P, ,PLASTIC, ,0.3V,7	
2		0202-001004	SOLDER-CREAM,SD,2030M,SZH-1,S63A,D0.04,5	S-N-A
2		0202-000187	SOLDER-WIRE,FLUX, ,RS605,D1.2,63Sn/37Pb	S-N-A
2		AA63-00143A	SHIELD-CASE, ,SPTE T0.5,T0.5,ALLMIGHT,CO	S-N-A
2		AA99-20068A	ASSY-PCB SUB,AUTO, AA95-00422B ,V	S-N-A
3	C101	2404-000275	C-TA,CHIP,100UF,10%,10V,CP,TP,7343	
3	C102	2404-000275	C-TA,CHIP,100UF,10%,10V,CP,TP,7343	
3	C103	2404-000256	C-TA,CHIP,47UF,20%,16V,CP,TP,7343	
3	C104	2203-000181	C-CERAMIC,CHIP,100nF,-80-20%,25V,Y5V,TP,	
3	C105	2203-000858	C-CERAMIC,CHIP,0.039nF,5%,50V,NP0,TP,201	
3	C106	2203-000181	C-CERAMIC,CHIP,100nF,-80-20%,25V,Y5V,TP,	
3	C107	2203-000716	C-CERAMIC,CHIP,3.3nF,10%,50V,X7R,TP,2012	
3	C108	2203-005809	C-CERAMIC,CHIP,10000nF,10%,16V,X7R,TP,201	
3	C109	2203-000181	C-CERAMIC,CHIP,100nF,-80-20%,25V,Y5V,TP,	
3	C110	2203-000444	C-CERAMIC,CHIP,1nF,10%,50V,X7R,TP,2012,	
3	C111	2203-000181	C-CERAMIC,CHIP,100nF,-80-20%,25V,Y5V,TP,	
3	C112	2203-000683	C-CERAMIC,CHIP,0.027nF,5%,50V,NP0,TP,201	
3	C113	2203-000683	C-CERAMIC,CHIP,0.027nF,5%,50V,NP0,TP,201	
3	C114	2203-000181	C-CERAMIC,CHIP,100nF,-80-20%,25V,Y5V,TP,	
3	C115	2203-000181	C-CERAMIC,CHIP,100nF,-80-20%,25V,Y5V,TP,	
3	C116	2203-000181	C-CERAMIC,CHIP,100nF,-80-20%,25V,Y5V,TP,	
3	C117	2203-000181	C-CERAMIC,CHIP,100nF,-80-20%,25V,Y5V,TP,	
3	C118	2203-000181	C-CERAMIC,CHIP,100nF,-80-20%,25V,Y5V,TP,	
3	C119	2203-000181	C-CERAMIC,CHIP,100nF,-80-20%,25V,Y5V,TP,	
3	C120	2203-000181	C-CERAMIC,CHIP,100nF,-80-20%,25V,Y5V,TP,	
3	C121	2203-000181	C-CERAMIC,CHIP,100nF,-80-20%,25V,Y5V,TP,	
3	C122	2203-000181	C-CERAMIC,CHIP,100nF,-80-20%,25V,Y5V,TP,	
3	C123	2203-000181	C-CERAMIC,CHIP,100nF,-80-20%,25V,Y5V,TP,	
3	C124	2203-000181	C-CERAMIC,CHIP,100nF,-80-20%,25V,Y5V,TP,	
3	C125	2203-000181	C-CERAMIC,CHIP,100nF,-80-20%,25V,Y5V,TP,	
3	C126	2203-000181	C-CERAMIC,CHIP,100nF,-80-20%,25V,Y5V,TP,	
3	C127	2203-000181	C-CERAMIC,CHIP,100nF,-80-20%,25V,Y5V,TP,	
3	C128	2203-000181	C-CERAMIC,CHIP,100nF,-80-20%,25V,Y5V,TP,	
3	C129	2203-000181	C-CERAMIC,CHIP,100nF,-80-20%,25V,Y5V,TP,	
3	C130	2203-000181	C-CERAMIC,CHIP,100nF,-80-20%,25V,Y5V,TP,	
3	C131	2203-000181	C-CERAMIC,CHIP,100nF,-80-20%,25V,Y5V,TP,	
3	C132	2203-000408	C-CERAMIC,CHIP,0.18nF,5%,50V,NP0,TP,2012	
3	C133	2404-000284	C-TA,CHIP,10uF,20%,16V, ,TP,3528,	
3	C134	2203-000181	C-CERAMIC,CHIP,100nF,-80-20%,25V,Y5V,TP,	
3	C135	2203-000716	C-CERAMIC,CHIP,3.3nF,10%,50V,X7R,TP,2012	
3	C136	2203-000181	C-CERAMIC,CHIP,100nF,-80-20%,25V,Y5V,TP,	
3	C137	2203-000716	C-CERAMIC,CHIP,3.3nF,10%,50V,X7R,TP,2012	
3	C138	2203-000408	C-CERAMIC,CHIP,0.18nF,5%,50V,NP0,TP,2012	
3	C139	2203-000181	C-CERAMIC,CHIP,100nF,-80-20%,25V,Y5V,TP,	
3	C140	2404-000284	C-TA,CHIP,10uF,20%,16V, ,TP,3528,	
3	C141	2203-000408	C-CERAMIC,CHIP,0.18nF,5%,50V,NP0,TP,2012	
3	C142	2404-000284	C-TA,CHIP,10uF,20%,16V, ,TP,3528,	
3	C143	2203-000181	C-CERAMIC,CHIP,100nF,-80-20%,25V,Y5V,TP,	
3	C144	2203-000716	C-CERAMIC,CHIP,3.3nF,10%,50V,X7R,TP,2012	
3	C145	2203-000181	C-CERAMIC,CHIP,100nF,-80-20%,25V,Y5V,TP,	
3	C146	2203-000716	C-CERAMIC,CHIP,3.3nF,10%,50V,X7R,TP,2012	
3	C147	2203-000408	C-CERAMIC,CHIP,0.18nF,5%,50V,NP0,TP,2012	
3	C148	2404-000284	C-TA,CHIP,10uF,20%,16V, ,TP,3528,	
3	C149	2203-000181	C-CERAMIC,CHIP,100nF,-80-20%,25V,Y5V,TP,	
3	C150	2203-000181	C-CERAMIC,CHIP,100nF,-80-20%,25V,Y5V,TP,	
3	C151	2203-000408	C-CERAMIC,CHIP,0.18nF,5%,50V,NP0,TP,2012	
3	C152	2404-000284	C-TA,CHIP,10uF,20%,16V, ,TP,3528,	
3	C153	2203-000181	C-CERAMIC,CHIP,100nF,-80-20%,25V,Y5V,TP,	
3	C154	2203-000716	C-CERAMIC,CHIP,3.3nF,10%,50V,X7R,TP,2012	

Level	Loc. No.	Code No.	Description ; Specification	Remark
3	C155	2203-000181	C-CERAMIC,CHIP,100nF,-80-20%,25V,Y5V,TP,	
3	C156	2203-000716	C-CERAMIC,CHIP,3.3nF,10%,50V,X7R,TP,2012	
3	C157	2203-000408	C-CERAMIC,CHIP,0.18nF,5%,50V,NP0,TP,2012	
3	C158	2404-000284	C-TA,CHIP,10uF,20%,16V, ,TP,3528,	
3	C159	2203-000181	C-CERAMIC,CHIP,100nF,-80-20%,25V,Y5V,TP,	
3	C160	2203-000181	C-CERAMIC,CHIP,100nF,-80-20%,25V,Y5V,TP,	
3	C161	2404-000256	C-TA,CHIP,47UF,20%,16V,CP,TP,7343	
3	C162	2404-000256	C-TA,CHIP,47UF,20%,16V,CP,TP,7343	
3	C164	2402-000173	C-AL,SMD,4.7uF,20%,25V,CP,TP,4.3x4.3x5,	
3	C165	2203-000181	C-CERAMIC,CHIP,100nF,-80-20%,25V,Y5V,TP,	
3	C166	2203-000181	C-CERAMIC,CHIP,100nF,-80-20%,25V,Y5V,TP,	
3	C167	2404-000123	C-TA,CHIP,10uF,20%,16V, ,TP,6032,2.9mm	
3	C168	2203-000181	C-CERAMIC,CHIP,100nF,-80-20%,25V,Y5V,TP,	
3	C169	2203-000181	C-CERAMIC,CHIP,100nF,-80-20%,25V,Y5V,TP,	
3	C170	2203-000151	C-CERAMIC,CHIP,100nF,-80-20%,25V,Y5V,TP,	
3	C171	2404-000284	C-TA,CHIP,10uF,20%,16V, ,TP,3528,	
3	C172	2404-000256	C-TA,CHIP,47UF,20%,16V,CP,TP,7343	
3	C173	2404-000256	C-TA,CHIP,47UF,20%,16V,CP,TP,7343	
3	C174	2404-000256	C-TA,CHIP,47UF,20%,16V,CP,TP,7343	
3	C201	2203-000408	C-CERAMIC,CHIP,0.18nF,5%,50V,NP0,TP,2012	
3	C202	2203-000408	C-CERAMIC,CHIP,0.18nF,5%,50V,NP0,TP,2012	
3	C203	2203-000408	C-CERAMIC,CHIP,0.18nF,5%,50V,NP0,TP,2012	
3	C204	2203-000408	C-CERAMIC,CHIP,0.18nF,5%,50V,NP0,TP,2012	
3	C205	2203-000408	C-CERAMIC,CHIP,0.18nF,5%,50V,NP0,TP,2012	
3	C206	2203-000408	C-CERAMIC,CHIP,0.18nF,5%,50V,NP0,TP,2012	
3	D101	0401-000160	DIODE-SWITCHING,SS3314,30V,100mA,LSC,TP	
3	D102	0401-000160	DIODE-SWITCHING,SS3314,30V,100mA,LSC,TP	
3	DZ101	0403-001016	DIODE-ZENER,RLZ5.2B,6.2V,5.95-6.27V,400m	
3	DZ102	0403-001016	DIODE-ZENER,RLZ5.2B,6.2V,5.95-6.27V,400m	
3	DZ104	0403-001016	DIODE-ZENER,RLZ5.2B,6.2V,5.95-6.27V,400m	
3	DZ105	0403-001016	DIODE-ZENER,RLZ5.2B,6.2V,5.95-6.27V,400m	
3	DZ106	0403-001016	DIODE-ZENER,RLZ5.2B,6.2V,5.95-6.27V,400m	
3	DZ107	0403-001016	DIODE-ZENER,RLZ5.2B,6.2V,5.95-6.27V,400m	
3	DZ108	0403-001016	DIODE-ZENER,RLZ5.2B,6.2V,5.95-6.27V,400m	
3	DZ109	0403-001016	DIODE-ZENER,RLZ5.2B,6.2V,5.95-6.27V,400m	
3	DZ110	0403-001016	DIODE-ZENER,RLZ5.2B,6.2V,5.95-6.27V,400m	
3	DZ111	0403-001016	DIODE-ZENER,RLZ5.2B,6.2V,5.95-6.27V,400m	
3	DZ112	0403-001016	DIODE-ZENER,RLZ5.2B,6.2V,5.95-6.27V,400m	
3	DZ113	0403-001016	DIODE-ZENER,RLZ5.2B,6.2V,5.95-6.27V,400m	
3	DZ114	0403-001016	DIODE-ZENER,RLZ5.2B,6.2V,5.95-6.27V,400m	
3	DZ115	0403-001016	DIODE-ZENER,RLZ5.2B,6.2V,5.95-6.27V,400m	
3	DZ116	0403-001016	DIODE-ZENER,RLZ5.2B,6.2V,5.95-6.27V,400m	
3	DZ117	0403-001284	DIODE-ZENER,RLZ3.3A,3.16-3.38V,500MW,LL	
3	EFI01	2901-000229	FILTER-EMI SMD;50x0.3A, ,2200ohm,4.5x3,	
3	EFI02	2901-000229	FILTER-EMI SMD;50x0.3A, ,2200ohm,4.5x3,	
3	EFI04	2901-000226	FILTER-EMI SMD;25x0.3A, ,300ohm,3.2x1.25	
3	EFI05	2901-000226	FILTER-EMI SMD;25x0.3A, ,300ohm,3.2x1.25	
3	EFI06	2901-000226	FILTER-EMI SMD;25x0.3A, ,300ohm,3.2x1.25	
3	EFI07	2901-000226	FILTER-EMI SMD;25x0.3A, ,300ohm,3.2x1.25	
3	EFI08	2901-000226	FILTER-EMI SMD;25x0.3A, ,300ohm,3.2x1.25	
3	EFI09	2901-000226	FILTER-EMI SMD;25x0.3A, ,300ohm,3.2x1.25	
3	EFI10	2901-000226	FILTER-EMI SMD;25x0.3A, ,300ohm,3.2x1.25	
3	EFI11	2901-000226	FILTER-EMI SMD;25x0.3A, ,300ohm,3.2x1.25	
3	EFI12	2901-000226	FILTER-EMI SMD;25x0.3A, ,300ohm,3.2x1.25	
3	EFI13	2901-000226	FILTER-EMI SMD;25x0.3A, ,300ohm,3.2x1.25	
3	EFI14	2901-000226	FILTER-EMI SMD;25x0.3A, ,300ohm,3.2x1.25	
3	EFI15	2901-000226	FILTER-EMI SMD;25x0.3A, ,300ohm,3.2x1.25	
3	EFI16	2901-000226	FILTER-EMI SMD;25x0.3A, ,300ohm,3.2x1.25	
3	IC101	AA13-00071A	IC-ASIC, ,SDC91,QFP208PG,CONV CONTROLL	
3	IC102	0801-001043	IC-CMOS LOGIC,74HC4046,PHASE LOCKED LOOP	
3	IC103	AA09-00032A	IC-MCU,TSC87251G2D-0TP,TSC87251G2D-0T	
3	IC104	1103-001167	IC-EEPROM,2BC64,8K,I2BIT,TSOP28P, 120NS	
3	IC105	1201-001520	IC-VIDEO AMP,2210,SOP8P150MIL,DUAL,7dB	
3	IC106	1201-001504	IC-OP AMP;072,SOP8P150MIL,DUAL, ,PLAST	
3	IC107	1201-001504	IC-OP AMP;072,SOP8P150MIL,DUAL, ,PLAST	
3	IC108	1201-001504	IC-OP AMP;072,SOP8P150MIL,DUAL, ,PLAST	
3	IC109	0801-001156	IC-CMOS LOGIC,74HC4066,BILATERAL SWITCH,	
3	IC110	0801-001156	IC-CMOS LOGIC,74HC4066,BILATERAL SWITCH,	
3	IC111	1001-000105	IC-ANALOG SWITCH-CD4066BM,BILATERAL CMOS	
3	IC112	1001-000105	IC-ANALOG SWITCH-CD4066BM,BILATERAL CMOS	
3	PCB	AA41-00188D	PCB-CONVERGENCE MODULE;SVP 43J4W,FR 4,4L	S-N-A
3	Q101	0501-000280	TR-SMALL SIGNAL,KSA1182,PNP,150mW,SOT 23	
3	Q102	0501-000342	TR-SMALL SIGNAL,KSC1623 Y,NPN,200mW,SOT-	
3	Q103	0501-000342	TR-SMALL SIGNAL,KSC1623 Y,NPN,200mW,SOT	
3	Q104	0501-000280	TR-SMALL SIGNAL,KSA1182,PNP,150mW,SOT 23	
3	Q105	0501-000342	TR-SMALL SIGNAL,KSC1623 Y,NPN,200mW,SOT	
3	Q106	0501-000342	TR-SMALL SIGNAL,KSC1623 Y,NPN,200mW,SOT	
3	Q107	0501-000342	TR-SMALL SIGNAL,KSC1623 Y,NPN,200mW,SOT	
3	Q108	0501-000280	TR-SMALL SIGNAL,KSA1182,PNP,150mW,SOT 23	
3	Q109	0505-000257	FET-SILICON,2SK217,N, -20mA, 150mW,SOT	
3	Q110	0505-000257	FET-SILICON,2SK217,N, -20mA, 150mW,SOT	
3	Q111	0505-000257	FET-SILICON,2SK217,N, -20mA, 150mW,SOT	
3	Q112	0505-000257	FET-SILICON,2SK217,N, -20mA, 150mW,SOT	
3	Q113	0505-000257	FET-SILICON,2SK217,N, -20mA, 150mW,SOT	
3	Q114	0505-000257	FET-SILICON,2SK217,N, -20mA, 150mW,SOT	
3	R101	2007-000881	R-CHIP,4.7OHM,5%,1/10W,DA,TP,2012	
3	R102	2007-000881	R-CHIP,4.7OHM,5%,1/10W,DA,TP,2012	
3	R103	2007-000881	R-CHIP,4.7OHM,5%,1/10W,DA,TP,2012	
3	R104	2007-000881	R-CHIP,4.7OHM,5%,1/10W,DA,TP,2012	
3	R105	2007-000415	R-CHIP,150HM,5%,1/10W,DA,TP,2012	
3	R106	2007-000947	R-CHIP,470HM,5%,1/10W,DA,TP,2012	
3	R107	2007-000282	R-CHIP,100KOHM,5%,1/10W,DA,TP,2012	
3	R108	2007-000872	R-CHIP,4.7KOHM,5%,1/10W,DA,TP,2012	
3	R109	2007-000493	R-CHIP,2.2KOHM,5%,1/10W,DA,TP,2012	
3	R110	2007-000221	R-CHIP,1.2KOHM,5%,1/10W,DA,TP,2012	
3	R111	2007-000380	R-CHIP,13KOHM,5%,1/10W,DA,TP,2012	
3	R112	2007-000468	R-CHIP,1KOHM,5%,1/10W,DA,TP,2012	
3	R113	2007-001097	R-CHIP,62KOHM,5%,1/10W,DA,TP,2012	
3	R114	2007-000468	R-CHIP,1KOHM,5%,1/10W,DA,TP,2012	
3	R116	2007-000468	R-CHIP,1KOHM,5%,1/10W,DA,TP,2012	
3	R117	2007-000468	R-CHIP,1KOHM,5%,1/10W,DA,TP,2012	
3	R118	2007-000468	R-CHIP,1KOHM,5%,1/10W,DA,TP,2012	
3	R119	2007-000468	R-CHIP,1KOHM,5%,1/10W,DA,TP,2012	
3	R120	2007-000401	R-CHIP,150OHM,5%,1/10W,DA,TP,2012	
3	R121	2007-000023	R-CHIP,120OHM,5%,1/10W,DA,TP,2012	
3	R122	2007-000468	R-CHIP,1KOHM,5%,1/10W,DA,TP,2012	
3	R123	2007-000401	R-CHIP,150OHM,5%,1/10W,DA,TP,2012	
3	R124	2007-000468	R-CHIP,1KOHM,5%,1/10W,DA,TP,2012	
3	R125	2007-000401	R-CHIP,150OHM,5%,1/10W,DA,TP,2012	
3	R126	2007-000401	R-CHIP,150OHM,5%,1/10W,DA,TP,2012	
3	R127	2007-000401	R-CHIP,150OHM,5%,1/10W,DA,TP,2012	
3	R128	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP,2012	
3	R129	2007-000465	R-CHIP,1KOHM,1%,1/10W,DA,TP,2012	
3	R130	2007-000868	R-CHIP,4.7KOHM,1%,1/10W,DA,TP,2012	
3	R131	2007-000981	R-CHIP,5.6KOHM,5%,1/10W,DA,TP,2012	
3	R132	2007-000465	R-CHIP,1KOHM,1%,1/10W,DA,TP,2012	
3	R133	2007-000868	R-CHIP,4.7KOHM,1%,1/10W,DA,TP,2012	
3	R134	2007-000981	R-CHIP,5.6KOHM,5%,1/10W,DA,TP,2012	
3	R135	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP,2012	
3	R136	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP,2012	
3	R137	2007-000465	R-CHIP,1KOHM,1%,1/10W,DA,TP,2012	
3	R138	2007-000868	R-CHIP,4.7KOHM,1%,1/10W,DA,TP,2012	
3	R139	2007-000981	R-CHIP,5.6KOHM,5%,1/10W,DA,TP,2012	
3	R140	2007-000465	R-CHIP,1KOHM,1%,1/10W,DA,TP,2012	
3	R141	2007-000868	R-CHIP,4.7KOHM,1%,1/10W,DA,TP,2012	
3	R142	2007-000981	R-CHIP,5.6KOHM,5%,1/10W,DA,TP,2012	
3	R143	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP,2012	
3	R144	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP,2012	
3	R145	2007-000465	R-CHIP,1KOHM,1%,1/10W,DA,TP,2012	
3	R146	2007-000868	R-CHIP,4.7KOHM,1%,1/10W,DA,TP,2012	
3	R147	2007-000981	R-CHIP,5.6KOHM,5%,1/10W,DA,TP,2012	
3	R148	2007-000465	R-CHIP,1KOHM,1%,1/10W,DA,TP,2012	
3	R149	2007-000868	R-CHIP,4.7KOHM,1%,1/10W,DA,TP,2012	
3	R150	2007-000981	R-CHIP,5.6KOHM,5%,1/10W,DA,TP,2012	
3	R151	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP,2012	
3	R152	2007-000282	R-CHIP,100KOHM,5%,1/10W,DA,TP,2012	
3	R153	2007-000872	R-CHIP,4.7KOHM,5%,1/10W,DA,TP,2012	
3	R154	2007-000774	R-CHIP,33KOHM,5%,1/10W,DA,TP,2012	
3	R155	2007-000300	R-CHIP,10KOHM,5%,1/10W,DA,TP,2012	
3	R156	2007-001055	R-CHIP,6.2KOHM,5%,1/10W,DA,TP,2012	
3	R157	2007-000671	R-CHIP,2KOHM,5%,1/10W,DA,TP,2012	
3	R158	2007-000468	R-CHIP,1KOHM,5%,1/10W,DA,TP,2012	
3	R159	2007-001166	R-CHIP,750HM,5%,1/10W,DA,TP,2012	
3	R160	2007-000766	R-CHIP,330OHM,5%,1/10W,DA,TP,2012	
3	R161	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP,2012	
3	R162	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP,2012	
3	R163	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP,2012	
3	R164	2007-000468	R-CHIP,1KOHM,5%,1/10W,DA,TP,2012	
3	R165	2007-000468	R-CHIP,1KOHM,5%,1/10W,DA,TP,2012	
3	R166	2007-000468	R-CHIP,1KOHM,5%,1/10W,DA,TP,2012	
3	R167	2007-000468	R-CHIP,1KOHM,5%,1/10W,DA,TP,2012	
3	R168	2007-000468	R-CHIP,1KOHM,5%,1/10W,DA,TP,2012	

Level	Loc. No.	Code No.	Description ; Specification	Remark
3	R169	2007-000703	R-CHIP;3.6KOHM,5%,1/10W,DA,TP2012	
3	R170	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
3	R171	2007-000221	R-CHIP;1.2KOHM,5%,1/10W,DA,TP2012	
3	R172	2007-000642	R-CHIP;270OHM,5%,1/10W,DA,TP2012	
3	R173	2007-000030	R-CHIP;560OHM,5%,1/10W,DA,TP2012	
3	R174	2007-000030	R-CHIP;560OHM,5%,1/10W,DA,TP2012	
3	R175	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP2012	
3	R176	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
3	R177	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
3	R178	2007-000728	R-CHIP;300OHM,5%,1/10W,DA,TP2012	
3	R179	2007-000728	R-CHIP;300OHM,5%,1/10W,DA,TP2012	
3	R180	2007-000728	R-CHIP;300OHM,5%,1/10W,DA,TP2012	
3	R181	2007-000728	R-CHIP;300OHM,5%,1/10W,DA,TP2012	
3	R182	2007-000728	R-CHIP;300OHM,5%,1/10W,DA,TP2012	
3	R183	2007-000728	R-CHIP;300OHM,5%,1/10W,DA,TP2012	
3	R184	2007-000830	R-CHIP;39KOHM,5%,1/10W,DA,TP2012	
3	R201	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
3	R203	2007-000565	R-CHIP;220KOHM,5%,1/10W,DA,TP2012	
3	R204	2007-000565	R-CHIP;220KOHM,5%,1/10W,DA,TP2012	
3	R205	2007-000565	R-CHIP;220KOHM,5%,1/10W,DA,TP2012	
3	R206	2007-000565	R-CHIP;220KOHM,5%,1/10W,DA,TP2012	
3	R207	2007-000565	R-CHIP;220KOHM,5%,1/10W,DA,TP2012	
3	R208	2007-000565	R-CHIP;220KOHM,5%,1/10W,DA,TP2012	
3	X101	2801-003860	CRYSTAL-SMD;24MHz,30ppm,28-AAV,20pF,50ohm	

ASSY-PCB,TERMINAL

Level	Loc. No.	Code No.	Description ; Specification	Remark
1	*	AA95-00219D	ASSY PCB,TERMINAL;-,SP43J5HF,J51A,-,1	
2	CNT01	3711-003630	CONNECTOR-HEADER;BOX,32P,2R,2.54mm,ANGLE	
2	CNT02	3711-003630	CONNECTOR-HEADER;BOX,32P,2R,2.54mm,ANGLE	
2	CNT03	3711-003601	CONNECTOR-HEADER;BOX,13P,1R,2.5mm,ANGLE,	
2	IC703	0904-001121	IC-A/D SUPPORT CHIP;8574,8BIT,DIP,16P,30	
2	IC704	1001-001022	IC-ANALOG SWITCH;TDA8601,BLANKING,DIP,16	
2	IC705	0801-000213	IC-CMOS LOGIC;4052,MULTIPLEXER,DIP,16P,3	
2	JKV01	3722-000498	JACK-SCART;21P,-,SN,BLK,NO	
2	JKV02	3722-001039	JACK-RCA;9P,3.4mm,SN,BLK,#15,--	
2	JKV03	3722-001382	JACK-RCA;5P(9P),3.4MM,NI,R/W/G/BLUE,	
2	JKV04	3722-001350	JACK-RCA;7P/9P,3.4MM,NI,BLK	
2	JKV05	3701-001013	CONNECTOR-DSUB;15P,3R,FEMALE,STRAIGHT,AU	
2	JKV06	3701-001013	CONNECTOR-DSUB;15P,3R,FEMALE,STRAIGHT,AU	
2	JKV07	3722-000544	JACK-VHS;4P,11.5mm,AG,BLK,N	
2	RN701	2011-000160	R-NETWORK;10Kohm,5%,1/8W,A,SIP,9P,TP	
2		AA65-30105A	CLAMP-WIRE;NYLON 66,V2,NTR,15MM,ALL MODE	S.N.A
2		AA99-20079E	ASSY PCB SUB,AUTO; AA95-00219D ,V	S.N.A
3	C701	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7.5	
3	C702	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
3	C703	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7.5	
3	C704	2203-000818	C-CERAMIC,CHIP;0.033nF,5%,50V,NP0,TP,201	
3	C705	2203-000818	C-CERAMIC,CHIP;0.033nF,5%,50V,NP0,TP,201	
3	C706	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C707	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C708	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C709	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C710	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C711	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C712	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
3	C713	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C714	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C715	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C716	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7.5	
3	C717	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
3	C718	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C719	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C720	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C721	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C722	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C723	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
3	C724	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C725	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
3	C726	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
3	C727	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C730	2401-002299	C-AL;4.7uF,20%,50V,GP,TP,5x7.5	
3	C731	2401-002299	C-AL;4.7uF,20%,50V,GP,TP,5x7.5	
3	C732	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,	
3	C733	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,	
3	C734	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
3	C735	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,	
3	C736	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,	
3	C737	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
3	C740	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11.5	
3	C741	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
3	C742	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11.5	
3	C743	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
3	C744	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
3	C745	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
3	C746	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
3	C747	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
3	C748	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
3	C749	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
3	C760	2401-000667	C-AL;2.2uF,20%,50V,WT,TP,5x11.5	
3	C761	2401-000667	C-AL;2.2uF,20%,50V,WT,TP,5x11.5	
3	C762	2401-000667	C-AL;2.2uF,20%,50V,WT,TP,5x11.5	
3	C763	2401-000667	C-AL;2.2uF,20%,50V,WT,TP,5x11.5	
3	C764	2401-000667	C-AL;2.2uF,20%,50V,WT,TP,5x11.5	
3	C765	2401-000667	C-AL;2.2uF,20%,50V,WT,TP,5x11.5	
3	C766	2401-000667	C-AL;2.2uF,20%,50V,WT,TP,5x11.5	
3	C767	2401-000667	C-AL;2.2uF,20%,50V,WT,TP,5x11.5	
3	C768	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C769	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C770	2203-000683	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,201	
3	C771	2203-000683	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,201	
3	C772	2203-000683	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,201	
3	C773	2203-000239	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,2012	
3	C774	2203-000239	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,2012	
3	C775	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,	
3	C776	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,	
3	C777	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7.5	
3	C780	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
3	C782	2401-000471	C-AL;10uF,20%,50V,BP,TP,5x11.5mm	
3	C783	2401-000471	C-AL;10uF,20%,50V,BP,TP,5x11.5mm	
3	DZ701	0403-000314	DIODE-ZENER;RLZ-9.1B,9.1V,8.80-9.30V,400	
3	DZ702	0403-000314	DIODE-ZENER;RLZ-9.1B,9.1V,8.80-9.30V,400	
3	DZ703	0403-000314	DIODE-ZENER;RLZ-9.1B,9.1V,8.80-9.30V,400	
3	DZ704	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
3	DZ705	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
3	IC701	1001-001030	IC-VIDEO SWITCH;TDA6920X,-,SOP,28P,300MI	
3	IC702	1001-001030	IC-VIDEO SWITCH;TDA6920X,-,SOP,28P,300MI	
3	J701	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
3	J702	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
3	L701	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	L702	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	L703	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	L704	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	L705	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	L706	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	L707	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	L708	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	L709	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	L710	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	L719	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	L720	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	L721	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	L722	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	L723	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	L724	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	L725	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	L726	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	PCB	AA41-00076B	PCB-AV TERMINAL;SP43J5HF,FR-4,2L,B,1.6T,	S.N.A
3	Q701	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
3	Q702	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
3	Q703	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
3	Q704	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
3	Q705	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
3	Q706	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
3	Q707	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
3	Q708	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
3	Q709	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
3	Q710	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
3	Q711	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
3	Q712	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
3	Q713	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	

Level	Loc. No.	Code No.	Description ; Specification	Remark
3	R701	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R702	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP2012	
3	R703	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
3	R704	2007-000511	R-CHIP;2.4KOHM,5%,1/10W,DA,TP2012	
3	R705	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
3	R706	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
3	R708	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R709	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R710	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R711	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
3	R712	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R713	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R714	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R715	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R716	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP2012	
3	R717	2007-000401	R-CHIP;150OHM,5%,1/10W,DA,TP2012	
3	R718	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP2012	
3	R719	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
3	R720	2007-000511	R-CHIP;2.4KOHM,5%,1/10W,DA,TP2012	
3	R721	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R722	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
3	R723	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R724	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R725	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
3	R726	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
3	R727	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
3	R728	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
3	R729	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
3	R730	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP2012	
3	R731	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP2012	
3	R732	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP2012	
3	R733	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP2012	
3	R734	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP2012	
3	R735	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP2012	
3	R736	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
3	R737	2007-000766	R-CHIP;330OHM,5%,1/10W,DA,TP2012	
3	R740	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
3	R741	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
3	R742	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
3	R743	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
3	R744	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
3	R745	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
3	R746	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
3	R748	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
3	R749	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
3	R750	2007-000572	R-CHIP;220OHM,5%,1/10W,DA,TP2012	
3	R751	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
3	R752	2007-000572	R-CHIP;220OHM,5%,1/10W,DA,TP2012	
3	R753	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
3	R754	2007-000572	R-CHIP;220OHM,5%,1/10W,DA,TP2012	
3	R755	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
3	R756	2007-000964	R-CHIP;5.1KOHM,5%,1/10W,DA,TP2012	
3	R757	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
3	R758	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
3	R759	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
3	R760	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R761	2007-000221	R-CHIP;1.2KOHM,5%,1/10W,DA,TP2012	
3	R762	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R763	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R764	2007-000221	R-CHIP;1.2KOHM,5%,1/10W,DA,TP2012	
3	R765	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R766	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R767	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R768	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R769	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R770	2007-000766	R-CHIP;330OHM,5%,1/10W,DA,TP2012	
3	R771	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
3	R772	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
3	R773	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
3	R774	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
3	R775	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
3	R776	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
3	R777	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
3	R778	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
3	R779	2007-001100	R-CHIP;62OHM,5%,1/10W,DA,TP2012	
3	R780	2007-001100	R-CHIP;62OHM,5%,1/10W,DA,TP2012	
3	R781	2007-001100	R-CHIP;62OHM,5%,1/10W,DA,TP2012	
3	R782	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP2012	
3	R783	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP2012	
3	R784	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP2012	
3	R785	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
3	R786	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R787	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R788	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
3	R791	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R792	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R793	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R794	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R795	2007-001155	R-CHIP;750OHM,5%,1/10W,DA,TP2012	
3	R796	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP2012	
3	R797	2007-001155	R-CHIP;750OHM,5%,1/10W,DA,TP2012	
3	R798	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP2012	
3	R799	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
3	R800	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
3	R801	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
3	R802	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
3	R803	2007-000328	R-CHIP;11KOHM,5%,1/10W,DA,TP2012	
3	R804	2007-000328	R-CHIP;11KOHM,5%,1/10W,DA,TP2012	
3	R805	2007-000001	R-CHIP;68KOHM,5%,1/10W,DA,TP2012	
3	R806	2007-000001	R-CHIP;68KOHM,5%,1/10W,DA,TP2012	
3	R807	2007-000001	R-CHIP;68KOHM,5%,1/10W,DA,TP2012	
3	R808	2007-000001	R-CHIP;68KOHM,5%,1/10W,DA,TP2012	
3	R809	2007-000001	R-CHIP;68KOHM,5%,1/10W,DA,TP2012	
3	R810	2007-000001	R-CHIP;68KOHM,5%,1/10W,DA,TP2012	
3	R811	2007-000001	R-CHIP;68KOHM,5%,1/10W,DA,TP2012	
3	R812	2007-000001	R-CHIP;68KOHM,5%,1/10W,DA,TP2012	
3	R813	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP2012	
3	R814	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP2012	
3	R815	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP2012	
3	R816	2007-000774	R-CHIP;33KOHM,5%,1/10W,DA,TP2012	
3	R817	2007-000615	R-CHIP;24KOHM,5%,1/10W,DA,TP2012	
3	R818	2007-000774	R-CHIP;33KOHM,5%,1/10W,DA,TP2012	
3	R819	2007-000615	R-CHIP;24KOHM,5%,1/10W,DA,TP2012	
2		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
2		0202-001004	SOLDER-CREAM;SQ-2030M,SZH-1.5,63A,D0.04.5	S.N.A

ASSY-PCB,H/V

Level	Loc. No.	Code No.	Description ; Specification	Remark
1	*	AA95-00056C	ASSY PCB,H/V;-,SP43J5HP3S/XTT,J51A,-,-	
2	BK01	AA61-10068A	BRACKET-PCB;-,M2160,SPTE,T0.3,-,-	S.N.A
2	BK02	AA61-10068A	BRACKET-PCB;-,M2160,SPTE,T0.3,-,-	S.N.A
2	BK03	AA61-10068A	BRACKET-PCB;-,M2160,SPTE,T0.3,-,-	S.N.A
2	CN401	3711-001049	CONNECTOR-HEADER;BOX,6P,1R,2.5mm,ANGLE,-	
2	CN402	3711-002709	CONNECTOR-HEADER;NOWALL,12P,1R,2.5MM,ANG	
2	CN403	AA39-20052A	LEAD CONNECTOR-ASSY;,4P,YBNH025-04,YSH02	
2	CN404	3711-001283	CONNECTOR-HEADER;NOWALL,14P,1R,2.5mm,ANG	
2	IC471	1203-000610	IC-PWM CONTROLLER;494,DIP,16P,300MIL,PLA	
2	L351	AA27-10003M	COIL-CHOKE;-,6100uH,J,40,34mA,TP,EL0607R	
2	PCB	AA41-00199C	PCB-H/V MODULE;P53A,CEM-1,1L,C,1.6T,330x	S.N.A
2	Q371	AA96-50291A	ASSY-H/S;-,-,AA62-30154B,2SC4636,-	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
3		0502-000442	TR-POWER;2SC4636RB,NPN,2W,TO-220,ST,10-	
3		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
3		AA62-30154B	HEAT SINK-ES;-,A6063,EXTR,-,-,SILVER ANO	
2	Q422	0505-000156	FET-SILICON;IRF620,N,200V,5A,0.8ohm,50W,	
2	R425	2003-000736	R-METAL OXIDE(S);560ohm,5%,3W,AA,TP,6x16	
2	R485	2008-001096	R-FUSIBLE(S);3.3OHM,5%,1/2W,AC,BK,2.5X6.	
2		2001-000262	R-CARBON;1.8MOHM,5%,1/8W,AA,TP,1.8X3.2M	
2		AA99-20071J	ASSY PCB SUB,AUTO; AA95-00056C ,V	S.N.A
3	C341	2401-001914	C-AL;1uF,20%,50V,BP,TP,5x11.5	
3	C342	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11.5	
3	C351	2301-000175	C-FILM,PEF;15nF,5%,50V,TP,7.1x3.5x13mm,5	
3	C352	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11.5	
3	C353	2301-000204	C-FILM,PEF;2.7nF,5%,50V,TP,7.4x3.9x13mm,	
3	C354	2301-000261	C-FILM,PEF;4.7nF,5%,100V,TP,10.5x12.5x6.	
3	C355	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11.5	
3	C356	2201-000180	C-CERAMIC,DISC;10nF,10%,50V,Y5V,TP,7x3.5	
3	C357	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11.5	
3	C358	2401-000471	C-AL;10uF,20%,50V,BP,TP,5x11.5mm	
3	C360	2306-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	

Level	Loc. No.	Code No.	Description ; Specification	Remark
3	C361	2306-000122	C FILM,MPPF,100nF,5%,50V,TP7.3x4.0x5.0m	
3	C362	2305-000140	C FILM,MPEF,100nF,5%,100V,TP10x12.5x6.5	
3	C371	2401-000302	C AL,100uF,20%,25V,GP,TP6.3x11.5	
3	C372	2401-000480	C AL,10uF,20%,50V,GP,TP5x11.5	
3	C373	2401-000302	C AL,100uF,20%,25V,GP,TP6.3x11.5	
3	C374	2401-001621	C AL,6.8uF,20%,450V,GP,TP13x20.5	
3	C405	2201-000558	C CERAMIC,DISC,0.47nF,10%,50V,Y5P,TP5x3	
3	C406	2201-000370	C CERAMIC,DISC,0.22nF,10%,50V,Y5P,TP4x3	
3	C421	2401-000302	C AL,100uF,20%,25V,GP,TP6.3x11.5	
3	C429	2306-000704	C FILM,MPEF,100nF,5%,250V,TP18.5x10.3x5	
3	C454	2303-000331	C FILM,PPF,4.7nF,5%,630V,TP19.5x12x7.7	
3	C455	2401-001527	C AL,47uF,20%,250V,HR,TP13x25mm,5m	
3	C456	2201-000132	C CERAMIC,DISC,0.1nF,10%,500V,Y5P,TP6.5	
3	C461	2201-000600	C CERAMIC,DISC,0.56nF,10%,50V,Y5P,TP5x3	
3	C462	2301-000246	C FILM,PEF,33nF,5%,100V,TP7x5.0x5.5mm,5	
3	C480	2306-000122	C FILM,MPPF,100nF,5%,50V,TP7.3x4.0x5.0m	
3	C481	2401-000914	C AL,22uF,20%,16V,GP,TP5x11.5	
3	C482	2305-000178	C FILM,MPEF,10nF,5%,100V,TP,5mm	
3	C484	2401-001026	C AL,3.3UF,20%,50V,GP,TP,5X11.5	
3	C485	2201-000146	C CERAMIC,DISC,0.1nF,5%,50V,SL,TP,5x3.5.	
3	C486	2201-000146	C CERAMIC,DISC,0.1nF,5%,50V,SL,TP,5x3.5.	
3	C487	2401-001026	C AL,3.3UF,20%,50V,GP,TP,5X11.5	
3	C488	2401-002144	C AL,47uF,20%,16V,GP,TP5x11.5	
3	C489	2401-001840	C AL,100uF,20%,16V,GP,TP6.3x11.5	
3	C490	2201-000119	C CERAMIC,DISC,100nF,+80-20%,50V,Y5V,TP	
3	C492	2401-002144	C AL,47uF,20%,16V,GP,TP5x11.5	
3	C493	2201-000119	C CERAMIC,DISC,100nF,+80-20%,50V,Y5V,TP	
3	C494	2201-000471	C CERAMIC,DISC,0.33nF,10%,50V,Y5P,TP4x3	
3	C495	2301-000192	C FILM,PEF,1nF,5%,50V,TP5.3x10mm,5mm	
3	C496	2401-000832	C AL,220uF,20%,25V,GP,TP8x11.5,5	
3	D342	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D343	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D344	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D345	0403-001325	DIODE ZENER,MTZJ15C,14.35-15.09V,500mW,D	
3	D352	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D353	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D355	0402-000546	DIODE RECTIFIER,TVR10G,400V,1.0A,DO-41,T	
3	D363	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D364	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D371	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D372	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D373	0402-000243	DIODE RECTIFIER,RC2-V1,2000V,0.2A,DO-201	
3	D384	0402-000132	DIODE RECTIFIER,1N4004,400V,1A,DO-41,TP	
3	D385	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D386	0403-001316	DIODE ZENER,MTZJ3.0A,2.85-3.07V,500mW,DO	
3	D395	0403-001319	DIODE ZENER,MTZJ4.7C,4.68-4.93V,500mW,DO	
3	D442	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D443	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D451	0402-000534	DIODE RECTIFIER,RG10V,400V,1.2A,DO-201,T	
3	D456	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D457	0403-000714	DIODE ZENER,MTZJ3.3B,3.3V,3.32-3.53V,500	
3	D474	0403-000734	DIODE ZENER,TZP15B,15V,14.7-16.5V,1W,DO	
3	D475	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D476	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D477	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D478	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D479	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D480	0402-000132	DIODE RECTIFIER,1N4004,400V,1A,DO-41,TP	
3	D483	0403-000720	DIODE ZENER,MTZJ9.1B,9.1V,8.57-9.01V,500	
3	D484	0402-000132	DIODE RECTIFIER,1N4004,400V,1A,DO-41,TP	
3	D491	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D492	0403-000716	DIODE ZENER,MTZJ4.7B,4.7V,4.55-4.8V,500m	
3	D493	0403-001325	DIODE ZENER,MTZJ15C,14.35-15.09V,500mW,D	
3	IC481	1203-001217	IC POSI.ADJUST REG.,431,TO-92,3P,4.58MIL	
3	L341	2701-000116	INDUCTOR AXIAL,10uH,10%,4.2x6.8mm	
3	Q342	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q343	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q344	0501-000283	TR SMALL SIGNAL,KSA539,PNP,400mW,TO-92,T	
3	Q350	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q351	0501-000283	TR SMALL SIGNAL,KSA539,PNP,400mW,TO-92,T	
3	Q352	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q353	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q354	0501-000283	TR SMALL SIGNAL,KSA539,PNP,400mW,TO-92,T	
3	Q355	0501-000366	TR SMALL SIGNAL,KSC2330-Y,NPN,1W,TO-92L,	
3	Q381	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q382	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q401	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	

Level	Loc. No.	Code No.	Description ; Specification	Remark
3	Q402	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q421	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q451	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q452	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q453	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q454	0501-000283	TR SMALL SIGNAL,KSA539,PNP,400mW,TO-92,T	
3	Q461	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q471	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q473	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q481	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q482	0501-000283	TR SMALL SIGNAL,KSA539,PNP,400mW,TO-92,T	
3	Q483	0501-000283	TR SMALL SIGNAL,KSA539,PNP,400mW,TO-92,T	
3	Q491	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	R339	2001-000613	R CARBON,3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R340	2001-000241	R CARBON,1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R341	2001-000429	R CARBON,1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R342	2001-000273	R CARBON,100KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R343	2001-000812	R CARBON,5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R344	2001-000890	R CARBON,6.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R345	2001-001088	R CARBON(S),1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
3	R345A	2001-000429	R CARBON,1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R346	2001-000290	R CARBON,10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R347	2001-001088	R CARBON(S),1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
3	R348	2001-000591	R CARBON,3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R349	2001-000252	R CARBON,1.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R351	2001-001178	R CARBON(S),680OHM,5%,1/2W,AA,TP,2.4X6.4	
3	R352	2001-000003	R CARBON,330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
3	R353	2001-000890	R CARBON,6.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R354	2001-000890	R CARBON,6.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R355	2001-000006	R CARBON,2.4KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R357	2001-000613	R CARBON,3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R358	2001-000008	R CARBON,15KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R359	2001-000766	R CARBON,43KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R360	2001-000857	R CARBON,560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R361	2001-001191	R CARBON(S),820KOHM,5%,1/2W,AA,TP,2.4X6	
3	R362	2001-000660	R CARBON,33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R363	2001-000725	R CARBON,4.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R364	2001-000938	R CARBON,68OHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R365	2001-001120	R CARBON(S),3.3OHM,5%,1/2W,AA,TP,2.4X6.4	
3	R366	2001-000109	R CARBON(S),47OHM,5%,1/2W,AA,TP,2.4X6.4	
3	R367	2001-001065	R CARBON(S),110KOHM,5%,1/2W,AA,TP,2.4X6	
3	R368	2001-001065	R CARBON(S),110KOHM,5%,1/2W,AA,TP,2.4X5	
3	R369	2001-001065	R CARBON(S),110KOHM,5%,1/2W,AA,TP,2.4X6	
3	R369A	2001-001065	R CARBON(S),110KOHM,5%,1/2W,AA,TP,2.4X6	
3	R370	2001-001065	R CARBON(S),110KOHM,5%,1/2W,AA,TP,2.4X6	
3	R371	2001-001065	R CARBON(S),110KOHM,5%,1/2W,AA,TP,2.4X6	
3	R372	2001-001110	R CARBON(S),240KOHM,5%,1/2W,AA,TP,2.4X6	
3	R373	2001-001110	R CARBON(S),240KOHM,5%,1/2W,AA,TP,2.4X6	
3	R374	2001-001110	R CARBON(S),240KOHM,5%,1/2W,AA,TP,2.4X6	
3	R375	2001-001113	R CARBON(S),270KOHM,5%,1/2W,AA,TP,2.4X6	
3	R376	2001-000613	R CARBON,3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R377	2004-001892	R METAL(S),162Kohm,1%,1/2W,AA,TP,2.5x6.5	
3	R378	2004-001892	R METAL(S),162Kohm,1%,1/2W,AA,TP,2.5x6.5	
3	R379	2004-001892	R METAL(S),162Kohm,1%,1/2W,AA,TP,2.5x6.5	
3	R380	2004-001892	R METAL(S),162Kohm,1%,1/2W,AA,TP,2.5x6.5	
3	R381	2001-001088	R CARBON(S),1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
3	R384	2001-001150	R CARBON(S),470KOHM,5%,1/2W,AA,TP,2.4X6	
3	R385	2001-000577	R CARBON,2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R386	2001-000786	R CARBON,47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R387	2001-000009	R CARBON,20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R388	2001-000522	R CARBON,22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R389	2001-000577	R CARBON,2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R395	2001-000734	R CARBON,4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R397	2001-000429	R CARBON,1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R411	2001-000734	R CARBON,4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R412	2001-001088	R CARBON(S),1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
3	R413	2001-000515	R CARBON,220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R414	2001-000290	R CARBON,10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R415	2001-000734	R CARBON,4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R416	2001-000006	R CARBON,2.4KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R420	2001-000281	R CARBON,100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R421	2003-002150	R METAL OXIDE,150OHM,5%,1W,AG,TP,4.3X12M	
3	R422	2001-000028	R CARBON(S),100OHM,5%,1/2W,AA,TP,2.4X6.4	
3	R423	2001-000613	R CARBON,3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R437	2008-001087	R FUSIBLE(S),1.8ohm,5%,2W,AG,TP,3.9x12mm	
3	R438	2001-000085	R CARBON(S),100KOHM,5%,1/2W,AA,TP,2.4X6	
3	R439	2001-000085	R CARBON(S),100KOHM,5%,1/2W,AA,TP,2.4X6	

Level	Loc. No.	Code No.	Description ; Specification	Remark
3	R442	2008-000254	R FUSIBLE(S),0.68ohm,5%,2W,AF,TP,3.9x10m	
3	R442A	2008-000254	R FUSIBLE(S),0.68ohm,5%,2W,AF,TP,3.9x10m	
3	R443	2003-002156	R METAL OXIDE,560OHM,5%,2W,AG,TP,6X16MM	
3	R443A	2003-002156	R METAL OXIDE,560OHM,5%,2W,AG,TP,6X16MM	
3	R445	2001-000258	R CARBON,1.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R446	2001-000522	R CARBON,22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R447	2001-000812	R CARBON,5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R448	2001-000411	R CARBON,18KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R449	2001-000660	R CARBON,33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R450	2001-000290	R CARBON,10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R451	2001-000812	R CARBON,5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R452	2001-000241	R CARBON,1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R454	2001-000761	R CARBON,430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R455	2001-000761	R CARBON,430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R456	2001-000761	R CARBON,430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R458	2001-000577	R CARBON,2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R459	2001-001192	R CARBON(S),820OHM,5%,1/2W,AA,TP,2.4X6.4	
3	R460	2003-002044	R METAL OXIDE(S),100ohm,5%,1W,AF,TP,2.5x	
3	R461	2001-000613	R CARBON,3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R464	2001-000734	R CARBON,4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R471	2001-001146	R CARBON(S),4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
3	R472	2001-000800	R CARBON,5.1KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R473	2001-000800	R CARBON,5.1KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R474	2001-000009	R CARBON,20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R474A	2001-000508	R CARBON,220KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R475	2004-001023	R METAL,5.6Kohm,1%,1/8W,AA,TP,1.8x3.2m	
3	R475B	2001-000734	R CARBON,4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R477	2001-000429	R CARBON,1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R479	2001-000005	R CARBON,390ohm,5%,1/8W,AA,TP,1.8x3.2mm	
3	R480	2001-000449	R CARBON,2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R481	2001-000290	R CARBON,10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R482	2001-001031	R CARBON,91KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R483	2001-000429	R CARBON,1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R484	2001-000429	R CARBON,1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R487	2001-000924	R CARBON,680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R489	2001-000522	R CARBON,22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R490	2001-000723	R CARBON,4.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R491	2001-001178	R CARBON(S),680OHM,5%,1/2W,AA,TP,2.4X6.4	
3	R492	2001-000591	R CARBON,3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R493	2001-000429	R CARBON,1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R494	2001-000066	R CARBON(S),10KOHM,5%,1/2W,AA,TP,2.4X6.4	
3	R495	2001-000037	R CARBON(S),330OHM,5%,1/2W,AA,TP,2.4X6.4	
3	R496	2001-000347	R CARBON,13KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R497	2001-000003	R CARBON,330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
3	R498	2001-001070	R CARBON(S),120OHM,5%,1/2W,AA,TP,2.4X6.4	
2		0202-000187	SOLDER-WIRE FLUX,-,RS60S,D1.2,63Sn/37Pb	S.N.A
2		AA65-30105C	CLAMP-WIRE,ALL MODEL,NYLON 66,V2,NTR,5MM	S.N.A

ASSY-PCB,CONV AMP

Level	Loc. No.	Code No.	Description ; Specification	Remark
1	*	AA95-00055L	ASSY PCB,CONV AMP,-,SPS3J5HF,JS1A,-,-	
2	C491	2306-000322	C FILM,MPPF,12nF,5%,1.6KV,TP,29x20.5x13,	
2	CN203	AA39-00115A	LEAD CONNECTOR ASSY.,10P,YBNH250-10,3515	
2	CN401	AA39-00128A	LEAD CONNECTOR ASSY.,8P,YBNH250-08,35155	
2	CN402	AA39-00116A	LEAD CONNECTOR ASSY.,12P,YBNH250-12,3515	
2	CN802	AA39-00128A	LEAD CONNECTOR ASSY.,8P,YBNH250-08,35155	
2	ICZ101	AA96-50152C	ASSY H/S,-,TR,AA62-30012A,KA7806A,30MM	
3		1203-000284	IC POSI.FIXED REG.,7806,TO-220,3P,-,PLAS	
3		6003-000333	SCREW-TAPTITE,RH,+,2S,M3,L10,ZPC(YEL),SW	
3		AA62-30012A	HEAT SINK-ES,-,A6063 EXTR,-,-,T0220,-,-	
2	ICZ102	1203-000121	IC-NEGA.FIXED REG.,7906,TO-220,3P,-,PLAS	
2	ICZ103	AA96-00034A	ASSY H/S,-,CONVERGENCE,AA62-30173D,STK3	
3		0205-000129	GREASE-SILICON,SC102,JAPAN	S.N.A
3		1201-001225	IC-VIDEO AMP,392,SIP,22P,-,TRIPLE,-,PLAS	
3		6003-001021	SCREW-TAPTITE,RH,+,B,M3,L15,ZPC(YEL),SWR	
3		AA62-30173D	HEAT SINK-ES,-,-,T1.0,WHITE,SCREW HOLE(2	
2	ICZ104	AA96-00034A	ASSY H/S,-,CONVERGENCE,AA62-30173D,STK3	
2	PCB	AA41-00135D	PCB-CONVERGENCE AMP,P51A,1L,CEM-1,330x24	S.N.A
2	SG303	4715-001050	SURGE ABSORBER,2.4KV,20%,1500A,-,DISC RA	
2		0202-000187	SOLDER-WIRE FLUX,-,RS60S,D1.2,63Sn/37Pb	S.N.A
2		AA99-20071E	ASSY PCB SUB,AUTO,-,AA95-00065L,-,V	S.N.A
3	CN403	3711-002643	CONNECTOR-HEADER,BOX,4P,1R,2.5MM,STRAIGH	
3	CZ101	2401-001429	C AL,470uF,20%,50V,GP,TP,13x20.5	
3	CZ102	2401-001429	C AL,470uF,20%,50V,GP,TP,13x20.5	

Level	Loc. No.	Code No.	Description ; Specification	Remark
3	CZ103	2401-000689	C AL,2200uF,20%,16V,GP,TP,13x25.5	
3	CZ105	2401-000689	C AL,2200uF,20%,16V,GP,TP,13x25.5	
3	CZ106	2201-000180	C CERAMIC,DISC,10nF,10%,50V,Y5V,TP7x3.5	
3	CZ107	2201-000180	C CERAMIC,DISC,10nF,10%,50V,Y5V,TP7x3.5	
3	CZ108	2201-000499	C CERAMIC,DISC,0.39nF,5%,50V,SL,TP8.5x3	
3	CZ109	2201-000499	C CERAMIC,DISC,0.39nF,5%,50V,SL,TP8.5x3	
3	CZ110	2201-000499	C CERAMIC,DISC,0.39nF,5%,50V,SL,TP8.5x3	
3	CZ111	2201-000976	C CERAMIC,DISC,0.022nF,5%,50V,NP0,TP5x3	
3	CZ112	2201-000863	C CERAMIC,DISC,0.68nF,10%,50V,Y5P,TP5x3	
3	CZ113	2201-000976	C CERAMIC,DISC,0.022nF,5%,50V,NP0,TP5x3	
3	CZ114	2201-000863	C CERAMIC,DISC,0.68nF,10%,50V,Y5P,TP5x3	
3	CZ115	2201-000976	C CERAMIC,DISC,0.022nF,5%,50V,NP0,TP5x3	
3	CZ116	2201-000863	C CERAMIC,DISC,0.68nF,10%,50V,Y5P,TP5x3	
3	CZ117	2201-000327	C CERAMIC,DISC,2.2nF,10%,50V,Y5V,TP6.5x	
3	CZ118	2201-000327	C CERAMIC,DISC,2.2nF,10%,50V,Y5V,TP6.5x	
3	CZ119	2201-000119	C CERAMIC,DISC,100nF,+80-20%,50V,Y5V,TP	
3	CZ120	2201-000119	C CERAMIC,DISC,100nF,+80-20%,50V,Y5V,TP	
3	CZ121	2201-000764	C CERAMIC,DISC,0.082nF,5%,50V,NP0,TP8x3	
3	CZ126	2201-000499	C CERAMIC,DISC,0.39nF,5%,50V,SL,TP8.5x3	
3	CZ127	2201-000499	C CERAMIC,DISC,0.39nF,5%,50V,SL,TP8.5x3	
3	CZ128	2201-000499	C CERAMIC,DISC,0.39nF,5%,50V,SL,TP8.5x3	
3	CZ132	2201-000976	C CERAMIC,DISC,0.022nF,5%,50V,NP0,TP5x3	
3	CZ133	2201-000863	C CERAMIC,DISC,0.68nF,10%,50V,Y5P,TP5x3	
3	CZ134	2201-000976	C CERAMIC,DISC,0.022nF,5%,50V,NP0,TP5x3	
3	CZ135	2201-000863	C CERAMIC,DISC,0.68nF,10%,50V,Y5P,TP5x3	
3	CZ136	2201-000976	C CERAMIC,DISC,0.022nF,5%,50V,NP0,TP5x3	
3	CZ137	2201-000863	C CERAMIC,DISC,0.68nF,10%,50V,Y5P,TP5x3	
3	CZ138	2201-000327	C CERAMIC,DISC,2.2nF,10%,50V,Y5V,TP6.5x	
3	CZ139	2201-000327	C CERAMIC,DISC,2.2nF,10%,50V,Y5V,TP6.5x	
3	CZ144	2401-001840	C AL,100uF,20%,16V,GP,TP6.3x11.5	
3	CZ145	2201-000119	C CERAMIC,DISC,100nF,+80-20%,50V,Y5V,TP	
3	CZ146	2401-001840	C AL,100uF,20%,16V,GP,TP6.3x11.5	
3	CZ147	2201-000119	C CERAMIC,DISC,100nF,+80-20%,50V,Y5V,TP	
3	CZ151	2202-000796	C CERAMIC,MLC-AXIAL,1NF,10%,50V,Y5P,TP3	
3	CZ152	2202-000796	C CERAMIC,MLC-AXIAL,1NF,10%,50V,Y5P,TP3	
3	CZ153	2202-000796	C CERAMIC,MLC-AXIAL,1NF,10%,50V,Y5P,TP3	
3	CZ154	2202-000796	C CERAMIC,MLC-AXIAL,1NF,10%,50V,Y5P,TP3	
3	CZ155	2202-000796	C CERAMIC,MLC-AXIAL,1NF,10%,50V,Y5P,TP3	
3	CZ156	2202-000796	C CERAMIC,MLC-AXIAL,1NF,10%,50V,Y5P,TP3	
3	D453	0402-001286	DIODE RECTIFIER,RP1H,2000V,1A,-,TP	
3	D501	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	DZ120	0403-000510	DIODE ZENER,MTZJ6.2B,6.2V,5.96-6.27V,500	
3	DZ121	0403-000510	DIODE ZENER,MTZJ6.2B,6.2V,5.96-6.27V,500	
3	DZ122	0403-000510	DIODE ZENER,MTZJ6.2B,6.2V,5.96-6.27V,500	
3	DZ126	0402-000546	DIODE RECTIFIER,TVR10G,400V,1.0A,DO-41,T	
3	DZ127	0402-000546	DIODE RECTIFIER,TVR10G,400V,1.0A,DO-41,T	
3	DZ128	0403-000510	DIODE ZENER,MTZJ6.2B,6.2V,5.96-6.27V,500	
3	DZ129	0403-000510	DIODE ZENER,MTZJ6.2B,6.2V,5.96-6.27V,500	
3	DZ130	0403-000510	DIODE ZENER,MTZJ6.2B,6.2V,5.96-6.27V,500	
3	DZ131	0403-000510	DIODE ZENER,MTZJ6.2B,6.2V,5.96-6.27V,500	
3	LZ101	2701-001030	INDUCTOR AXIAL,43uH,10%,5x14mm	
3	LZ102	2701-001030	INDUCTOR AXIAL,43uH,10%,5x14mm	
3	LZ103	2701-000142	INDUCTOR AXIAL,1uH,10%,2.5x3.4mm	
3	LZ104	2701-000142	INDUCTOR AXIAL,1uH,10%,2.5x3.4mm	
3	LZ107	2701-000142	INDUCTOR AXIAL,1uH,10%,2.5x3.4mm	
3	LZ108	2701-000142	INDUCTOR AXIAL,1uH,10%,2.5x3.4mm	
3	LZ109	2701-000142	INDUCTOR AXIAL,1uH,10%,2.5x3.4mm	
3	LZ110	2701-000142	INDUCTOR AXIAL,1uH,10%,2.5x3.4mm	
3	LZ111	2701-000142	INDUCTOR AXIAL,1uH,10%,2.5x3.4mm	
3	LZ112	2701-000142	INDUCTOR AXIAL,1uH,10%,2.5x3.4mm	
3	R382	2002-001006	R COMPOSITION,4.7Kohm,5%,1/2W,AA,TP,3.7x	
3	R476	2004-004046	R METAL(S),430Kohm,1%,1/2W,AA,TP,2.5x6.5	
3	R476A	2004-004001	R METAL(S),180Kohm,1%,1/2W,AA,TP,2.5x6.5	
3	R476B	2004-001892	R METAL(S),162Kohm,1%,1/2W,AA,TP,2.5x6.5	
3	R476C	2004-004046	R METAL(S),430Kohm,1%,1/2W,AA,TP,2.5x6.5	
3	R478	2004-001892	R METAL(S),162Kohm,1%,1/2W,AA,TP,2.5x6.5	
3	R501	2004-001376	R METAL(S),11Kohm,1%,1/2W,AA,TP,2.4x6.4m	
3	R502	2004-004366	R METAL(S),1.3Kohm,1%,1/2W,AA,TP,2.5x6.5	
3	RFZ19	2008-000261	R FUSIBLE(S),150ohm,5%,1W,AF,TP,3.9x10mm	
3	RFZ20	2008-000261	R FUSIBLE(S),150ohm,5%,1W,AF,TP,3.9x10mm	
3	RFZ21	2008-000261	R FUSIBLE(S),150ohm,5%,1W,AF,TP,3.9x10mm	
3	RFZ22	2008-000261	R FUSIBLE(S),150ohm,5%,1W,AF,TP,3.9x10mm	
3	RFZ50	2008-000261	R FUSIBLE(S),150ohm,5%,1W,AF,TP,3.9x10mm	
3	RFZ51	2008-000261	R FUSIBLE(S),150ohm,5%,1W,AF,TP,3.9x10mm	
3	RFZ52	2008-000261	R FUSIBLE(S),150ohm,5%,1W,AF,TP,3.9x10mm	
3	RFZ53	2008-000261	R FUSIBLE(S),150ohm,5%,1W,AF,TP,3.9x10mm	

Level	Loc. No.	Code No.	Description ; Specification	Remark
..3	RZ101	..2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
..3	RZ102	..2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
..3	RZ103	..2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
..3	RZ104	..2001-001114	R-CARBON(S);2700HM,5%,1/2W,AA,TP2.4X6.4	
..3	RZ105	..2001-001114	R-CARBON(S);2700HM,5%,1/2W,AA,TP2.4X6.4	
..3	RZ106	..2001-001114	R-CARBON(S);2700HM,5%,1/2W,AA,TP2.4X6.4	
..3	RZ107	..2001-001114	R-CARBON(S);2700HM,5%,1/2W,AA,TP2.4X6.4	
..3	RZ108	..2001-001114	R-CARBON(S);2700HM,5%,1/2W,AA,TP2.4X6.4	
..3	RZ109	..2001-001114	R-CARBON(S);2700HM,5%,1/2W,AA,TP2.4X6.4	
..3	RZ110	..2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP1.8X3.2MM	
..3	RZ111	..2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP1.8X3.2MM	
..3	RZ112	..2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP1.8X3.2MM	
..3	RZ113	..2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP1.8X3.2M	
..3	RZ114	..2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP1.8X3.2MM	
..3	RZ115	..2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP1.8X3.2M	
..3	RZ116	..2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP1.8X3.2MM	
..3	RZ117	..2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP1.8X3.2M	
..3	RZ118	..2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP1.8X3.2MM	
..3	RZ120	..2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP1.8X3.2MM	
..3	RZ121	..2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP1.8X3.2MM	
..3	RZ122	..2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP1.8x3.2mm	
..3	RZ123	..2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP3.9X10M	
..3	RZ124	..2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP3.9X10M	
..3	RZ125	..2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP3.9X10M	
..3	RZ126	..2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP3.9X10M	
..3	RZ127	..2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP3.9X10M	
..3	RZ128	..2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP3.9X10M	
..3	RZ129	..2003-001024	R-METAL OXIDE(S);150ohm,5%,2W,AF,TP3.9x	
..3	RZ129A	..2003-001024	R-METAL OXIDE(S);150ohm,5%,2W,AF,TP3.9x	
..3	RZ130	..2003-001024	R-METAL OXIDE(S);150ohm,5%,2W,AF,TP3.9x	
..3	RZ130A	..2003-001024	R-METAL OXIDE(S);150ohm,5%,2W,AF,TP3.9x	
..3	RZ131	..2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP5X16MM	
..3	RZ131A	..2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP5X16MM	
..3	RZ132	..2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP5X16MM	
..3	RZ132A	..2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP5X16MM	
..3	RZ133	..2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP1.8X3.2MM	
..3	RZ134	..2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP1.8X3.2MM	
..3	RZ135	..2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP1.8X3.2MM	
..3	RZ136	..2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP1.8X3.2M	
..3	RZ137	..2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP1.8X3.2MM	
..3	RZ138	..2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP1.8X3.2M	
..3	RZ139	..2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP1.8X3.2MM	
..3	RZ140	..2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP1.8X3.2M	
..3	RZ141	..2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP1.8X3.2MM	
..3	RZ142	..2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP3.9X10M	
..3	RZ143	..2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP3.9X10M	
..3	RZ144	..2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP3.9X10M	
..3	RZ145	..2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP3.9X10M	
..3	RZ146	..2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP3.9X10M	
..3	RZ147	..2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP3.9X10M	
..3	RZ148	..2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP5X16MM	
..3	RZ148A	..2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP5X16MM	
..3	RZ149	..2003-001024	R-METAL OXIDE(S);150ohm,5%,2W,AF,TP3.9x	
..3	RZ149A	..2003-001024	R-METAL OXIDE(S);150ohm,5%,2W,AF,TP3.9x	
..3	VR472	..2103-001086	VR SEMI;100KOHM,25%,0.3W,TOP	

ASSY CABINET MASK

1	*	AA91-00498C	ASSY CABINET MASK, ,HB,GRAY,G906~D902 PA	
.2	C/FRON	AA63-00380A	COVER-CORNER,P,,ITPOLYESTER, , ,CLR,#572	
.2		AA64-01544C	CABINET-FRONT,MASK,43JB,GD906P~DG902P DO	
.3		AA64-01544A	CABINET-FRONT,MASK,43JB,LB84 4 APCHUL,AB	S.N.A
.2		AA64-01545B	CABINET-MASK,SIDE,43JB,GD906P~DG902,ABS,	
.3		AA64-01545A	CABINET-MASK,SIDE,43JB,L665,4 APCHUL,ABS	S.N.A
.2		AA64-01544H	CABINET-FRONT,MASK,SP43J8HF,G906~D902 J5	
.3		AA64-01544A	CABINET-FRONT,MASK,43JB,LB84 4 APCHUL,AB	S.N.A
.2		AA61-00505B	HOLDER CORNER;43,54,62,JB,ABS,GRAY,HB	

ASSY ACCESSORY

1	*	AA94-02252A	ASSY ACCESSORY;SP43J5HFX/SAP,J51A,SINCAP	S.N.A

Level	Loc. No.	Code No.	Description ; Specification	Remark
.2		AA68-00856B	MANUAL,USER'S,SP43J5HF/43J8HF, ENG, ,W/P	S.N.A
.2		AA69-00009C	BAG,SHEET,LDPE,70.0/0.08,W150,L120, ,	S.N.A
.2		AA61-20126A	HOLDER,LEG, ,ABS,HB,BLK,	S.N.A
.2		AA39-40001B	CABLE,RCA, ,1500MM	

REMOCON

1	*	AA59-00100A	REMOCON, ,TM57,KS88P0416S,53,UGRAY,S,	
.2		AA69-00100A	IC,MICOM,2B6L3808SSC,R,50MO, ,28PIN,2.3	
.2		2902-000194	RESONATOR,CERAMIC,9MHz,1.0%,TP8.5x4.5x5	

7-2 SP43J8HFX/XHK

ASSY PCB MAIN(OPT)

Level	Loc. No.	Code No.	Description ; Specification	Remark
1	*	AA94-03459N	ASSY PCB MAIN(OPT);SP43J8HFX/XHK,J51A~HQ	
.2	C664	2401-001068	C AL,3300uF,20%,50V,GP,BK,22x40,10	
.2	C665	2401-000737	C AL,2200uF,20%,50V,GP,TP18x35.5,7	
.2	CN801	3711-003974	CONNECTOR-HEADER,BOX,12P,1R,2.5mm,STRAIG	
.2	CN101	3710-001208	CONNECTOR-SOCKET,32P,2R,2.54mm,STRAIGHT	
.2	CN102	3710-001208	CONNECTOR-SOCKET,32P,2R,2.54mm,STRAIGHT	
.2	DS803	2401-000370	C AL,47uF,20%,450V,GP,BK,16X35.5,7	
.2	FM01	AM40-10006S	TUNER F/S,TECC2549PG30A(S),PAL B/G,TR,18	
.2	IC101	AA96-00110C	ASSY H/S, , ,AA62-30013K,SI-3090C, ,	
.3		1203-000577	IC VOLTAGE REGULATOR;3090,2PSP, ,PLASTI	
.3		6003-000333	SCREW-TAPTITE;RH, ,2S,M3,L10,ZPC(YELL),SW	
.3		AA62-30013K	HEATSINK-ES, , , , ,44/18, ,WHT,A6063-EX	
.2	IC102	AA96-00110A	ASSY H/S, , ,AA62-30013K,SI-3050C,	
.3		1203-000203	IC-POSI,ADJUST REG.,3050,TO-220,5P, ,PLA	
.3		6003-000333	SCREW-TAPTITE;RH, ,2S,M3,L10,ZPC(YELL),SW	
.3		AA62-30013K	HEATSINK-ES, , , , ,44/18, ,WHT,A6063-EX	
.2	IC103	1204-001276	IC-SOUND PROCESSOR;TDA9810,DIP24P,400MI	
.2	IC502	AA96-00110A	ASSY H/S, , ,AA62-30013K,SI-3050C,	
.2	IC503	AA96-00110A	ASSY H/S, , ,AA62-30013K,SI-3050C,	
.2	IC504	AA96-00110A	ASSY H/S, , ,AA62-30013K,SI-3050C,	
.2	IC665	AA96-00038A	ASSY H/S; SOUND AMP,AA62-30173E,TDA726	
.3		0205-000129	GREASE SILICON;SC102,,JAPAN	S.N.A
.3		1201-001026	IC POWER AMP,7265,ZIP11P19.6MIL,DUAL,1	
.3		6003-000333	SCREW-TAPTITE;RH, ,2S,M3,L10,ZPC(YELL),SW	
.3		AA62-30173E	HEAT-SINK,ES, , ,T1.0,WHITE,SCREW HOLE(T	S.N.A
.2	F/CAB	AA39-30007B	F CABLE, ,T,150mm,1365#26	
.2	L261	AA27-10001C	COIL CHOKE, ,100uH,K ,5.0A,ST,700UH,KIR	
.2	LF605	AA29-00004A	FILTER-LINE NOISE, ,20UH,3A,AC80-260V,TQ	
.2	PZ107	AA96-50162F	ASSY H/S, ,POWER,AA62-30013E,2SA1011,30	
.3		3502-000131	TR-POWER;2SA1011,O,PNP,1.2W,TO-220, ,60	
.3		6003-000333	SCREW-TAPTITE;RH, ,2S,M3,L10,ZPC(YELL),SW	
.3		AA62-30013E	HEAT-SINK,ES, ,A6063-EXTR, , ,3021I,T02	
.2	PZ106	AA96-50162G	ASSY H/S, ,AMP,AA62-30013E,2SC2344,30MM	
.3		0502-000153	TR-POWER;2SC2344,O,NPN,1.2W,TO-220, ,60	
.3		5003-000333	SCREW-TAPTITE;RH, ,2S,M3,L10,ZPC(YELL),SW	
.3		AA62-30013E	HEAT-SINK,ES, ,A6063-EXTR, , ,3021I,T02	
.2	R913	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP1.8X3.2MM	
.2	RL801	3501-001053	RELAY-POWER;5Vdc,530mW,10A,1Form A,15mS,5	
.2	TS801	AA26-00019A	TRANS-SWITCHING; ,AC80~260V, ,US, ,4MM,B	
.2	X901	2801-000224	CRYSTAL-UNIT,32.768KHZ,20PPM,2P,4AX12.5	
.2		AA95-00007A	ASSY F/CONVERTER, ,SVP-434J,M,UPT531A,NTSC	
.3	CON01	3711-002709	CONNECTOR-HEADER,NOWALL,12P,1R,2.5MM,ANG	
.3	CON02	3711-002703	CONNECTOR-HEADER,NOWALL,5P,1R,2.5mm,ANGL	
.3	IC03	AA13-30021E	IC-MCU,Z90234,R3911,SZM-374F,C,ST,24K,	
.3	IC04	1103-001208	IC EEPROM;AT24C02,PC27,C,256x8Bit,DIP8P	
.3	S/CASE	AA63-40037A	SHIELD-CASE;-,SPTE,T0.5,SCT12A,-	S.N.A
.3	XTR01	2804-001213	OSCILLATOR-CLOCK,80MHz,100ppm,10TTL & CM	
.3		AA99-20043V	ASSY-PCB SUB,AUTO, ,AA95-00007A , ,V	S.N.A
..4	CF10	2203-000260	C-CERAMIC,CHIP,10nF,10%,50V,X7R,TP,2012	
..4	CF11	2401-001840	C-AL,100uF,20%,16V,GP,TP6.3x11.5	
..4	CF12	2203-000181	C CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP,	
..4	CF13	2401-001513	C AL,47uF,20%,16V,WT,TP5x11,5	
..4	CF14	2203-000181	C CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP,	
..4	CF15	2203-000429	C CERAMIC,CHIP,0.018nF,5%,50V,NP0,TP,201	
..4	CF16	2203-000634	C-CERAMIC,CHIP,0.022nF,5%,50V,NP0,TP,201	
..4	CF17	2203-000429	C CERAMIC,CHIP,0.018nF,5%,50V,NP0,TP,201	
..4	CF18	2203-000503	C CERAMIC,CHIP,0.027nF,5%,50V,NP0,TP,201	
..4	CF19	2203-000181	C CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP,	
..4	CF21	2203-000181	C CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP,	
..4	CF22	2203-000181	C CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP,	
..4	CF23	2401-001513	C AL,47uF,20%,16V,WT,TP5x11,5	
..4	CF24	2203-000181	C CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP,	
..4	CF25	2203-000181	C CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP,	
..4	CF26	2203-000181	C CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP,	
..4	CF27	2203-000181	C CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP,	
..4	CF28	2401-001513	C AL,47uF,20%,16V,WT,TP5x11,5	
..4	CF29	2401-001513	C AL,47uF,20%,16V,WT,TP5x11,5	
..4	CF30	2203-000181	C CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP,	
..4	CF31	2203-000181	C CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP,	
..4	CF32	2203-000181	C CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP,	
..4	CF33	2203-000181	C CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP,	
..4	CF34	2203-000181	C CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP,	
..4	CF35	2203-000181	C CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP,	
..4	CF37	2203-000181	C CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP,	
..4	CF38	2401-001513	C AL,47uF,20%,16V,WT,TP5x11,5	
..4	CF39	2203-000181	C CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP,	
..4	CF40	2203-000181	C CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP,	
..4	CF41	2203-000181	C CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP,	
..4	CF42	2203-000191	C CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP,	
..4	CF44	2404-000151	C TA,CHIP,1uF,20%,16V, ,TP,3216,	
..4	CF45	2203-001158	C CERAMIC,CHIP,0.068nF,5%,50V,NP0,TP,201	
..4	CF46	2404-000151	C TA,CHIP,1uF,20%,16V, ,TP,3216,	
..4	CF47	2203-001158	C CERAMIC,CHIP,0.068nF,5%,50V,NP0,TP,201	
..4	CF48	2404-000151	C TA,CHIP,1uF,20%,16V, ,TP,3216,	
..4	CF49	2203-001158	C CERAMIC,CHIP,0.068nF,5%,50V,NP0,TP,201	
..4	CF50	2203-000181	C CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP,	
..4	CF51	2203-000181	C CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP,	
..4	CF52	2203-000316	C CERAMIC,CHIP,0.12nF,5%,50V,NP0,TP,2012	
..4	CF53	2203-000316	C CERAMIC,CHIP,0.12nF,5%,50V,NP0,TP,2012	
..4	CF54	2402-000173	C AL,SMD,4.7uF,20%,35V,GP,TP,4.3x4.3x5,	
..4	CF55	2203-000181	C CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP,	
..4	CF56	2203-000260	C CERAMIC,CHIP,10nF,10%,50V,X7R,TP,2012	
..4	CF57	2402-000173	C AL,SMD,4.7uF,20%,35V,GP,TP,4.3x4.3x5	
..4	CF58	2203-000181	C CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP,	
..4	CF60	2401-001840	C AL,100uF,20%,16V,GP,TP6.3x11.5	
..4	CF61	2203-000181	C CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP,	
..4	CF62	2401-001513	C AL,47uF,20%,16V,WT,TP5x11,5	
..4	CF63	2203-000181	C CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP,	
..4	CF64	2203-000181	C CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP,	
..4	CF65	2203-000181	C CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP,	
..4	CF66	2401-001513	C AL,47uF,20%,16V,WT,TP5x11,5	
..4	CF67	2203-000181	C CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP,	
..4	CF68	2203-000181	C CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP,	
..4	CF69	2203-000181	C CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP,	
..4	CF70	2203-000181	C CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP,	
..4	CF71	2203-000181	C CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP,	
..4	CF72	2203-000181	C CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP,	
..4	CF75	2401-001840	C AL,100uF,20%,16V,GP,TP6.3x11.5	
..4	CF76	2203-000181	C CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP,	
..4	CF77	2203-000429	C CERAMIC,CHIP,0.018nF,5%,50V,NP0,TP,201	
..4	CF78	2203-000429	C CERAMIC,CHIP,0.018nF,5%,50V,NP0,TP,201	
..4	CF79	2401-000027	C AL,4.7uF,20%,50V,GP,TP5x11,5	
..4	CF80	2203-000181	C CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP,	
..4	CF81	2203-000181	C CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP,	
..4	CF84	2203-000858	C CERAMIC,CHIP,0.039nF,5%,50V,NP0,TP,201	
..4	CF85	2203-000839	C CERAMIC,CHIP,0.39nF,5%,50V,NP0,TP,2012	
..4	CF86	2203-000858	C CERAMIC,CHIP,0.039nF,5%,50V,NP0,TP,201	
..4	CF87	2203-000839	C CERAMIC,CHIP,0.39nF,5%,50V,NP0,TP,2012	
..4	CF88	2203-000858	C CERAMIC,CHIP,0.039nF,5%,50V,NP0,TP,201	
..4	CF89	2203-000839	C CERAMIC,CHIP,0.39nF,5%,50V,NP0,TP,2012	
..4	DF01	0401-000008	DIODE-SWITCHING,DAN217,80V,100mA,SOT-23,	
..4	DF02	0401-000008	DIODE-SWITCHING,DAN217,80V,100mA,SOT-23,	
..4	DF03	0401-000008	DIODE-SWITCHING,DAN217,80V,100mA,SOT-23,	
..4	FF13	2901-000226	FILTER-EMI,SMD,25V0.3A, ,100pF,3.2x1.25	
..4	FF14	2901-000226	FILTER-EMI,SMD,25V0.3A, ,100pF,3.2x1.25	
..4	FF15	2901-000233	FILTER-EMI,SMD,50V0.3A, ,330pF,4.5x3.2x	
..4	FF16	2901-000233	FILTER-EMI,SMD,50V0.3A, ,330pF,4.5x3.2x	
..4	FF17	2901-000233	FILTER-EMI,SMD,50V0.3A, ,330pF,4.5x3.2x	
..4	IC01	1204-001406	IC-VIDEO PROCESS,FS310KBC,QFP128P1100M	
..4	IC02	1105-001270	IC-DRAM,72V161621,2x524Kx16Bit,TSOP	
..4	IC05	1203-001419	IC VOLTAGE REGULATOR;4931,TO-252,3P6.6x	
..4	LF10	2901-000297	FILTER-EMI ON BOARD, ,3A, , ,3.5x5,TP	
..4	LF11	2701-000116	INDUCTOR-AXIAL,10uH,10%,4.2x9.8mm	
..4	LF12	2701-000115	INDUCTOR-AXIAL,10uH,10%,3x7mm	
..4	LF13	2701-000115	INDUCTOR-AXIAL,10uH,10%,3x7mm	
..4	LF14	2701-000115	INDUCTOR-AXIAL,10uH,10%,3x7mm	
..4	LF15	2701-000115	INDUCTOR-AXIAL,10uH,10%,3x7mm	
..4	LF16	2701-000149	INDUCTOR-AXIAL,2.7uH,10%,2.5x3.4mm	
..4	LF17	2701-000149	INDUCTOR-AXIAL,2.7uH,10%,2.5x3.4mm	
..4	LF18	2701-000149	INDUCTOR-AXIAL,2.7uH,10%,2.5x3.4mm	

Level	Loc. No.	Code No.	Description ; Specification	Remark
4	PCB	AA41-10907B	PCB-FORMAT CONNERTER;KPM51A,4L,FR-4,245X	S.N.A
4	RF11	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RF13	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RF15	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RF16	2007-000477	R-CHIP;1MOHM,5%,1/10W,DA,TP2012	
4	RF17	2007-000477	R-CHIP;1MOHM,5%,1/10W,DA,TP2012	
4	RF18	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
4	RF19	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
4	RF21	2007-000642	R-CHIP;270OHM,5%,1/10W,DA,TP2012	
4	RF22	2007-001118	R-CHIP;680OHM,5%,1/10W,DA,TP2012	
4	RF23	2007-000401	R-CHIP;150OHM,5%,1/10W,DA,TP2012	
4	RF24	2007-000401	R-CHIP;150OHM,5%,1/10W,DA,TP2012	
4	RF25	2007-000518	R-CHIP;2.7KOHM,5%,1/10W,DA,TP2012	
4	RF26	2007-000518	R-CHIP;2.7KOHM,5%,1/10W,DA,TP2012	
4	RF27	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RF29	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
4	RF30	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
4	RF31	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
4	RF32	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
4	RF33	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
4	RF34	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
4	RF35	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
4	RF36	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
4	RF37	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
4	RF38	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
4	RF39	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
4	RF40	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
4	RF41	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
4	RF42	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
4	RF43	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
4	RF44	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
4	RF45	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
4	RF46	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
4	RF47	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
4	RF48	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
4	RF49	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
4	RF51	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
4	RF52	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
4	RF53	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
4	RF54	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
4	RF55	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
4	RF56	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
4	RF57	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
4	RF58	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
4	RF59	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
4	RF60	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
4	RF61	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
4	RF62	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
4	RF64	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RF66	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
4	RF67	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
4	RF68	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RF70	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
4	RF71	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
4	RF72	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
4	RF73	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
4	RF74	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
4	RF75	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
4	RF76	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
4	RF78	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
4	RF79	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
4	RF80	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
4	RF81	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
4	RF82	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RF83	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
4	RF84	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
4	RF85	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
4	RF86	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
4	RF87	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
4	RF88	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
4	XTR02	2801-000152	CRYSTAL-UNIT;14.31818MHz,40ppm,28-AAM,16	
4	XTR04	2801-000724	CRYSTAL-UNIT;6MHz,50ppm,28-AAM,20pF,40ch	
2		AA95-00427B	ASSY SOUND;-,SP43J5P3S/XTT,J51A,AA95-004	
3	C614	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11.5	
3	C615	2203-000595	C-CERAMIC,CHIP;0.22nF,5%,50V,NP0,TP2012	
3	C616	2203-000938	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP2012	
3	C617	2203-000142	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP2012	

Level	Loc. No.	Code No.	Description ; Specification	Remark
3	C618	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP2012	
3	C619	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP2012	
3	C620	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11.5	
3	C621	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11.5	
3	C622	2203-000701	C-CERAMIC,CHIP;0.002nF,0.25pF,50V,NP0,TP	
3	C623	2203-000701	C-CERAMIC,CHIP;0.002nF,0.25pF,50V,NP0,TP	
3	C624	2203-001077	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP201	
3	C625	2203-001077	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP201	
3	C626	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11.5	
3	C627	2203-000938	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP2012	
3	C628	2203-000142	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP2012	
3	C629	2203-001077	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP201	
3	C630	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11.5	
3	C631	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
3	C632	2401-002229	C-AL;470nF,20%,50V,WT,TP,5x11.5	
3	C633	2401-002229	C-AL;470nF,20%,50V,WT,TP,5x11.5	
3	C634	2203-000784	C-CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP2012	
3	C635	2203-000784	C-CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP2012	
3	C636	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
3	C637	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11.5	
3	C638	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
3	C639	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
3	C640	2203-000938	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP2012	
3	C641	2203-000142	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP2012	
3	C642	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11.5	
3	C643	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11.5	
3	C644	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11.5	
3	C645	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11.5	
3	C646	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11.5	
3	C649	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11.5	
3	C650	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP2012	
3	C651	2401-000365	C-AL;100uF,20%,50V,WT,TP,10x12.5mm,	
3	C653	2203-000784	C-CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP2012	
3	C654	2401-002229	C-AL;470nF,20%,50V,WT,TP,5x11.5	
3	C655	2203-000784	C-CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP2012	
3	C656	2401-002229	C-AL;470nF,20%,50V,WT,TP,5x11.5	
3	C657	2401-002229	C-AL;470nF,20%,50V,WT,TP,5x11.5	
3	C658	2203-000784	C-CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP2012	
3	C661	2203-000784	C-CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP2012	
3	C662	2401-002229	C-AL;470nF,20%,50V,WT,TP,5x11.5	
3	C663	2401-002229	C-AL;470nF,20%,50V,WT,TP,5x11.5	
3	C664	2203-000784	C-CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP2012	
3	C667	2203-000784	C-CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP2012	
3	C668	2401-002229	C-AL;470nF,20%,50V,WT,TP,5x11.5	
3	C669	2401-002229	C-AL;470nF,20%,50V,WT,TP,5x11.5	
3	C670	2203-000784	C-CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP2012	
3	C684	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11.5	
3	C688	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11.5	
3	C691	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11.5	
3	C692	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP2012	
3	C695	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP2012	
3	C696	2203-000170	C-CERAMIC,CHIP;1.8nF,10%,50V,X7R,TP2012	
3	C697	2203-000170	C-CERAMIC,CHIP;1.8nF,10%,50V,X7R,TP2012	
3	CB1	2401-000365	C-AL;100uF,20%,50V,WT,TP,10x12.5mm,	
3	CD601	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP2012	
3	CD602	2203-000142	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP2012	
3	CD603	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11.5	
3	CD604	2203-000595	C-CERAMIC,CHIP;0.22nF,5%,50V,NP0,TP2012	
3	CD605	2203-000938	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP2012	
3	CD606	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11.5	
3	CD607	2203-000938	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP2012	
3	CD608	2203-000142	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP2012	
3	CD609	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
3	CD610	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11.5	
3	CD611	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
3	CD612	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11.5	
3	CD613	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11.5	
3	CD615	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11.5	
3	CD616	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP2012,	
3	CD618	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP2012	
3	CD619	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
3	CD620	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
3	CD621	2203-000938	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP2012	
3	CD622	2203-000142	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP2012	
3	CD623	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11.5	
3	CD624	2203-000495	C-CERAMIC,CHIP;2.2nF,10%,50V,X7R,TP2012	
3	CD625	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11.5	

Level	Loc. No.	Code No.	Description ; Specification	Remark
3	CD626	2203-000495	C-CERAMIC,CHIP;2.2nF,10%,50V,X7R,TP2012	
3	CD627	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11.5	
3	CD628	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP2012	
3	CD629	2401-000365	C-AL;100uF,20%,50V,WT,TP,10x12.5mm,	
3	CD630	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP2012	
3	CD81	2401-000365	C-AL;100uF,20%,50V,WT,TP,10x12.5mm,	
3	CN601A	3711-003626	CONNECTOR-HEADER;NOWALL,20P,1R,2.5mm,ANG	
3	CN602A	3711-003626	CONNECTOR-HEADER;NOWALL,20P,1R,2.5mm,ANG	
3	IC601	1204-001689	IC-SOUND PROCESSOR;MSP3410D-C5,PLCC,68P,	
3	IC604	1201-000541	IC-OP AMP;062,SOP,8P,153MIL,DUAL,6V/mV,P	
3	ICD601	1204-001198	IC-DECODER;DPL3519A-A2,PLCC,68P,,PLASTI	
3	ICD602	1201-000541	IC-OP AMP;062,SOP,8P,153MIL,DUAL,6V/mV,P	
3	L601	2701-000170	INDUCTOR-AXIAL;3.9uH,10%,3x7mm	
3	L602	2701-000170	INDUCTOR-AXIAL;3.9uH,10%,3x7mm	
3	L603	2701-000112	INDUCTOR-AXIAL;100uH,10%,3x7mm	
3	LD601	2701-000170	INDUCTOR-AXIAL;3.9uH,10%,3x7mm	
3	LD602	2701-000112	INDUCTOR-AXIAL;100uH,10%,3x7mm	
3	LD603	2701-000170	INDUCTOR-AXIAL;3.9uH,10%,3x7mm	
3	PCB	AA41-00087A	PCB-AUDIO;PLT51A,2L,FR-4,180X245X1.6T,3A	S.N.A
3	Q606	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
3	Q607	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
3	R601	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
3	R602	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
3	R610	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R611	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R614	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
3	R617	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP2012	
3	R618	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP2012	
3	R619	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R620	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R621	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R622	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R623	2007-000477	R-CHIP;1MOHM,5%,1/10W,DA,TP2012	
3	R624	2007-000477	R-CHIP;1MOHM,5%,1/10W,DA,TP2012	
3	R625	2007-000477	R-CHIP;1MOHM,5%,1/10W,DA,TP2012	
3	R626	2007-000477	R-CHIP;1MOHM,5%,1/10W,DA,TP2012	
3	R632	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP2012	
3	R633	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP2012	
3	R634	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP2012	
3	R635	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP2012	
3	R636	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP2012	
3	R637	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP2012	
3	R638	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP2012	
3	R660	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
3	R661	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
3	R664	2007-001177	R-CHIP;8.2KOHM,5%,1/10W,DA,TP2012	
3	R665	2007-000774	R-CHIP;33KOHM,5%,1/10W,DA,TP2012	
3	R666	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
3	R669	2007-001177	R-CHIP;8.2KOHM,5%,1/10W,DA,TP2012	
3	R670	2007-000774	R-CHIP;33KOHM,5%,1/10W,DA,TP2012	
3	R672	2007-000686	R-CHIP;22KOHM,5%,1/10W,DA,TP2012	
3	R673	2007-000686	R-CHIP;22KOHM,5%,1/10W,DA,TP2012	
3	R674	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP2012	
3	R675	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP2012	
3	RB1	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP2012	
3	RB2	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP2012	
3	RB3	2007-000328	R-CHIP;11KOHM,5%,1/10W,DA,TP2012	
3	RB4	2007-000328	R-CHIP;11KOHM,5%,1/10W,DA,TP2012	
3	RD601	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
3	RD602	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
3	RD604	2007-001177	R-CHIP;8.2KOHM,5%,1/10W,DA,TP2012	
3	RD605	2007-000774	R-CHIP;33KOHM,5%,1/10W,DA,TP2012	
3	RD610	2007-001177	R-CHIP;8.2KOHM,5%,1/10W,DA,TP2012	
3	RD611	2007-000774	R-CHIP;33KOHM,5%,1/10W,DA,TP2012	
3	RD627	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
3	RDB1	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP2012	
3	RDB2	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP2012	
3	RDB3	2007-000328	R-CHIP;11KOHM,5%,1/10W,DA,TP2012	
3	RDB4	2007-000328	R-CHIP;11KOHM,5%,1/10W,DA,TP2012	
3	X601	2801-000186	CRYSTAL-UNIT;18.432MHz,25ppm,28-AAM,8pF,	
3		AA63-40273A	SHIELD-CASE;-,SPTE,T0.5,-,CX724AHD	
3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
2		AA95-00519E	ASSY PCB,PROSCAN;-,SP53J5HF,J51A,-,-	
3	CNP901	3711-003543	CONNECTOR-HEADER;NOWALL,16P,1R,2.54MM,AN	
3	CNP902	3711-001283	CONNECTOR-HEADER;NOWALL,14P,1R,2.5mm,ANG	
3	CNP903	3711-001283	CONNECTOR-HEADER;NOWALL,14P,1R,2.5mm,ANG	

Level	Loc. No.	Code No.	Description ; Specification	Remark
3	CNP904	3711-001283	CONNECTOR-HEADER;NOWALL,14P,1R,2.5mm,ANG	
3	XP101	2801-004019	CRYSTAL UNIT;20.25MHz,30ppm,28-AAM,13pF	
3	XP501	2801-003811	CRYSTAL UNIT;24.576MHZ,20PPM,28-AAM,30PF	
3		AA99-20079H	ASSY PCB SUB,AUTO;-,AA95-00519E,-,V	S.N.A
4	CP101	2203-000938	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP2012	
4	CP102	2203-000938	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP2012	
4	CP103	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP2012	
4	CP104	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP2012	
4	CP106	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP2012,	
4	CP109	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
4	CP110	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7.5	
4	CP111	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP2012	
4	CP112	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
4	CP113	2203-001172	C-CERAMIC,CHIP;0.006nF,0.25pF,50V,NP0,TP	
4	CP114	2203-001172	C-CERAMIC,CHIP;0.006nF,0.25pF,50V,NP0,TP	
4	CP115	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
4	CP116	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7.5	
4	CP117	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
4	CP118	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7.5	
4	CP119	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
4	CP120	2203-001002	C-CERAMIC,CHIP;0.047nF,5%,50V,NP0,TP201	
4	CP121	2203-001002	C-CERAMIC,CHIP;0.047nF,5%,50V,NP0,TP201	
4	CP122	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP2012	
4	CP126	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
4	CP127	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7.5	
4	CP128	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7.5	
4	CP129	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
4	CP130	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7.5	
4	CP131	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
4	CP132	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
4	CP133	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
4	CP135	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP2012	
4	CP137	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
4	CP139	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP2012	
4	CP141	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
4	CP142	2203-000938	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP2012	
4	CP143	2203-000938	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP2012	
4	CP144	2203-000938	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP2012	
4	CP145	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP2012	
4	CP301	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
4	CP302	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
4	CP303	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
4	CP304	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
4	CP305	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7.5	
4	CP306	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
4	CP307	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7.5	
4	CP308	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
4	CP309	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7.5	
4	CP310	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
4	CP311	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7.5	
4	CP312	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
4	CP313	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
4	CP314	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
4	CP315	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
4	CP316	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
4	CP317	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
4	CP401	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
4	CP402	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
4	CP403	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7.5	
4	CP404	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
4	CP405	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
4	CP406	2203-000142	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP2012	
4	CP407	2203-000239	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP2012	
4	CP408	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
4	CP409	2203-000555	C-CERAMIC,CHIP;0.02nF,5%,50V,NP0,TP2012	
4	CP410	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
4	CP411	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
4	CP412	2203-000555	C-CERAMIC,CHIP;0.02nF,5%,50V,NP0,TP2012	
4	CP413	2203-000555	C-CERAMIC,CHIP;0.02nF,5%,50V,NP0,TP2012	
4	CP414	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
4	CP415	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
4	CP416	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
4	CP417	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
4	CP418	2404-001020	C-TA,CHIP;10uF,20%,10V,GP,TP,3216,3.2	
4	CP419	2404-001020	C-TA,CHIP;10uF,20%,10V,GP,TP,3216,3.2	
4	CP420	2404-001020	C-TA,CHIP;10uF,20%,10V,GP,TP,3216,3.2	

Level	Loc. No.	Code No.	Description ; Specification	Remark
..4	CP501	2203-002494	C-CERAMIC,CHIP:470nF,10%,16V,X7R,TP2012	
..4	CP502	2203-002494	C-CERAMIC,CHIP:470nF,10%,16V,X7R,TP2012	
..4	CP503	2203-002494	C-CERAMIC,CHIP:470nF,10%,16V,X7R,TP2012	
..4	CP504	2203-002494	C-CERAMIC,CHIP:470nF,10%,16V,X7R,TP2012	
..4	CP505	2203-002494	C-CERAMIC,CHIP:470nF,10%,16V,X7R,TP2012	
..4	CP506	2401-001496	C-AL,47uF,20%,16V,GP,TP,5x7.5	
..4	CP507	2203-000181	C-CERAMIC,CHIP:100nF,+80-20%,25V,Y5V,TP	
..4	CP508	2203-002494	C-CERAMIC,CHIP:470nF,10%,16V,X7R,TP2012	
..4	CP509	2203-002494	C-CERAMIC,CHIP:470nF,10%,16V,X7R,TP2012	
..4	CP510	2203-002494	C-CERAMIC,CHIP:470nF,10%,16V,X7R,TP2012	
..4	CP511	2203-002494	C-CERAMIC,CHIP:470nF,10%,16V,X7R,TP2012	
..4	CP512	2203-002494	C-CERAMIC,CHIP:470nF,10%,16V,X7R,TP2012	
..4	CP513	2203-002494	C-CERAMIC,CHIP:470nF,10%,16V,X7R,TP2012	
..4	CP514	2203-002494	C-CERAMIC,CHIP:470nF,10%,16V,X7R,TP2012	
..4	CP515	2203-002494	C-CERAMIC,CHIP:470nF,10%,16V,X7R,TP2012	
..4	CP516	2203-002494	C-CERAMIC,CHIP:470nF,10%,16V,X7R,TP2012	
..4	CP517	2203-002494	C-CERAMIC,CHIP:470nF,10%,16V,X7R,TP2012	
..4	CP518	2401-000598	C-AL,1uF,20%,50V,GP,TP,4x7.5	
..4	CP519	2203-002494	C-CERAMIC,CHIP:470nF,10%,16V,X7R,TP2012	
..4	CP520	2203-002494	C-CERAMIC,CHIP:470nF,10%,16V,X7R,TP2012	
..4	CP521	2203-002494	C-CERAMIC,CHIP:470nF,10%,16V,X7R,TP2012	
..4	CP522	2203-002494	C-CERAMIC,CHIP:470nF,10%,16V,X7R,TP2012	
..4	CP523	2203-002494	C-CERAMIC,CHIP:470nF,10%,16V,X7R,TP2012	
..4	CP524	2203-000260	C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP2012	
..4	CP525	2203-000181	C-CERAMIC,CHIP:100nF,+80-20%,25V,Y5V,TP	
..4	CP527	2203-000181	C-CERAMIC,CHIP:100nF,+80-20%,25V,Y5V,TP	
..4	CP528	2401-001496	C-AL,47uF,20%,16V,GP,TP,5x7.5	
..4	CP529	2203-000575	C-CERAMIC,CHIP:220NF,10%,25V,X7R,TP2012	
..4	CP530	2203-000575	C-CERAMIC,CHIP:220NF,10%,25V,X7R,TP2012	
..4	CP531	2203-000575	C-CERAMIC,CHIP:220NF,10%,25V,X7R,TP2012	
..4	CP532	2203-002494	C-CERAMIC,CHIP:470nF,10%,16V,X7R,TP2012	
..4	CP533	2401-000486	C-AL,10uF,20%,50V,GP,TP,6.3x7mm,5	
..4	CP534	2203-000260	C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP2012	
..4	CP535	2203-000260	C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP2012	
..4	CP536	2203-000260	C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP2012	
..4	CP537	2203-000260	C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP2012	
..4	CP538	2203-000260	C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP2012	
..4	CP539	2203-000260	C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP2012	
..4	CP540	2401-000486	C-AL,10uF,20%,50V,GP,TP,6.3x7mm,5	
..4	CP541	2203-001002	C-CERAMIC,CHIP:0.047nF,5%,50V,NP0,TP201	
..4	CP542	2203-001002	C-CERAMIC,CHIP:0.047nF,5%,50V,NP0,TP201	
..4	CP545	2203-002494	C-CERAMIC,CHIP:470nF,10%,16V,X7R,TP2012	
..4	CP546	2203-000260	C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP2012	
..4	CP547	2203-000260	C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP2012	
..4	CP548	2203-000260	C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP2012	
..4	CP549	2203-000181	C-CERAMIC,CHIP:100nF,+80-20%,25V,Y5V,TP	
..4	CP550	2203-000181	C-CERAMIC,CHIP:100nF,+80-20%,25V,Y5V,TP	
..4	CP551	2203-000181	C-CERAMIC,CHIP:100nF,+80-20%,25V,Y5V,TP	
..4	CP552	2401-001496	C-AL,47uF,20%,16V,GP,TP,5x7.5	
..4	CP553	2203-000181	C-CERAMIC,CHIP:100nF,+80-20%,25V,Y5V,TP	
..4	CP554	2203-000181	C-CERAMIC,CHIP:100nF,+80-20%,25V,Y5V,TP	
..4	CP555	2203-000181	C-CERAMIC,CHIP:100nF,+80-20%,25V,Y5V,TP	
..4	CP556	2203-000181	C-CERAMIC,CHIP:100nF,+80-20%,25V,Y5V,TP	
..4	CP559	2203-000181	C-CERAMIC,CHIP:100nF,+80-20%,25V,Y5V,TP	
..4	CP601	2203-001088	C-CERAMIC,CHIP:0.005nF,0.25pF,50V,NP0,TP	
..4	CP602	2203-001088	C-CERAMIC,CHIP:0.005nF,0.25pF,50V,NP0,TP	
..4	CP603	2203-002494	C-CERAMIC,CHIP:470nF,10%,16V,X7R,TP2012	
..4	CP604	2203-000938	C-CERAMIC,CHIP:0.47nF,5%,50V,NP0,TP2012	
..4	CP605	2203-000444	C-CERAMIC,CHIP:1nF,10%,50V,X7R,TP2012,-	
..4	CP607	2203-000181	C-CERAMIC,CHIP:100nF,+80-20%,25V,Y5V,TP	
..4	CP609	2203-000181	C-CERAMIC,CHIP:100nF,+80-20%,25V,Y5V,TP	
..4	CP610	2203-000181	C-CERAMIC,CHIP:100nF,+80-20%,25V,Y5V,TP	
..4	CP611	2203-000444	C-CERAMIC,CHIP:1nF,10%,50V,X7R,TP2012,-	
..4	CP612	2203-000444	C-CERAMIC,CHIP:1nF,10%,50V,X7R,TP2012,-	
..4	CP613	2203-000444	C-CERAMIC,CHIP:1nF,10%,50V,X7R,TP2012,-	
..4	CP614	2203-000181	C-CERAMIC,CHIP:100nF,+80-20%,25V,Y5V,TP	
..4	CP615	2203-000181	C-CERAMIC,CHIP:100nF,+80-20%,25V,Y5V,TP	
..4	CP616	2203-001002	C-CERAMIC,CHIP:0.047nF,5%,50V,NP0,TP201	
..4	CP617	2203-000181	C-CERAMIC,CHIP:100nF,+80-20%,25V,Y5V,TP	
..4	CP618	2203-000239	C-CERAMIC,CHIP:0.1nF,5%,50V,NP0,TP2012	
..4	CP619	2203-000181	C-CERAMIC,CHIP:100nF,+80-20%,25V,Y5V,TP	
..4	CP620	2203-000181	C-CERAMIC,CHIP:100nF,+80-20%,25V,Y5V,TP	
..4	CP621	2203-000239	C-CERAMIC,CHIP:0.1nF,5%,50V,NP0,TP2012	
..4	CP622	2203-000142	C-CERAMIC,CHIP:1.5nF,10%,50V,X7R,TP2012	
..4	CP623	2203-000181	C-CERAMIC,CHIP:100nF,+80-20%,25V,Y5V,TP	
..4	CP624	2401-001496	C-AL,47uF,20%,16V,GP,TP,5x7.5	
..4	CP625	2203-000181	C-CERAMIC,CHIP:100nF,+80-20%,25V,Y5V,TP	

Level	Loc. No.	Code No.	Description ; Specification	Remark
..4	CP626	2401-002009	C-AL,100uF,20%,16V,GP,TP,6.3x7.5	
..4	CP627	2203-000181	C-CERAMIC,CHIP:100nF,+80-20%,25V,Y5V,TP	
..4	CP628	2401-002009	C-AL,100uF,20%,16V,GP,TP,6.3x7.5	
..4	CP629	2203-000181	C-CERAMIC,CHIP:100nF,+80-20%,25V,Y5V,TP	
..4	CP630	2203-000181	C-CERAMIC,CHIP:100nF,+80-20%,25V,Y5V,TP	
..4	CP631	2401-000598	C-AL,1uF,20%,50V,GP,TP,4x7.5	
..4	CP901	2404-001229	C-TA,CHIP:4.7uF,20%,25V,GP,TP,3528	
..4	CP902	2203-000181	C-CERAMIC,CHIP:100nF,+80-20%,25V,Y5V,TP	
..4	CP904	2203-001088	C-CERAMIC,CHIP:0.005nF,0.25pF,50V,NP0,TP	
..4	CP905	2203-002494	C-CERAMIC,CHIP:470nF,10%,16V,X7R,TP2012	
..4	CP906	2203-000495	C-CERAMIC,CHIP:2.2nF,10%,50V,X7R,TP2012	
..4	DP501	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
..4	DP502	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
..4	DP503	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
..4	DP504	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
..4	DP505	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
..4	DP601	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
..4	DP602	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
..4	DP603	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
..4	DP604	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
..4	DP605	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
..4	DP606	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
..4	DP607	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
..4	DP901	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
..4	DP902	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
..4	DP903	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
..4	DP904	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
..4	FP101	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
..4	FP102	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
..4	FP301	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
..4	FP901	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
..4	FP902	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
..4	FP903	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
..4	FP904	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
..4	FP905	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
..4	FP906	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
..4	FP907	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
..4	FP908	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
..4	ICP101	1204-001362	IC-VIDEO PROCESS;VPC3215C-B8,PLCC,43P,-	
..4	ICP103	1205-001172	IC-INTERFACE;CIP3250A-B1,PLCC,68P,-,PLAS	
..4	ICP301	1204-001623	IC-VERTICAL PROCESSO;SDA9400,QFP,64P,-,P	
..4	ICP302	1203-001419	IC-VOLTAGE REGULATOR;4931,TO-252,3P,6.6x	
..4	ICP401	1002-001045	IC-D/A CONVERTER;9280,8BIT,PLCC,68P,-,-	
..4	ICP501	1204-001550	IC-VIDEO PROCESS;CXA2101AQ,QFP,80P,-,PLA	
..4	ICP601	1204-001372	IC-HOR/VER PROCESSO;SDA9361,QFP,44P,-,P	
..4	ICP901	1202-000001	IC-VOLTAGE COMP;7533,TO-92,3P,-,SINGLE,	
..4	LP101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	S.N.A
..4	LP102	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	S.N.A
..4	LP103	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	S.N.A
..4	LP105	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	S.N.A
..4	LP106	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	S.N.A
..4	LP107	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	S.N.A
..4	LP301	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	S.N.A
..4	LP302	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	S.N.A
..4	LP303	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	S.N.A
..4	LP401	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	S.N.A
..4	LP402	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	S.N.A
..4	LP403	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	S.N.A
..4	LP404	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	S.N.A
..4	LP601	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	S.N.A
..4	LP602	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	S.N.A
..4	LP603	2703-001717	INDUCTOR-SMD;1.2uH,5%,3.2x2.5x2.2mm	
..4	LP901	3301-001186	CORE-FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m	S.N.A
..4	LP902	3301-001186	CORE-FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m	S.N.A
..4	LP903	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	S.N.A
..4	LP904	3301-001184	CORE-FERRITE BEAD;AB,1.3kohm,4.5x3.2x1.3	S.N.A
..4	LP905	3301-001184	CORE-FERRITE BEAD;AB,1.3kohm,4.5x3.2x1.3	S.N.A
..4	LP906	3301-001184	CORE-FERRITE BEAD;AB,1.3kohm,4.5x3.2x1.3	S.N.A
..4	QP501	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
..4	QP502	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
..4	QP503	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
..4	QP504	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
..4	QP505	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
..4	QP506	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
..4	QP508	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT	
..4	QP502	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
..4	QP902	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	

Level	Loc. No.	Code No.	Description ; Specification	Remark
..4	RP101	2007-000029	R-CHIP:0OHM,5%,1/10W,DA,TP2012	
..4	RP102	2007-000947	R-CHIP:47OHM,5%,1/10W,DA,TP2012	
..4	RP106	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP112	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP113	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP114	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP115	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP117	2007-000029	R-CHIP:0OHM,5%,1/10W,DA,TP2012	
..4	RP134	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP135	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP136	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
..4	RP137	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
..4	RP138	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
..4	RP139	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
..4	RP140	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
..4	RP141	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
..4	RP142	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
..4	RP143	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
..4	RP153	2007-000401	R-CHIP:150OHM,5%,1/10W,DA,TP2012	
..4	RP154	2007-000308	R-CHIP:10OHM,5%,1/10W,DA,TP2012	
..4	RP155	2007-000947	R-CHIP:47OHM,5%,1/10W,DA,TP2012	
..4	RP156	2007-000947	R-CHIP:47OHM,5%,1/10W,DA,TP2012	
..4	RP157	2007-000947	R-CHIP:47OHM,5%,1/10W,DA,TP2012	
..4	RP159	2007-001166	R-CHIP:75OHM,5%,1/10W,DA,TP2012	
..4	RP161	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP301	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP302	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP303	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP304	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP305	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP401	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
..4	RP402	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
..4	RP403	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
..4	RP404	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
..4	RP405	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP406	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP407	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP408	2007-001055	R-CHIP:6.2KOHM,5%,1/10W,DA,TP2012	
..4	RP409	2007-000401	R-CHIP:150OHM,5%,1/10W,DA,TP2012	
..4	RP411	2007-001166	R-CHIP:75OHM,5%,1/10W,DA,TP2012	
..4	RP412	2007-001166	R-CHIP:75OHM,5%,1/10W,DA,TP2012	
..4	RP413	2007-000401	R-CHIP:150OHM,5%,1/10W,DA,TP2012	
..4	RP415	2007-001166	R-CHIP:75OHM,5%,1/10W,DA,TP2012	
..4	RP416	2007-001166	R-CHIP:75OHM,5%,1/10W,DA,TP2012	
..4	RP417	2007-000380	R-CHIP:13KOHM,5%,1/10W,DA,TP2012	
..4	RP418	2007-000401	R-CHIP:150OHM,5%,1/10W,DA,TP2012	
..4	RP419	2007-001166	R-CHIP:75OHM,5%,1/10W,DA,TP2012	
..4	RP421	2007-001166	R-CHIP:75OHM,5%,1/10W,DA,TP2012	
..4	RP422	2007-000300	R-CHIP:10KOHM,5%,1/10W,DA,TP2012	
..4	RP423	2007-000401	R-CHIP:150OHM,5%,1/10W,DA,TP2012	
..4	RP501	2007-000029	R-CHIP:0OHM,5%,1/10W,DA,TP2012	
..4	RP502	2007-000029	R-CHIP:0OHM,5%,1/10W,DA,TP2012	
..4	RP503	2007-000029	R-CHIP:0OHM,5%,1/10W,DA,TP2012	
..4	RP504	2007-000030	R-CHIP:560OHM,5%,1/10W,DA,TP2012	
..4	RP505	2007-000572	R-CHIP:220OHM,5%,1/10W,DA,TP2012	
..4	RP506	2007-000493	R-CHIP:2.2KOHM,5%,1/10W,DA,TP2012	
..4	RP507	2007-001166	R-CHIP:75OHM,5%,1/10W,DA,TP2012	
..4	RP509	2007-000931	R-CHIP:470OHM,5%,1/10W,DA,TP2012	
..4	RP510	2007-000938	R-CHIP:47KOHM,1%,1/10W,DA,TP2012	
..4	RP513	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP514	2007-000210	R-CHIP:1.1KOHM,5%,1/10W,DA,TP2012	
..4	RP515	2007-000468	R-CHIP:1KOHM,5%,1/10W,DA,TP2012	
..4	RP516	2007-000468	R-CHIP:1KOHM,5%,1/10W,DA,TP2012	
..4	RP517	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP518	2007-000210	R-CHIP:1.1KOHM,5%,1/10W,DA,TP2012	
..4	RP519	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP521	2007-000210	R-CHIP:1.1KOHM,5%,1/10W,DA,TP2012	
..4	RP522	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP523	2007-000210	R-CHIP:1.1KOHM,5%,1/10W,DA,TP2012	
..4	RP524	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP525	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP526	2007-000210	R-CHIP:1.1KOHM,5%,1/10W,DA,TP2012	
..4	RP527	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP528	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP529	2007-000210	R-CHIP:1.1KOHM,5%,1/10W,DA,TP2012	
..4	RP530	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	

Level	Loc. No.	Code No.	Description ; Specification	Remark
..4	RP537	2007-000689	R-CHIP:3.3MOHM,5%,1/10W,DA,TP2012	
..4	RP542	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP543	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP544	2007-000029	R-CHIP:0OHM,5%,1/10W,DA,TP2012	
..4	RP546	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP547	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP549	2007-000671	R-CHIP:2KOHM,5%,1/10W,DA,TP2012	
..4	RP550	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP553	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP554	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP555	2007-000582	R-CHIP:22KOHM,1%,1/10W,DA,TP2012	
..4	RP556	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP560	2007-000468	R-CHIP:1KOHM,5%,1/10W,DA,TP2012	
..4	RP562	2007-000468	R-CHIP:1KOHM,5%,1/10W,DA,TP2012	
..4	RP565	2007-000029	R-CHIP:0OHM,5%,1/10W,DA,TP2012	
..4	RP566	2007-000029	R-CHIP:0OHM,5%,1/10W,DA,TP2012	
..4	RP567	2007-000029	R-CHIP:0OHM,5%,1/10W,DA,TP2012	
..4	RP568	2007-000029	R-CHIP:0OHM,5%,1/10W,DA,TP2012	
..4	RP569	2007-000029	R-CHIP:0OHM,5%,1/10W,DA,TP2012	
..4	RP570	2007-000300	R-CHIP:10KOHM,5%,1/10W,DA,TP2012	
..4	RP571	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP601	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP602	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP603	2007-001208	R-CHIP:82KOHM,5%,1/10W,DA,TP2012	
..4	RP604	2007-000947	R-CHIP:47OHM,5%,1/10W,DA,TP2012	
..4	RP605	2007-000518	R-CHIP:2.7KOHM,5%,1/10W,DA,TP2012	
..4	RP606	2007-000518	R-CHIP:2.7KOHM,5%,1/10W,DA,TP2012	
..4	RP609	2007-000872	R-CHIP:4.7KOHM,5%,1/10W,DA,TP2012	
..4	RP611	2007-000468	R-CHIP:1KOHM,5%,1/10W,DA,TP2012	
..4	RP613	2007-000941	R-CHIP:47KOHM,5%,1/10W,DA,TP2012	
..4	RP614	2007-000001	R-CHIP:68KOHM,5%,1/10W,DA,TP2012	
..4	RP619	2007-000468	R-CHIP:1KOHM,5%,1/10W,DA,TP2012	
..4	RP620	2007-000947	R-CHIP:47OHM,5%,1/10W,DA,TP2012	
..4	RP621	2007-000947	R-CHIP:47OHM,5%,1/10W,DA,TP2012	
..4	RP622	2007-000468	R-CHIP:1KOHM,5%,1/10W,DA,TP2012	
..4	RP623	2007-000822	R-CHIP:390OHM,5%,1/10W,DA,TP2012	
..4	RP624	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP625	2007-000872	R-CHIP:4.7KOHM,5%,1/10W,DA,TP2012	
..4	RP626	2007-000931	R-CHIP:470OHM,5%,1/10W,DA,TP2012	
..4	RP627	2007-000872	R-CHIP:4.7KOHM,5%,1/10W,DA,TP2012	
..4	RP628	2007-000267	R-CHIP:1.8KOHM,5%,1/10W,DA,TP2012	
..4	RP629	2007-000872	R-CHIP:4.7KOHM,5%,1/10W,DA,TP2012	
..4	RP630	2007-000468	R-CHIP:1KOHM,5%,1/10W,DA,TP2012	
..4	RP631	2007-000872	R-CHIP:4.7KOHM,5%,1/10W,DA,TP2012	
..4	RP708	2007-000029	R-CHIP:0OHM,5%,1/10W,DA,TP2012	
..4	RP719	2007-000029	R-CHIP:0OHM,5%,1/10W,DA,TP2012	
..4	RP727	2007-000029	R-CHIP:0OHM,5%,1/10W,DA,TP2012	
..4	RP735	2007-000029	R-CHIP:0OHM,5%,1/10W,DA,TP2012	
..4	RP736	2007-000029	R-CHIP:0OHM,5%,1/10W,DA,TP2012	
..4	RP737	2007-000029	R-CHIP:0OHM,5%,1/10W,DA,TP2012	
..4	RP738	2007-000029	R-CHIP:0OHM,5%,1/10W,DA,TP2012	
..4	RP901	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP904	2007-000029	R-CHIP:0OHM,5%,1/10W,DA,TP2012	
..4	RP907	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP908	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP912	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP913	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP914	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP915	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP916	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP917	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP918	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP920	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP921	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP924	2007-000029	R-CHIP:0OHM,5%,1/10W,DA,TP2012	
..4	RP925	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP926	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP927	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	
..4	RP929	2007-000029	R-CHIP:0OHM,5%,1/10W,DA,TP2012	
..4	RP931	2007-000029	R-CHIP:0OHM,5%,1/10W,DA,TP2012	
..4	RP933	2007-000029	R-CHIP:0OHM,5%,1/10W,DA,TP2012	
..4	RP935	2007-000029	R-CHIP:0OHM,5%,1/10W,DA,TP2012	
..4	RP936	2007-000468	R-CHIP:1KOHM,5%,1/10W,DA,TP2012	
..4	RP943	2007-000468	R-CHIP:1KOHM,5%,1/10W,DA,TP2012	
..4	RP944	2007-000941	R-CHIP:47KOHM,5%,1/10W,DA,TP2012	
..4	RP945	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP2012	

Level	Loc. No.	Code No.	Description ; Specification	Remark
4	RP980	2007-000029	R CHIP 0OHM 5% 1/10W DA TP2012	
4		AA41-00233B	PCB PROSCAN SVP-53_SPFR 4.4L 3.1 ST C15	S.N.A
3		AA63-40272A	CASE-ELD CASE, SPTE T0.5, OX724A-G	S.N.A
2		AA65-00529A	ASSY PCB PRP SP43_S4P_U51A	
3	CNP01	3711-002709	CONNECTOR HEADER,NOWALL,12P1R,2.5MM,ANG	
3	CNP03	3711-002709	CONNECTOR HEADER,NOWALL,12P1R,2.5MM,ANG	
3	CP101	1204-000530	C PAL/NTSC DECODER,TDA9160A,DIP32P,400	
3	CP102	1204-000560	C DEMODULATOR,TDA9815,DIP32P,400MIL,PL	
3	RP126	2103-000665	CR SEMI,20Kohm,25%,1/5W,SIDE	
3	TP101	AA25-10004E	TRANS IF,37MG,VIF,7mm,8pf,116.7MHz,S	
3	ZP102	2904-000253	FILTER,SAW AV,38.9MHz,DIP10K,ST,TBDB,S/G	
3		AA99-20066Z	ASSY PCB SUB,AUTO AA65-00529A V	S.N.A
4	CP101	2203-000221	C CERAMIC,CHIP,100nF,20%,50V,Y5V,TP,3216	
4	CP102	2401-000922	C AL,22uF,20%,16V,CP,TP5x5.5	
4	CP103	2203-000429	C CERAMIC,CHIP,0.018nF,5%,50V,NP0,TP,201	
4	CP104	2203-000181	C CERAMIC,CHIP,100nF,+80-20%,25V,Y5V,TP	
4	CP105	2203-000717	C CERAMIC,CHIP,3.3nF,10%,50V,X7R,TP,3216	
4	CP106	2203-000221	C CERAMIC,CHIP,100nF,20%,50V,Y5V,TP,3216	
4	CP107	2203-000221	C CERAMIC,CHIP,100nF,20%,50V,Y5V,TP,3216	
4	CP108	2203-000221	C CERAMIC,CHIP,100nF,20%,50V,Y5V,TP,3216	
4	CP109	2401-001840	C AL,100uF,20%,16V,GP,TP6.3x11.5	
4	CP110	2203-000221	C CERAMIC,CHIP,100nF,20%,50V,Y5V,TP,3216	
4	CP111	2203-000716	C CERAMIC,CHIP,3.3nF,10%,50V,X7R,TP,2012	
4	CP112	2401-000660	C AL,2.2uF,20%,50V,GP,TP5x11.5	
4	CP114	2203-000221	C CERAMIC,CHIP,100nF,20%,50V,Y5V,TP,3216	
4	CP115	2203-000221	C CERAMIC,CHIP,100nF,20%,50V,Y5V,TP,3216	
4	CP116	2203-000753	C CERAMIC,CHIP,330nF,+80-20%,50V,Y5V,TP	
4	CP117	2401-002144	C AL,47uF,20%,16V,GP,TP5x11.5	
4	CP118	2203-000221	C CERAMIC,CHIP,100nF,20%,50V,Y5V,TP,3216	
4	CP119	2201-000692	C CERAMIC,DISC,0.008nF,0.5pF,50V,U2J,TP4	
4	CP120	2203-000578	C CERAMIC,CHIP,220nF,20%,50V,Y5V,TP,3216	
4	CP121	2401-000660	C AL,2.2uF,20%,50V,GP,TP5x11.5	
4	CP123	2203-000260	C CERAMIC,CHIP,10nF,10%,50V,X7R,TP,2012	
4	CP124	2401-000660	C AL,2.2uF,20%,50V,GP,TP5x11.5	
4	CP125	2203-000250	C CERAMIC,CHIP,10nF,10%,50V,X7R,TP,2012	
4	CP126	2401-001840	C AL,100uF,20%,16V,GP,TP6.3x11.5	
4	CP127	2203-000221	C CERAMIC,CHIP,100nF,20%,50V,Y5V,TP,3216	
4	CP129	2203-000260	C CERAMIC,CHIP,10nF,10%,50V,X7R,TP,2012	
4	CP130	2203-000239	C CERAMIC,CHIP,0.1nF,5%,50V,NP0,TP,2012	
4	CP131	2201-000692	C CERAMIC,DISC,0.008nF,0.5pF,50V,U2J,TP4	
4	CP132	2203-000239	C CERAMIC,CHIP,0.1nF,5%,50V,NP0,TP,2012	
4	CP133	2203-000221	C CERAMIC,CHIP,100nF,20%,50V,Y5V,TP,3216	
4	CP134	2401-001840	C AL,100uF,20%,16V,GP,TP6.3x11.5	
4	CP135	2401-002144	C AL,47uF,20%,16V,GP,TP5x11.5	
4	CP136	2203-000260	C CERAMIC,CHIP,10nF,10%,50V,X7R,TP,2012	
4	CP137	2203-000938	C CERAMIC,CHIP,0.47nF,5%,50V,NP0,TP,2012	
4	CP142	2401-000199	C AL,1000uF,20%,6.3V,GP,TP10x12.5	
4	CP143	2401-002144	C AL,47uF,20%,16V,GP,TP5x11.5	
4	CP144	2203-000221	C CERAMIC,CHIP,100nF,20%,50V,Y5V,TP,3216	
4	CP145	2203-000221	C CERAMIC,CHIP,100nF,20%,50V,Y5V,TP,3216	
4	CP201	2203-000325	C CERAMIC,CHIP,12nF,10%,50V,X7R,TP,3216	
4	CP203	2401-002144	C AL,47uF,20%,16V,GP,TP5x11.5	
4	CP204	2203-000221	C CERAMIC,CHIP,100nF,20%,50V,Y5V,TP,3216	
4	CP205	2401-001840	C AL,100uF,20%,16V,GP,TP6.3x11.5	
4	CP206	2203-000221	C CERAMIC,CHIP,100nF,20%,50V,Y5V,TP,3216	
4	CP207	2401-001840	C AL,100uF,20%,16V,GP,TP6.3x11.5	
4	CP208	2203-000221	C CERAMIC,CHIP,100nF,20%,50V,Y5V,TP,3216	
4	CP209	2401-001914	C AL,1uF,20%,50V,BP,TP5x11.5	
4	CP210	2401-001840	C AL,100uF,20%,16V,GP,TP6.3x11.5	
4	CP211	2401-000603	C AL,1uF,20%,50V,GP,TP5x11.5	
4	CP213	2401-000603	C AL,1uF,20%,50V,GP,TP5x11.5	
4	CP214	2203-000578	C CERAMIC,CHIP,220nF,20%,50V,Y5V,TP,3216	
4	CP215	2401-000603	C AL,1uF,20%,50V,GP,TP5x11.5	
4	CP216	2203-000221	C CERAMIC,CHIP,100nF,20%,50V,Y5V,TP,3216	
4	CP217	2203-000578	C CERAMIC,CHIP,220nF,20%,50V,Y5V,TP,3216	
4	CP218	2203-002085	C CERAMIC,CHIP,56nF,10%,50V,X7R,TP,2012	
4	CP219	2203-000495	C CERAMIC,CHIP,2.2nF,10%,50V,X7R,TP,2012	
4	CP220	2203-000578	C CERAMIC,CHIP,220nF,20%,50V,Y5V,TP,3216	
4	CP221	2203-000221	C CERAMIC,CHIP,100nF,20%,50V,Y5V,TP,3216	
4	CP301	2401-001840	C AL,100uF,20%,16V,GP,TP6.3x11.5	
4	CP302	2203-000221	C CERAMIC,CHIP,100nF,20%,50V,Y5V,TP,3216	
4	CP303	2401-001840	C AL,100uF,20%,16V,GP,TP6.3x11.5	
4	CP304	2203-000221	C CERAMIC,CHIP,100nF,20%,50V,Y5V,TP,3216	
4	CP305	2203-001077	C CERAMIC,CHIP,0.056nF,5%,50V,NP0,TP,201	
4	CP306	2203-001077	C CERAMIC,CHIP,0.056nF,5%,50V,NP0,TP,201	
4	DP101	0401-000160	DIODE,SWITCHING,SS314,30V,100mA,USC,TP	
4	DP103	0403-000720	DIODE,ZENER,MTZ,9.1B,9.1V,8.57,9.01V,500	
4	DP105	0401-000160	DIODE,SWITCHING,SS314,30V,100mA,USC,TP	
4	DP201	0403-000334	DIODE,ZENER,UDZ-TE-5A,2.7V,2.54,2.75V,500	
4	CP103	AA13-20004A	IC HYBRID,PAPNET,SIP5PRE,AMP,TP	
4	CP105	1204-000635	IC PICTURE PROCESS,SDA9188X,SOP32P350M	
4	CP201	1402-000206	IC A/D CONVERTER,SDA9187,2X,6BIT,SOP28P	
4	LP102	2701-000219	INDUCTOR,AXIAL,820nH,10%,2.5x3.4mm	
4	LP103	2701-000114	INDUCTOR,AXIAL,10uH,10%,2.5x3.4mm	
4	LP104	2701-000114	INDUCTOR,AXIAL,10uH,10%,2.5x3.4mm	
4	LP105	2701-000114	INDUCTOR,AXIAL,10uH,10%,2.5x3.4mm	
4	LP201	2701-000197	INDUCTOR,AXIAL,5.6uH,10%,2.5x3.4mm	
4	LP301	2701-000114	INDUCTOR,AXIAL,10um,10%,2.5x3.4mm	
4	PCB	AA41-11003A	PCB,PIP,SCT51A,ZLFR,4.330x245x1ST,AS6	S.N.A
4	QP104	0501-000342	TR,SMALL SIGNAL,KSC1623,YNPN,200mW,SOT	
4	QP105	0501-000342	TR,SMALL SIGNAL,KSC1623,YNPN,200mW,SOT	
4	QP106	0501-000342	TR,SMALL SIGNAL,KSC1623,YNPN,200mW,SOT	
4	QP201	0501-000342	TR,SMALL SIGNAL,KSC1623,YNPN,200mW,SOT	
4	QP202	0501-000342	TR,SMALL SIGNAL,KSC1623,YNPN,200mW,SOT	
4	QP203	0501-000280	TR,SMALL SIGNAL,KSA1182,PNP,150mW,SOT-23	
4	QP204	0501-000342	TR,SMALL SIGNAL,KSC1623,YNPN,200mW,SOT	
4	QP205	0501-000342	TR,SMALL SIGNAL,KSC1623,YNPN,200mW,SOT	
4	QP206	0501-000342	TR,SMALL SIGNAL,KSC1623,YNPN,200mW,SOT	
4	QP302	0501-000342	TR,SMALL SIGNAL,KSC1623,YNPN,200mW,SOT	
4	QP303	0501-000280	TR,SMALL SIGNAL,KSA1182,PNP,150mW,SOT-23	
4	QP304	0501-000280	TR,SMALL SIGNAL,KSA1182,PNP,150mW,SOT-23	
4	QP305	0501-000280	TR,SMALL SIGNAL,KSA1182,PNP,150mW,SOT-23	
4	RC129	2007-000586	R-CHIP,22KOHM,5%,1/10W,DA,TP,2012	
4	RP101	2007-001208	R-CHIP,82KOHM,5%,1/10W,DA,TP,2012	
4	RP104	2007-000468	R-CHIP,1KOHM,5%,1/10W,DA,TP,2012	
4	RP105	2007-000328	R-CHIP,11KOHM,5%,1/10W,DA,TP,2012	
4	RP106	2007-000774	R-CHIP,33KOHM,5%,1/10W,DA,TP,2012	
4	RP107	2007-000409	R-CHIP,15KOHM,5%,1/10W,DA,TP,2012	
4	RP108	2007-000493	R-CHIP,2.2KOHM,5%,1/10W,DA,TP,2012	
4	RP109	2007-000830	R-CHIP,39KOHM,5%,1/10W,DA,TP,2012	
4	RP110	2007-000300	R-CHIP,10KOHM,5%,1/10W,DA,TP,2012	
4	RP111	2007-000872	R-CHIP,4.7KOHM,5%,1/10W,DA,TP,2012	
4	RP112	2007-000931	R-CHIP,470OHM,5%,1/10W,DA,TP,2012	
4	RP113	2007-000774	R-CHIP,33KOHM,5%,1/10W,DA,TP,2012	
4	RP114	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP,2012	
4	RP115	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP,2012	
4	RP116	2007-000493	R-CHIP,2.2KOHM,5%,1/10W,DA,TP,2012	
4	RP118	3001-000117	R-CARBON(S),5R0HM,5%,1/2W,AA,TP,2 4X6.4M	
4	RP119	2007-000282	R-CHIP,100KOHM,5%,1/10W,DA,TP,2012	
4	RP122	2007-000300	R-CHIP,10KOHM,5%,1/10W,DA,TP,2012	
4	RP123	2007-000941	R-CHIP,47KOHM,5%,1/10W,DA,TP,2012	
4	RP124	2007-000941	R-CHIP,47KOHM,5%,1/10W,DA,TP,2012	
4	RP125	2007-000401	R-CHIP,150OHM,5%,1/10W,DA,TP,2012	
4	RP127	2007-000030	R-CHIP,560OHM,5%,1/10W,DA,TP,2012	
4	RP128	2007-000941	R-CHIP,47KOHM,5%,1/10W,DA,TP,2012	
4	RP130	2007-000872	R-CHIP,4.7KOHM,5%,1/10W,DA,TP,2012	
4	RP131	2007-000586	R-CHIP,22KOHM,5%,1/10W,DA,TP,2012	
4	RP132	2007-000468	R-CHIP,1KOHM,5%,1/10W,DA,TP,2012	
4	RP135	2007-000468	R-CHIP,1KOHM,5%,1/10W,DA,TP,2012	
4	RP136	2007-000872	R-CHIP,4.7KOHM,5%,1/10W,DA,TP,2012	
4	RP137	2007-001039	R-CHIP,56KOHM,5%,1/10W,DA,TP,2012	
4	RP138	2007-000586	R-CHIP,22KOHM,5%,1/10W,DA,TP,2012	
4	RP140	2007-000029	R-CHIP,0OHM,5%,1/10W,DA,TP,2012	
4	RP201	2007-001039	R-CHIP,56KOHM,5%,1/10W,DA,TP,2012	
4	RP202	2007-000401	R-CHIP,150OHM,5%,1/10W,DA,TP,2012	
4	RP203	2007-000703	R-CHIP,3.6KOHM,5%,1/10W,DA,TP,2012	
4	RP204	2007-000593	R-CHIP,220HM,5%,1/10W,DA,TP,2012	
4	RP205	2007-000477	R-CHIP,1MOHM,5%,1/10W,DA,TP,2012	
4	RP206	2007-000931	R-CHIP,470OHM,5%,1/10W,DA,TP,2012	
4	RP207	2007-001009	R-CHIP,51KOHM,5%,1/10W,DA,TP,2012	
4	RP208	2007-000774	R-CHIP,33KOHM,5%,1/10W,DA,TP,2012	
4	RP209	2007-000401	R-CHIP,150OHM,5%,1/10W,DA,TP,2012	
4	RP210	2007-000221	R-CHIP,1.2KOHM,5%,1/10W,DA,TP,2012	
4	RP211	2007-001001	R-CHIP,510OHM,5%,1/10W,DA,TP,2012	
4	RP212	2007-000931	R-CHIP,470OHM,5%,1/10W,DA,TP,2012	
4	RP213	2007-000872	R-CHIP,4.7KOHM,5%,1/10W,DA,TP,2012	
4	RP215	2007-000872	R-CHIP,4.7KOHM,5%,1/10W,DA,TP,2012	
4	RP216	2007-000872	R-CHIP,4.7KOHM,5%,1/10W,DA,TP,2012	
4	RP217	2007-000409	R-CHIP,15KOHM,5%,1/10W,DA,TP,2012	
4	RP301	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP,2012	
4	RP303	2007-000468	R-CHIP,1KOHM,5%,1/10W,DA,TP,2012	
4	RP304	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP,2012	
4	RP307	2007-000518	R-CHIP,2.7KOHM,5%,1/10W,DA,TP,2012	
4	RP308	2007-000401	R-CHIP,150OHM,5%,1/10W,DA,TP,2012	

Level	Loc. No.	Code No.	Description ; Specification	Remark
4	RP309	2007-000931	R-CHIP,470OHM,5%,1/10W,DA,TP,2012	
4	RP310	2007-000931	R-CHIP,470OHM,5%,1/10W,DA,TP,2012	
4	RP311	2007-000931	R-CHIP,470OHM,5%,1/10W,DA,TP,2012	
4	RP312	2007-000300	R-CHIP,10KOHM,5%,1/10W,DA,TP,2012	
4	RP313	2007-000798	R-CHIP,360OHM,5%,1/10W,DA,TP,2012	
4	RP314	2007-000798	R-CHIP,360OHM,5%,1/10W,DA,TP,2012	
4	RP315	2007-000798	R-CHIP,360OHM,5%,1/10W,DA,TP,2012	
4	RP316	2001-001146	R-CARBON(S),4.7OHM,5%,1/2W,AA,TP,2 4X5.4	
4	RP317	2001-001146	R-CARBON(S),4.7OHM,5%,1/2W,AA,TP,2 4X5.4	
4	XP101	2801-000235	CRYSTAL UNIT,3.579545MHz,40ppm,28 4AM,S	
4	XP102	2801-000274	CRYSTAL UNIT,4.433619MHz,30PPM,28 4AM,20	
4	XP301	2802-000121	RESONATOR,CERAMIC,20.48MHz,0.5%,TP,10.0x	
3		AA63-40013A	SHIELD CASE, SPTE T0.5,SCT51A,WZT4	S.N.A
3		3202-000187	SOLDER WIRE FLUX 2560S,D1.2,63Sn/37Pb	S.N.A
2		AA99-30214M	ASSY PCB ROBOT AA94-03459N R	S.N.A
3	CN201	3711-003051	CONNECTOR HEADER,BOX,8P1R,2.5mm,STRAIGHT	
3	CN202	3711-003052	CONNECTOR HEADER,BOX,10P1R,2.5mm,STRAIGH	
3	CN501	3711-003051	CONNECTOR HEADER,BOX,8P1R,2.5mm,STRAIGHT	
3	CNY01	3711-003973	CONNECTOR HEADER,BOX,11P1R,2.5mm,STRAIG	
3	CS810	2201-000446	C CERAMIC,DISC,3.3nF,20%,400V,Y5U,TP,15x	
3	CS811	2201-000446	C CERAMIC,DISC,3.3nF,20%,400V,Y5U,TP,15x	
3	DS801	0402-000102	DIODE,BRIDGE,DZSB60,600V,1.5A,	
3	FI101	2904-000253	FILTER,SAW,AV,38.9MHz,DIP10K,ST,TBDB,S/G	
3	FI102	2904-001010	FILTER,SAW,AV,32.9~33.4MHz,SIP5PST,14 4	
3	HI02	AA40-10006T	TUNER,F/S,TECC2849PG29A(S),PAL,B/G,TP,18	
3	IC501	AA99-00111L	ASSY-H/S, , ,AA62-30013J,KA78R12,	
4		1203-000165	IC,POSI,ADJUST REG,,78R12,TO-220,3P	
4		6003-000333	SCREW,TAPTITE,RH,-,2S,M3L10,ZPGYEL,SW	
4		AA62-30013L	HEATSINK,ES, , , , ,44/22, ,WHT, , , , ,	
3	IC802	AA99-50147A	ASSY H/S, ,TR,AA62-30012B,KA7805A,	S.N.A
4		1203-000274	IC,POSI,FIXED REG,,7805,TO-220,3P,PLAS	
4		6003-000333	SCREW,TAPTITE,RH,-,2S,M3L10,ZPGYEL,SW	
4		AA62-30012B	HEAT SINK,ES,,AA063,EXTR, ,45/19,T02	S.N.A
3	IC901	AA99-00092A	IC,MICOM,E9035612PSC,R5P21,SP43,S4P,SDP	
3	IC902	1103-001106	IC,EEPROM,CAT,DC,1024x8bit,DIP8P,300?MIL	
3	QS201	AA13-00024A	IC,HYBRID, ,ITNY253P,3PIN,	
3	QS902	0604-001032	PHOTO COUPLER,TR,170,250?,300mW,DIP 4 ST	
3		AA99-10208Y	ASSY,PCB,MAIN,AUTO,AA99-30214M,	S.N.A
4	C103	2201-000119	C CERAMIC,DISC,100nF,+80-20%,50V,Y5V,TP	
4	C104	2401-001840	C AL,100uF,20%,16V,GP,TP6.3x11.5	
4	C105	2401-001302	C AL,100uF,20%,25V,GP,TP6.3x11.5	
4	C107	2305-000665	C FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x6.3m	
4	C109	2201-000119	C CERAMIC,DISC,100nF,+80-20%,50V,Y5V,TP	
4	C110	2401-001840	C AL,100uF,20%,16V,GP,TP6.3x11.5	
4	C119	2201-000119	C CERAMIC,DISC,100nF,+80-20%,50V,Y5V,TP	
4	C121	2305-000665	C FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x6.3m	
4	C125	2401-000603	C AL,1uF,20%,50V,GP,TP5x11.5	
4	C126	2201-000119	C CERAMIC,DISC,100nF,+80-20%,50V,Y5V,TP	
4	C130	2201-000119	C CERAMIC,DISC,100nF,+80-20%,50V,Y5V,TP	
4	C131	2305-000665	C FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x6.0m	
4	C132	2305-000665	C FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x6.0m	
4	C133	2401-001363	C AL,470uF,20%,16V,GP,TP10x12.5,5	
4	C134	2401-002273	C AL,220uF,20%,25V,HR,TP,10x20mm,5m	
4	C135	2401-000287	C AL,100uF,20%,16V,WT,TP5.3x11.5	
4	C136	2401-000027	C AL,4.7uF,20%,50V,GP,TP5x11.5	
4	C137	2401-002212	C AL,10uF,20%,25V,WT,TP5x11.5	
4	C138	2305-000665	C FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x6.0m	
4	C139	2201-000180	C CERAMIC,DISC,10nF,10%,50V,Y5V,TP,2.5x3.5	
4	C140	2201-000292	C CERAMIC,DISC,1nF,10%,50V,SP,TP5x3.5,	
4	C141	2201-000292	C CERAMIC,DISC,1nF,10%,50V,SP,TP5x3.5,	
4	C142	2305-000289	C FILM,MPEF,220nF,5%,63V,TP, ,5mm	
4	C143	2401-000667	C AL,2.2uF,20%,50V,WT,TP5x11.5	
4	C144	2201-000180	C CERAMIC,DISC,10nF,10%,50V,Y5V,TP,2.5	
4	C145	2305-000665	C FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x6.0m	
4	C146	2305-000665	C FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x6.3m	
4	C147	2401-000660	C AL,2.2uF,20%,50V,GP,TP5x11.5	
4	C148	2305-000665	C FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x6.0m	
4	C149	2401-000947	C AL,22uF,20%,35V,GP,TP5x11.5	
4	C180	2401-002300	C AL,47uF,20%,50V,GP,TP6.3x11.5	
4	C185	2401-001363	C AL,470uF,20%,16V,GP,TP10x12.5,5	
4	C191	2401-002619	C AL,47uF,20%,25V,GP,TP5x11.5	
4	C501	2305-000665	C FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x6.0m	
4	C502	2401-001397	C AL,470uF,20%,25V,GP,TP10x16.5	
4	C503	2305-000665	C FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x6.0m	
4	C504	2401-000832	C AL,220uF,20%,25V,GP,TP8x11.5,5	
4	C505	2305-000665	C FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x6.0m	
4	C506	2401-002594	C AL,220uF,20%,16V,GP,TP8x11.5,5	
4	C507	2305-000665	C FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x6.0m	
4	C508	2401-002296	C AL,470uF,20%,16V,WT,TP10x12.5,5	
4	C509	2305-000665	C FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x6.0m	
4	C510	2401-000133	C AL,1000uF,20%,16V,GP,TP10x20,5	
4	C511	2305-000665	C FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x6.0m	
4	C512	2401-000689	C AL,2200uF,20%,16V,GP,TP13x25,5	
4	C519	2305-000665	C FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x6.0m	
4	C520	2401-001397	C AL,470uF,20%,25V,GP,TP10x16,5	
4	C521	2305-000665	C FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x6.0m	
4	C522	2401-002296	C AL,470uF,20%,16V,WT,TP10x12.5,5	
4	C523	2201-000292	C CERAMIC,DISC,1nF,10%,50V,Y5P,TP5x3.5,	
4	C537	2305-000665	C FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x6.0m	
4	C538	2401-001840	C AL,100uF,20%,16V,GP,TP6.3x11.5	
4	C539	2401-001840	C AL,100uF,20%,16V,GP,TP6.3x11.5	
4	C540	2305-000665	C FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x6.0m	
4	C543	2201-000144	C CERAMIC,DISC,0.1nF,5%,50V,NP0,TP,3.5x3	
4	C544	2401-002144	C AL,47uF,20%,16V,GP,TP5x11.5	
4	C601	2401-002299	C AL,4.7uF,20%,50V,GP,TP5x7.5	
4	C602	2401-002299	C AL,4.7uF,20%,50V,GP,TP5x7.5	
4	C666	2305-000665	C FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x6.0m	
4	C667	2401-000603	C AL,1uF,20%,50V,GP,TP5x11.5	
4	C668	2401-000603	C AL,1uF,20%,50V,GP,TP5x11.5	
4	C669	2401-000662	C AL,22uF,20%,50V,GP,TP5x11.5	
4	C670	2401-000603	C AL,1uF,20%,50V,GP,TP5x11.5	
4	C671	2401-001537	C AL,47uF,20%,25V,GP,TP6.3x7mm,5mm	
4	C676	2401-001192	C AL,33uF,20%,50V,GP,TP6.3x11.5	
4	C686	2201-000411	C CERAMIC,DISC,0.27nF,10%,50V,Y5P,TP4x3	
4	C687	2201-000411	C CERAMIC,DISC,0.27nF,10%,50V,Y5P,TP4x3	
4	C688	2401-000192	C AL,1000uF,20%,50V,GP,TP16x25,7.5	
4	C689	2305-000665	C FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x6.0m	
4	C690	2305-000665	C FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x6.0m	
4	C691	2401-001192	C AL,1000uF,20%,50V,GP,TP16x25,7.5	
4	C701	2401-000027	C AL,4.7uF,20%,50V,GP,TP5x11.5	
4	C801	2401-002300	C AL,47uF,20%,50V,GP,TP6.3x11.5	
4	C901	2012-000706	C CERAMIC,MLC,AXIAL,1NF,10%,50V,Y5P,TP3	
4	C905	2401-001496	C AL,47uF,20%,16V,GP,TP5x7.5	
4	C906	2305-000149	C FILM,MPEF,100nF,5%,100V,TP,12x12.5x6.5	
4	C908	2201-000292	C CERAMIC,DISC,1nF,10%,50V,Y5P,TP5x3.5,	
4	C909	2201-000292	C CERAMIC,DISC,1nF,10%,50V,Y5P,TP5x3.5,	
4	C912	2201-000119	C CERAMIC,DISC,100nF,+80-20%,50V,Y5V,TP,	
4	C913	2201-000193	C CERAMIC,DISC,0.01nF,0.25pF,50V,NP0,TP	
4	C914	2201-000573	C CERAMIC,DISC,0.047nF,5%,50V,NP0,TP,5x3	
4	C915	2201-000119	C CERAMIC,DISC,100nF,+80-20%,50V,Y5V,TP,	
4	C916	2401-002042	C AL,220uF,20%,10V,GP,TP6.3x11.5	
4	C917	2401-002144	C AL,47uF,20%,16V,GP,TP5x11.5	
4	C918	2201-000119	C CERAMIC,DISC,100nF,+80-20%,50V,Y5V,TP,	
4	C919	2401-000480	C AL,10uF,20%,50V,GP,TP5x11.5	
4	C920	2201-000119	C CERAMIC,DISC,100nF,+80-20%,50V,Y5V,TP,	
4	C925	2201-000119	C CERAMIC,DISC,100nF,+80-20%,50V,Y5V,TP,	
4	C926	2401-000480	C AL,10uF,20%,50V,GP,TP5x11.5	
4	C927	2202-002231	C CERAMIC,MLC,AXIAL,330pF,10%,50V,SP,TP	
4	C928	2202-000796	C CERAMIC,MLC,AXIAL,1NF,10%,50V,Y5P,TP3	
4	CN003	3711-002642	CONNECTOR HEADER,BOX,3P1R,2.5MM,STRAIGH	
4	CN402	3711-002642	CONNECTOR HEADER,BOX,3P1R,2.5MM,STRAIGH	
4	CN403	3711-002642	CONNECTOR HEADER,BOX,3P1R,2.5MM,STRAIGH	
4	CN404	3711-002642	CONNECTOR HEADER,BOX,3P1R,2.5MM,STRAIGH	
4	CN601	3711-002643	CONNECTOR HEADER,BOX,4P1R,2.5MM,STRAIGH	
4	CS801	2201-000332	C CERAMIC,DISC,2.2nF,20%,250V,Y5U,TP5x4	
4	CS802	2201-000332	C CERAMIC,DISC,2.2nF,20%,250V,Y5U,TP5x4	
4	CS804	2201-000119	C CERAMIC,DISC,100nF,+80-20%,50V,Y5V,TP,	
4	CS805	2401-002286	C AL,470uF,20%,16V,WT,TP,10x12.5,5	
4	CS807	2201-000119	C CERAMIC,DISC,100nF,+80-20%,50V,Y5V,TP,	
4	CS808	2401-002286	C AL,470uF,20%,16V,WT,TP,10x12.5,5	
4	CS809	2201-000556	C CERAMIC,DISC,0.47nF,10%,500V,Y5P,TP,5,	
4	CS812	2201-002076	C CERAMIC,DISC,0.068nF,5%,1kV,SL,TP,8x4m	
4	CZ144	2401-000480	C AL,10uF,20%,50V,GP,TP5x11.5	
4	CZ146	2401-000832	C AL,220uF,20%,25V,GP,TP8x11.5,5	
4	CZ147	2201-000193	C CERAMIC,DISC,0.01nF,0.25pF,50V,NP0,TP,	
4	CZ148	2201-000193	C CERAMIC,DISC,0.01nF,0.25pF,50V,NP0,TP,	
4	CZ149	2201-000516	C CERAMIC,DISC,4.7nF,+100-0%,500V,Y5U,TP	
4	CZ150	2201-000516	C CERAMIC,DISC,4.7nF,+100-0%,500V,Y5U,TP	
4	CZ151	2401-001513	C AL,47uF,20%,16V,WT,TP5x11.5	
4	CZ152	2401-001157	C AL,33uF,20%,160V,GP,TP12.5x20,5	
4	CZ153	2401-001513	C AL,47uF,20%,16V,WT,TP5x11.5	
4	CZ155	2201-000604	C CERAMIC,DISC,0.056nF,+100-0%,500V,SL,T	

7-28 Samsung Electronics

Level	Loc. No.	Code No.	Description ; Specification	Remark
4	C2167	2401-001220	C-AL,4.7uF,20%,160V,GP,TP,9x11,5.5	
4	C2167A	2401-001220	C-AL,4.7uF,20%,160V,GP,TP,9x11,5.5	
4	D101	0401-001088	DIODE-SWITCHING;BAW75,50V,300mA,DO-35,TP	
4	D102	0401-001088	DIODE-SWITCHING;BAW75,50V,300mA,DO-35,TP	
4	D103	0401-001088	DIODE-SWITCHING;BAW75,50V,300mA,DO-35,TP	
4	D501	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35	
4	D664	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
4	D665	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35	
4	D666	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35.	
4	D667	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35.	
4	D668	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35.	
4	D669	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35.	
4	D701	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35	
4	D702	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35.	
4	D703	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35	
4	D901	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35	
4	D902	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35	
4	D903	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35.	
4	D904	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35	
4	D905	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35.	
4	D906	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35	
4	D907	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35.	
4	DS802	1405-000152	VARISTOR;560V,2500A,14x8.5mm,TP	
4	DS803	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
4	DS804	0403-001318	DIODE-ZENER;MTZJ4.3B,4.17-4.43V,500mW,DO	
4	DS805	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
4	DS806	1405-001030	VARISTOR;120V,2500A,14x8.5mm,TP	
4	DS807	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
4	DS808	1405-000152	VARISTOR;560V,2500A,14x8.5mm,TP	
4	DS809	0404-001056	DIODE-SCHOTTKY;RK16,60V,1.5A,DO-204AC,TP	
4	DS810	1405-000152	VARISTOR;560V,2500A,14x8.5mm,TP	
4	DZ116	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35.	
4	DZ117	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35.	
4	DZ118	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
4	DZ119	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35	
4	DZ120	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
4	DZ121	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
4	DZ501	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
4	DZ502	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
4	DZ503	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ504	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ505	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ506	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
4	DZ507	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
4	DZ508	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
4	DZ665	0403-001039	DIODE-ZENER;MA2560,56V,52-60V,1W,DO-41,T	
4	DZ666	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
4	DZ667	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
4	DZ701	0403-001140	DIODE-ZENER;RD10ESAB-T4,10V,9.19-10.30V,	
4	DZ801	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
4	DZ901	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
4	DZ902	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
4	DZ903	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
4	DZ904	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
4	DZ905	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
4	DZ906	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
4	DZ907	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
4	DZ911	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
4	DZ912	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
4	DZ914	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
4	DZ915	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
4	F901	2901-000297	FILTER-EMI ON BOARD;-,3A,-,3.5x5,TP,-	
4	FI103	2903-000181	FILTER-CERAMIC;BR,5.5MHz,-,-,TP,TPS5.5	
4	FI104	2903-000129	FILTER-CERAMIC;BR,4.5MHz,-,-,TP,-	
4	IC506	1203-000293	IC POSI.FIXED REG.;7808,TO-220,3P,-,PLAS	
4	IC904	1203-000515	IC VOL. DETECTOR;7042,TO-92,3P,177MIL,PL	
4	L101	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
4	L103	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
4	L106	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
4	L107	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
4	L108	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
4	L109	2701-000101	INDUCTOR-AXIAL;1.2uH,10%,2.5x3.4mm	
4	L110	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
4	L111	2701-000120	INDUCTOR-AXIAL;12uH,10%,2.5x3.4mm	
4	L112	2701-000299	INDUCTOR-AXIAL;13UH,10%,2.5X3.4MM	
4	L113	AA26-10006G	TRANS-IF;-,7mG,VIF,-,7mm,8pF,77.8MHz,ST	
4	L114	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	

Level	Loc. No.	Code No.	Description ; Specification	Remark
4	L115	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
4	L116	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
4	L117	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
4	L118	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
4	L501	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
4	L502	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
4	L503	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
4	L504	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
4	L505	2901-000297	FILTER-EMI ON BOARD;-,3A,-,3.5x5,TP,-	
4	L506	3301-000297	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500	
4	L507	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
4	L514	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500	
4	L515	3301-000297	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
4	L601	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
4	L602	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
4	L604	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500	
4	L901	2901-000297	FILTER-EMI ON BOARD;-,3A,-,3.5x5,TP,-	
4	L902	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
4	L903	2701-001040	INDUCTOR-AXIAL;10uH,10%,4.5x14mm	
4	L907	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500	
4	L909	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
4	L910	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
4	L911	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
4	L912	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
4	LD901	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
4	LS801	2901-000297	FILTER-EMI ON BOARD;-,3A,-,3.5x5,TP,-	
4	LS802	2901-000297	FILTER-EMI ON BOARD;-,3A,-,3.5x5,TP,-	
4	LS803	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
4	LZ112	2701-000002	INDUCTOR-AXIAL;100uH,10%,4.2x9.8mm	
4	PCB	AA41-000758	PCB-MAIN;SP43J7PFFR,1,1L,B,1.6T,330X24	S.N.A
4	Q101	0504-000137	TR-DIGITAL;KSR1202,NPN,300mW,10K/10K,TO-	
4	Q102	0504-000123	TR-DIGITAL;KSR1010,NPN,300mW,10K,TO-92,T	
4	Q103	0501-000245	TR-SMALL SIGNAL;BC548C,NPN,500mW,TO-92,T	
4	Q104	0504-000123	TR-DIGITAL;KSR1010,NPN,300mW,10K,TO-92,T	
4	Q105	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
4	Q106	0504-000150	TR-DIGITAL;KSR2010,PNP,300mW,10K,TO-92,T	
4	Q107	0504-000123	TR-DIGITAL;KSR1010,NPN,300mW,10K,TO-92,T	
4	Q665	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
4	Q666	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
4	Q667	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
4	Q701	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
4	Q702	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
4	Q901	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
4	Q902	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
4	Q903	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
4	Q909	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
4	Q910	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
4	QS801	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1000mW,TO-	
4	QZ103	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
4	QZ104	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
4	QZ105	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
4	QZ106	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
4	R123	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R131	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R132	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R142	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R145	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R146	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R148	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R149	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R150	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R151	2001-000313	R-CARBON;11KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R152	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R153	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R154	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R155	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R156	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R157	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R158	2001-000867	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R159	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R160	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R161	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R162	2001-000969	R-CARBON;750OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R163	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R164	2001-000490	R-CARBON;200OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R165	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R166	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	

Level	Loc. No.	Code No.	Description ; Specification	Remark
4	R167	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R168	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R169	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R501	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
4	R502	2001-000291	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R503	2001-000291	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R504	2001-000405	R-CARBON;180OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R509	2008-000256	R-FUSIBLE(S);1ohm,5%,2W,AF,TP,3.9x10mm	
4	R510	2008-000256	R-FUSIBLE(S);1ohm,5%,2W,AF,TP,3.9x10mm	
4	R511	2008-001115	R-FUSIBLE(S);0.68ohm,10%,2W,AG,TP,3.9x12	
4	R512	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R524	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R525	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R526	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R531	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R532	2001-000037	R-CARBON(S);330OHM,5%,1/2W,AA,TP,2.4X6.4	
4	R533	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R601	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4	
4	R602	2001-000605	R-CARBON;3.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R603	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R661	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
4	R662	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
4	R665	2001-001188	R-CARBON(S);8.2KOHM,5%,1/2W,AA,TP,2.4X6.	
4	R666	2001-001188	R-CARBON(S);8.2KOHM,5%,1/2W,AA,TP,2.4X6.	
4	R668	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
4	R669	2001-001144	R-CARBON(S);4.7KOHM,5%,1/2W,AA,TP,2.4X6.	
4	R670	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
4	R671	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
4	R672	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
4	R673	2001-000411	R-CARBON;18KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R674	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R675	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
4	R676	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R677	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R678	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R679	2001-001071	R-CARBON(S);12KOHM,5%,1/2W,AA,TP,2.4X6.4	
4	R680	2001-001000	R-CARBON;82KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R681	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
4	R682	2004-001997	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP,2.5x6	
4	R683	2004-001997	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP,2.5x6	
4	R684	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
4	R685	2004-001390	R-METAL(S);1Kohm,2%,1/2W,AA,TP,2.4x6.4mm	
4	R686	2004-001390	R-METAL(S);1Kohm,2%,1/2W,AA,TP,2.4x6.4mm	
4	R687	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
4	R689	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
4	R690	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R701	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R702	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R703	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R704	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R801	2003-001098	R-METAL OXIDE(S);22Kohm,5%,3W,AA,TP,6x16	
4	R901	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R903	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R904	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R905	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R906	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R907	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R908	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R909	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R910	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R912	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R914	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R915	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R916	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R917	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R918	2001-000832	R-CARBON;510OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R919	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R921	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R922	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R923	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R924	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R925	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R926	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R930	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R931	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R932	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	

Level	Loc. No.	Code No.	Description ; Specification	Remark
4	R945	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R946	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R947	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R948	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R949	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R950	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R951	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R952	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R953	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R954	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R955	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R958	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R959	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R960	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R961	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R962	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R967	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R968	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R970	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R971	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R974	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R977	2001-001062	R-CARBON(S);10MOHM,5%,1/2W,AA,TP,2.4X6.4	
4	R979	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R980	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R981	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R982	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R983	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R984	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R985	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R986	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R987	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R988	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R989	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R990	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R991	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R992	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R993	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R994	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	RD901	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	RD903	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	RF802	2008-000294	R-FUSIBLE(S);33ohm,5%,2W,AF,TP,3.9x10mm	
4	RS801	2003-002194	R-METAL OXIDE(S);1.8Kohm,5%,1W,AF,TP,2.5	
4	RS802	2001-001192	R-CARBON(S);820OHM,5%,1/2W,AA,TP,2.4X6.4	
4	RS803	2001-001159	R-CARBON(S);510OHM,5%,1/2W,AA,TP,2.4X6.4	
4	RS804	2001-001182	R-CARBON(S);7.5KOHM,5%,1/2W,AA,TP,2.4X6.	
4	RS805	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
4	RS806	2001-001159	R-CARBON(S);510OHM,5%,1/2W,AA,TP,2.4X6.4	
4	RS807	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	RZ153	2008-001086	R-FUSIBLE(S);3.3ohm,5%,2W,AG,TP,3.9x12mm	
4	RZ154	2003-000532	R-METAL OXIDE(S);18ohm,5%,2W,AF,TP,4x12m	
4	RZ156	2001-001159	R-CARBON(S);510OHM,5%,1/2W,AA,TP,2.4X6.4	
4	RZ165	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	RZ166	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	RZ167	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	RZ167A	2001-000554	R-CARBON;270OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	RZ168	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
4	RZ169	2001-000019	R-CARBON(S);10OHM,5%,1/2W,AA,TP,2.4X6.4M	
4	RZ170	2001-000666	R-CARBON;33OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	RZ171	2001-000666	R-CARBON;33OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	RZ172	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	RZ173	2001-001139	R-CARBON(S);39KOHM,5%,1/2W,AA,TP,2.4X6.4	
4	RZ174	2001-001139	R-CARBON(S);39KOHM,5%,1/2W,AA,TP,2.4X6.4	
4	RZ175	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	RZ176	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	RZ177	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	RZ178	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	RZ179	2003-000713	R-METAL OXIDE(S);47ohm,5%,2W,AF,TP,4x12m	
4	RZ180	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
4	RZ181	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
4	RZ182	2003-000713	R-METAL OXIDE(S);47ohm,5%,2W,AF,TP,4x12m	
4	RZ183	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
4	RZ184	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
4	VR101	2103-000672	VR-SEMI;20Kohm,25%,1/5W,TOP	
2		0202-000187	SOLDER-WIRE FLUX;-,RS605,D1.2,63Sn/37Pb	S.N.A
2		AA39-20577A	LEAD CONNECTOR ASSY;6(3)P,YFH806-06,800	
2		AA39-20010C	LEAD CONNECTOR ASSY;1P,YFH800-01,S,600,	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2		1301-001201	CORE FERRITE,AE,21x11x32mm,1500,29OG	
2		AA65-30109A	CLAMP,FBT,NYLON 66,V2 BLK,...	S.N.A
2		AA65-30106A	CLAMP,WIRE,NYLON 66,V2,NTR,19VW,ALL MODE	S.N.A
2		AA65-30104B	CLAMP,WIRE,NYLON 66,V2 BLK,AY2.25,ALL MOD	S.N.A
2		AA65-30013A	CLAMP,WIRE,NYLON 66,V0,NTR,DA:WH 45N,...	S.N.A
2		AA59-00171A	MODULE,FOCUS,PACK,SVP 9200,S200,P3,...	

ASSY POWER CORD

1	*	AA96-20129K	ASSY POWER CORD,EPTWYES(HO)+,0.56MM,M	
2		3811-000401	WIRE,PVC CU,BCW,A,300V,ROLL,17.0,16mm,#22	S.N.A
2		AA39-10097K	POWER CORD,EPTWYES(HO),H03VV-2,F,2.4m	
2		AA61-30284A	HOLDER-P,FORD,PPVO,BLK,KE702	S.N.A

ASSY PCB CRT

1	*	AA95-00922A	ASSY PCB,CRT,,,51A,43/54,PAL	
2	BCW GN	AA39-20009G	LEAD CONNECTOR ASSY,,1P,YFH-800-01,700,16	
2	C511	2201-002117	C CERAMIC,DISC,4.7nF,20%,3KV,Y5U,TP,16x6	
2	C541	2201-002117	C CERAMIC,DISC,4.7nF,20%,3KV,Y5U,TP,16x6	
2	C571	2201-002117	C CERAMIC,DISC,4.7nF,20%,3KV,Y5U,TP,16x6	
2	CN501	3711-003051	CONNECTOR,HEADER,BOX,8P,1R,2.5mm,STRAGHT	
2	CN502	3711-003052	CONNECTOR,HEADER,BOX,10P,1R,2.5mm,STRAGH	
2	CN502B	3711-003052	CONNECTOR,HEADER,BOX,10P,1R,2.5mm,STRAGH	
2	CN503	3711-003052	CONNECTOR,HEADER,BOX,10P,1R,2.5mm,STRAGH	
2	CN503B	3711-003052	CONNECTOR,HEADER,BOX,10P,1R,2.5mm,STRAGH	
2	CNW401	AA39-20027B	LEAD CONNECTOR ASSY,,5P,67096-006,S,400	
2	CNW501	AA39-00127A	LEAD CONNECTOR ASSY,,8P,3515S-0R00,S,400	
2	CNW502	AA39-00112A	LEAD CONNECTOR ASSY,,10P,3515S-1000,S,30	
2	CNW503	AA39-00112A	LEAD CONNECTOR ASSY,,10P,3515S-1000,S,30	
2	FOCUS	AA39-20115A	LEAD CONNECTOR ASSY,,1P,BUSHING,500,3239	
2	FOCUS	AA39-20115A	LEAD CONNECTOR ASSY,,1P,BUSHING,500,3239	
2	FOCUS	AA39-20115B	LEAD CONNECTOR ASSY,,1P,BUSHING,,700MM,	
2	GBW GN	3811-000446	WIRE PVC CU,TCWA,600V,ROLL,17.0,16mm,#22	S.N.A
2	GBW SC	3811-000480	WIRE PVC CU,BCWA,1KV,ROLL,17.0,15mm,#22	S.N.A
2	GDW GN	AA39-20009D	LEAD CONNECTOR ASSY,,1P,YFH-800-01,500,16	
2	GRW GN	3811-000446	WIRE PVC CU,TCWA 600V,ROLL,17.0,16mm,#22	S.N.A
2	GRW SC	3811-000480	WIRE PVC CU,BCWA,1KV,ROLL,17.0,15mm,#22	S.N.A
2	IC501	AA96-50151B	ASSY H/S,,AMP,AA61-10060A,TDA6111Q,...	
3		1201-001131	IC-VIDEO AMP,6111,SIP9P,,SINGLE,,,PLAS	
3		6001-000057	SCREW-MACHINE;RH,,M3,L6,ZPC(BLK),SWRCH1	
3		6021-000222	NUT-HEXAGON,2C,M3,ZPC(YEL),SM20C 1	S.N.A
3		AA61-10060A	BRACKET TR;,,,CUS 1 1/2H,T0.5,,,,	S.N.A
2	IC531	AA96-50151B	ASSY H/S;,,AMP,AA61-10060A,TDA6111Q,...	
2	IC561	AA96-50151B	ASSY H/S;,,AMP,AA61-10060A,TDA6111Q,...	
2	PCB	AA41-00357B	PCB,CRT,PCI,533,R,FR 1.1LB,1.6T,245x245	S.N.A
2	RBW GN	AA39-20009F	LEAD CONNECTOR ASSY,,1P,YFH-800-01,200,16	
2	SC502	AA27-00084A	COIL;S-23,,,,,,,,,,S-23,5000A/ohm	
2	SC532	AA27-00084A	COIL;S-23,,,,,,,,,,S-23,5000A/ohm	
2	SC562	AA27-00084A	COIL;S-23,,,,,,,,,,S-23,5000A/ohm	
2	VS01	3704-001019	SOCKET,CRT,10P,29.1P,1.35,SPI,AU30U	
2	VS31	3704-001019	SOCKET,CRT,10P,29.1P,1.35,SPI,AU30U	
2	VS61	3704-001019	SOCKET,CRT,10P,29.1P,1.35,SPI,AU30U	
2	VR501	2101-000321	VR,ROTARY,1Mohm,,,0.6W,SIDE	
2	VR531	2101-000321	VR,ROTARY,1Mohm,,,0.6W,SIDE	
2	VR561	2101-000321	VR,ROTARY,1Mohm,,,0.6W,SIDE	
2		AA99-20089J	ASSY,PCB SUB,AUTO;,AA95-00523A V	S.N.A
3	C502	2401-000027	C AL,4.7uF,20%,50V,GP,TP,5x11.5	
3	C503	2201-000119	C CERAMIC,DISC,100nF,-80-20%,50V,Y5V,TP,	
3	C504	2401-001537	C AL,47uF,20%,25V,GP,TP,6.3x7mm,5mm	
3	C505	2305-000149	C FILM,MPEF,100nF,5%,100V,TP,12x12.5x6.5	
3	C506	2401-000430	C AL,10uF,20%,250V,GP,TP,10x16mm,5m	
3	C507	2305-000154	C FILM,MPEF,100nF,5%,400V,TP,21.5x6.5x11	
3	C510	2401-000430	C AL,10uF,20%,250V,GP,TP,10x16mm,5m	
3	C512	2401-000133	C AL,1000uF,20%,16V,GP,TP,10x20,5	
3	C513	2201-000983	C CERAMIC,DISC,1nF,10%,2kV,Y5P,TP5x6.7	
3	C514	2201-000599	C CERAMIC,DISC,0.56nF,10%,5KV,Y5P,TP5	
3	C532	2401-000027	C AL,4.7uF,20%,50V,GP,TP,5x11.5	
3	C533	2201-000119	C CERAMIC,DISC,100nF,-80-20%,50V,Y5V,TP,	
3	C534	2401-001537	C AL,47uF,20%,25V,GP,TP,6.3x7mm,5mm	
3	C535	2305-000149	C FILM,MPEF,100nF,5%,100V,TP,12x12.5x6.5	
3	C536	2401-000430	C AL,10uF,20%,250V,GP,TP,10x16mm,5m	
3	C537	2305-000154	C FILM,MPEF,100nF,5%,400V,TP,21.5x6.5x11	
3	C540	2401-000430	C AL,10uF,20%,250V,GP,TP,10x16mm,5m	
3	C542	2201-000983	C CERAMIC,DISC,1nF,10%,2kV,Y5P,TP5x6.7	
3	C543	2201-000599	C CERAMIC,DISC,0.56nF,10%,5KV,Y5P,TP5	
3	C562	2401-000027	C AL,4.7uF,20%,50V,GP,TP,5x11.5	
3	C563	2201-000119	C CERAMIC,DISC,100nF,-80-20%,50V,Y5V,TP	
3	C564	2401-001537	C AL,47uF,20%,25V,GP,TP,6.3x7mm,5mm	
3	C565	2305-000149	C FILM,MPEF,100nF,5%,100V,TP,12x12.5x6.5	
3	C566	2401-000430	C AL,10uF,20%,250V,GP,TP,10x16mm,5m	
3	C567	2305-000154	C FILM,MPEF,100nF,5%,400V,TP,21.5x6.5x11	
3	C570	2401-000430	C AL,10uF,20%,250V,GP,TP,10x16mm,5m	
3	C572	2201-000983	C CERAMIC,DISC,1nF,10%,2kV,Y5P,TP5x6.7	
3	C573	2201-000599	C CERAMIC,DISC,0.56nF,10%,5KV,Y5P,TP5	
3	CN401	3711-002645	CONNECTOR,HEADER,BOX,6P,1R,2.5MM,STRAIGH	
3	D501	0402-000546	DIODE,RECTIFIER,TVR10G,400V,1.0A,DO-41,T	
3	D502	0402-000546	DIODE,RECTIFIER,TVR10G,400V,1.0A,DO-41,T	
3	D503	0402-000493	DIODE,RECTIFIER,1R5GU41,400V,1.5A,DO-15L	
3	D504	0401-000005	DIODE,SWITCHING,1N4148,100V,200mA,DO-35,	
3	D509	0401-000005	DIODE,SWITCHING,1N4148,100V,200mA,DO-35,	
3	D510	0401-000005	DIODE,SWITCHING,1N4148,100V,200mA,DO-35,	
3	D531	0402-000546	DIODE,RECTIFIER,TVR10G,400V,1.0A,DO-41,T	
3	D532	0402-000546	DIODE,RECTIFIER,TVR10G,400V,1.0A,DO-41,T	
3	D533	0402-000493	DIODE,RECTIFIER,1R5GU41,400V,1.5A,DO-15L	
3	D561	0402-000546	DIODE,RECTIFIER,TVR10G,400V,1.0A,DO-41,T	
3	D562	0402-000546	DIODE,RECTIFIER,TVR10G,400V,1.0A,DO-41,T	
3	D563	0402-000493	DIODE,RECTIFIER,1R5GU41,400V,1.5A,DO-15L	
3	DZ501	0403-000334	DIODE,ZENER;UZ2.7BSA,2.7V,2.54,2.75V,500	
3	DZ502	0403-000508	DIODE,ZENER;MTZJ5.6B,5.6V,5.45,5.73V,500	
3	DZ503	0403-000708	DIODE,ZENER;MTZJ13B,13V,12.55,13.21V,500	
3	DZ531	0403-000334	DIODE,ZENER;UZ2.7BSA,2.7V,2.54,2.75V,500	
3	DZ532	0403-000508	DIODE,ZENER;MTZJ5.6B,5.6V,5.45,5.73V,500	
3	DZ533	0403-000708	DIODE,ZENER;MTZJ13B,13V,12.55,13.21V,500	
3	DZ561	0403-000334	DIODE,ZENER;UZ2.7BSA,2.7V,2.54,2.75V,500	
3	DZ562	0403-000508	DIODE,ZENER;MTZJ5.6B,5.6V,5.45,5.73V,500	
3	DZ563	0403-000708	DIODE,ZENER;MTZJ13B,13V,12.55,13.21V,500	
3	L501	2701-000114	INDUCTOR,AXIAL,10uH,10%,2.5x3.4mm	
3	L531	2701-000114	INDUCTOR,AXIAL,10uH,10%,2.5x3.4mm	
3	L561	2701-000114	INDUCTOR,AXIAL,10uH,10%,2.5x3.4mm	
3	Q501	0502-000006	TR,POWER;KSC1507,NPN,15W,TO-220,TP,120	
3	Q502	0501-000389	TR;SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q504	0501-000283	TR;SMALL SIGNAL,KSA539,PNP,400mW,TO-92,T	
3	Q531	0502-000006	TR,POWER;KSC1507,NPN,15W,TO-220,TP,120	
3	Q533	0501-000283	TR;SMALL SIGNAL,KSA539,PNP,400mW,TO-92,T	
3	Q561	0502-000006	TR,POWER;KSC1507,NPN,15W,TO-220,TP,120	
3	Q563	0501-000283	TR;SMALL SIGNAL,KSA539,PNP,400mW,TO-92,T	
3	R500	2001-000449	R,CARBON,2.2K,OHM,5%,1/8W,AA,TP1.8X3.2M	
3	R502	2001-000935	R,CARBON,620OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R503	2001-000429	R,CARBON,1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R504	2001-000006	R,CARBON,2.4KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R505	2001-000362	R,CARBON,150OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R506	2001-001088	R,CARBON;S;1KOHM,5%,1/2W,AA,TP2.4X6.4M	
3	R507	2001-000429	R,CARBON,1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R508	2003-000738	R,METAL OXIDE(S),56Kohm,5%,2W,AA,TP4x12	
3	R509	2001-000734	R,CARBON,4.7KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R510	2001-000864	R,CARBON,560OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R511	2001-000009	R,CARBON,20KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R513	2008-000252	R,FUSIBLE(S),0.47ohm,10%,1/2W,AE,TP2.5x	
3	R514	2001-001122	R,CARBON(S),3.9KOHM,5%,1/2W,AA,TP2.4X6	
3	R515	2002-001017	R,COMPOSITION,1Kohm,10%,1/2W,AA,TP3.7x9	
3	R516	2001-000009	R,CARBON,20KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R517	2001-000085	R,CARBON(S),100KOHM,5%,1/2W,AA,TP2.4X6.	
3	R518	2002-001021	R,COMPOSITION,560KOHM,10%,1/2W,AA,TP3.7	
3	R519	2002-001021	R,COMPOSITION,560KOHM,10%,1/2W,AA,TP3.7	
3	R520	2001-000066	R,CARBON(S);10KOHM,5%,1/2W,AA,TP2.4X6.4	
3	R521	2001-001052	R,CARBON(S),1.5MOHM,5%,1/2W,AA,TP2.4X6.	
3	R522	2002-001006	R,COMPOSITION,4.7Kohm,5%,1/2W,AA,TP3.7x	
3	R523	2002-001006	R,COMPOSITION,4.7Kohm,5%,1/2W,AA,TP3.7x	
3	R524	2001-000028	R,CARBON(S),100OHM,5%,1/2W,AA,TP2.4X6.4	
3	R526	2001-000539	R,CARBON,24KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R527	2001-000677	R,CARBON,2KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R528	2001-001015	R,CARBON,9.1KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R529	2002-001021	R,COMPOSITION,560KOHM,10%,1/2W,AA,TP3.7	
3	R532	2001-000429	R,CARBON,1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R533	2001-000429	R,CARBON,1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R536	2001-001068	R,CARBON(S),1KOHM,5%,1/2W,AA,TP2.4X6.4M	
3	R537	2001-000429	R,CARBON,1KOHM,5%,1/8W,AA,TP1.8X3.2MM	

Level	Loc. No.	Code No.	Description ; Specification	Remark
3	R538	2003-000738	R,METAL OXIDE(S),56Kohm,5%,2W,AA,TP4x12	
3	R540	2001-000660	R,CARBON,33KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R541	2001-000009	R,CARBON,20KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R543	2008-000252	R,FUSIBLE(S),0.47ohm,10%,1/2W,AE,TP2.5x	
3	R544	2001-001122	R,CARBON(S),3.9KOHM,5%,1/2W,AA,TP2.4X6.	
3	R545	2002-001017	R,COMPOSITION,1Kohm,10%,1/2W,AA,TP3.7x9	
3	R546	2001-000009	R,CARBON,20KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R547	2001-000085	R,CARBON(S),100KOHM,5%,1/2W,AA,TP2.4X6.	
3	R548	2002-001021	R,COMPOSITION,560KOHM,10%,1/2W,AA,TP3.7	
3	R549	2002-001021	R,COMPOSITION,560KOHM,10%,1/2W,AA,TP3.7	
3	R550	2001-000066	R,CARBON(S);10KOHM,5%,1/2W,AA,TP2.4X6.4	
3	R551	2001-001052	R,CARBON(S),1.5MOHM,5%,1/2W,AA,TP2.4X6.	
3	R552	2002-001006	R,COMPOSITION,4.7Kohm,5%,1/2W,AA,TP3.7x	
3	R553	2002-001006	R,COMPOSITION,4.7Kohm,5%,1/2W,AA,TP3.7x	
3	R554	2001-000028	R,CARBON(S),100OHM,5%,1/2W,AA,TP2.4X6.4	
3	R555	2001-000734	R,CARBON,4.7KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R556	2001-000472	R,CARBON,2.7KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R557	2001-000362	R,CARBON,150OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R559	2002-001015	R,COMPOSITION,47Kohm,5%,1/2W,AA,TP3.7x9	
3	R562	2001-000232	R,CARBON,1.3KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R563	2001-000429	R,CARBON,1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R564	2001-001031	R,CARBON,91KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R566	2001-001088	R,CARBON(S);1KOHM,5%,1/2W,AA,TP2.4X6.4M	
3	R567	2001-000429	R,CARBON,1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R568	2001-000734	R,CARBON,4.7KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R569	2001-000006	R,CARBON,2.4KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R570	2001-000362	R,CARBON,150OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R571	2001-000281	R,CARBON,100OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R572	2003-000738	R,METAL OXIDE(S),56Kohm,5%,2W,AA,TP4x12	
3	R573	2008-000252	R,FUSIBLE(S),0.47ohm,10%,1/2W,AE,TP2.5x	
3	R574	2001-001122	R,CARBON(S),3.9KOHM,5%,1/2W,AA,TP2.4X6.	
3	R575	2002-001017	R,COMPOSITION,1Kohm,10%,1/2W,AA,TP3.7x9	
3	R576	2001-000009	R,CARBON,20KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R577	2001-000085	R,CARBON(S),100KOHM,5%,1/2W,AA,TP2.4X6.	
3	R578	2002-001021	R,COMPOSITION,560KOHM,10%,1/2W,AA,TP3.7	
3	R579	2002-001021	R,COMPOSITION,560KOHM,10%,1/2W,AA,TP3.7	
3	R580	2001-000066	R,CARBON(S);10KOHM,5%,1/2W,AA,TP2.4X6.4	
3	R581	2001-001052	R,CARBON(S),1.5MOHM,5%,1/2W,AA,TP2.4X6.	
3	R582	2002-001006	R,COMPOSITION,4.7Kohm,5%,1/2W,AA,TP3.7x	
3	R583	2002-001006	R,COMPOSITION,4.7Kohm,5%,1/2W,AA,TP3.7x	
3	R584	2001-000028	R,CARBON(S),100OHM,5%,1/2W,AA,TP2.4X6.4	
3	R589	2002-001015	R,COMPOSITION,47Kohm,5%,1/2W,AA,TP3.7x9	
3	SG351	4715-001036	SURGE ABSORBER,500V,20%,...TP	
3	SG501	4715-001036	SURGE ABSORBER,500V,20%,...TP	
3	SG503	4715-001036	SURGE ABSORBER,500V,20%,...TP	
3	SG533	4715-001036	SURGE ABSORBER,500V,20%,...TP	
3	SG561	4715-001036	SURGE ABSORBER,500V,20%,...TP	
3	SG563	4715-001036	SURGE ABSORBER,500V,20%,...TP	

ASSY-A/V FRONT

1	*	AA95-00918A	ASSY-A/V FRONT,,SP43J,49P,J51B,,,,MVT	
2	CNW02	AA39-20032J	LEAD CONNECTOR ASSY,,12P,67096-012,S,130	
2	CNY01	3711-003641	CONNECTOR,HEADER,BOX,12P,1R,2.5mm,STRAIG	
2	CP01	2202-000263	C CERAMIC,MLC AXIAL,470pF,10%,50V,Y5P,TP	
2	CP02	2202-000263	C CERAMIC,MLC AXIAL,470pF,10%,50V,Y5P,TP	
2	CP03	2202-000263	C CERAMIC,MLC AXIAL,470pF,10%,50V,Y5P,TP	
2	CP04	2401-002009	C AL,100uF,20%,16V,GP,TP,6.3x7.5	
2	CP05	2401-002009	C AL,100uF,20%,16V,GP,TP,6.3x7.5	
2	CP06	2401-002009	C AL,100uF,20%,16V,GP,TP,6.3x7.5	
2	CP07	2401-002009	C AL,100uF,20%,16V,GP,TP,6.3x7.5	
2	CP08	2401-002009	C AL,100uF,20%,16V,GP,TP,6.3x7.5	
2	CP09	2202-000121	C CERAMIC,MLC AXIAL,100pF,10%,50V,Y5P,TP	
2	CP10	2202-000121	C CERAMIC,MLC AXIAL,100pF,10%,50V,Y5P,TP	
2	DZ01	0403-000510	DIODE,ZENER;MTZJ6.2B,6.2V,5.96,6.27V,500	
2	DZ02	0403-000510	DIODE,ZENER;MTZJ6.2B,6.2V,5.96,6.27V,500	
2	JK02	3722-001164	JACK,RCA,3P,3.4mm,SN,WH-YE-RE,#16-22	
2	JK101	3722-000544	JACK,VHS,4P,11.5mm,AG,BLK,N	
2	PCB	AA41-00379A	PCB,A/V FRONT,SP43J,SHF,FRO,1LA,1.6T,24	S.N.A
2	RP01	2001-000273	R,CARBON;100KOHM,5%,1/8W,AA,TP1.8X3.2M	
2	RP02	2001-000969	R,CARBON,750HM,5%,1/8W,AA,TP1.8X3.2MM	
2	RP03	2001-000273	R,CARBON;100KOHM,5%,1/8W,AA,TP1.8X3.2M	
2	RP04	2001-000969	R,CARBON;750HM,5%,1/8W,AA,TP1.8X3.2MM	
2	RP05	2001-000969	R,CARBON;750HM,5%,1/8W,AA,TP1.8X3.2MM	
2		3301-001201	CORE,FERRITE,AE,21x11x32mm,1500,29OG	
2		AA63-10002A	BAND,TIE;,NYLON66,V2,,,L100,NTR,	S.N.A
2		AA96-60004J	ASSY,SUB,PART;APT51A,A/V,,ALL	S.N.A
3		0202-000187	SOLDER-WIRE,FLUX;,,RS60S,D1.2,63Sn/37Pb	S.N.A

ASSY-PCB,SUB

1	*	AA95-00425C	ASSY,PCB,SUB;,SP53J,SHF,,51A,PAL,FREE,/O	
2	C430	2301-001219	C FILM,MPE,PPF,3.9nF,5%,1.6KV,TP,29x8.5x	
2	C431	2305-000326	C FILM,MPEF,4.7nF,5%,1.6KV,TP,28.5x16x9m	
2	C432	2306-000267	C FILM,MPEF,8.2nF,5%,1.6KV,TP,28.5x18.5x	
2	C436	2305-000235	C FILM,MPEF,560nF,5%,400V,TP,26*22.5*14	
2	C438	2306-000267	C FILM,MPEF,8.2nF,5%,1.6KV,TP,28.5x18.5x	
2	C471	2301-001091	C FILM,MPEF,470nF,5%,400V,TP,26x21.5x14	
2	C473	2305-000322	C FILM,MPEF,12nF,5%,1.6KV,TP,29x20.5x13.	
2	C474	2306-000326	C FILM,MPEF,4.7nF,5%,1.6KV,TP,28.5x16x9m	
2	C477	2301-002113	C FILM,PEF,220nF,5%,250V,TP,21.5x11.7.5	
2	C801	2306-000321	C FILM,MPEF,470NF,5%,275V,TP,,22.5	
2	C802	2306-000321	C FILM,MPEF,470NF,5%,275V,TP,,22.5	
2	C812	2401-000701	C AL,2200uF,20%,250V,GP,,,35x70mm,1	
2	C813	2401-000701	C AL,2200uF,20%,250V,GP,,,35x70mm,1	
2	C831	2305-000323	C FILM,MPPF,2.2nF,5%,1.6KV,TP,28.5x15.5x	
2	C842	2401-003370	C AL,47uF,20%,450V,CP,BK,16X35.5,7.	
2	C862	2401-002225	C AL,3300uF,20%,50V,WT,BK,22x41,7.5	
2	C865	2401-000737	C AL,2200uF,20%,50V,GP,TP18x35.5,7	
2	C868	2401-000737	C AL,2200uF,20%,50V,GP,TP18x35.5,7	
2	C875	2401-002251	C AL,470uF,20%,200V,GP,BK,25x40mm,1	
2	C876	2401-000787	C AL,220uF,20%,160V,GP,TP,16x31.5mm	
2	C891	2201-000987	C CERAMIC,DISC,2.2nF,20%,400V,Y5U,TP,12	
2	C892	2201-000987	C CERAMIC,DISC,2.2nF,20%,400V,Y5U,TP,12	
2	CN201	AA39-00128A	LEAD CONNECTOR ASSY,,9P,YBN-250,,35,,,,	
2	CN202	AA39-00115A	LEAD CONNECTOR ASSY,,10P,YBN-250,,10,,35	
2	CN203	3711-003052	CONNECTOR,HEADER,BOX,10P,1R,2.5mm,STRAGH	
2	CN401	3711-003051	CONNECTOR,HEADER,BOX,8P,1R,2.5mm,STRAGHT	
2	CN402	3711-000974	CONNECTOR,HEADER,BOX,12P,1R,2.5mm,STRAIG	
2	CN801	AA39-00116A	LEAD CONNECTOR ASSY,,12P,YBN-H250,,12,,35	
2	CN802	3711-003051	CONNECTOR,HEADER,BOX,8P,1R,2.5mm,STRAIGHT	
2	CNW06	AA39-00009A	LEAD CONNECTOR ASSY,,3P,YFH-800,03,S,2	
2	CNW09	AA39-20061G	LEAD CONNECTOR ASSY,,3P,YFH-800-03,S,100M	
2	D464	0402-000236	DIODE,RECTIFIER,GI824,400V,5A,,,TP	
2	D804	AA96-50310A	ASSY H/S;,,POWER,AA62-30150C,RBV606,	
3		AA62-30150C	HEAT SINK,ES;,,A6063,EXTR,,,WHT,40/24,Si	
3		AA63-30003A	WASHER;,,,,T1.5,,,SBHG-1,,	S.N.A
3		6003-000333	SCREW-TAPTITE,RH,+,2S,M3,L10,ZPC(YEL),SW	
2	D810	0402-002050	DIODE,RECTIFIER,RG4C,1000V,1A,	
2	D854	AA96-00111C	ASSY H/S;,,,AA62-30013L,FML,G12S,	
3		0402-000233	DIODE,RECTIFIER,FML-G12S,200V,5A,,,,	
3		6003-000333	SCREW-TAPTITE,RH,+,2S,M3,L10,ZPC(YEL),SW	
3		AA62-30013L	HEATSINK,ES;,,,,,44/22,,WHT,,,,,	
2	D871	AA96-00032A	ASSY H/S;,,,AA62-30173B,FML,G12,FMCG26	
3		0402-000233	DIODE,RECTIFIER,FML-G12S,200V,5A,,,,	
3		0402-000231	DIODE,RECTIFIER,FMG-G26S,600V,4A,TO-220F	
3		AA62-30173B	HEAT SINK,ES;,,,T1.0,WHT,,ALL,,,88X2	
3		6003-000333	SCREW-TAPTITE,RH,+,2S,M3,L10,ZPC(YEL),SW	
3		0205-000129	GREASE,SILICON,SC102,,JAPAN	S.N.A
2	DZ481	0403-001327	DIODE,ZENER;MTZJ18A,16.22,17.06V,500mW,D	
2	DZ833	0403-001007	DIODE,TVS,P6KE180A,171/180/189V,600W,CAS	
2	FR01	3601-001007	FUSE,CARTRIDGE,250V,6.3A,TIME LAG,GLASS,	
2	FR02	3601-001137	FUSE,AXIAL LEAD,250V,6A,SLOW BLOW,GLASS,	
2	FR04	3601-001007	FUSE,CARTRIDGE,250V,6.3A,TIME LAG,GLASS,	
2	IC301	AA96-50381A	ASSY H/S;,,,AA62-30180B,LA7845,	
3		0205-000129	GREASE,SILICON,SC102,,JAPAN	S.N.A
3		1204-000617	IC,VERTIVAL DEF,LA7845,SIP,7P,,PLASTIC	
3		6003-000333	SCREW-TAPTITE,RH,+,2S,M3,L10,ZPC(YEL),SW	
3		AA62-30180B	HEAT SINK,ES;,,A6063,EXTR,,2,WHT,70MM,,	
2	IC421	1203-000165	IC,POSI ADJUST REG,,78R12,TO-220,3P,,,	
2	IC430	1203-000162	IC,POSI ADJUST REG,,317,TO-220,3P,,PLAS	
2	IC431	1201-000191	IC,OP AMP,4558,DIP8P,300MIL,DUAL,20V/mV	
2	IC801	AA96-00035A	ASSY H/S;,,POWER,AA62-30181P,STR,F6656,	
3		0205-000129	GREASE,SILICON,SC102,,JAPAN	S.N.A

Level	Loc. No.	Code No.	Description ; Specification	Remark
3		6003-000333	SCREW TAPTITE,RH,-,2S,M3,L10,ZPC(YEL),SW	
3		AA13-00013A	C HYBRID; ,STR F6656,LF1351,5PIN,-,	
3		AA62-30181P	HEAT SINK ES; ,T1.0,WHITE,SCREW HOLE(2	
2	C302	AA13-00033A	C HYBRID; SVD001, 7PIN,	
2	C604	1203-001400	C POWER PRESCALER;SE110N,TO-220(SIP),3P	
2	C306	0604-001032	PHOTO-COUPLER;TR,170-260%,300mW,DIP 4,ST	
2	L431	AA27-30003M	COIL LINEARITY; ,5uH,OWA14x15,USRC0.1x6	
2	L432	AA27-40001U	COIL HORIZ.WIDTH; 220UH,DR1420,P0.12X1	
2	L482	3301-000374	CORE FERRITE BEAD;AA,3.5x1.0x9.0mm, ,	
2	L800	AA29-30002L	FILTER LINE NOISE; ,10mHMIN,5A,AC90~260V	
2	L801	AA29-30002M	FILTER LINE NOISE; ,1mHMIN,5A,AC90~260V,	
2	L803	AA29-30002M	FILTER LINE NOISE; ,1mHMIN,5A,AC90~260V,	
2	L854	AA27-10001C	COIL CHOKE; ,100uH,K,-,5.0A,ST,700UH-K(R	
2	L860	AA27-10001C	COIL CHOKE; ,100uH,K, 5.0A,ST,700UH-K(R	
2	L862	AA27-10001C	COIL CHOKE; ,100uH,K, 5.0A,ST,700UH-K(R	
2	L872	AA27-10001C	COIL CHOKE; ,100uH,K, 5.0A,ST,700UH-K(R	
2	L874	AA27-10002L	COIL CHOKE; ,24UH,K,-,2A, 24UH-K,10X10M	
2	PCB	AA41-00197C	PCB;PCJ533R,CEM 1,1L,C,1.6T,330X24	S.N.A
2	Q431	AA96-00033E	ASSY H/S; ,H OUT,AA62-30173C,2SC5446, F	
3		AA02-00007A	MICA-DPM-04,MICA,22x29x0.15mm	
3		AA62-30173C	HEAT SINK ES; , ,T1.0,WHITE,SCREW HOLE(2	
3		AA60-30001A	WASHER-PLATE;M3,ID3.5,15X8.5,T1.0,-,SBHG	S.N.A
3		6003-000333	SCREW-TAPTITE,RH,+,2S,M3,L10,ZPC(YEL),SW	
3		0502-001175	TR POWER;2SC5446,NPN,200000mW,TO-3PL,BK	
3		0402-001296	DIODE RECTIFIER;FMP-3FU,1.5KV,5A,TO-3PF,	
3		0205-000129	GREASE SILICON;SC102,JAPAN	S.N.A
2	Q433	AA96-50407A	ASSY-H/S;-,-,AA62-30154G,KSD73Y,-	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
3		0502-000298	TR-POWER;KSD73,NPN,30000mW,TO-220,TP,12	
3		6003-000333	SCREW-TAPTITE,RH,+,2S,M3,L10,ZPC(YEL),SW	
3		AA62-30154G	HEAT SINK-ES; A6063 EXTR,-,WHT,50/16,-,	
2	Q441	AA96-50383F	ASSY-H/S; ,-,AA62-30180D,2SD921,-	
3		0205-000129	GREASE SILICON;SC102,JAPAN	S.N.A
3		0502-001104	TR POWER;2SD921,NPN,80W,TO-3PBK,700-	
3		6003-000333	SCREW-TAPTITE,RH,-,2S,M3,L10,ZPC(YEL),SW	
3		AA62-30180D	HEAT SINK-ES;-,A6063 EXTR.,2,WHT,50mm,-,	
2	Q472	0505-000156	FET-SILICON;IRF620,N,200V,5A,0.8ohm,50W,	
2	Q473	AA96-00037A	ASSY H/S;-, AA62-30181N,2SC4125, IRFS6	
3		0502-001100	TR POWER;2SC4125,NPN,70W,TO-3PML,BK,8	
3		AA62-30181N	HEAT SINK,ES;-,-,T1.0,WHITE,SCREW HOLE(2	
3		AA60-30001A	WASHER PLATE,M3,ID3.5,15X8.5,T1.0,-,SBHG	S.N.A
3		6003-000333	SCREW TAPTITE,RH,-,2S,M3,L10,ZPC(YEL),SW	
3		0505-001202	FET-SILICON;IRFS640A,N,200V,9.8A,0.18ohm	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
2	R440	2008-001091	R-FUSIBLE(S);0.47OHM,10%,1/2W,AC,BK,2.5X	
2	R442	2008-000189	R-FUSIBLE;0.47ohm,10%,2W,AA,TP,6x15.5mm	
2	R445	2008-001091	R-FUSIBLE(S);0.47OHM,10%,1/2W,AC,BK,2.5X	
2	R803	1404-001195	THERMISTOR-NTC;5.1ohm,15%,2900,27mW/C,BK	
2	R815	2003-002162	R-METAL OXIDE(S);15KOHM,5%,3W,AG,TP,6X16	
2	R815A	2003-002162	R-METAL OXIDE(S);15KOHM,5%,3W,AG,TP,6X16	
2	R817	2009-001096	R-METAL PLATE;0.07ohm,5%,5W,CL,BK,5x14x1	
2	R841	2008-001096	R-FUSIBLE(S);3.3OHM,5%,1/2W,AC,BK,2.5X6.	
2	RL802	3501-001040	RELAY-POWER;12VDC,500mW,10A,1FormA,15mS,	
2	T431	AA26-50001U	TRANS-HORIZ.DRIVE;-,28mH,105uH,4uH,ER28x	
2	T432	AA26-00053A	TRANS;-,1.2mH,-,-,EER4445,BK,1.2mH,-	
2	T444	AA26-30005A	TRANS-FLYBACK; ,FWZ-50A001,50,108V	
2	T461	AA26-50001V	TRANS-HORIZ.DRIVE;-,6.0mH,113uH,4uH,EI19	
2	T481	AA26-50001W	TRANS-HORIZ.DRIVE; ,830uH,23uH,4uH,EI 30	
2	T802	AA26-00006A	TRANS SWITCHING;-,90~260V,110V/34V/-,30V	
2		AA65-30110A	CLAMP WIRE;NYLON 66,V2,BLK,PAL TV,ALL M	S.N.A
2		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
2		AA99-20072K	ASSY PCB SUB,AUTO; AA95-00425C ,V	S.N.A
3	C301	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
3	C302	2201-000292	C CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
3	C303	2305-000149	C FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
3	C304	2201-000292	C-CERAMIC,DISC,1nF,10%,50V,Y5P,TP,5x3.5,	
3	C305	2201-002022	C CERAMIC,DISC;0.005nF,0.25pF,500V,NP0,T	
3	C307	2401-000365	C AL,100uF,20%,50V,WT,TP,10x12.5mm,	
3	C308	2401-000365	C AL,100uF,20%,50V,WT,TP,10x12.5mm,	
3	C309	2305-000285	C FILM,MPEF;220NF,5%,100V,TP,10.5X5.5X15	
3	C311	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
3	C412	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,8x7x3.2mm,5mm	
3	C413	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
3	C417	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
3	C418	2401-000360	C AL;100uF,20%,50V,GP,TP,8x11.5,5	
3	C419	2201-000180	C-CERAMIC,DISC;10nF,10%,50V,Y5V,TP,7x3,5	
3	C426	2401-000360	C AL;100uF,20%,50V,GP,TP,8x11.5,5	
3	C427	2401-002300	C AL,47uF,20%,50V,GP,TP,5x11.5	
3	C428	2306-000122	C FILM,MPPF,100nF,5%,50V,TP,7.3x4.0x5.0m	
3	C437	2401-003114	C AL,4.7uF,20%,250V,WT,TP,10x16.5	
3	C441	2401-000262	C AL,100uF,20%,160V,HR,TP,16x25,7.5	
3	C445	2401-001622	C AL,6.8uF,20%,50V,BP,TP,15x25mm,7	
3	C450	2401-000262	C AL,100uF,20%,160V,HR,TP,16x25,7.5	
3	C451	2401-001160	C AL,33uF,20%,160V,GP,-,15x35mm,7.5	
3	C452	2201-000132	C CERAMIC,DISC,0.1nF,10%,500V,Y5P,TP,6.5	
3	C453	2401-002288	C-AL,470uF,20%,25V,WT,TP,10x20,5	
3	C454	2401-001429	C AL,470uF,20%,50V,GP,TP,13x20,5	
3	C455	2201-000132	C CERAMIC,DISC,0.1nF,10%,500V,Y5P,TP,6.5	
3	C457	2201-000132	C CERAMIC,DISC,0.1nF,10%,500V,Y5P,TP,6.5	
3	C458	2401-002288	C AL,470uF,20%,25V,WT,TP,10x20,5	
3	C467	2401-000360	C AL,100uF,20%,50V,GP,TP,8x11.5,5	
3	C468	2201-000119	C CERAMIC,DISC,100nF,+80-20%,50V,Y5V,TP	
3	C469	2201-000180	C CERAMIC,DISC,10nF,10%,50V,Y5V,TP,7x3,5	
3	C472	2401-000262	C AL,100uF,20%,160V,HR,TP,16x25,7.5	
3	C476	2401-000647	C AL,2.2uF,20%,50V,BP,TP,5x11.5	
3	C478	2301-000020	C FILM,PEF,27nF,5%,100V,TP,7.3x4x12.5mm,	
3	C479	2301-000200	C FILM,PEF,2.2nF,5%,200V,TP,11.0x6.0x9.0	
3	C483	2401-000660	C-AL,2.2uF,20%,50V,GP,TP,5x11.5	
3	C484	2201-000132	C CERAMIC,DISC,0.1nF,10%,500V,Y5P,TP,6.5	
3	C809	2201-000551	C-CERAMIC,DISC,0.47nF,10%,1kV,Y5P,TP,6.3	
3	C814	2201-002041	C-CERAMIC,DISC,0.82nF,10%,2kV,Y5P,TP,9x5	
3	C815	2201-000406	C CERAMIC,DISC,0.27nF,10%,2kV,Y5P,TP,6.3	
3	C816	2201-000332	C-CERAMIC,DISC,2.2nF,20%,250V,Y5U,TP,9x4	
3	C817	2201-000332	C-CERAMIC,DISC,2.2nF,20%,250V,Y5U,TP,9x4	
3	C818	2301-001216	C-FILM,PPF,47nF,5%,630V,TP,20x14.5x22,7.	
3	C819	2201-000332	C-CERAMIC,DISC,2.2nF,20%,250V,Y5U,TP,9x4	
3	C833	2201-000292	C CERAMIC,DISC,1nF,10%,50V,Y5P,TP,5x3.5,	
3	C834	2401-003028	C AL,100uF,20%,25V,WT,TP,6.3x11.5	
3	C835	2401-002395	C AL,22UF,20%,25V,WT,TP,5X11.5	
3	C851	2201-000551	C-CERAMIC,DISC,0.47nF,10%,1kV,Y5P,TP,6.3	
3	C852	2401-000133	C-AL,1000uF,20%,16V,GP,TP,10x20.5	
3	C854	2201-000551	C CERAMIC,DISC,0.47nF,10%,1kV,Y5P,TP,6.3	
3	C855	2401-003141	C AL,2200uF,20%,25V,WT,TP,13x25,5mm	
3	C857	2401-000133	C AL,1000uF,20%,15V,GP,TP,10x20.5	
3	C861	2201-000551	C CERAMIC,DISC,0.47nF,10%,1kV,Y5P,TP,6.3	
3	C864	2201-000551	C-CERAMIC,DISC,0.47nF,10%,1kV,Y5P,TP,6.3	
3	C866	2401-000192	C AL,1000uF,20%,50V,GP,TP,16x25,7.5	
3	C869	2401-000192	C-AL,1000uF,20%,50V,GP,TP,16x25,7.5	
3	C871	2201-000551	C-CERAMIC,DISC,0.47nF,10%,1kV,Y5P,TP,6.3	
3	C872	2401-000703	C-AL,2200uF,20%,25V,GP,-,12.5x25mm,	
3	C873	2401-001998	C AL,1000uF,20%,25V,GP,TP,10x20,5mm	
3	C874	2201-000551	C-CERAMIC,DISC,0.47nF,10%,1kV,Y5P,TP,6.3	
3	C877	2305-000427	C-FILM,MPEF,47nF,5%,100V,TP,7.5x12.5x3.5	
3	D302	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
3	D433	0402-000537	DIODE-RECTIFIER;RH1A,600V,0.6A,DO-204AC	
3	D435	0402-000132	DIODE RECTIFIER;1N4004,400V,1A,DO-41,TP	
3	D436	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
3	D438	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
3	D440	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
3	D441	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
3	D444	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
3	D445	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
3	D472	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
3	D474	0402-000546	DIODE RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
3	D801	1405-000187	VARISTOR;750V,1250A,12.5x7mm,TP	
3	D802	1405-000187	VARISTOR;750V,1250A,12.5x7mm,TP	
3	D805	0402-000546	DIODE RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
3	D834	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
3	D839	0402-000243	DIODE RECTIFIER;RC2-V1,2000V,0.2A,DO-201	
3	D842	0402-000546	DIODE RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
3	D843	0402-000546	DIODE RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
3	D851	0402-000493	DIODE-RECTIFIER;1RSGU41,400V,1.5A,DO-15L	
3	DZ301	0403-001328	DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D	
3	DZ304	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
3	DZ305	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
3	DZ306	0403-001167	DIODE-ZENER;MTZJ30D,30V,29.02-30.51V,500	
3	DZ307	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
3	DZ413	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
3	DZ473	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
3	DZ837	0403-000170	DIODE-ZENER;1N4762,82V,10%,1W,DO-41,TP	
3	DZ840	0403-001039	DIODE-ZENER;MA2560,56V,52.60V,1W,DO-41,T	
3	DZ841	0403-000691	DIODE-ZENER;R2K,170V,170-200V,-,-,TP	
3	DZ842	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
3	DZ858	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	

Level	Loc. No.	Code No.	Description ; Specification	Remark
3	F801A	3602-000114	FUSE HOLDER; , ,30mohm	
3	F801B	3602-000114	FUSE HOLDER; , ,30mohm	
3	F804A	3602-000114	FUSE HOLDER; , ,30mohm	
3	F804B	3602-000114	FUSE HOLDER; , ,30mohm	
3	F805	3601-001086	FUSE AXIAL LEAD;125V,5A,FAST ACTING,GLAS	
3	F806	3601-001065	FUSE-AXIAL LEAD;125V,3.5A,FAST ACTING,CE	
3	F854	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST ACTING,GLAS	
3	F855	3601-001163	FUSE AXIAL LEAD;125V,7A,-,EPOXY,2.4X7.1M	
3	F871	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST ACTING,GLAS	
3	L481	3301-000287	CORE FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
3	L483	2901-000299	FILTER-EMI ON BOARD; ,6A,UL/CSA, ,9x7.5,	
3	L492	2701-000115	INDUCTOR AXIAL;10uH,10%,3x7mm	
3	L493	2901-000297	FILTER EMI ON BOARD; ,3A,-, ,3.5x5,TP,	
3	L494	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500.	
3	L495	2901-000297	FILTER-EMI ON BOARD;-,3A, , ,3.5x5,TP,	
3	L806	2901-000297	FILTER EMI ON BOARD;-,3A, , ,3.5x5,TP,	
3	L807	2901-000297	FILTER-EMI ON BOARD;-,3A, ,-,3.5x5,TP,	
3	L808	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500.	
3	L810	2901-000297	FILTER-EMI ON BOARD; ,3A,-, ,3.5x5,TP,	
3	L811	2901-000297	FILTER-EMI ON BOARD; ,3A, , ,3.5x5,TP-	
3	L812	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,	
3	L813	2901-000297	FILTER-EMI ON BOARD; ,3A, , ,3.5x5,TP,	
3	L814	3301-000287	CORE FERRITE BEAD;AA,3.5x1.0x6.0mm,1500.	
3	L815	2901-000297	FILTER-EMI ON BOARD; ,3A, , ,3.5x5,TP,	
3	L816	2901-000297	FILTER-EMI ON BOARD; ,3A,-,-,3.5x5,TP,-	
3	L831	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500.	
3	L832	3301-000287	CORE FERRITE BEAD;AA,3.5x1.0x6.0mm,1500.	
3	L851	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,	
3	L857	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500.	
3	L859	3301-000287	CORE FERRITE BEAD;AA,3.5x1.0x6.0mm,1500.	
3	Q301	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
3	Q432	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
3	R301	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP,2.5x6.	
3	R302	2004-001897	R METAL(S);43.2Kohm,1%,1/2W,AA,TP,2.5x6	
3	R303	2004-001984	R METAL(S);26.7Kohm,1%,1/2W,AA,TP,2.4x6.	
3	R305	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP,2.4x6.	
3	R306	2003-001036	R METAL OXIDE(S);3.3ohm,5%,2W,AF,TP,3.9x	
3	R307	2003-001036	R METAL OXIDE(S);3.3ohm,5%,2W,AF,TP,3.9x	
3	R308	2001-000016	R CARBON(S);1OHM,5%,1/2W,AA,TP,2.4X6.4MM	
3	R310	2003-002150	R METAL OXIDE;270OHM,5%,2W,AG,TP,6X16MM	
3	R312	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R313	2001-000761	R CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R314	2001-000761	R CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R332	2001-001107	R CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
3	R333	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
3	R334	2001-001107	R CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
3	R405	2009-001109	R-TEMPERATURE;240ohm,5%,1/4W,AA,TP,2.3x6	
3	R406	2004-001983	R-METAL(S);2.49Kohm,1%,1/2W,AA,TP,2.4x6.	
3	R407	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP,2.5x6	
3	R408	2004-001402	R METAL(S);6.8Kohm,1%,1/2W,AA,TP,2.4x6.4	
3	R409	2001-001178	R-CARBON(S);680OHM,5%,1/2W,AA,TP,2.4X6.4	
3	R410	2001-000052	R-CARBON(S);3.3KOHM,5%,1/2W,AA,TP,2.4X6.	
3	R412	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R419	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R424	2008-000299	R-FUSIBLE(S);47ohm,5%,2W,AF,TP,3.9x10mm	
3	R426	2003-002153	R METAL OXIDE;4.7OHM,5%,2W,AG,TP,6X16MM	
3	R427	2003-002152	R METAL OXIDE;1OHM,5%,2W,AG,TP,6X16MM	
3	R427A	2003-002152	R-METAL OXIDE;1OHM,5%,2W,AG,TP,6X16MM	
3	R428	2002-001017	R COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
3	R428A	2002-001017	R COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
3	R429	2003-000586	R METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
3	R430	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
3	R433	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
3	R434	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
3	R441	2008-000189	R-FUSIBLE;0.47ohm,10%,2W,AA,TP,6x15.5mm	
3	R444	2003-000995	R-METAL OXIDE(S);3.3Kohm,5%,2W,AF,TP,3.9	
3	R462	2003-002026	R METAL OXIDE(S);4.7ohm,5%,1W,AF,TP,2.5x	
3	R463	2003-001024	R-METAL OXIDE(S);150ohm,5%,2W,AF,TP,3.9x	
3	R464	2003-002158	R-METAL OXIDE;0.68OHM,5%,1W,AG,TP,4.3X12	
3	R465	2001-001043	R CARBON(S);0OHM,5%,1/2W,AA,TP,2.4X6.4MM	
3	R466	2004-001386	R-METAL(S);16.9Kohm,1%,1/2W,AA,TP,2.4x6.	
3	R467	2004-001986	R-METAL(S);35.7Kohm,1%,1/2W,AA,TP,2.4x6.	
3	R468	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
3	R469	2004-001390	R-METAL(S);1Kohm,2%,1/2W,AA,TP,2.4x6.4mm	
3	R470	2001-000028	R CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
3	R471	2004-002011	R METAL(S);110Kohm,1%,1/2W,AA,TP,2.4x6.4	
3	R472	2008-000252	R FUSIBLE(S);0.47ohm,10%,1/2W,AF,TP,2.5x	
3	R473	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
3	R486	2003-002014	R METAL OXIDE(S);0.6OHM,5%,2W,AF,TP,3.9X	
3	R488	2001-000273	R CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R808	2001-000002	R CARBON(S);200KOHM,5%,1/2W,AA,TP,6.4X2	
3	R809	2001-000002	R-CARBON(S);200KOHM,5%,1/2W,AA,TP,6.4X2.	
3	R810	2002-001010	R COMPOSITION;1.8Mohm,5%,1/2W,AA,TP,3.7x	
3	R812	2003-002151	R METAL OXIDE;18KOHM,5%,2W,AG,TP,6X16MM	
3	R814	2003-002151	R METAL OXIDE;18KOHM,5%,2W,AG,TP,6X16MM	
3	R825	2002-001010	R-COMPOSITION;1.8Mohm,5%,1/2W,AA,TP,3.7x	
3	R832	2001-001178	R-CARBON(S);680OHM,5%,1/2W,AA,TP,2.4X6.4	
3	R833	2003-001024	R-METAL OXIDE(S);150ohm,5%,2W,AF,TP,3.9x	
3	R834	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP,2.4X6.	
3	R835	2001-001188	R CARBON(S);8.2KOHM,5%,1/2W,AA,TP,2.4X6.	
3	R837	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP,2.4X6.	
3	R838	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP,2.4X6.	
3	R842	2003-001040	R-METAL OXIDE(S);47Kohm,5%,2W,AF,TP,3.9x	
3	R842A	2003-001040	R-METAL OXIDE(S);47Kohm,5%,2W,AF,TP,3.9x	
3	R844	2003-002024	R METAL OXIDE(S);91Kohm,5%,2W,AF,TP,3.9x	
3	R845	2003-002024	R METAL OXIDE(S);91Kohm,5%,2W,AF,TP,3.9x	
3	R846	2003-002020	R METAL OXIDE(S);56Kohm,5%,2W,AF,TP,3.9x	
3	R847	2003-002020	R METAL OXIDE(S);56Kohm,5%,2W,AF,TP,3.9x	
3	R848	2001-001110	R-CARBON(S);240KOHM,5%,1/2W,AA,TP,2.4X6.	
3	R850	2008-001079	R FUSIBLE;4.7OHM,5%,2W,AF,TP,3.9X10MM	
3	R855	2001-001196	R-CARBON(S);9.1KOHM,5%,1/2W,AA,TP,2.4X6.	
3	R856	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
3	R857	2001-001155	R CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6	
3	R871	2001-001088	R CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
3	R872	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
3	R873	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP,2.4X6	
3	R891	2002-001012	R COMPOSITION;8.2Mohm,5%,1/2W,AA,TP,3.7x	
3	VR471	2103-001024	VR-SEMI;50Kohm,25%,0.3W,TOP	
2		AA65-30109A	CLAMP-FBT,NYLON 66,V2,BLK,-,-	S.N.A
2		AA65-30105B	CLAMP-WIRE,NYLON 66,V2,NTR,25MM ALL MODE	S.N.A
2		AA62-00010A	HEAT SINK; , T1.0,SILVER,H/SINK & SHIEL	S.N.A
2		6003-001023	SCREW TAPTITE,RWH,+,B,M3,L10,ZPC(YEL),SW	
2		0403-001325	DIODE ZENER;MTZJ15C,14.35-15.09V,500mW,D	

ASSY-PCB,CONV MDL

Level	Loc. No.	Code No.	Description ; Specification	Remark
1	*	AA95-00422B	ASSY PCB,CONV MDL; ,SP43J5HPJ51A, ,	
2	C163	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP, ,5mm	
2	CN101	3711-002709	CONNECTOR-HEADER;NOWALL,12P,1R,2.5MM,ANG	
2	CN102	3711-002709	CONNECTOR-HEADER;NOWALL,12P,1R,2.5MM,ANG	
2	IC113	1203-000641	IC-RESET;7442,TO-92,3P,-,PLASTIC,0.3/7	
2		0202-001004	SOLDER-CREAM;SQ-2030M SZH-1,S63A,D0.04,6	S.N.A
2		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
2		AA63-00143A	SHIELD-CASE;-,SPTE T0.5,T0.5,ALLMIGHT,CO	S.N.A
2		AA99-20068A	ASSY-PCB SUB,AUTO; AA95-00422B ,V	S.N.A
3	C101	2404-000275	C-TA,CHIP;100UF,10%,10V,GP,TP,7343	
3	C102	2404-000275	C-TA,CHIP;100UF,10%,10V,GP,TP,7343	
3	C103	2404-000256	C-TA,CHIP;47UF,20%,16V,GP,TP,7343	
3	C104	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
3	C105	2203-000858	C CERAMIC,CHIP;0.039nF,5%,50V,NP0,TP,201	
3	C106	2203-000181	C CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
3	C107	2203-000716	C CERAMIC,CHIP;3.3nF,10%,50V,X7R,TP,2012	
3	C108	2203-005809	C CERAMIC,CHIP;1000nF,10%,16V,X7R,TP,201	
3	C109	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
3	C110	2203-000444	C CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
3	C111	2203-000181	C CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
3	C112	2203-000683	C CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,201	
3	C113	2203-000683	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,201	
3	C114	2203-000181	C CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
3	C115	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
3	C116	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
3	C117	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
3	C118	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
3	C119	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
3	C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
3	C121	2203-000181	C CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
3	C122	2203-000181	C CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
3	C123	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
3	C124	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
3	C125	2203-000181	C CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	

Level	Loc. No.	Code No.	Description ; Specification	Remark
.3	C126	2203-000181	C CERAMIC,CHIP 100nF ~80 20% 25V Y5V TP	
.3	C127	2203-000181	C CERAMIC,CHIP 100nF ~80 20% 25V Y5V TP	
.3	C128	2203-000181	C CERAMIC,CHIP 100nF ~80 20% 25V Y5V TP	
.3	C129	2203-000181	C CERAMIC,CHIP 100nF ~80 20% 25V Y5V TP	
.3	C130	2203-000181	C CERAMIC,CHIP 100nF ~80 20% 25V Y5V TP	
.3	C131	2203-000181	C CERAMIC,CHIP 100nF ~80 20% 25V Y5V TP	
.3	C132	2203-000408	C CERAMIC,CHIP 0.18nF 5% 50V NP0 TP 2012	
.3	C133	2404-000284	C TA,CHIP 10uF 20% 16V, TP,3528,	
.3	C134	2203-000181	C CERAMIC,CHIP 100nF ~80 20% 25V Y5V TP	
.3	C135	2203-000716	C CERAMIC,CHIP 3.3nF 10% 50V X7R TP 2012	
.3	C136	2203-000181	C CERAMIC,CHIP 100nF ~80 20% 25V Y5V TP	
.3	C137	2203-000716	C CERAMIC,CHIP 3.3nF 10% 50V X7R TP 2012	
.3	C138	2203-000408	C CERAMIC,CHIP 0.18nF 5% 50V NP0 TP 2012	
.3	C139	2203-000181	C CERAMIC,CHIP 100nF ~80 20% 25V Y5V TP	
.3	C140	2404-000284	C TA,CHIP 10uF 20% 16V, TP,3528,	
.3	C141	2203-000408	C CERAMIC,CHIP 0.18nF 5% 50V NP0 TP 2012	
.3	C142	2404-000284	C TA,CHIP 10uF 20% 16V, TP,3528,	
.3	C143	2203-000181	C CERAMIC,CHIP 100nF ~80 20% 25V Y5V TP	
.3	C144	2203-000716	C CERAMIC,CHIP 3.3nF 10% 50V X7R TP 2012	
.3	C145	2203-000181	C CERAMIC,CHIP 100nF ~80 20% 25V Y5V TP	
.3	C146	2203-000716	C CERAMIC,CHIP 3.3nF 10% 50V X7R TP 2012	
.3	C147	2203-000408	C CERAMIC,CHIP 0.18nF 5% 50V NP0 TP 2012	
.3	C148	2404-000284	C TA,CHIP 10uF 20% 16V, TP,3528,	
.3	C149	2203-000181	C CERAMIC,CHIP 100nF ~80 20% 25V Y5V TP	
.3	C150	2203-000181	C CERAMIC,CHIP 100nF ~80 20% 25V Y5V TP	
.3	C151	2203-000408	C CERAMIC,CHIP 0.18nF 5% 50V NP0 TP 2012	
.3	C152	2404-000284	C TA,CHIP 10uF 20% 16V, TP,3528,	
.3	C153	2203-000181	C CERAMIC,CHIP 100nF ~80 20% 25V Y5V TP	
.3	C154	2203-000716	C CERAMIC,CHIP 3.3nF 10% 50V X7R TP 2012	
.3	C155	2203-000181	C CERAMIC,CHIP 100nF ~80 20% 25V Y5V TP	
.3	C156	2203-000716	C CERAMIC,CHIP 3.3nF 10% 50V X7R TP 2012	
.3	C157	2203-000408	C CERAMIC,CHIP 0.18nF 5% 50V NP0 TP 2012	
.3	C158	2404-000284	C TA,CHIP 10uF 20% 16V, TP,3528,	
.3	C159	2203-000181	C CERAMIC,CHIP 100nF ~80 20% 25V Y5V TP	
.3	C160	2203-000181	C CERAMIC,CHIP 100nF ~80 20% 25V Y5V TP	
.3	C161	2404-000256	C TA,CHIP 47uF 20% 16V,CP,TP,7343	
.3	C162	2404-000256	C TA,CHIP 47uF 20% 16V,CP,TP,7343	
.3	C164	2402-000173	C AL,SMD 4.7uF 20% 35V,CP,TP 4.3x4.3x5	
.3	C165	2203-000181	C CERAMIC,CHIP 100nF ~80 20% 25V Y5V TP	
.3	C166	2203-000181	C CERAMIC,CHIP 100nF ~80 20% 25V Y5V TP	
.3	C167	2404-000123	C TA,CHIP 10uF 20% 16V, TP6032,2.8mm	
.3	C168	2203-000181	C CERAMIC,CHIP 100nF ~80 20% 25V Y5V TP	
.3	C169	2203-000181	C CERAMIC,CHIP 100nF ~80 20% 25V Y5V TP	
.3	C170	2203-000181	C CERAMIC,CHIP 100nF ~80 20% 25V Y5V TP	
.3	C171	2404-000284	C TA,CHIP 10uF 20% 16V, TP,3528,	
.3	C172	2404-000256	C TA,CHIP 47uF 20% 16V,CP,TP,7343	
.3	C173	2404-000256	C TA,CHIP 47uF 20% 16V,CP,TP,7343	
.3	C174	2404-000256	C TA,CHIP 47uF 20% 16V,CP,TP,7343	
.3	C201	2203-000408	C CERAMIC,CHIP 0.18nF 5% 50V NP0 TP 2012	
.3	C202	2203-000408	C CERAMIC,CHIP 0.18nF 5% 50V NP0 TP 2012	
.3	C203	2203-000408	C CERAMIC,CHIP 0.18nF 5% 50V NP0 TP 2012	
.3	C204	2203-000408	C CERAMIC,CHIP 0.18nF 5% 50V NP0 TP 2012	
.3	C205	2203-000408	C CERAMIC,CHIP 0.18nF 5% 50V NP0 TP 2012	
.3	C206	2203-000408	C CERAMIC,CHIP 0.18nF 5% 50V NP0 TP 2012	
.3	D101	0401-000160	DIODE SWITCHING;ISS314 30V 100mA USC TP	
.3	D102	0401-000160	DIODE SWITCHING;ISS314 30V 100mA USC TP	
.3	DZ101	0403-001016	DIODE ZENER;RLZ6.2B 6.2V 5.96 6.27V 400m	
.3	DZ102	0403-001016	DIODE ZENER;RLZ6.2B 6.2V 5.96 6.27V 400m	
.3	DZ104	0403-001016	DIODE ZENER;RLZ6.2B 6.2V 5.96 6.27V 400m	
.3	DZ105	0403-001016	DIODE ZENER;RLZ6.2B 6.2V 5.96 6.27V 400m	
.3	DZ106	0403-001016	DIODE ZENER;RLZ6.2B 6.2V 5.96 6.27V 400m	
.3	DZ107	0403-001016	DIODE ZENER;RLZ6.2B 6.2V 5.96 6.27V 400m	
.3	DZ108	0403-001016	DIODE ZENER;RLZ6.2B 6.2V 5.96 6.27V 400m	
.3	DZ109	0403-001016	DIODE ZENER;RLZ6.2B 6.2V 5.96 6.27V 400m	
.3	DZ110	0403-001016	DIODE ZENER;RLZ6.2B 6.2V 5.96 6.27V 400m	
.3	DZ111	0403-001016	DIODE ZENER;RLZ6.2B 6.2V 5.96 6.27V 400m	
.3	DZ112	0403-001016	DIODE ZENER;RLZ6.2B 6.2V 5.96 6.27V 400m	
.3	DZ113	0403-001016	DIODE ZENER;RLZ6.2B 6.2V 5.96 6.27V 400m	
.3	DZ114	0403-001016	DIODE ZENER;RLZ6.2B 6.2V 5.96 6.27V 400m	
.3	DZ115	0403-001016	DIODE ZENER;RLZ6.2B 6.2V 5.96 6.27V 400m	
.3	DZ116	0403-001016	DIODE ZENER;RLZ6.2B 6.2V 5.96 6.27V 400m	
.3	DZ117	0403-001284	DIODE ZENER;RLZ3.3A 3.16 3.38V 500MW LL	
.3	EF101	2901-000229	FILTER EMI SMD 50V 0.3A ,22000pF 4.5x3.	
.3	EF102	2901-000229	FILTER EMI SMD 50V 0.3A ,22000pF 4.5x3.	
.3	EF104	2901-000226	FILTER EMI SMD 25V 0.3A ,100pF 3.2x1.25	
.3	EF105	2901-000226	FILTER EMI SMD 25V 0.3A ,100pF 3.2x1.25	
.3	EF106	2901-000226	FILTER EMI SMD 25V 0.3A ,100pF 3.2x1.25	
.3	EF107	2901-000226	FILTER EMI SMD 25V 0.3A ,100pF 3.2x1.25	
.3	EF108	2901-000226	FILTER EMI SMD 25V 0.3A ,100pF 3.2x1.25	
.3	EF109	2901-000226	FILTER EMI SMD 25V 0.3A ,100pF 3.2x1.25	
.3	EF110	2901-000226	FILTER EMI SMD 25V 0.3A ,100pF 3.2x1.25	
.3	EF111	2901-000226	FILTER EMI SMD 25V 0.3A ,100pF 3.2x1.25	
.3	EF112	2901-000226	FILTER EMI SMD 25V 0.3A ,100pF 3.2x1.25	
.3	EF113	2901-000226	FILTER EMI SMD 25V 0.3A ,100pF 3.2x1.25	
.3	EF114	2901-000226	FILTER EMI SMD 25V 0.3A ,100pF 3.2x1.25	
.3	EF115	2901-000226	FILTER EMI SMD 25V 0.3A ,100pF 3.2x1.25	
.3	EF116	2901-000226	FILTER EMI SMD 25V 0.3A ,100pF 3.2x1.25	
.3	IC101	AA13-00071A	IC ASIC,,SDC9110FP208PCGNV CONTROLL	
.3	IC102	0601-001043	IC CMOS LOGIC 74HC4046 PHASE LOCKED LOOP	
.3	IC103	AA09-00032A	IC MCU TSC87251G2D-12IPTSC87251G2D IOT	
.3	IC104	1103-001167	IC EEPROM,28C64 8K 90X55X1T,150P,25P 120NS	
.3	IC105	1201-001520	IC VIDEO AMP,221M SOP9P150MIL,DUAL,7MB	
.3	IC106	1201-001504	IC OP AMP,072 SOP8P150MIL,DUAL PLAST	
.3	IC107	1201-001504	IC OP AMP,072 SOP8P150MIL,DUAL PLAST	
.3	IC108	1201-001504	IC OP AMP,072 SOP8P150MIL,DUAL PLAST	
.3	IC109	0801-001156	IC CMOS LOGIC 74HC4066 BILATERAL SWITCH	
.3	IC110	0801-001156	IC CMOS LOGIC 74HC4066 BILATERAL SWITCH	
.3	IC111	1001-000105	IC ANALOG SWITCH;CD4066BM,BILATERAL CMOS	
.3	IC112	1001-000105	IC ANALOG SWITCH;CD4066BM,BILATERAL CMOS	
.3	PCB	AA41-00188D	PCB CONVERGENCE MODULE;SVP 43J4M,FR 4.4L	S.N.A
.3	Q101	0501-000280	TR SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.3	Q102	0501-000342	TR SMALL SIGNAL;KSC1623 Y,NPN,200mW,SOT-	
.3	Q103	0501-000342	TR SMALL SIGNAL;KSC1623 Y,NPN,200mW,SOT-	
.3	Q104	0501-000280	TR SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.3	Q105	0501-000342	TR SMALL SIGNAL;KSC1623 Y,NPN,200mW,SOT-	
.3	Q106	0501-000342	TR SMALL SIGNAL;KSC1623 Y,NPN,200mW,SOT-	
.3	Q107	0501-000342	TR SMALL SIGNAL;KSC1623 Y,NPN,200mW,SOT-	
.3	Q108	0501-000280	TR SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.3	Q109	0505-000257	FET SILICON,2SK217 N, 20mA ,150mW,SOT-	
.3	Q110	0505-000257	FET SILICON,2SK217 N, 20mA ,150mW,SOT-	
.3	Q111	0505-000257	FET SILICON,2SK217 N, 20mA ,150mW,SOT-	
.3	Q112	0505-000257	FET SILICON,2SK217 N, 20mA ,150mW,SOT-	
.3	Q113	0505-000257	FET SILICON,2SK217 N, 20mA ,150mW,SOT-	
.3	Q114	0505-000257	FET SILICON,2SK217 N, 20mA ,150mW,SOT-	
.3	R101	2007-000881	R CHIP 4.70HM,5%,1/10W,DA,TP,2012	
.3	R102	2007-000881	R CHIP 4.70HM,5%,1/10W,DA,TP,2012	
.3	R103	2007-000881	R CHIP 4.70HM,5%,1/10W,DA,TP,2012	
.3	R104	2007-000881	R CHIP 4.70HM,5%,1/10W,DA,TP,2012	
.3	R105	2007-000415	R CHIP 150HM,5%,1/10W,DA,TP,2012	
.3	R106	2007-000947	R CHIP 470HM,5%,1/10W,DA,TP,2012	
.3	R107	2007-000282	R CHIP 100KOHM,5%,1/10W,DA,TP,2012	
.3	R108	2007-000872	R CHIP 4.7KOHM,5%,1/10W,DA,TP,2012	
.3	R109	2007-000493	R CHIP 2.2KOHM,5%,1/10W,DA,TP,2012	
.3	R110	2007-000221	R CHIP 1.2KOHM,5%,1/10W,DA,TP,2012	
.3	R111	2007-000380	R CHIP 13KOHM,5%,1/10W,DA,TP,2012	
.3	R112	2007-000468	R CHIP 1KOHM,5%,1/10W,DA,TP,2012	
.3	R113	2007-001097	R CHIP 82KOHM,5%,1/10W,DA,TP,2012	
.3	R114	2007-000468	R CHIP 1KOHM,5%,1/10W,DA,TP,2012	
.3	R116	2007-000468	R CHIP 1KOHM,5%,1/10W,DA,TP,2012	
.3	R117	2007-000468	R CHIP 1KOHM,5%,1/10W,DA,TP,2012	
.3	R118	2007-000468	R CHIP 1KOHM,5%,1/10W,DA,TP,2012	
.3	R119	2007-000468	R CHIP 1KOHM,5%,1/10W,DA,TP,2012	
.3	R120	2007-000401	R CHIP 150OHM,5%,1/10W,DA,TP,2012	
.3	R121	2007-000023	R CHIP 120OHM,5%,1/10W,DA,TP,2012	
.3	R122	2007-000468	R CHIP 1KOHM,5%,1/10W,DA,TP,2012	
.3	R123	2007-000401	R CHIP 150OHM,5%,1/10W,DA,TP,2012	
.3	R124	2007-000468	R CHIP 1KOHM,5%,1/10W,DA,TP,2012	
.3	R125	2007-000401	R CHIP 150OHM,5%,1/10W,DA,TP,2012	
.3	R126	2007-000401	R CHIP 150OHM,5%,1/10W,DA,TP,2012	
.3	R127	2007-000401	R CHIP 150OHM,5%,1/10W,DA,TP,2012	
.3	R128	2007-000200	R CHIP 100OHM,5%,1/10W,DA,TP,2012	
.3	R129	2007-000465	R CHIP 1KOHM,1%,1/10W,DA,TP,2012	
.3	R130	2007-000868	R CHIP 4.7KOHM,1%,1/10W,DA,TP,2012	
.3	R131	2007-000981	R CHIP 5.6KOHM,5%,1/10W,DA,TP,2012	
.3	R132	2007-000465	R CHIP 1KOHM,1%,1/10W,DA,TP,2012	
.3	R133	2007-000868	R CHIP 4.7KOHM,1%,1/10W,DA,TP,2012	
.3	R134	2007-000981	R CHIP 5.6KOHM,5%,1/10W,DA,TP,2012	
.3	R135	2007-000290	R CHIP 100OHM,5%,1/10W,DA,TP,2012	
.3	R136	2007-000290	R CHIP 100OHM,5%,1/10W,DA,TP,2012	
.3	R137	2007-000465	R CHIP 1KOHM,1%,1/10W,DA,TP,2012	
.3	R138	2007-000868	R CHIP 4.7KOHM,1%,1/10W,DA,TP,2012	
.3	R139	2007-000981	R CHIP 5.6KOHM,5%,1/10W,DA,TP,2012	
.3	R140	2007-000465	R CHIP 1KOHM,1%,1/10W,DA,TP,2012	
.3	R141	2007-000868	R CHIP 4.7KOHM,1%,1/10W,DA,TP,2012	

Level	Loc. No.	Code No.	Description ; Specification	Remark
.3	R142	2007-000981	R CHIP 5.6KOHM,5%,1/10W,DA,TP,2012	
.3	R143	2007-000290	R CHIP 100OHM,5%,1/10W,DA,TP,2012	
.3	R144	2007-000290	R CHIP 100OHM,5%,1/10W,DA,TP,2012	
.3	R145	2007-000465	R CHIP 1KOHM,1%,1/10W,DA,TP,2012	
.3	R146	2007-000868	R CHIP 4.7KOHM,1%,1/10W,DA,TP,2012	
.3	R147	2007-000981	R CHIP 5.6KOHM,5%,1/10W,DA,TP,2012	
.3	R148	2007-000465	R CHIP 1KOHM,1%,1/10W,DA,TP,2012	
.3	R149	2007-000868	R CHIP 4.7KOHM,1%,1/10W,DA,TP,2012	
.3	R150	2007-000981	R CHIP 5.6KOHM,5%,1/10W,DA,TP,2012	
.3	R151	2007-000290	R CHIP 100OHM,5%,1/10W,DA,TP,2012	
.3	R152	2007-000292	R CHIP 100KOHM,5%,1/10W,DA,TP,2012	
.3	R153	2007-000872	R CHIP 4.7KOHM,5%,1/10W,DA,TP,2012	
.3	R154	2007-000774	R CHIP 33KOHM,5%,1/10W,DA,TP,2012	
.3	R155	2007-000300	R CHIP 10KOHM,5%,1/10W,DA,TP,2012	
.3	R156	2007-001055	R CHIP 5.2KOHM,5%,1/10W,DA,TP,2012	
.3	R157	2007-000671	R CHIP 2KOHM,5%,1/10W,DA,TP,2012	
.3	R158	2007-000468	R CHIP 1KOHM,5%,1/10W,DA,TP,2012	
.3	R159	2007-001166	R CHIP 750HM,5%,1/10W,DA,TP,2012	
.3	R160	2007-000766	R CHIP 330OHM,5%,1/10W,DA,TP,2012	
.3	R161	2007-000290	R CHIP 100OHM,5%,1/10W,DA,TP,2012	
.3	R162	2007-000290	R CHIP 100OHM,5%,1/10W,DA,TP,2012	
.3	R163	2007-000290	R CHIP 100OHM,5%,1/10W,DA,TP,2012	
.3	R164	2007-000468	R CHIP 1KOHM,5%,1/10W,DA,TP,2012	
.3	R165	2007-000468	R CHIP 1KOHM,5%,1/10W,DA,TP,2012	
.3	R166	2007-000468	R CHIP 1KOHM,5%,1/10W,DA,TP,2012	
.3	R167	2007-000468	R CHIP 1KOHM,5%,1/10W,DA,TP,2012	
.3	R168	2007-000468	R CHIP 1KOHM,5%,1/10W,DA,TP,2012	
.3	R169	2007-000703	R CHIP 3.6KOHM,5%,1/10W,DA,TP,2012	
.3	R170	2007-000468	R CHIP 1KOHM,5%,1/10W,DA,TP,2012	
.3	R171	2007-000221	R CHIP 1.2KOHM,5%,1/10W,DA,TP,2012	
.3	R172	2007-000642	R CHIP 270OHM,5%,1/10W,DA,TP,2012	
.3	R173	2007-000030	R CHIP 560OHM,5%,1/10W,DA,TP,2012	
.3	R174	2007-000030	R CHIP 560OHM,5%,1/10W,DA,TP,2012	
.3	R175	2007-000282	R CHIP 100KOHM,5%,1/10W,DA,TP,2012	
.3	R176	2007-000872	R CHIP 4.7KOHM,5%,1/10W,DA,TP,2012	
.3	R177	2007-000872	R CHIP 4.7KOHM,5%,1/10W,DA,TP,2012	
.3	R178	2007-000728	R CHIP 300OHM,5%,1/10W,DA,TP,2012	
.3	R179	2007-000728	R CHIP 300OHM,5%,1/10W,DA,TP,2012	
.3	R180	2007-000728	R CHIP 300OHM,5%,1/10W,DA,TP,2012	
.3	R181	2007-000728	R CHIP 300OHM,5%,1/10W,DA,TP,2012	
.3	R182	2007-000728	R CHIP 300OHM,5%,1/10W,DA,TP,2012	
.3	R183	2007-000728	R CHIP 300OHM,5%,1/10W,DA,TP,2012	
.3	R184	2007-000830	R CHIP 39KOHM,5%,1/10W,DA,TP,2012	
.3	R201	2007-000029	R CHIP 00HM,5%,1/10W,DA,TP,2012	
.3	R203	2007-000565	R CHIP 220KOHM,5%,1/10W,DA,TP,2012	
.3	R204	2007-000565	R CHIP 220KOHM,5%,1/10W,DA,TP,2012	
.3	R205	2007-000565	R CHIP 220KOHM,5%,1/10W,DA,TP,2012	
.3	R206	2007-000565	R CHIP 220KOHM,5%,1/10W,DA,TP,2012	
.3	R207	2007-000565	R CHIP 220KOHM,5%,1/10W,DA,TP,2012	
.3	R208	2007-000565	R CHIP 220KOHM,5%,1/10W,DA,TP,2012	
.3	X101	2801-003860	CRYSTAL SMD 24MHz,30ppm,28 ABV,20pF,50oh	

ASSY-FRONT,BOT

1	*	AA91-00497H	ASSY FRONT,BOT,VO G4309 PAL,HIPS,SP43J8	
.2	PFDCFB	6002-000522	SCREW-TAPPING,TH,+,2.M4,L15,ZPC(BLK),SWR	
.2		AA64-70124C	BADGE BRAND,AL,R2500,SILVER,L=70,SAMSUNG	
.2		AA64-013960	INLAY AV,43,54,62,8,PS SHEET,T0.5, ,BLK	S.N.A
.2		AA64-01386C	PANEL FRONT,DECORATION;43,54,62,8,HIPS,V	
.2		AA64-013810	CABINET FRONT,BOT,43,8,HIPS,VO,G4309	
.2		AA60-00080A	SPACER FELT,43,54,8,FELT, , , , ,T0.35,	S.N.A
.2		AA60-000798	SPACER JERSEY,43,8,JERSEY,GRAY,SP 700G	S.N.A
.2		AA60-00077A	SPACER DUAL,LOCK;54,8,#250, , , , , , ,4	S.N.A

ASSY-CONTROL

1	*	AA91-00476F	ASSY CONTROL,H8 BLK,ABS PAL J51A,SP54J8	
.2	BM-MS	6003-001023	SCREW-TAPTITE,RWH,+,BJM3,L10,ZPC(YEL),SW	
.2	KNOPOW	AA61-60003J	SPRING-CS, ,SUS304,0.5,OD6,H12,N7, , ,	
.2	PC+BM	6003-000334	SCREW-TAPTITE,RH,+,2S,M3,L6,ZPC(YEL),SWR	
.2	PCB-PC	6003-001026	SCREW-TAPTITE,RH,+,B,M4,L15,ZPC(BLK),SWR	
.2		AA64-013015	INDICATOR LED 43,54,62,8,ACRYL, ,SMOKE	
.2		AA64-01469F	WINDOW CONTROL;43,54,62,8,ACRYL, SHEET,T3	
.2		AA64-01503A	KNOB CONTACT;54,8,C3603, , , , , ,	
.2		AA98-00094A	ASSY PCB,CONTROL, ,SP43J8HF,J51A, ,	
.2		AA98-00097A	ASSY PCB,POWER S/W, ,SP43J8HF,J51A, ,	
.2		AA61-005618	BRACKET,MASTER;54,8,SECC,T1.0, ,	S.N.A
.2		AA64-01387B	PANEL CONTROL;43,54,62,8,ABS, ,H8,IVORY	
.2		AA64-013888	KNOB CONTROL;43,54,62,8,ABS, ,BLK, ,H8,	
.2		AA64-01389E	KNOB POWER;43,54,62,8,ABS GRAY,LG 807P,M	
.2		AA64-013908	WINDOW REMOCON;43,54,62,8,PC, , , , ,VIO	

ASSY CHASSIS PART

1	*	AA90-00635C	ASSY CHASSIS PART,J51A,43,8	S.N.A
.2	PCN-HC	6003-001023	SCREW-TAPTITE,RWH, ,BJM3,L10,ZPC(YEL),SW	
.2	DF-FBT	6003-001023	SCREW-TAPTITE,RWH, ,BJM3,L10,ZPC(YEL),SW	
.2	DF-HC	6003-001023	SCREW-TAPTITE,RWH, ,BJM3,L10,ZPC(YEL),SW	
.2	PM-HC	6003-001023	SCREW-TAPTITE,RWH, ,BJM3,L10,ZPC(YEL),SW	
.2		AA61-005048	HOLDER CHASSIS,43,54,62,8,ABS,GRAY,VO,	

ASSY CABINET

1	*	AA90-00634K	ASSY CABINET,43,8,SP43J8HFX/XHK	S.N.A
.2	AC-AFB	6002-000522	SCREW-TAPPING,TH,+,2.M4,L15,ZPC(BLK),SWR	
.2	AC-BCM	AA60-10011A	SCREW-TAPTITE,HH,+,PC,M4,L12,ZPC(BLK),SW	
.2	AV-CFD	6003-001023	SCREW-TAPTITE,RWH,+,BJM3,L10,ZPC(YEL),SW	
.2	BM-CBT	6003-001026	SCREW-TAPTITE,RH,+,B,M4,L15,ZPC(BLK),SWR	
.2	CBAPT	6003-001019	SCREW-TAPTITE,RH,+,B,M4,L12,ZPC(BLK),SWR	
.2	CBT-CW	AA63-60002V	SPACER FELT,FELT0.3,BLK,60X40,	S.N.A
.2	JF3	AA65-00011C	JUMP WIRE,ALL MODEL,NYLON 66 V2,NTR,25M	S.N.A
.2	CW-CBT	6005-001003	SCREW-WOOD,HH,+,M4,L20,ZPC(BLK),SWRCH18A	S.N.A
.2	CWBBCM	6005-001054	SCREW-ASSY,WOOD,WWHH,+,M7,L32,ZPC(YEL)	S.N.A
.2	CWBCSB	6005-001003	SCREW-WOOD,HH,+,M4,L20,ZPC(BLK),SWRCH18A	S.N.A
.2	CWBCBS	6005-001003	SCREW-WOOD,HH,+,M4,L20,ZPC(BLK),SWRCH18A	S.N.A
.2	CWBCFB	6005-001003	SCREW-WOOD,HH,+,M4,L20,ZPC(BLK),SWRCH18A	S.N.A
.2	CWBHC	6005-001003	SCREW-WOOD,HH,+,M4,L20,ZPC(BLK),SWRCH18A	S.N.A
.2	FP-BCM	AA60-10011A	SCREW-TAPTITE,HH,+,PC,M4,L12,ZPC(BLK),SW	
.2	HN-BCM	AA60-10011A	SCREW-TAPTITE,HH,+,PC,M4,L12,ZPC(BLK),SW	
.2		AA67-00115A	SCREEN-LENTI,43IN, ,T1.008*690, , ,TINT+1	
.2		AA67-00079A	MIRROR-BACK;43JB,GLASS,912*580*5+4(DS)*3	
.2		AA67-00030A	SUN SCREEN,HC, ,43INCH,H/C,A/S,PMMA,T+93%	
.2		AA65-30008A	CLAMP-CORD;PE,H8,BLK, , ,	S.N.A
.2		AA64-60495B	INLAY-COVER,SP 43AJM6PS,T0.5,149.3X69.5	
.2		AA64-01399F	INLAY-TERMINAL,,J7,JB,PS SHEET,T0.5, ,BLK	S.N.A
.2		AA67-00115B	SCREEN-FRESNEL;43IN, ,T2,910*692, , ,	
.2		AA64-01392C	DOOR-AV;43,54,62,8,ABS,H8,GRAY,LG-807P	S.N.A
.2		AA91-00489B	ASSY-BRK,MIRROR, , ,SECC-1 T1.0,54J8	
.3		AA60-00073A	SPACER-FELT;54J8,FELT, , , ,T1.0, ,210	S.N.A
.3		AA61-005128	BRACKET-MIRROR;43,53,61J8,SECC 1,T1.0, ,	S.N.A
.2		AA61-00600A	SPRING-EARTH;43,8,STS, , , , , , , ,0.	S.N.A
.2		AA61-004758	BRACKET CRT,MAIN;54,SECC,T1.6, ,	
.2		AA60-00091N	SPACER FELT, FELT,70X10, , ,BLK,T1.0, ,	S.N.A
.2		AA60-000728	SPACER-COVER,DUST;43,54,62,J9,SPONGE 94HF	S.N.A
.2		AA60-00066E	SPACER SCREEN;43,53,61J8,ABS, , , ,BLK,	S.N.A
.2		AA60-00066D	SPACER SCREEN;43,53,61J8,ABS, , , ,BLK,	S.N.A
.2		AA26-30006E	TRANS-FLYBACK, ,FW2.5(A0001BES),50KV,	
.2		AA61-006186	GUIDE-FLOW;54J8,J7,ABS,H8,BLK, ,	
.2		AA64-013858	CABINET-BACK,SIDE;43,54,62J8, ,HIPS,VO,BL	
.2		AA64-013848	CABINET-BACK,BOT;43,54,62J8, ,HIPS,VO,BL	
.2		AA64-013788	CABINET-BACK,TOP;43J8, ,HIPS,H8,BLK	
.2		AA63-60131F	SPACER FELT,PC,61ZRJFELT, , , ,BLK,T0.5,	S.N.A
.2		AA63-10007C	BAND-PP, , , , ,W18, ,CLEAR,1G,	S.N.A
.2		AA61-20285A	HOLDER-BOX, ,3456,PPVO,WHT,	
.2		AA61-00642A	SPRING-EARTH,MAIN;PRO,J07,J8,J9,STS,67,	S.N.A

ASSY CRT-(G)

⚠ 1	*	AA94-02870B	ASSY CRT (G),P16LSC03HKA,-380MC,7,BARE,	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	BC-AL	AA60-10011A	SCREW TAPTITE,HH,+PC,M4L12,ZPC(BLK),SW	
3		AA91-00449A	ASSY BRACKET,CRT,,,SECC T1.0,P,,T	
3		AA61-00473B	BRACKET,CRT,S3,SECC,T1.6,	S.N.A
3		AA61-00479A	SPRING WIRE,CRT,P,T,STS,,	S.N.A
3		AA61-00615B	BRACKET EARTH,S4J,B,PBS,T0.5,	S.N.A
2		AA65-30114A	CLAMP LOCK,NYLON 66,V2,NTR,,PROJECTION,	S.N.A
2		AA61-00555B	HOLDER LANS,S3J,B,PC,ABS,BLK,,,GF20%	S.N.A
2		AA61-00476B	BRACKET LENS,S3,SECC,T1.6,	S.N.A
2		AA64-013158	CASE COUPLER,GREEN,43,S3.61,T2.0,AL SHE	S.N.A
2		AA25-30006F	TRANS FLYBACK,,FWZ-50A001C,55.30KV	
2		AA67-10071A	LENS,DELTA 77.79,,GREEN,IC ELEMENT	
2		AA67-10005A	LENS ASSY,,DELTA,CLEAR,S4388,,77	
2		AA91-00491A	ASSY-HOLDER,PACK,,,FILM PP RUBBER,S4J,B	
3		AA60-00062B	SPACER O,RING,S3,SILICON,,,,GRAY,	S.N.A
3		AA61-00477B	HOLDER PACK,43,S3.61,J,B,PP,,HB	S.N.A
2		AA27-50005C	DEFLECTION-YOKE,,,DPD-4392ALST-3,P,T,TCRT	
2		AA03-00201A	CRT MONO,P16LSC03HKA,,7inch,,,,FLAT	S.N.A
2		AA60-00074A	SPACER DYP,T,SILICON RUBBER,,,,GRAY,	S.N.A
2		AA60-00063B	SPACER CLENS,S3,SILICON,,,,GRAY,	S.N.A
2		AA60-00061B	SPACER CRT,S3,SILICON,,,,GRAY,	S.N.A
2		AA39-00018A	LEAD CONNECTOR ASSY,,1P,YFH-800-01,YRH187	
2		AA33-00006A	MAGNET CONVERGENCE,,JH-92LT,J-036,,29.1m,0	

ASSY CRT-(B)

Level	Loc. No.	Code No.	Description ; Specification	Remark
1	*	AA94-02869A	ASSY CRT-(B),P16LSC03BMB,-,380MG,7 BARE,	
2	BC-AL	AA60-10011A	SCREW TAPTITE,HH,+PC,M4L12,ZPC(BLK),SW	
2		AA65-30114A	CLAMP LOCK,NYLON 66,V2,NTR,,PROJECTION,	S.N.A
2		AA67-10005A	LENS ASSY,,DELTA,CLEAR,S4388,,77,	
2		AA91-00449A	ASSY BRACKET,CRT,,,SECC T1.0,P,,T	
3		AA61-00473B	BRACKET,CRT,S3,SECC,T1.6,	S.N.A
3		AA61-00479A	SPRING WIRE,CRT,P,T,STS,,	S.N.A
3		AA61-00615B	BRACKET EARTH,S4J,B,PBS,T0.5,	S.N.A
2		AA91-00491A	ASSY HOLDER,PACK,,,FILM PP RUBBER,S4J,B	
3		AA60-00062B	SPACER O,RING,S3,SILICON,,,,GRAY,	S.N.A
3		AA61-00477B	HOLDER PACK,43,S3.61,J,B,PP,,HB	S.N.A
2		AA60-00074A	SPACER DYP,T,SILICON RUBBER,,,,GRAY,	S.N.A
2		AA61-00602B	BRACKET LENS,RB,PROJECTION SECC,T1.6,	
2		AA67-10007A	LENS,,DELTA,CLEAR,PJT,,77.79,	
2		AA25-30006F	TRANS FLYBACK,,FWZ-50A001C,55.30KV	
2		AA64-013158	CASE COUPLER,BLUE,S3,T2.0,AL SHEET,,,	S.N.A
2		AA27-50005C	DEFLECTION-YOKE,,,DPD-4392ALST-3,P,T,TCRT	
2		AA03-00202A	CRT MONO,P16LSC03BMB,,7inch,,,,FLAT	S.N.A
2		AA61-00555B	HOLDER LANS,S3J,B,PC,ABS,BLK,,,GF20%	S.N.A
2		AA60-00063B	SPACER CLENS,S3,SILICON,,,,GRAY,	S.N.A
2		AA60-00061B	SPACER CRT,S3,SILICON,,,,GRAY,	S.N.A
2		AA39-00018A	LEAD CONNECTOR ASSY,,1P,YFH-800-01,YRH187	
2		AA33-00005A	MAGNET CONVERGENCE,,JH-92LTU-036,,29.1m,	

ASSY CRT-(R)

Level	Loc. No.	Code No.	Description ; Specification	Remark
1	*	AA94-02868A	ASSY CRT-(R),P16LSC03RJA,-,380MG,7 BARE,	
2	BC-AL	AA60-10011A	SCREW TAPTITE,HH,+PC,M4L12,ZPC(BLK),SW	
2		AA65-30114A	CLAMP LOCK,NYLON 66,V2,NTR,,PROJECTION,	S.N.A
2		AA64-013148	CASE COUPLER,RED,S3,T2.0,AL SHEET,,,	S.N.A
2		AA67-10005A	LENS ASSY,,DELTA,CLEAR,S4388,,77,	
2		AA67-10008A	LENS,,DELTA,RED,PJT,,77.79,	
2		AA91-00449A	ASSY BRACKET,CRT,,,SECC T1.0,P,,T	
3		AA61-00473B	BRACKET,CRT,S3,SECC,T1.6,	S.N.A
3		AA61-00478A	SPRING WIRE,CRT,P,T,STS,,,,,,,,,,	S.N.A
3		AA61-00615B	BRACKET EARTH,S4J,B,PBS,T0.5,	S.N.A
2		AA91-00491A	ASSY HOLDER,PACK,,,FILM PP RUBBER,S4J,B	
3		AA60-00062B	SPACER O,RING,S3,SILICON,,,,GRAY,	S.N.A
3		AA61-00477B	HOLDER PACK,43,S3.61,J,B,PP,,HB	S.N.A
2		AA60-00074A	SPACER DYP,T,SILICON RUBBER,,,,GRAY,	S.N.A
2		AA25-30006F	TRANS FLYBACK,,FWZ-50A001C,55.30KV	
2		AA61-00602B	BRACKET LENS,RB,PROJECTION,SECC,T1.6,	
2		AA27-50005C	DEFLECTION-YOKE,,,DPD-4392ALST-3,P,T,TCRT	
2		AA03-00200A	CRT MONO,P16LSC03RJA,,7inch,,,,FLAT	S.N.A
2		AA61-00555B	HOLDER LANS,S3J,B,PC,ABS,BLK,,,GF20%	S.N.A
2		AA60-00063B	SPACER CLENS,S3,SILICON,,,,GRAY,	S.N.A
2		AA60-00061B	SPACER CRT,S3,SILICON,,,,GRAY,	S.N.A
2		AA39-00018A	LEAD CONNECTOR ASSY,,1P,YFH-800-01,YRH187	
2		AA33-00006A	MAGNET CONVERGENCE,,JH-92LTU-036,,29.1m,	
2		AA60-00061B	SPACER CRT,S3,SILICON,,,,GRAY,	S.N.A
2		AA39-00018A	LEAD CONNECTOR ASSY,,1P,YFH-800-01,YRH187	
2		AA33-00006A	MAGNET CONVERGENCE,,JH-92LTU-036,,29.1m,0	
2		AA60-00061B	SPACER CRT,S3,SILICON,,,,GRAY,	S.N.A
2		AA39-00018A	LEAD CONNECTOR ASSY,,1P,YFH-800-01,YRH187	
2		AA33-00006A	MAGNET CONVERGENCE,,JH-92LTU-35A,,29.1m,0	
2		AA60-00061B	SPACER CRT,S3,SILICON,,,,GRAY,	S.N.A
2		AA39-00018A	LEAD CONNECTOR ASSY,,1P,YFH-800-01,YRH187	
2		AA33-00006A	MAGNET CONVERGENCE,,JH-92LT,35A,,29.1m,0	
2		AA91-00621A	ASSY-WOOD,,WOOD KBM21 5B,SVP 43JBSR,,,T	
2	AWTAWB	6005-001094	SCREW ASSY,WOOD,WW,HH,+,M7,L32,ZPC(YEL	S.N.A
2		AA91-00495A	ASSY WOOD,TOP,,,,WOOD,SVP 43JBSR,,,T	
3	CWTHCW	AA60-10051A	SCREW WOOD,PH,+,M4,L16,ZPC(BLK),SWRCH18A	
3		AA64-01398A	CABINET WOOD,TOP,43J,B,,WOOD,,,	S.N.A
3		AA61-00510E	HOLDER SCREEN,43J,B,ABS,BLK,HB,,,	
3		AA61-00510D	HOLDER SCREEN,43J,B,ABS,BLK,HB,,,	
3		AA61-00507B	HOLDER CABINET,WOOD,43,54,62,B,ABS,BLK,H	
2		AA91-00496A	ASSY WOOD,BOT,,,,WOOD,SVP 43JBSR,,,T	
3	CASCWB	AA60-10051A	SCREW WOOD,PH,+,M4,L16,ZPC(BLK),SWRCH18A	
3	HCMCWB	AA60-10051A	SCREW WOOD,PH,+,M4,L16,ZPC(BLK),SWRCH18A	
3	HW-CWB	AA60-10051B	SCREW WOOD,BH,+,M3.5,L11,ZPC(YEL),SWRCH+1	
3	SPKCWB	AA60-10051A	SCREW WOOD,PH,+,M4,L16,ZPC(BLK),SWRCH18A	
3		AA61-00508B	HOLDER,JERSEY,43,54,62,B,ABS,BLK,HB,,,	
3		AA61-00533B	BRACKET GRILLE,43,54,62,J,B,SECC 1,T0.5	
3		AA63-00347B	COVER DUCT,43,J,B,HIPS,,,HB,BLK,,,	
3		AA98-00049A	ASSY-LEAD,CON,,,LEAD CON,CORE,AA39-20505	
4		3301-001201	CORE FERRITE,AE,21x11x32mm,1500,2B0G	
3		AA39-00086A	LEAD CONNECTOR ASSY,,2.2UF,REC,REC,200MM	
3		AA60-00043A	SPACER SPEAKER,FELT,T2,,,43J,5,	
3		AA64-014014	CABINET WOOD,BOT,43J,B,,,WOOD,,,,	S.N.A
3		AA61-00506B	HOLDER CRT,MAIN,43,54,62,J,B,HIPS,BLK,HB,	
3		3001-000279	SPEAKER;30W,8ohm,91dB,20Hz	
3		3001-001107	SPEAKER;20W,8ohm,95dB,1300Hz	
3		AA60-00078A	SPACER DUAL,LOCK,S4J,B,P50.40X25	
3		AA61-00094C	HOLDER RAIL,,PC,J533R,ABS,HB,BLK,480	
3		AA61-00097A	HOLDER WIRE,,,NYLON 6/6,,,NTR,	
3		AA61-00458A	CASTER,,,TP4015 05 NYL,OH47,,,SR4	S.N.A

ASSY CABINET MASK

Level	Loc. No.	Code No.	Description ; Specification	Remark
1	*	AA91-00498C	ASSY CABINET MASK,,HB,GRAY,G906~D902 PA	
2	C/FRON	AA63-00380A	COVER CORNER,PJT,POLYESTER,,,CLR,#572	
2		AA64-01544C	CABINET-FRONT,MASK,43J,B,GD909P~DG902P DO	
3		AA64-01544A	CABINET-FRONT,MASK,43J,B,1884.4 APCHULAB	S.N.A
2		AA64-01545B	CABINET-MASK,SIDE,43J,B,GD909P+DG902,ABS,	
3		AA64-01545A	CABINET-MASK,SIDE,43J,B,L665.4 APCHULABS	S.N.A
2		AA64-01544H	CABINET-FRONT,MASK,SP43J,B-F,G906~D902 JS	
3		AA64-01544A	CABINET-FRONT,MASK,43J,B,1884.4 APCHULAB	S.N.A
2		AA61-00505B	HOLDER-CORNER,43,54,62,H,ABS,GRAY,HB	

ASSY-PCB,TERMINAL

Level	Loc. No.	Code No.	Description ; Specification	Remark
1	*	AA95-00219D	ASSY-PCB,TERMINAL,,,SP43J,SHF,J51A,,,1	
2	CNT01	3711-003630	CONNECTOR-HEADER,BOX,32P,2R,2.54mm,ANGLE	
2	CNT02	3711-003630	CONNECTOR-HEADER,BOX,32P,2R,2.54mm,ANGLE	
2	CNT03	3711-003601	CONNECTOR-HEADER,BOX,12P,1R,2.5mm,ANGLE,	
2	IC703	0904-001121	IC I/O SUPPORT CHIP,8574,88IT,DIP16P,30	
2	IC704	1001-001022	IC ANALOG SWITCH,TDA8601,BLANKING,DIP16	
2	IC705	0801-000213	IC CMOS LOGIC,4052,MULTIPLEXER,DIP,16P,3	
2	JKV01	3722-000498	JACK SCART,21P,,SN,BLK,NO	
2	JKV02	3722-001039	JACK-RCA,SP,3.4mm,SN,BLK,#16-22	
2	JKV03	3722-001382	JACK-RCA,SP(P),3.4MM,NI,R/W/G/BLUE,,	
2	JKV04	3722-001350	JACK-RCA,7P/SP,3.4MM,NI,BLK,,	
2	JKV05	3701-001013	CONNECTOR-DSUB,15P,3R,FEMALE,STRAIGHT,AU	
2	JKV06	3701-001013	CONNECTOR-DSUB,15P,3R,FEMALE,STRAIGHT,AU	
2	JKV07	3722-000544	JACK VHS,4P,11.5mm,AG,BLK,N	
2	RN701	2011-000160	R-NETWORK,10Kohm,5%,1/8W,A,SIP9P,TP	
2		AA65-30105A	CLAMP WIRE,NYLON 66,V2,NTR,15MM,ALL MODE	S.N.A
2		AA99-20079E	ASSY-PCB SUB,AUTO;,AA95-00219D,,,V	S.N.A
3	C701	2401-002009	C-AL,100uF,20%,16V,GP,TP6.3x7.5	
3	C702	2203-000181	C-CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP,	
3	C703	2401-002009	C-AL,100uF,20%,16V,GP,TP6.3x7.5	

Level	Loc. No.	Code No.	Description ; Specification	Remark
3	C704	2203-000818	C-CERAMIC,CHIP,0.033nF,5%,50V,NP0,TP,201	
3	C705	2203-000818	C-CERAMIC,CHIP,0.033nF,5%,50V,NP0,TP,201	
3	C706	2203-000979	C-CERAMIC,CHIP,47nF,10%,50V,X7R,TP,2012	
3	C707	2203-000979	C-CERAMIC,CHIP,47nF,10%,50V,X7R,TP,2012	
3	C708	2203-000979	C-CERAMIC,CHIP,47nF,10%,50V,X7R,TP,2012	
3	C709	2203-000979	C-CERAMIC,CHIP,47nF,10%,50V,X7R,TP,2012	
3	C710	2203-000979	C-CERAMIC,CHIP,47nF,10%,50V,X7R,TP,2012	
3	C711	2203-000979	C-CERAMIC,CHIP,47nF,10%,50V,X7R,TP,2012	
3	C712	2203-000181	C-CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP	
3	C713	2203-000979	C-CERAMIC,CHIP,47nF,10%,50V,X7R,TP,2012	
3	C714	2203-000979	C-CERAMIC,CHIP,47nF,10%,50V,X7R,TP,2012	
3	C715	2203-000979	C-CERAMIC,CHIP,47nF,10%,50V,X7R,TP,2012	
3	C716	2401-002009	C-AL,100uF,20%,16V,GP,TP6.3x7.5	
3	C717	2203-000181	C-CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP	
3	C718	2203-000979	C-CERAMIC,CHIP,47nF,10%,50V,X7R,TP,2012	
3	C719	2203-000979	C-CERAMIC,CHIP,47nF,10%,50V,X7R,TP,2012	
3	C720	2203-000979	C-CERAMIC,CHIP,47nF,10%,50V,X7R,TP,2012	
3	C721	2203-000979	C-CERAMIC,CHIP,47nF,10%,50V,X7R,TP,2012	
3	C722	2203-000979	C-CERAMIC,CHIP,47nF,10%,50V,X7R,TP,2012	
3	C723	2203-000181	C-CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP	
3	C724	2203-000979	C-CERAMIC,CHIP,47nF,10%,50V,X7R,TP,2012	
3	C725	2203-000181	C-CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP	
3	C726	2203-000181	C-CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP	
3	C727	2203-000979	C-CERAMIC,CHIP,47nF,10%,50V,X7R,TP,2012	
3	C730	2401-002299	C-AL,4.7uF,20%,50V,GP,TP,5x7.5	
3	C731	2401-002299	C-AL,4.7uF,20%,50V,GP,TP,5x7.5	
3	C732	2203-000444	C-CERAMIC,CHIP,1nF,10%,50V,X7R,TP,2012,	
3	C733	2203-000444	C-CERAMIC,CHIP,1nF,10%,50V,X7R,TP,2012,	
3	C734	2203-000444	C-CERAMIC,CHIP,1nF,10%,50V,X7R,TP,2012,	
3	C735	2203-000444	C-CERAMIC,CHIP,1nF,10%,50V,X7R,TP,2012,	
3	C736	2203-000444	C-CERAMIC,CHIP,1nF,10%,50V,X7R,TP,2012,	
3	C737	2203-000444	C-CERAMIC,CHIP,1nF,10%,50V,X7R,TP,2012	
3	C740	2401-001840	C-AL,100uF,20%,16V,GP,TP5.3x11.5	
3	C741	2203-000181	C-CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP	
3	C742	2401-001840	C-AL,100uF,20%,16V,GP,TP5.3x11.5	
3	C743	2203-000181	C-CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP	
3	C744	2203-000575	C-CERAMIC,CHIP,220NF,10%,25V,X7R,TP,2012	
3	C745	2203-000575	C-CERAMIC,CHIP,220NF,10%,25V,X7R,TP,2012	
3	C746	2203-000575	C-CERAMIC,CHIP,220NF,10%,25V,X7R,TP,2012	
3	C747	2203-000575	C-CERAMIC,CHIP,220NF,10%,25V,X7R,TP,2012	
3	C748	2203-000575	C-CERAMIC,CHIP,220NF,10%,25V,X7R,TP,2012	
3	C749	2203-000575	C-CERAMIC,CHIP,220NF,10%,25V,X7R,TP,2012	
3	C760	2401-000667	C-AL,2.2uF,20%,50V,WT,TP,5x11.5	
3	C761	2401-000667	C-AL,2.2uF,20%,50V,WT,TP,5x11.5	
3	C762	2401-000667	C-AL,2.2uF,20%,50V,WT,TP,5x11.5	
3	C763	2401-000667	C-AL,2.2uF,20%,50V,WT,TP,5x11.5	
3	C764	2401-000667	C-AL,2.2uF,20%,50V,WT,TP,5x11.5	
3	C765	2401-000667	C-AL,2.2uF,20%,50V,WT,TP,5x11.5	
3	C766	2401-000667	C-AL,2.2uF,20%,50V,WT,TP,5x11.5	
3	C767	2401-000667	C-AL,2.2uF,20%,50V,WT,TP,5x11.5	
3	C768	2203-000979	C-CERAMIC,CHIP,47nF,10%,50V,X7R,TP,2012	
3	C769	2203-000979	C-CERAMIC,CHIP,47nF,10%,50V,X7R,TP,2012	
3	C770	2203-000683	C-CERAMIC,CHIP,0.027nF,5%,50V,NP0,TP,201	
3	C771	2203-000683	C-CERAMIC,CHIP,0.027nF,5%,50V,NP0,TP,201	
3	C772	2203-000683	C-CERAMIC,CHIP,0.027nF,5%,50V,NP0,TP,201	
3	C773	2203-000239	C-CERAMIC,CHIP,0.1nF,5%,50V,NP0,TP,2012	
3	C774	2203-000239	C-CERAMIC,CHIP,0.1nF,5%,50V,NP0,TP,2012	
3	C775	2203-000444	C-CERAMIC,CHIP,1nF,10%,50V,X7R,TP,2012,	
3	C776	2203-000444	C-CERAMIC,CHIP,1nF,10%,50V,X7R,TP,2012,	
3	C777	2401-001496	C-AL,47uF,20%,16V,GP,TP5x7.5	
3	C780	2401-000360	C-AL,100uF,20%,50V,GP,TP8x11.5,5	
3	C782	2401-000471	C-AL,10uF,20%,50V,BP,TP,5x11.5mm	
3	C783	2401-000471	C-AL,10uF,20%,50V,BP,TP,5x11.5mm	
3	DZ701	0403-000314	DIODE-ZENER,RLZ,9.1B,9.1V,B,80-9.30V,400	
3	DZ702	0403-000314	DIODE-ZENER,RLZ,9.1B,9.1V,B,80-9.30V,400	
3	DZ703	0403-000314	DIODE-ZENER,RLZ,9.1B,9.1V,B,80-9.30V,400	
3	DZ704	0403-001117	DIODE-ZENER,RLZ12B,5%,500mW,LL 34,TP	
3	DZ705	0403-000620	DIODE-ZENER,RLZ5.6B,5.6,5,500mW,LL 34,TP	
3	IC701	1001-001030	IC-VIDEO SWITCH,TDA6820R,,SOP28P,300MM	
3	IC702	1001-001030	IC-VIDEO SWITCH,TDA6820R,,SOP28P,300MM	
3	J701	2007-000029	R-CHIP,0OHM,5%,1/10W,DA,TP,2012	
3	J702	2007-000029	R-CHIP,0OHM,5%,1/10W,DA,TP,2012	
3	L701	2702-001094	INDUCTOR RADIAL,10uH,10%,6x4mm	
3	L702	2702-001094	INDUCTOR RADIAL,10uH,10%,6x4mm	
3	L703	2702-001094	INDUCTOR RADIAL,10uH,10%,6x4mm	
3	L704	2702-001094	INDUCTOR RADIAL,10uH,10%,6x4mm	
3	L705	2702-001094	INDUCTOR RADIAL,10uH,10%,6x4mm	
3	L706	2702-001094	INDUCTOR RADIAL,10uH,10%,6x4mm	
3	L707	2702-001094	INDUCTOR RADIAL,10uH,10%,6x4mm	
3	L708	2702-001094	INDUCTOR RADIAL,10uH,10%,6x4mm	
3	L709	2702-001094	INDUCTOR RADIAL,10uH,10%,6x4mm	
3	L710	2702-001094	INDUCTOR RADIAL,10uH,10%,6x4mm	
3	L719	2702-001094	INDUCTOR RADIAL,10uH,10%,6x4mm	
3	L720	2702-001094	INDUCTOR RADIAL,10uH,10%,6x4mm	
3	L721	2702-001094	INDUCTOR RADIAL,10uH,10%,6x4mm	
3	L722	2702-001094	INDUCTOR RADIAL,10uH,10%,6x4mm	
3	L723	2702-001094	INDUCTOR RADIAL,10uH,10%,6x4mm	
3	L724	2702-001094	INDUCTOR RADIAL,10uH,10%,6x4mm	
3	L725	2702-001094	INDUCTOR RADIAL,10uH,10%,6x4mm	
3	L726	2702-001094	INDUCTOR RADIAL,10uH,10%,6x4mm	
3	PCB	AA41-000768	PCB,AV TERMINAL,SP43J,SHF,R4.2L,3.1,6T	S.N.A
3	Q701	0501-000727	TR SMALL SIGNAL,BC848C,NPN,310mW,SOT-23,	
3	Q702	0501-000727	TR SMALL SIGNAL,BC848C,NPN,310mW,SOT-23,	
3	Q703	0501-000727	TR SMALL SIGNAL,BC848C,NPN,310mW,SOT-23,	
3	Q704	0501-000727	TR SMALL SIGNAL,BC848C,NPN,310mW,SOT-23,	
3	Q705	0501-000727	TR SMALL SIGNAL,BC848C,NPN,310mW,SOT-23,	
3	Q706	0501-000727	TR SMALL SIGNAL,BC848C,NPN,310mW,SOT-23,	
3	Q707	0501-000727	TR SMALL SIGNAL,BC848C,NPN,310mW,SOT-23,	
3	Q708	0501-000727	TR SMALL SIGNAL,BC848C,NPN,310mW,SOT-23,	
3	Q709	0501-000727	TR SMALL SIGNAL,BC848C,NPN,310mW,SOT-23,	
3	Q710	0501-000727	TR SMALL SIGNAL,BC848C,NPN,310mW,SOT-23,	
3	Q711	0501-000727	TR SMALL SIGNAL,BC848C,NPN,310mW,SOT-23,	
3	Q712	0501-000727	TR SMALL SIGNAL,BC848C,NPN,310mW,SOT-23,	
3	Q713	0501-000727	TR SMALL SIGNAL,BC848C,NPN,310mW,SOT-23,	
3	R701	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP,2012	
3	R702	2007-000300	R-CHIP,10KOHM,5%,1/10W,DA,TP,2012	
3	R703	2007-000468	R-CHIP,1KOHM,5%,1/10W,DA,TP,2012	
3	R704	2007-000511	R-CHIP,2.4KOHM,5%,1/10W,DA,TP,2012	
3	R705	2007-001166	R-CHIP,75OHM,5%,1/10W,DA,TP,2012	
3	R706	2007-001166	R-CHIP,75OHM,5%,1/10W,DA,TP,2012	
3	R708	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP,2012	
3	R709	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP,2012	
3	R710	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP,2012	
3	R711	2007-001166	R-CHIP,75OHM,5%,1/10W,DA,TP,2012	
3	R712	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP,2012	
3	R713	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP,2012	
3	R714	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP,2012	
3	R715	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP,2012	
3	R716	2007-000300	R-CHIP,10KOHM,5%,1/10W,DA,TP,2012	
3	R717	2007-000401	R-CHIP,150OHM,5%,1/10W,DA,TP,2012	
3	R718	2007-000300	R-CHIP,10KOHM,5%,1/10W,DA,TP,2012	
3	R719	2007-000468	R-CHIP,1KOHM,5%,1/10W,DA,TP,2012	
3	R720	2007-000511	R-CHIP,2.4KOHM,5%,1/10W,DA,TP,2012	
3	R721	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP,2012	
3	R722	2007-001166	R-CHIP,75OHM,5%,1/10W,DA,TP,2012	
3	R723	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP,2012	
3	R724	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP,2012	
3	R725	2007-001166	R-CHIP,75OHM,5%,1/10W,DA,TP,2012	
3	R726	2007-001166	R-CHIP,75OHM,5%,1/10W,DA,TP,2012	
3	R727	2007-001166	R-CHIP,75OHM,5%,1/10W,DA,TP,2012	
3	R728	2007-001166	R-CHIP,75OHM,5%,1/10W,DA,TP,2012	
3	R729	2007-001166	R-CHIP,75OHM,5%,1/10W,DA,TP,2012	
3	R730	2007-000282	R-CHIP,100KOHM,5%,1/10W,DA,TP,2012	
3	R731	2007-000282	R-CHIP,100KOHM,5%,1/10W,DA,TP,2012	
3	R732	2007-000282	R-CHIP,100KOHM,5%,1/10W,DA,TP,2012	
3	R733	2007-000282	R-CHIP,100KOHM,5%,1/10W,DA,TP,2012	
3	R734	2007-000941	R-CHIP,47KOHM,5%,1/10W,DA,TP,2012	
3	R735	2007-000941	R-CHIP,47KOHM,5%,1/10W,DA,TP,2012	
3	R736	2007-001166	R-CHIP,75OHM,5%,1/10W,DA,TP,2012	
3	R737	2007-000766	R-CHIP,330OHM,5%,1/10W,DA,TP,2012	
3	R740	2007-000468	R-CHIP,1KOHM,5%,1/10W,DA,TP,2012	
3	R741	2007-000468	R-CHIP,1KOHM,5%,1/10W,DA,TP,2012	
3	R742	2007-000468	R-CHIP,1KOHM,5%,1/10W,DA,TP,2012	
3	R743	2007-000468	R-CHIP,1KOHM,5%,1/10W,DA,TP,2012	
3	R744	2007-000468	R-CHIP,1KOHM,5%,1/10W,DA,TP,2012	
3	R745	2007-000468	R-CHIP,1KOHM,5%,1/10W,DA,TP,2012	
3	R746	2007-000468	R-CHIP,1KOHM,5%,1/10W,DA,TP,2012	
3	R748	2007-000872	R-CHIP,4.7KOHM,5%,1/10W,DA,TP,2012	
3	R749	2007-000029	R-CHIP,0OHM,5%,1/10W,DA,TP,2012	
3	R750	2007-000572	R-CHIP,220OHM,5%,1/10W,DA,TP,2012	
3	R751	2007-000029	R-CHIP,0OHM,5%,1/10W,DA,TP,2012	
3	R752	2007-000572	R-CHIP,220OHM,5%,1/10W,DA,TP,2012	

Level	Loc. No.	Code No.	Description ; Specification	Remark
.3	R753	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
3	R754	2007-000572	R-CHIP;220OHM,5%,1/10W,DA,TP,2012	
3	R755	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
.3	R756	2007-000964	R-CHIP;5.1KOHM,5%,1/10W,DA,TP,2012	
3	R757	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
.3	R758	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
3	R759	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
..3	R760	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R761	2007-000221	R-CHIP;1.2KOHM,5%,1/10W,DA,TP,2012	
3	R762	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R763	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R764	2007-000221	R-CHIP;1.2KOHM,5%,1/10W,DA,TP,2012	
3	R765	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R766	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R767	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R768	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R769	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R770	2007-000766	R-CHIP;330OHM,5%,1/10W,DA,TP,2012	
3	R771	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
3	R772	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
3	R773	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
.3	R774	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
.3	R775	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
.3	R776	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
..3	R777	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
..3	R778	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
.3	R779	2007-001100	R-CHIP;62OHM,5%,1/10W,DA,TP,2012	
..3	R780	2007-001100	R-CHIP;62OHM,5%,1/10W,DA,TP,2012	
.3	R781	2007-001100	R-CHIP;62OHM,5%,1/10W,DA,TP,2012	
.3	R782	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
.3	R783	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
.3	R784	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
.3	R785	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
..3	R786	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
..3	R787	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R788	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
.3	R791	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
.3	R792	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R793	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
..3	R794	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
..3	R795	2007-001155	R-CHIP;750OHM,5%,1/10W,DA,TP,2012	
..3	R796	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
..3	R797	2007-001155	R-CHIP;750OHM,5%,1/10W,DA,TP,2012	
.3	R798	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
..3	R799	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
..3	R800	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
.3	R801	2007-001156	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
..3	R802	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
.3	R803	2007-000328	R-CHIP;11KOHM,5%,1/10W,DA,TP,2012	
..3	R804	2007-000328	R-CHIP;11KOHM,5%,1/10W,DA,TP,2012	
..3	R805	2007-000001	R-CHIP;68KOHM,5%,1/10W,DA,TP,2012	
3	R806	2007-000001	R-CHIP;68KOHM,5%,1/10W,DA,TP,2012	
..3	R807	2007-000001	R-CHIP;68KOHM,5%,1/10W,DA,TP,2012	
..3	R808	2007-000001	R-CHIP;68KOHM,5%,1/10W,DA,TP,2012	
..3	R809	2007-000001	R-CHIP;68KOHM,5%,1/10W,DA,TP,2012	
..3	R810	2007-000001	R-CHIP;68KOHM,5%,1/10W,DA,TP,2012	
.3	R811	2007-000001	R-CHIP;68KOHM,5%,1/10W,DA,TP,2012	
.3	R812	2007-000001	R-CHIP;68KOHM,5%,1/10W,DA,TP,2012	
.3	R813	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
..3	R814	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
.3	R815	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
..3	R816	2007-000774	R-CHIP;33KOHM,5%,1/10W,DA,TP,2012	
..3	R817	2007-000615	R-CHIP;24KOHM,5%,1/10W,DA,TP,2012	
.3	R818	2007-000774	R-CHIP;33KOHM,5%,1/10W,DA,TP,2012	
.3	R819	2007-000615	R-CHIP;24KOHM,5%,1/10W,DA,TP,2012	
..2		0202-000187	SOLDER WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
..2		0202-001004	SOLDER-CREAM;SQ-2030M SZH-1,S63A,D0.04,5	S.N.A

ASSY-PCB,H/V

Level	Loc. No.	Code No.	Description ; Specification	Remark
1	*	AA95-00056C	ASSY-PCB,H/V;-,SP43J5HP3S/XTT,J51A,-,-	
..2	BK01	AA61-10068A	BRACKET-PCB;-,M2160,SPTE,T0.3,-,-,-	S.N.A
2	BK02	AA61-10068A	BRACKET-PCB;-,M2160,SPTE,T0.3,-,-	S.N.A
2	BK03	AA61-10068A	BRACKET-PCB;-,M2160,SPTE,T0.3,-,-	S.N.A
.2	CN401	3711-001049	CONNECTOR HEADER;BOX,5P,1R,2.5mm,ANGLE,-	
2	CN402	3711-002709	CONNECTOR HEADER;NOWALL,12P,1R,2.5MM,ANG	
2	CN403	AA39-20052A	LEAD CONNECTOR ASSY;-,4P,YBNH025-04,YSH02	
.2	CN404	3711-001283	CONNECTOR HEADER;NOWALL,14P,1R,2.5mm,ANG	
2	IC471	1203-000610	IC-PWM CONTROLLER;494,DIP,16P,300MIL,PLA	
2	L351	AA27-10003M	COIL-CHOKE;-,6100uH,J,40,34mA,TP,EL0607R	
2	PCB	AA41-00199C	PCB-H/V MODULE;P53A,CEM-1,1L,C,1.6T,330x	S.N.A
2	Q371	AA96-50291A	ASSY-H/S;-,AA62-301548,2SC4636,	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
.3		0502-000442	TR-POWER;2SC4636RB,NPN,2W,TO-220,ST,10-	
.3		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
3		AA62-301548	HEAT SINK-ES;-,A6063,EXTR,-,SILVER ANO	
2	Q422	0505-000156	FET-SILICON;IRF620,N,200V,5A,0.8ohm,50W,	
.2	R425	2003-000736	R-METAL OXIDE(S);560ohm,5%,3W,AA,TP,6x16	
2	R485	2008-001096	R-FUSIBLE(S);3.3OHM,5%,1/2W,AC,BK,2.5X6.	
2		2001-000262	R-CARBON;1.8MOHM,5%,1/8W,AA,TP,1.8X3.2M	
2		AA99-20071J	ASSY PCB SUB AUTO;-,AA95-00056C,-,V	S.N.A
3	C341	2401-001914	C-AL;1uF,20%,50V,BP,TP,5x11,5	
.3	C342	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
3	C351	2301-000175	C-FILM,PEF;15nF,5%,50V,TP,7.1x3.5x13mm,5	
3	C352	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.3	C353	2301-000204	C-FILM,PEF;2.7nF,5%,50V,TP,7.4x3.9x13mm,	
..3	C354	2301-000261	C-FILM,PEF;4.7nF,5%,100V,TP,10.5x12.5x6,	
.3	C355	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
..3	C356	2201-000180	C-CERAMIC,DISC;10nF,10%,50V,Y5V,TP,7x3,5	
..3	C357	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
.3	C358	2401-000471	C-AL;10uF,20%,50V,BP,TP,5x11,5mm	
..3	C360	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
.3	C361	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0m	
..3	C362	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
..3	C371	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
.3	C372	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
..3	C373	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
..3	C374	2401-001621	C-AL;6.8uF,20%,450V,GP,TP,13x20,5	
.3	C405	2201-000558	C-CERAMIC,DISC;0.47nF,10%,50V,Y5P,TP,5x3	
3	C406	2201-000370	C-CERAMIC,DISC;0.22nF,10%,50V,Y5P,TP,4x3	
3	C421	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
3	C429	2305-000704	C-FILM,MPEF;100nF,5%,250V,TP,16.5x10.3x5	
.3	C454	2303-000331	C-FILM,PPF;4.7nF,5%,630V,TP,19.5x12x7.7	
.3	C455	2401-001527	C-AL;47uF,20%,250V,HR,TP,13x25mm,5m	
.3	C456	2201-000132	C-CERAMIC,DISC;0.1nF,10%,500V,Y5P,TP,6.5	
.3	C461	2201-000600	C-CERAMIC,DISC;0.56nF,10%,50V,Y5P,TP,5x3	
.3	C462	2301-000246	C-FILM,PEF;33nF,5%,100V,TP,7x5.0x9.5mm,5	
.3	C480	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0m	
..3	C481	2401-000914	C-AL;22uF,20%,16V,GP,TP,5x11,5	
..3	C482	2305-000178	C-FILM,MPEF;10nF,5%,100V,TP,-,5mm	
..3	C484	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
..3	C485	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,	
..3	C486	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,	
..3	C487	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
..3	C488	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
..3	C489	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
..3	C490	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
..3	C492	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
..3	C493	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP	
..3	C494	2201-000471	C-CERAMIC,DISC;0.33nF,10%,50V,Y5P,TP,4x3	
.3	C495	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
.3	C496	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
.3	D342	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
..3	D343	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.3	D344	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.3	D345	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
..3	D352	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
..3	D353	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
..3	D355	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
..3	D363	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
..3	D364	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
..3	D371	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
..3	D372	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
..3	D373	0402-000243	DIODE-RECTIFIER;RC2-V1,2000V,0.2A,DO-201	
..3	D384	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
..3	D385	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
..3	D386	0403-001316	DIODE-ZENER;MTZJ3.0A,2.85-3.07V,500mW,DO	
..3	D395	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
..3	D442	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
..3	D443	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
..3	D451	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	

Level	Loc. No.	Code No.	Description ; Specification	Remark
..3	D456	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35	
3	D457	0403-000714	DIODE-ZENER;MTZJ3.3B,3.3V,3.32-3.53V,500	
3	D474	0403-000734	DIODE-ZENER;TZP15B,15V,14.7-16.5V,1W,DO-	
.3	D475	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35	
..3	D476	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35.	
3	D477	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35	
..3	D478	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35.	
.3	D479	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35.	
..3	D480	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
3	D483	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
3	D484	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
3	D491	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35.	
3	D492	0403-000716	DIODE-ZENER;MTZJ4.7B,4.7V,4.55-4.8V,500m	
3	D493	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
3	IC481	1203-001217	IC-POS.ADJUST REG;431,TO-92,3P,4.58MIL	
.3	L341	2701-000116	INDUCTOR-AXIAL;10uH,10%,4.2x9.8mm	
.3	Q342	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
3	Q343	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
..3	Q344	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
..3	Q350	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
3	Q351	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
.3	Q352	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
..3	Q353	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.3	Q354	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
..3	Q355	0501-000366	TR-SMALL SIGNAL;KSC2330-Y,NPN,1W,TO-92L	
..3	Q381	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
..3	Q382	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
..3	Q401	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
..3	Q402	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
..3	Q421	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.3	Q451	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
..3	Q452	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
3	Q453	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.3	Q454	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
3	Q461	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
3	Q471	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
3	Q473	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
3	Q481	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
3	Q482	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
.3	Q483	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
3	Q491	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.3	R339	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.3	R340	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R341	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.3	R342	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.3	R343	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.3	R344	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..3	R345	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
.3	R345A	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..3	R346	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..3	R347	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
.3	R348	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.3	R349	2001-000252	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..3	R351	2001-001178	R-CARBON(S);680OHM,5%,1/2W,AA,TP,2.4X6.4	
..3	R352	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
..3	R353	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.3	R354	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.3	R355	2001-000006	R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..3	R357	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.3	R358	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.3	R359	2001-000766	R-CARBON;43KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.3	R360	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.3	R361	2001-001191	R-CARBON(S);820KOHM,5%,1/2W,AA,TP,2.4X6	
..3	R362	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.3	R363	2001-000723	R-CARBON;4.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.3	R364	2001-000938	R-CARBON;[illegible],5%,1/8W,AA,TP,1.8X3.2MM	
3	R365	2001-001120	R-CARBON(S);3.3OHM,5%,1/2W,AA,TP,2.4X6.4	
..3	R366	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4	
..3	R367	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6	
.3	R368	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	
.3	R369	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	
..3	R369A	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	
..3	R370	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	
.3	R371	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	
..3	R372	2001-001110	R-CARBON(S);240KOHM,5%,1/2W,AA,TP,2.4X6.	
.3	R373	2001-001110	R-CARBON(S);240KOHM,5%,1/2W,AA,TP,2.4X6	
3	R374	2001-001110	R-CARBON(S);240KOHM,5%,1/2W,AA,TP,2.4X6.	
3	R375	2001-001113	R-CARBON(S);270KOHM,5%,1/2W,AA,TP,2.4X6.	
.3	R376	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R377	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
..3	R378	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
.3	R379	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
..3	R380	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
3	R381	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
.3	R384	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA,TP,2.4X6.	
3	R385	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R386	2001-000796	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R387	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.3	R388	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R389	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R395	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R397	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.3	R411	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.3	R412	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
.3	R413	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
..3	R414	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..3	R415	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..3	R416	2001-000006	R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..3	R420	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
..3	R421	2003-002159	R-METAL OXIDE;150OHM,5%,1W,AC,TP,4.3X12M	
..3	R422	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
..3	R423	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.3	R437	2008-001087	R-FUSIBLE(S);1.8ohm,5%,2W,AG,TP,3.9x12mm	
..3	R438	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
..3	R439	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
.3	R442	2008-000254	R-FUSIBLE(S);0.68ohm,5%,2W,AF,TP,3.9x10m	
.3	R442A	2008-000254	R-FUSIBLE(S);0.68ohm,5%,2W,AF,TP,3.9x10m	
..3	R443	2003-002156	R-METAL OXIDE;560OHM,5%,2W,AG,TP,5X15MM	
3	R443A	2003-002156	R-METAL OXIDE;560OHM,5%,2W,AC,TP,5X16MM	
3	R445	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..3	R446	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R447	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R448	2001-000411	R-CARBON;18KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.3	R449	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R450	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.3	R451	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R452	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..3	R454	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
..3	R455	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
..3	R456	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
..3	R458	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..3	R459	2001-001192	R-CARBON(S);820OHM,5%,1/2W,AA,TP,2.4X6.4	
...3	R460	2003-002044	R-METAL OXIDE(S);100ohm,5%,1W,AF,TP,2.5x	
..3	R461	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..3	R464	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..3	R471	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
..3	R472	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3	R473	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..3	R474	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..3	R474A	2001-000508	R-CARBON;220KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..3	R475	2004-001023	R-METAL;5.6Kohm,1%,1/8W,AA,TP,1.8x3.2m	
..3	R475B	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..3	R477	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.3	R479	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm	
.3	R480	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R481	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R482	2001-001031	R-CARBON;91KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R483	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R484	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.3	R487	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.3	R489	2001-000622	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..3	R490	2001-000723	R-CARBON;4.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.3	R491	2001-001178	R-CARBON(S);680OHM,5%,1/2W,AA,TP,2.4X6.4	
..3	R492	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..3	R493	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..3	R494	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
..3	R495	2001-000037	R-CARBON(S);330OHM,5%,1/2W,AA,TP,2.4X6.4	
..3	R496	2001-000347	R-CARBON;13KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..3	R497	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
..3	R498	2001-001070	R-CARBON(S);120OHM,5%,1/2W,AA,TP,2.4X6.4	
..2		0202-000187	SOLDER WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
2		AA65-30105C	CLAMP WIRE;ALL MODEL,NYLON 66,V2,NTR,5MM	S.N.A

ASSY-PCB,CONV AMP

Level	Loc. No.	Code No.	Description ; Specification	Remark
1	*	AA95-00055L	ASSY PCB,CONV AMP; SP43J3HF,J51A	
2	C491	2306-000322	C FILM,MPPF,12nF,5%,1.6KV,TP:29x20.5x13	
2	CN203	AA39-00115A	LEAD CONNECTOR ASSY;10PYBN-H250-10.3S1S	
2	CN401	AA39-00129A	LEAD CONNECTOR ASSY;8PYBN-H250-08.3S1S	
2	CN402	AA39-00116A	LEAD CONNECTOR ASSY;12PYBN-H250-12.3S1S	
2	CN802	AA39-00128A	LEAD CONNECTOR ASSY;8PYBN-H250-08.3S1S	
2	CZ101	AA96-50152C	ASSY H/S;,TR:AA62-30012A,KA7906A,30MM	
3		1203-000284	C,POSI,FIXED,REG;,7906,TO-220,3P,,PLAS	
3		6003-000333	SCREW,TAPTITE,RH,-,2S,M3,L10,ZPC(YEL),SW	
3		AA62-30012A	HEAT SINK;ES,,,AA063,EXTR,,,T0220,	
2	CZ102	1203-000121	C,NEGA,FIXED,REG;,7906,TO-220,3P,,PLAS	
2	CZ103	AA96-00034A	ASSY H/S,,CONVERGENCE;AA62-30172D,STK3	
3		0205-000129	GREASE,SILICON,SC102,,JAPAN	S.N.A
3		1201-001225	IC,VIDEO AMP;3SZ,SIP,22P,,TRIPLE,,PLAS	
3		6003-001021	SCREW,TAPTITE,RH,-,B,M3,L15,ZPC(YEL),SWR	
3		AA62-30173D	HEAT SINK;ES,,,T1.0,WHITE,SCREW HOLE(2	
2	CZ104	AA96-00034A	ASSY H/S,,CONVERGENCE;AA62-30173D,STK3	
2	PCB	AA41-00135D	PCB,CONVERGENCE AMP;PS1A,1L,CEM-1,330x24	S.N.A
2	SG303	4715-001050	SURGE ABSORBER;2.4kV,20%,1500A,,,DISC,RA	
2		0202-000187	SOLDER-WIRE,FLUX,,,RS605,D1.2,63Sn/37Pb	S.N.A
2		AA99-20071E	ASSY-PCB SUB,AUTO;,AA95-00055L,,,V	S.N.A
3	CN403	3711-002543	CONNECTOR,HEADER,BOX,4P,1R,2.5MM,STRAIGH	
3	CZ101	2401-001429	C,AL,470uF,20%,50V,GP,TP,13x20.5	
3	CZ102	2401-001429	C,AL,470uF,20%,50V,GP,TP,13x20.5	
3	CZ103	2401-000689	C,AL,2200uF,20%,16V,GP,TP,13x25.5	
3	CZ105	2401-000689	C,AL,2200uF,20%,16V,GP,TP,13x25.5	
3	CZ106	2201-000180	C,CERAMIC,DISC,10nF,10%,50V,Y5V,TP,7x3.5	
3	CZ107	2201-000180	C,CERAMIC,DISC,10nF,10%,50V,Y5V,TP,7x3.5	
3	CZ108	2201-000499	C,CERAMIC,DISC,0.39nF,5%,50V,SL,TP,8.5x3	
3	CZ109	2201-000499	C,CERAMIC,DISC,0.39nF,5%,50V,SL,TP,8.5x3	
3	CZ110	2201-000499	C,CERAMIC,DISC,0.39nF,5%,50V,SL,TP,8.5x3	
3	CZ111	2201-000976	C,CERAMIC,DISC,0.022nF,5%,50V,NP0,TP,5x3	
3	CZ112	2201-000863	C,CERAMIC,DISC,0.68nF,10%,50V,Y5P,TP,5x3	
3	CZ113	2201-000976	C,CERAMIC,DISC,0.022nF,5%,50V,NP0,TP,5x3	
3	CZ114	2201-000863	C,CERAMIC,DISC,0.68nF,10%,50V,Y5P,TP,5x3	
3	CZ115	2201-000976	C,CERAMIC,DISC,0.022nF,5%,50V,NP0,TP,5x3	
3	CZ116	2201-000863	C,CERAMIC,DISC,0.68nF,10%,50V,Y5P,TP,5x3	
3	CZ117	2201-000327	C,CERAMIC,DISC,2.2nF,10%,50V,Y5V,TP,6.5x	
3	CZ118	2201-000327	C,CERAMIC,DISC,2.2nF,10%,50V,Y5V,TP,6.5x	
3	CZ119	2201-000119	C,CERAMIC,DISC,100nF,-80,20%,50V,Y5V,TP,	
3	CZ120	2201-000119	C,CERAMIC,DISC,100nF,-80,20%,50V,Y5V,TP,	
3	CZ121	2201-000764	C,CERAMIC,DISC,0.082nF,5%,50V,NP0,TP,8x3	
3	CZ126	2201-000499	C,CERAMIC,DISC,0.39nF,5%,50V,SL,TP,8.5x3	
3	CZ127	2201-000499	C,CERAMIC,DISC,0.39nF,5%,50V,SL,TP,8.5x3	
3	CZ128	2201-000499	C,CERAMIC,DISC,0.39nF,5%,50V,SL,TP,8.5x3	
3	CZ132	2201-000976	C,CERAMIC,DISC,0.022nF,5%,50V,NP0,TP,5x3	
3	CZ133	2201-000863	C,CERAMIC,DISC,0.68nF,10%,50V,Y5P,TP,5x3	
3	CZ134	2201-000876	C,CERAMIC,DISC,0.022nF,5%,50V,NP0,TP,5x3	
3	CZ135	2201-000863	C,CERAMIC,DISC,0.68nF,10%,50V,Y5P,TP,5x3	
3	CZ136	2201-000976	C,CERAMIC,DISC,0.022nF,5%,50V,NP0,TP,5x3	
3	CZ137	2201-000863	C,CERAMIC,DISC,0.68nF,10%,50V,Y5P,TP,5x3	
3	CZ138	2201-000327	C,CERAMIC,DISC,2.2nF,10%,50V,Y5V,TP,6.5x	
3	CZ139	2201-000327	C,CERAMIC,DISC,2.2nF,10%,50V,Y5V,TP,6.5x	
3	CZ144	2401-001840	C,AL,100uF,20%,16V,GP,TP,6.3x11.5	
3	CZ145	2201-000119	C,CERAMIC,DISC,100nF,-80,20%,50V,Y5V,TP,	
3	CZ146	2401-001840	C,AL,100uF,20%,16V,GP,TP,6.3x11.5	
3	CZ147	2201-000119	C,CERAMIC,DISC,100nF,-80,20%,50V,Y5V,TP,	
3	CZ151	2202-000796	C,CERAMIC,MLC,AXIAL,1NF,10%,50V,Y5P,TP,3	
3	CZ152	2202-000796	C,CERAMIC,MLC,AXIAL,1NF,10%,50V,Y5P,TP,3	
3	CZ153	2202-000796	C,CERAMIC,MLC,AXIAL,1NF,10%,50V,Y5P,TP,3	
3	CZ154	2202-000796	C,CERAMIC,MLC,AXIAL,1NF,10%,50V,Y5P,TP,3	
3	CZ155	2202-000796	C,CERAMIC,MLC,AXIAL,1NF,10%,50V,Y5P,TP,3	
3	CZ156	2202-000796	C,CERAMIC,MLC,AXIAL,1NF,10%,50V,Y5P,TP,3	
3	D453	0402-001288	DIODE,RECTIFIER,RPTH,2000V,,1A,,,TP	
3	D501	0401-000005	DIODE,SWITCHING,1N4148,100V,200mA,DO-35,	
3	DZ120	0403-000510	DIODE,ZENER,MTZJ-6.2B,6.2V,5.96-6.27V,500	
3	DZ121	0403-000510	DIODE,ZENER,MTZJ-6.2B,6.2V,5.96-6.27V,500	
3	DZ122	0403-000510	DIODE,ZENER,MTZJ-6.2B,6.2V,5.96-6.27V,500	
3	DZ126	0402-000546	DIODE,RECTIFIER,TVR10G,400V,1.0A,DO-41,T	
3	DZ127	0402-000546	DIODE,RECTIFIER,TVR10G,400V,1.0A,DO-41,T	
3	DZ128	0403-000510	DIODE,ZENER,MTZJ-6.2B,6.2V,5.96-6.27V,500	
3	DZ129	0403-000510	DIODE,ZENER,MTZJ-6.2B,6.2V,5.96-6.27V,500	
3	DZ130	0403-000510	DIODE,ZENER,MTZJ-6.2B,6.2V,5.96-6.27V,500	
3	DZ131	0403-000510	DIODE,ZENER,MTZJ-6.2B,6.2V,5.96-6.27V,500	
3	LZ101	2701-001030	INDUCTOR,AXIAL,4.8uH,10%,5x14mm	
3	LZ102	2701-001030	INDUCTOR,AXIAL,4.8uH,10%,5x14mm	
3	LZ103	2701-000142	INDUCTOR,AXIAL,1uH,10%,2.5x3.4mm	
3	LZ104	2701-000142	INDUCTOR,AXIAL,1uH,10%,2.5x3.4mm	
3	LZ107	2701-000142	INDUCTOR,AXIAL,1uH,10%,2.5x3.4mm	
3	LZ108	2701-000142	INDUCTOR,AXIAL,1uH,10%,2.5x3.4mm	
3	LZ109	2701-000142	INDUCTOR,AXIAL,1uH,10%,2.5x3.4mm	
3	LZ110	2701-000142	INDUCTOR,AXIAL,1uH,10%,2.5x3.4mm	
3	LZ111	2701-000142	INDUCTOR,AXIAL,1uH,10%,2.5x3.4mm	
3	LZ112	2701-000142	INDUCTOR,AXIAL,1uH,10%,2.5x3.4mm	
3	R382	2902-001006	R,CA,POSITION,4.7Kohm,5%,1/2W,AA,TP,3.1x	
3	R476	2904-004046	R,METAL(S),430Kohm,1%,1/2W,AA,TP2.5x6.5	
3	R476A	2904-004001	R,METAL(S),180Kohm,1%,1/2W,AA,TP2.5x6.5	
3	R476B	2904-001892	R,METAL(S),162Kohm,1%,1/2W,AA,TP2.5x6.5	
3	R476C	2904-004046	R,METAL(S),430Kohm,1%,1/2W,AA,TP2.5x6.5	
3	R478	2904-001892	R,METAL(S),162Kohm,1%,1/2W,AA,TP2.5x6.5	
3	R501	2904-001376	R,METAL(S),11Kohm,1%,1/2W,AA,TP2.4x6.4m	
3	R502	2904-004366	R,METAL(S),1.3Kohm,1%,1/2W,AA,TP2.5x6.5	
3	RF219	2008-000261	R,FUSIBLE(S),150ohm,5%,1W,AF,TP,3.9x10mm	
3	RF220	2008-000261	R,FUSIBLE(S),150ohm,5%,1W,AF,TP,3.9x10mm	
3	RF221	2008-000261	R,FUSIBLE(S),150ohm,5%,1W,AF,TP,3.9x10mm	
3	RF222	2008-000261	R,FUSIBLE(S),150ohm,5%,1W,AF,TP,3.9x10mm	
3	RF250	2008-000261	R,FUSIBLE(S),150ohm,5%,1W,AF,TP,3.9x10mm	
3	RF251	2008-000261	R,FUSIBLE(S),150ohm,5%,1W,AF,TP,3.9x10mm	
3	RF252	2008-000261	R,FUSIBLE(S),150ohm,5%,1W,AF,TP,3.9x10mm	
3	RF253	2008-000261	R,FUSIBLE(S),150ohm,5%,1W,AF,TP,3.9x10mm	
3	RZ101	2001-000429	R,CARBON,1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RZ102	2001-000429	R,CARBON,1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RZ103	2001-000429	R,CARBON,1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RZ104	2001-001114	R,CARBON(S),270OHM,5%,1/2W,AA,TP2.4X6.4	
3	RZ105	2001-001114	R,CARBON(S),270OHM,5%,1/2W,AA,TP2.4X6.4	
3	RZ106	2001-001114	R,CARBON(S),270OHM,5%,1/2W,AA,TP2.4X6.4	
3	RZ107	2001-001114	R,CARBON(S),270OHM,5%,1/2W,AA,TP2.4X6.4	
3	RZ108	2001-001114	R,CARBON(S),270OHM,5%,1/2W,AA,TP2.4X6.4	
3	RZ109	2001-001114	R,CARBON(S),270OHM,5%,1/2W,AA,TP2.4X6.4	
3	RZ110	2001-000563	R,CARBON,27KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	RZ111	2001-000563	R,CARBON,27KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	RZ112	2001-000563	R,CARBON,27KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	RZ113	2001-000591	R,CARBON,3.3KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	RZ114	2001-000857	R,CARBON,560OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	RZ115	2001-000591	R,CARBON,3.3KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	RZ116	2001-000857	R,CARBON,560OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	RZ117	2001-000591	R,CARBON,3.3KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	RZ118	2001-000857	R,CARBON,560OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	RZ120	2001-000281	R,CARBON,1000HM,5%,1/8W,AA,TP1.8X3.2MM	
3	RZ121	2001-000281	R,CARBON,1000HM,5%,1/8W,AA,TP1.8X3.2MM	
3	RZ122	2001-000003	R,CARBON,330ohm,5%,1/8W,AA,TP1.8x3.2mm	
3	RZ123	2003-002148	R,METAL OXIDE,3.9OHM,2%,2W,AF,TP,3.9X10M	
3	RZ124	2003-002148	R,METAL OXIDE,3.9OHM,2%,2W,AF,TP,3.9X10M	
3	RZ125	2003-002148	R,METAL OXIDE,3.9OHM,2%,2W,AF,TP,3.9X10M	
3	RZ126	2003-002148	R,METAL OXIDE,3.9OHM,2%,2W,AF,TP,3.9X10M	
3	RZ127	2003-002148	R,METAL OXIDE,3.9OHM,2%,2W,AF,TP,3.9X10M	
3	RZ128	2003-002148	R,METAL OXIDE,3.9OHM,2%,2W,AF,TP,3.9X10M	
3	RZ129	2003-001024	R,METAL OXIDE(S),150ohm,5%,2W,AF,TP,3.9x	
3	RZ129A	2003-001024	R,METAL OXIDE(S),150ohm,5%,2W,AF,TP,3.9x	
3	RZ130	2003-001024	R,METAL OXIDE(S),150ohm,5%,2W,AF,TP,3.9x	
3	RZ130A	2003-001024	R,METAL OXIDE(S),150ohm,5%,2W,AF,TP,3.9x	
3	RZ131	2003-002157	R,METAL OXIDE,220OHM,5%,2W,AG,TP5X16MM	
3	RZ131A	2003-002157	R,METAL OXIDE,220OHM,5%,2W,AG,TP5X16MM	
3	RZ132	2003-002157	R,METAL OXIDE,220OHM,5%,2W,AG,TP5X16MM	
3	RZ132A	2003-002157	R,METAL OXIDE,220OHM,5%,2W,AG,TP5X16MM	
3	RZ133	2001-000563	R,CARBON,27KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	RZ134	2001-000563	R,CARBON,27KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	RZ135	2001-000563	R,CARBON,27KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	RZ136	2001-000591	R,CARBON,3.3KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	RZ137	2001-000857	R,CARBON,560OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	RZ138	2001-000591	R,CARBON,3.3KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	RZ139	2001-000857	R,CARBON,560OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	RZ140	2001-000591	R,CARBON,3.3KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	RZ141	2001-000857	R,CARBON,560OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	RZ142	2003-002148	R,METAL OXIDE,3.9OHM,2%,2W,AF,TP,3.9X10M	
3	RZ143	2003-002148	R,METAL OXIDE,3.9OHM,2%,2W,AF,TP,3.9X10M	
3	RZ144	2003-002148	R,METAL OXIDE,3.9OHM,2%,2W,AF,TP,3.9X10M	
3	RZ145	2003-002148	R,METAL OXIDE,3.9OHM,2%,2W,AF,TP,3.9X10M	
3	RZ146	2003-002148	R,METAL OXIDE,3.9OHM,2%,2W,AF,TP,3.9X10M	
3	RZ147	2003-002148	R,METAL OXIDE,3.9OHM,2%,2W,AF,TP,3.9X10M	

Level	Loc. No.	Code No.	Description ; Specification	Remark
3	RZ149	2003-002157	R,METAL OXIDE,220OHM,5%,2W,AG,TP5X15MM	
3	RZ149A	2003-002157	R,METAL OXIDE,220OHM,5%,2W,AG,TP5X15MM	
3	RZ149	2005-001024	R,METAL OXIDE(S),150ohm,5%,2W,AF,TP3.9x	
3	RZ149A	2003-001024	R,METAL OXIDE(S),150ohm,5%,2W,AF,TP3.9x	
3	VR472	2103-001096	VR,SEMI,100KOHM,25%,0.3W,TOP	

ASSY ACCESSORY

Level	Loc. No.	Code No.	Description ; Specification	Remark
1	*	AA94-03537A	ASSY ACCESSORY;SP43J8HFX/XHK,J51A,+CA/CRO	S.N.A
2		AA69-00009C	BAG SHEET,LDPE,T0.08,W150,L120,,,	S.N.A
2		AA68-00856B	MANUAL USERS;SP43J5HF/43J8HF,ENG,,A.P	S.N.A
2		AA61-20126A	HOLDER LEG,,,ABS HB,BLK	S.N.A
2		AA39-40001B	CABLE RCA;1500MM	

REMOCON

Level	Loc. No.	Code No.	Description ; Specification	Remark
1	*	AA59-00100A	REMOCON;,TM57,KS88PP4165,53,LGRAY,S	
2		AA09-00100A	C,MICOM,2B6LB80BSSC,R:50MC,,28PIN,2	
2		2902-000194	RESONATOR,CERAMIC,8MHz,1.0%,TP,9.5x4.6x3	

7-3 SP43J8HFX/SED

ASSY PCB MAIN(OPT)

Level	Loc. No.	Code No.	Description ; Specification	Remark
1	*	AA94-03459R	ASSY PCB MAIN(OPT);SP43J8HFX/SED,J51A,SW	
2	C564	2401-001068	C,AL,3300uF,20%,50V,GP,8X,22x40,10	
2	C565	2401-000737	C,AL,2200uF,20%,50V,GP,TP,18x35.5,7	
2	CN801	3711-002974	CONNECTOR,HEADER,BOX,12P,1R,2.5mm,STRAIG	
2	CNT01	3710-001208	CONNECTOR,SOCKET,32P,2R,2.54mm,STRAIGHT	
2	CNT02	3710-001208	CONNECTOR,SOCKET,32P,2R,2.54mm,STRAIGHT	
2	CS803	2401-003370	C,AL,47uF,20%,450V,GP,8K,16X35.5,7	
2	H001	AA40-10006S	TUNER F/S,TECC2949PG30A(S),PAL,B/G,TR,18	
2	IC101	AA96-00110C	ASSY H/S,,,AA62-30013K,SI-3090C,	
3		1203-000577	IC,VOLTAGE REGULATOR;3090,ZIP,5P,,,PLASTI	
3		6003-000333	SCREW,TAPTITE,RH,-,2S,M3,L10,ZPC(YEL),SW	
3		AA62-30013K	HEATSINK;ES,,,,,,44/18,,,WHT,AA6063,EX	
2	IC102	AA96-00110A	ASSY H/S,,,AA62-30013K,SI-3050C,	
3		1203-000203	IC,POSI,ADJUST,REG,,,3050,TO-220,5P,,PLA	
3		6003-000333	SCREW,TAPTITE,RH,-,2S,M3,L10,ZPC(YEL),SW	
3		AA62-30013K	HEATSINK;ES,,,,,,44/18,,,WHT,AA6063,EX	
2	IC103	1204-001276	IC,SOUND PROCESSOR,TDA9810,DIP24P,400MI	
2	IC502	AA96-00110A	ASSY H/S,,,AA62-30013K,SI-3050C,	
2	IC503	AA96-00110A	ASSY H/S,,,AA62-30013K,SI-3050C,	
2	IC504	AA96-00110A	ASSY H/S,,,AA62-30013K,SI-3050C,	
2	IC665	AA96-00008A	ASSY H/S,,,SOUND AMP;AA62-30173E,TDA726	
3		0205-000129	GREASE,SILICON,SC102,,JAPAN	S.N.A
3		1201-001026	IC,POWER AMP;7265,ZIP,11P,19.6MIL,DUAL,1	
3		6003-000333	SCREW,TAPTITE,RH,-,2S,M3,L10,ZPC(YEL),SW	
3		AA62-30173E	HEAT SINK;ES,,,,T1.0,WHITE,SCREW HOLE(1	S.N.A
2	IF/CAB	AA39-30007B	IF CABLE,,,T150mm,1365#26	
2	L201	AA27-10001C	COIL-CHOKE,,,100uH,K,,5.0A,ST,700UH,KIR	
2	L603	AA29-00004A	FILTER-LINE NOISE,,,20UH,3A,AC80-260V,TO	
2	QZ107	AA96-50162F	ASSY H/S,,,POWER;AA62-30013E,2SA1011,30	
3		0502-000131	TR-POWER;2SA1011,D,PNP,1.2W,TO-220,,60	
3		6003-000333	SCREW-TAPTITE,RH,-,2S,M3,L10,ZPC(YEL),SW	
3		AA62-30013E	HEAT SINK;ES,,,A6063,EXTR,,,,30(2),T02	
2	QZ108	AA96-50162G	ASSY H/S,,,AMP;AA62-30013E,2SC2344,30MM	
3		0502-000153	TR-POWER;2SC2344,O,NPN,1.2W,TO-220,,60	
3		6003-000333	SCREW,TAPTITE,RH,-,2S,M3,L10,ZPC(YEL),SW	
3		AA62-30013E	HEAT SINK;ES,,,A6063,EXTR,,,,30(2),T02	
2	R913	2001-000786	R,CARBON,47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	RL801	3501-001053	RELAY,POWER,5Vdc,530mW,10A,1Form,A,15mS,5	
2	TS801	AA26-00019A	TRANS,SWITCHING,,AC80~260V,,,US,,,4Wt,LB	
2	X901	2801-003224	CRYSTAL-UNIT,32.768KHZ,20PPM,2B,AA,12.5	
2		AA99-30216C	ASSY-PCB,ROBOT,,,AA94-03459R,,,ER	S.N.A
3	CN201	3711-003051	CONNECTOR,HEADER,BOX,8P,1R,2.5mm,STRAGHT	
3	CN202	3711-003052	CONNECTOR,HEADER,BOX,10P,1R,2.5mm,STRAGH	
3	CN501	3711-003051	CONNECTOR,HEADER,BOX,8P,1R,2.5mm,STRAGHT	
3	CNY01	3711-003973	CONNECTOR,HEADER,BOX,11P,1R,2.5mm,STRAIG	
3	CS810	2201-000446	C,CERAMIC,DISC,3.3nF,20%,400V,Y5U,TP,15x	
3	CS811	2201-000446	C,CERAMIC,DISC,3.3nF,20%,400V,Y5U,TP,15x	
3	DS801	0402-000102	DIODE,BRIDGE,D2SB60,600V,1.5A,,,	
3	F101	2904-000253	FILTER,SAW,AV,38.9MHz,DIP10K,ST,19dB,B/G	
3	F102	2904-001010	FILTER,SAW,AV,32.9~33.4MHz,SIP5P,ST,14.4	
3	H002	AA40-10006T	TUNER F/S,TECC2849PG29A(S),PAL,B/G,TR,18	
3	IC501	AA96-00111L	ASSY H/S,,,,AA62-30013L,KA78R12,	
4		1203-000155	IC,POSI,ADJUST,REG,,,78R12,TO-220,3P,	
4		6003-000333	SCREW,TAPTITE,RH,-,2S,M3,L10,ZPC(YEL),SW	
4		AA62-30013L	HEATSINK;ES,,,,,,44/22,,,WHT,,,	
3	IC801	AA96-50147A	ASSY H/S,,,TR:AA62-30012B,KA7805A,	S.N.A
4		1203-000274	IC,POSI,FIXED,REG,,,7805,TO-220,3P,,PLAS	
4		6003-000333	SCREW,TAPTITE,RH,-,2S,M3,L10,ZPC(YEL),SW	
4		AA62-30012B	HEAT SINK;ES,,,A6063,EXTR,,,,45(16),T02	S.N.A
3	IC201	AA09-00093A	IC,MICOM,2003S612PSC,R50P3,SP43J/SHF,52P	
3	IC302	1103-001106	IC,EEPROM,CB1DC,1024x8Bit,DIP8P,300MIL,	
3	IC5201	AA13-00024A	IC,HYBRID,,TNY253P,,8PIN,	
3	ICS802	0604-001032	PHOTO-COUPLER,TR,170-260%,300mW,DIP-4,ST	
3		AA99-10210N	ASSY-PCB,MAIN,AUTO;,AA99-30216C,,,V	S.N.A
4	C103	2201-000119	C,CERAMIC,DISC,100nF,-80,20%,50V,Y5V,TP,	
4	C104	2401-001840	C,AL,100uF,20%,16V,GP,TP,6.3x11.5	
4	C105	2401-000302	C,AL,100uF,20%,25V,GP,TP,6.3x11.5	
4	C107	2305-000665	C,FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x5.0m	
4	C109	2201-000119	C,CERAMIC,DISC,100nF,-80,20%,50V,Y5V,TP,	
4	C110	2401-001840	C,AL,100uF,20%,16V,GP,TP,6.3x11.5	
4	C119	2201-000119	C,CERAMIC,DISC,100nF,-80,20%,50V,Y5V,TP,	
4	C121	2305-000665	C,FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x5.0m	
4	C125	2401-000603	C,AL,1uF,20%,50V,GP,TP,5x11,5	
4	C126	2201-000119	C,CERAMIC,DISC,100nF,-80,20%,50V,Y5V,TP,	
4	C130	2201-000119	C,CERAMIC,DISC,100nF,-80,20%,50V,Y5V,TP,	
4	C131	2305-000665	C,FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x5.0m	
4	C132	2305-000665	C,FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x5.0m	
4	C133	2401-001363	C,AL,470uF,20%,16V,GP,TP,10x12.5,5	
4	C134	2401-002273	C,AL,220uF,20%,25V,HR,TP,10x20mm,5m	
4	C135	2401-000287	C,AL,100uF,20%,16V,WT,TP,6.3x11.5	
4	C136	2401-000027	C,AL,4.7uF,20%,50V,GP,TP,5x11,5	
4	C137	2401-002212	C,AL,10uF,20%,25V,WT,TP,5x11,5	
4	C138	2305-000665	C,FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x5.0m	
4	C139	2201-000180	C,CERAMIC,DISC,10nF,10%,50V,Y5V,TP,7x3.5	
4	C140	2201-000292	C,CERAMIC,DISC,1nF,10%,50V,Y5P,TP,5x3.5,	
4	C141	2201-000292	C,CERAMIC,DISC,1nF,10%,50V,Y5P,TP,5x3.5,	
4	C142	2305-000289	C,FILM,MPEF,2.2nF,5%,63V,TP,,,5mm	
4	C143	2401-000667	C,AL,2.2uF,20%,50V,WT,TP,5x11,5	
4	C144	2201-000180	C,CERAMIC,DISC,10nF,10%,50V,Y5V,TP,7x3.5	
4	C145	2305-000665	C,FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x5.0m	
4	C146	2305-000665	C,FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x5.0m	
4	C147	2401-000680	C,AL,2.2uF,20%,50V,GP,TP,5x11,5	
4	C148	2305-000665	C,FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x5.0m	
4	C149	2401-000947	C,AL,22uF,20%,25V,GP,TP,5x11,5	
4	C180	2401-002300	C,AL,47uF,20%,50V,GP,TP,6.3x11.5	
4	C185	2401-001363	C,AL,470uF,20%,16V,GP,TP,10x12.5,5	
4	C191	2401-002619	C,AL,47uF,20%,25V,GP,TP,5x11,5	
4	C501	2305-000665	C,FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x5.0m	

Level	Loc. No.	Code No.	Description ; Specification	Remark
.4	C502	2401-001397	C AL 470uF,20%,25V,GP,TP,10x16.5	
.4	C503	2305-000665	C FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x5.0m	
.4	C504	2401-000832	C AL 220uF,20%,25V,GP,TP,8x11.5.5	
.4	C505	2305-000665	C FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x5.0m	
.4	C506	2401-002594	C AL 220uF,20%,16V,GP,TP,8x11.5.5	
.4	C507	2305-000665	C FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x5.0m	
.4	C508	2401-002286	C AL 470uF,20%,16V,WT,TP,10x12.5.5	
.4	C509	2305-000665	C FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x5.0m	
.4	C510	2401-000133	C AL 1000uF,20%,16V,GP,TP,10x20.5	
.4	C511	2305-000665	C FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x5.0m	
.4	C512	2401-000689	C AL 2200uF,20%,16V,GP,TP,13x25.5	
.4	C519	2305-000665	C FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x5.0m	
.4	C520	2401-001397	C AL 470uF,20%,25V,GP,TP,10x16.5	
.4	C521	2305-000665	C FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x5.0m	
.4	C522	2401-002286	C AL 470uF,20%,16V,WT,TP,10x12.5.5	
.4	C523	2201-000292	C CERAMIC,DISC,1nF,10%,50V,Y5P,TP,5x3.5,	
.4	C537	2305-000665	C FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x5.0m	
.4	C538	2401-001840	C AL 100uF,20%,16V,GP,TP,6.3x11.5	
.4	C539	2401-001840	C AL 100uF,20%,16V,GP,TP,6.3x11.5	
.4	C540	2305-000665	C FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x5.0m	
.4	C543	2201-000144	C CERAMIC,DISC,0.1nF,5%,50V,NP0,TP,8.5x3	
.4	C544	2401-002144	C AL 47uF,20%,16V,GP,TP,5x11.5	
.4	C601	2401-002299	C AL 4.7uF,20%,50V,GP,TP,5x7.5	
.4	C602	2401-002299	C AL 4.7uF,20%,50V,GP,TP,5x7.5	
.4	C666	2305-000665	C FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x5.0m	
.4	C667	2401-000603	C AL 1uF,20%,50V,GP,TP,5x11.5	
.4	C668	2401-000603	C AL 1uF,20%,50V,GP,TP,5x11.5	
.4	C669	2401-000962	C AL 22uF,20%,50V,GP,TP,5x11.5	
.4	C670	2401-000603	C AL 1uF,20%,50V,GP,TP,5x11.5	
.4	C671	2401-001537	C AL 47uF,20%,25V,GP,TP,6.3x7mm,5mm	
.4	C676	2401-001192	C AL 33uF,20%,50V,GP,TP,6.3x11.5	
.4	C686	2201-000411	C CERAMIC,DISC,0.27nF,10%,50V,Y5P,TP,4x3	
.4	C687	2201-000411	C CERAMIC,DISC,0.27nF,10%,50V,Y5P,TP,4x3	
.4	C688	2401-000192	C AL 1000uF,20%,50V,GP,TP,16x25,7.5	
.4	C689	2305-000665	C FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x5.0m	
.4	C690	2305-000665	C FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x5.0m	
.4	C691	2401-000192	C AL 1000uF,20%,50V,GP,TP,16x25,7.5	
.4	C701	2401-000027	C AL 4.7uF,20%,50V,GP,TP,5x11.5	
.4	C801	2401-002300	C AL 47uF,20%,50V,GP,TP,6.3x11.5	
.4	C901	2202-000796	C CERAMIC,MLC AXIAL,1NF,10%,50V,Y5P,TP,3	
.4	C905	2401-001496	C AL 47uF,20%,16V,GP,TP,5x7.5	
.4	C906	2305-000149	C FILM,MPEF,100nF,5%,100V,TP,12x12.5x5.5	
.4	C908	2201-000292	C CERAMIC,DISC,1nF,10%,50V,Y5P,TP,5x3.5,	
.4	C909	2201-000292	C CERAMIC,DISC,1nF,10%,50V,Y5P,TP,5x3.5,	
.4	C912	2201-000119	C CERAMIC,DISC,100nF,-80-20%,50V,Y5V,TP	
.4	C913	2201-000193	C CERAMIC,DISC,0.01nF,0.25pF,50V,NP0,TP	
.4	C914	2201-000573	C CERAMIC,DISC,0.047nF,5%,50V,NP0,TP,5x3	
.4	C915	2201-000119	C CERAMIC,DISC,100nF,-80-20%,50V,Y5V,TP	
.4	C916	2401-002042	C AL 220uF,20%,10V,GP,TP,6.3x11.5	
.4	C917	2401-002144	C AL 47uF,20%,16V,GP,TP,5x11.5	
.4	C918	2201-000119	C CERAMIC,DISC,100nF,-80-20%,50V,Y5V,TP	
.4	C919	2401-000480	C AL 10uF,20%,50V,GP,TP,5x11.5	
.4	C920	2201-000119	C CERAMIC,DISC,100nF,-80-20%,50V,Y5V,TP	
.4	C925	2201-000119	C CERAMIC,DISC,100nF,-80-20%,50V,Y5V,TP	
.4	C926	2401-000480	C AL 10uF,20%,50V,GP,TP,5x11.5	
.4	C927	2202-000231	C CERAMIC,MLC AXIAL,330pF,10%,50V,Y5P,TP	
.4	C928	2202-000796	C CERAMIC,MLC AXIAL,1NF,10%,50V,Y5P,TP,3	
.4	CN003	3711-002642	CONNECTOR HEADER,BOX,3P,1R,2.5MM,STRAIGH	
.4	CN402	3711-002642	CONNECTOR HEADER,BOX,3P,1R,2.5MM,STRAIGH	
.4	CN403	3711-002642	CONNECTOR HEADER,BOX,3P,1R,2.5MM,STRAIGH	
.4	CN404	3711-002642	CONNECTOR HEADER,BOX,3P,1R,2.5MM,STRAIGH	
.4	CN601	3711-002643	CONNECTOR HEADER,BOX,4P,1R,2.5MM,STRAIGH	
.4	CS801	2201-000332	C CERAMIC,DISC,2.2nF,20%,250V,Y5U,TP,9x4	
.4	CS802	2201-000332	C CERAMIC,DISC,2.2nF,20%,250V,Y5U,TP,9x4	
.4	CS804	2201-000119	C CERAMIC,DISC,100nF,-80-20%,50V,Y5V,TP	
.4	CS805	2401-002286	C AL 470uF,20%,16V,WT,TP,10x12.5.5	
.4	CS807	2201-000119	C CERAMIC,DISC,100nF,-80-20%,50V,Y5V,TP	
.4	CS808	2401-002286	C AL 470uF,20%,16V,WT,TP,10x12.5.5	
.4	CS809	2201-000556	C CERAMIC,DISC,0.47nF,10%,500V,Y5P,TP,5.	
.4	CS812	2201-002076	C CERAMIC,DISC,0.068nF,5%,1kV,SL,TP,8x4m	
.4	CZ144	2401-000480	C AL 10uF,20%,50V,GP,TP,5x11.5	
.4	CZ146	2401-000832	C AL 220uF,20%,25V,GP,TP,8x11.5.5	
.4	CZ147	2201-000193	C CERAMIC,DISC,0.01nF,0.25pF,50V,NP0,TP	
.4	CZ148	2201-000193	C CERAMIC,DISC,0.01nF,0.25pF,50V,NP0,TP	
.4	CZ149	2201-000516	C CERAMIC,DISC,4.7nF,-100-0%,500V,Y5U,TP	
.4	CZ150	2201-000516	C CERAMIC,DISC,4.7nF,+100-0%,500V,Y5U,TP	
.4	CZ151	2401-001513	C AL 47uF,20%,16V,WT,TP,5x11.5	

Level	Loc. No.	Code No.	Description ; Specification	Remark
.4	CZ152	2401-001157	C AL 33uF,20%,160V,GP,TP,12.5x20.5	
.4	CZ153	2401-001513	C AL 47uF,20%,16V,WT,TP,5x11.5	
.4	CZ155	2201-000604	C CERAMIC,DISC,0.056nF,-100-0%,500V,SL,T	
.4	CZ167	2401-001220	C AL 4.7uF,20%,160V,GP,TP,8x11.5.5	
.4	CZ167A	2401-001220	C AL 4.7uF,20%,160V,GP,TP,8x11.5.5	
.4	D101	0401-001088	DIODE SWITCHING,BAW76,50V,300mA,DO-35,TP	
.4	D102	0401-001088	DIODE SWITCHING,BAW76,50V,300mA,DO-35,TP	
.4	D103	0401-001088	DIODE SWITCHING,BAW76,50V,300mA,DO-35,TP	
.4	D501	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
.4	D664	0402-000546	DIODE RECTIFIER,TVR10G,400V,1.0A,DO-41,T	
.4	D665	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
.4	D666	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
.4	D667	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
.4	D668	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
.4	D669	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
.4	D701	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
.4	D702	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
.4	D703	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
.4	D901	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
.4	D902	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
.4	D903	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
.4	D904	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
.4	D905	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
.4	D906	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
.4	D907	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
.4	DS802	1405-000152	VARISTOR,560V,2500A,14x8.5mm,TP	
.4	DS803	0403-001322	DIODE ZENER,MTZJ8.2B,7.78-8.19V,500mW,DO	
.4	DS804	0403-001318	DIODE ZENER,MTZJ4.3B,4.17-4.43V,500mW,DO	
.4	DS805	0402-000534	DIODE RECTIFIER,RG10V,400V,1.2A,DO-201,T	
.4	DS806	1405-001030	VARISTOR,120V,2500A,14x8.5mm,TP	
.4	DS807	0402-000546	DIODE RECTIFIER,TVR10G,400V,1.0A,DO-41,T	
.4	DS808	1405-000152	VARISTOR,560V,2500A,14x8.5mm,TP	
.4	DS809	0404-001056	DIODE SCHOTTKY,RK16,60V,1.5A,DO-204AC,TP	
.4	DS810	1405-000152	VARISTOR,560V,2500A,14x8.5mm,TP	
.4	DZ116	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
.4	DZ117	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
.4	DZ118	0402-000546	DIODE RECTIFIER,TVR10G,400V,1.0A,DO-41,T	
.4	DZ119	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35	
.4	DZ120	0402-000546	DIODE RECTIFIER,TVR10G,400V,1.0A,DO-41,T	
.4	DZ121	0402-000546	DIODE RECTIFIER,TVR10G,400V,1.0A,DO-41,T	
.4	DZ501	0403-000508	DIODE ZENER,MTZJ5.6B,5.6V,5.45-5.73V,500	
.4	DZ502	0403-000508	DIODE ZENER,MTZJ5.6B,5.6V,5.45-5.73V,500	
.4	DZ503	0403-000720	DIODE ZENER,MTZJ9.1B,9.1V,8.57-9.01V,500	
.4	DZ504	0403-000720	DIODE ZENER,MTZJ9.1B,9.1V,8.57-9.01V,500	
.4	DZ505	0403-000720	DIODE ZENER,MTZJ9.1B,9.1V,8.57-9.01V,500	
.4	DZ506	0403-000508	DIODE ZENER,MTZJ5.6B,5.6V,5.45-5.73V,500	
.4	DZ507	0403-000510	DIODE ZENER,MTZJ6.2B,6.2V,5.96-6.27V,500	
.4	DZ508	0403-000510	DIODE ZENER,MTZJ6.2B,6.2V,5.96-6.27V,500	
.4	DZ665	0403-001039	DIODE ZENER,MA2560,56V,52-60V,1W,DO-41,T	
.4	DZ666	0403-001325	DIODE ZENER,MTZJ15C,14.35-15.09V,500mW,D	
.4	DZ667	0403-001319	DIODE ZENER,MTZJ4.7C,4.68-4.93V,500mW,DO	
.4	DZ701	0403-001140	DIODE ZENER,RD10ESAB-T4,10V,9.19-10.30V,	
.4	DZ801	0403-000700	DIODE ZENER,TZP33A,33V,31-35V,1W,DO-41,T	
.4	DZ901	0403-000508	DIODE ZENER,MTZJ5.6B,5.6V,5.45-5.73V,500	
.4	DZ902	0403-000508	DIODE ZENER,MTZJ5.6B,5.6V,5.45-5.73V,500	
.4	DZ903	0403-000508	DIODE ZENER,MTZJ5.6B,5.6V,5.45-5.73V,500	
.4	DZ904	0403-000508	DIODE ZENER,MTZJ5.6B,5.6V,5.45-5.73V,500	
.4	DZ905	0403-000510	DIODE ZENER,MTZJ6.2B,6.2V,5.96-6.27V,500	
.4	DZ906	0403-000510	DIODE ZENER,MTZJ6.2B,6.2V,5.96-6.27V,500	
.4	DZ907	0403-000510	DIODE ZENER,MTZJ6.2B,6.2V,5.96-6.27V,500	
.4	DZ911	0403-000510	DIODE ZENER,MTZJ6.2B,6.2V,5.96-6.27V,500	
.4	DZ912	0403-000508	DIODE ZENER,MTZJ5.6B,5.6V,5.45-5.73V,500	
.4	DZ914	0403-000508	DIODE ZENER,MTZJ5.6B,5.6V,5.45-5.73V,500	
.4	DZ915	0403-000508	DIODE ZENER,MTZJ5.6B,5.6V,5.45-5.73V,500	
.4	F901	2901-000297	FILTER EMI ON BOARD,-,3A,-,-,3.5x5,TP,-	
.4	FI103	2903-000181	FILTER-CERAMIC,BR,5.5MHz,-,-,-,TP,TPS5.5	
.4	FI104	2903-000129	FILTER CERAMIC,BR,4.5MHz,-,-,-,TP,-	
.4	IC506	1203-000293	IC-POSI.FIXED REG.;7808,TO-220,3P,-,PLAS	
.4	IC904	1203-000615	IC-VOL. DETECTOR;7042,TO-92,3P,177MIL,PL	
.4	L101	2701-000115	INDUCTOR-AXIAL,10uH,10%,3x7mm	
.4	L103	2701-000115	INDUCTOR-AXIAL,10uH,10%,3x7mm	
.4	L105	2701-000115	INDUCTOR-AXIAL,10uH,10%,3x7mm	
.4	L107	2701-000115	INDUCTOR-AXIAL,10uH,10%,3x7mm	
.4	L108	2701-000115	INDUCTOR-AXIAL,10uH,10%,3x7mm	
.4	L109	2701-000101	INDUCTOR-AXIAL,1.2uH,10%,2.5x3.4mm	
.4	L110	2701-000115	INDUCTOR-AXIAL,10uH,10%,3x7mm	
.4	L111	2701-000120	INDUCTOR-AXIAL,12uH,10%,2.5x3.4mm	

Level	Loc. No.	Code No.	Description ; Specification	Remark
.4	L112	2701-000299	INDUCTOR AXIAL,13UH,10%,2.5X3.4MM	
.4	L113	AA26-10006G	TRANS IF,-,7mG,VIF,-,7mm,8pF,77.8MHz,ST	
.4	L114	2701-000114	INDUCTOR AXIAL,10uH,10%,2.5x3.4mm	
.4	L115	2701-000114	INDUCTOR AXIAL,10uH,10%,2.5x3.4mm	
.4	L115	2701-000114	INDUCTOR AXIAL,10uH,10%,2.5x3.4mm	
.4	L117	2701-000114	INDUCTOR AXIAL,10uH,10%,2.5x3.4mm	
.4	L118	2701-000115	INDUCTOR-AXIAL,10uH,10%,3x7mm	
.4	L501	2701-000114	INDUCTOR-AXIAL,10uH,10%,2.5x3.4mm	
.4	L502	2701-000114	INDUCTOR-AXIAL,10uH,10%,2.5x3.4mm	
.4	L503	2701-000114	INDUCTOR-AXIAL,10uH,10%,2.5x3.4mm	
.4	L504	2701-000114	INDUCTOR-AXIAL,10uH,10%,2.5x3.4mm	
.4	L505	2901-000297	FILTER-EMI ON BOARD,-,3A,-,-,3.5x5,TP,-	
.4	L506	3301-000287	CORE-FERRITE BEAD,AA,3.5x1.0x6.0mm,1500,	
.4	L507	3301-000287	CORE-FERRITE BEAD,AA,3.5x1.0x6.0mm,1500,	
.4	L514	3301-000287	CORE-FERRITE BEAD,AA,3.5x1.0x6.0mm,1500,	
.4	L515	3301-000287	CORE-FERRITE BEAD,AA,3.5x1.0x6.0mm,1500,	
.4	L601	2701-000114	INDUCTOR-AXIAL,10uH,10%,2.5x3.4mm	
.4	L602	2701-000114	INDUCTOR-AXIAL,10uH,10%,2.5x3.4mm	
.4	L504	3301-000287	CORE-FERRITE BEAD,AA,3.5x1.0x6.0mm,1500,	
.4	L901	2901-000297	FILTER-EMI ON BOARD,-,3A,-,-,3.5x5,TP,	
.4	L902	2701-000115	INDUCTOR-AXIAL,10uH,10%,3x7mm	
.4	L903	2701-001040	INDUCTOR-AXIAL,10uH,10%,4.5x14mm	
.4	L907	3301-000287	CORE-FERRITE BEAD,AA,3.5x1.0x6.0mm,1500,	
.4	L909	2701-000114	INDUCTOR-AXIAL,10uH,10%,2.5x3.4mm	
.4	L910	2701-000114	INDUCTOR-AXIAL,10uH,10%,2.5x3.4mm	
.4	L911	2701-000114	INDUCTOR-AXIAL,10uH,10%,2.5x3.4mm	
.4	L912	2701-000114	INDUCTOR-AXIAL,10uH,10%,2.5x3.4mm	
.4	LD901	2701-000115	INDUCTOR-AXIAL,10uH,10%,3x7mm	
.4	LS801	2901-000297	FILTER-EMI ON BOARD,-,3A,-,-,3.5x5,TP,-	
.4	LS802	2901-000297	FILTER-EMI ON BOARD,-,3A,-,-,3.5x5,TP,-	
.4	LS803	3301-000287	CORE-FERRITE BEAD,AA,3.5x1.0x6.0mm,1500,	
.4	LZ112	2701-000002	INDUCTOR AXIAL,100uH,10%,4.2x9.8mm	
.4	PCB	AA41-00075B	PCB-MAIN;SP43J7PF,FR-1,1L,B,1.6T,330X24	S.N.A
.4	Q101	0504-000137	TR-DIGITAL,KSR1202,NPN,300mW,10K/10K,TO	
.4	Q102	0504-000123	TR-DIGITAL,KSR1010,NPN,300mW,10K,TO-92,T	
.4	Q103	0501-000245	TR-SMALL SIGNAL,BC548C,NPN,500mW,TO-92,T	
.4	Q104	0504-000123	TR-DIGITAL,KSR1010,NPN,300mW,10K,TO-92,T	
.4	Q105	0501-000389	TR-SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
.4	Q106	0504-000150	TR-DIGITAL,KSR2010,PNP,300mW,10K,TO-92,T	
.4	Q107	0504-000123	TR-DIGITAL,KSR1010,NPN,300mW,10K,TO-92,T	
.4	Q665	0501-000389	TR-SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
.4	Q666	0501-000389	TR-SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
.4	Q667	0501-000389	TR-SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
.4	Q701	0501-000389	TR-SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
.4	Q702	0501-000389	TR-SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
.4	Q901	0501-000389	TR-SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
.4	Q902	0501-000389	TR-SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
.4	Q903	0501-000389	TR-SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
.4	Q909	0501-000283	TR-SMALL SIGNAL,KSA539,PNP,400mW,TO-92,T	
.4	Q910	0501-000389	TR-SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
.4	QS801	0501-000369	TR-SMALL SIGNAL,KSC2331-Y,NPN,1000mW,TO-	
.4	QZ103	0501-000389	TR-SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
.4	QZ104	0501-000389	TR-SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
.4	QZ105	0501-000389	TR-SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
.4	QZ106	0501-000283	TR-SMALL SIGNAL,KSA539,PNP,400mW,TO-92,T	
.4	R123	2001-000429	R-CARBON,1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R131	2001-000739	R-CARBON,4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
.4	R132	2001-000739	R-CARBON,4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
.4	R142	2001-000281	R-CARBON,100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R145	2001-000890	R-CARBON,6.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.4	R146	2001-000362	R-CARBON,150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R148	2001-000290	R-CARBON,10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R149	2001-000331	R-CARBON,12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R150	2001-000290	R-CARBON,10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R151	2001-000313	R-CARBON,11KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R152	2001-000449	R-CARBON,2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.4	R153	2001-000449	R-CARBON,2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.4	R154	2001-000449	R-CARBON,2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.4	R155	2001-000522	R-CARBON,22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R156	2001-000241	R-CARBON,1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.4	R157	2001-000241	R-CARBON,1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.4	R158	2001-000857	R-CARBON,560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R159	2001-000864	R-CARBON,56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R160	2001-000786	R-CARBON,47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R161	2001-000005	R-CARBON,390ohm,5%,1/8W,AA,TP,1.8x3.2mm	
.4	R162	2001-000969	R-CARBON,75OHM,5%,1/8W,AA,TP,1.8X3.2MM	

Level	Loc. No.	Code No.	Description ; Specification	Remark
.4	R163	2001-000515	R-CARBON,220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R164	2001-000490	R-CARBON,200OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R165	2001-000515	R-CARBON,220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R166	2001-000429	R-CARBON,1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R167	2001-000522	R-CARBON,22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R168	2001-000522	R-CARBON,22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R169	2001-000734	R-CARBON,4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.4	R501	2001-000066	R-CARBON(S),10KOHM,5%,1/2W,AA,TP,2.4X6.4	
.4	R502	2001-000281	R-CARBON,100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R503	2001-000281	R-CARBON,100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R504	2001-000405	R-CARBON,180OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R509	2008-000266	R-FUSIBLE(S),1ohm,5%,2W,AF,TP,3.9x10mm	
.4	R510	2008-000266	R-FUSIBLE(S),1ohm,5%,2W,AF,TP,3.9x10mm	
.4	R511	2008-001116	R-FUSIBLE(S),0.68ohm,10%,2W,AG,TP,3.9x12	
.4	R512	2001-000003	R-CARBON,330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
.4	R524	2001-000739	R-CARBON,4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
.4	R525	2001-000739	R-CARBON,4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
.4	R526	2001-000739	R-CARBON,4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
.4	R531	2001-000739	R-CARBON,4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
.4	R532	2001-000037	R-CARBON(S),330OHM,5%,1/2W,AA,TP,2.4X6.4	
.4	R533	2001-000739	R-CARBON,4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
.4	R601	2001-000109	R-CARBON(S),470OHM,5%,1/2W,AA,TP,2.4X6.4	
.4	R602	2001-000605	R-CARBON,3.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.4	R603	2001-000734	R-CARBON,4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.4	R661	2001-001093	R-CARBON(S),2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
.4	R662	2001-001093	R-CARBON(S),2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
.4	R665	2001-001188	R-CARBON(S),8.2KOHM,5%,1/2W,AA,TP,2.4X6.	
.4	R666	2001-001188	R-CARBON(S),8.2KOHM,5%,1/2W,AA,TP,2.4X6.	
.4	R668	2001-000028	R-CARBON(S),100OHM,5%,1/2W,AA,TP,2.4X6.4	
.4	R669	2001-001144	R-CARBON(S),4.7KOHM,5%,1/2W,AA,TP,2.4X6.	
.4	R670	2001-000085	R-CARBON(S),100KOHM,5%,1/2W,AA,TP,2.4X6.	
.4	R671	2001-000066	R-CARBON(S),10KOHM,5%,1/2W,AA,TP,2.4X6.4	
.4	R672	2001-000066	R-CARBON(S),10KOHM,5%,1/2W,AA,TP,2.4X6.4	
.4	R673	2001-000411	R-CARBON,18KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R674	2001-000780	R-CARBON,470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R675	2001-000066	R-CARBON(S),10KOHM,5%,1/2W,AA,TP,2.4X6.4	
.4	R676	2001-000812	R-CARBON,5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.4	R677	2001-000290	R-CARBON,10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R678	2001-000008	R-CARBON,15KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R679	2001-001071	R-CARBON(S),12KOHM,5%,1/2W,AA,TP,2.4X6.4	
.4	R680	2001-001000	R-CARBON,82KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R681	2001-001093	R-CARBON(S),2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
.4	R682	2004-001897	R-METAL(S),43.2Kohm,1%,1/2W,AA,TP,2.5x6.	
.4	R683	2004-001897	R-METAL(S),43.2Kohm,1%,1/2W,AA,TP,2.5x6.	
.4	R684	2001-001093	R-CARBON(S),2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
.4	R685	2004-001390	R-METAL(S),1Kohm,2%,1/2W,AA,TP,2.4x6.4mm	
.4	R686	2004-001390	R-METAL(S),1Kohm,2%,1/2W,AA,TP,2.4x6.4mm	
.4	R687	2001-001146	R-CARBON(S),4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
.4	R689	2001-001146	R-CARBON(S),4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
.4	R690	2001-000734	R-CARBON,4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.4	R701	2001-000786	R-CARBON,47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R702	2001-000290	R-CARBON,10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R703	2001-000290	R-CARBON,10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R704	2001-000290	R-CARBON,10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R801	2003-001098	R-METAL OXIDE(S),22Kohm,5%,3W,AA,TP,6x16	
.4	R901	2001-000734	R-CARBON,4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.4	R903	2001-000429	R-CARBON,1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R904	2001-000290	R-CARBON,10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R905	2001-000734	R-CARBON,4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.4	R906	2001-000429	R-CARBON,1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R907	2001-000429	R-CARBON,1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R908	2001-000281	R-CARBON,100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R909	2001-000281	R-CARBON,100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R910	2001-000281	R-CARBON,100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R912	2001-000003	R-CARBON,330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
.4	R914	2001-000281	R-CARBON,100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R915	2001-000281	R-CARBON,100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R916	2001-000472	R-CARBON,2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.4	R917	2001-000472	R-CARBON,2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.4	R918	2001-000832	R-CARBON,510OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R919	2001-000691	R-CARBON,3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.4	R921	2001-000812	R-CARBON,5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.4	R922	2001-000812	R-CARBON,5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.4	R923	2001-000786	R-CARBON,47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R924	2001-000786	R-CARBON,47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R925	2001-000241	R-CARBON,1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	

Level	Loc. No.	Code No.	Description ; Specification	Remark
4	R926	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R930	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R931	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R932	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R945	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R946	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R947	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R948	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R949	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R950	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R951	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R952	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R953	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R954	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R955	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R958	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R959	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R960	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R961	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R962	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R967	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R968	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R970	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R971	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R974	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R977	2001-001062	R-CARBON(S);10MOHM,5%,1/2W,AA,TP,2.4X6.4	
4	R979	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R980	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R981	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R982	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R983	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R984	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R985	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R986	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R987	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R988	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R989	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R990	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R991	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R992	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R993	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R994	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	RD901	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	RD903	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	RF802	2008-000294	R-FUSIBLE(S);33ohm,5%,2W,AF,TP,3.9x10mm	
4	RS801	2003-002194	R-METAL OXIDE(S);1.8Kohm,5%,1W,AF,TP,2.5	
4	RS802	2001-001192	R-CARBON(S);820OHM,5%,1/2W,AA,TP,2.4X6.4	
4	RS803	2001-001159	R-CARBON(S);510OHM,5%,1/2W,AA,TP,2.4X6.4	
4	RS804	2001-001182	R-CARBON(S);7.5KOHM,5%,1/2W,AA,TP,2.4X6.	
4	RS805	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
4	RS806	2001-001159	R-CARBON(S);510OHM,5%,1/2W,AA,TP,2.4X6.4	
4	RS807	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	RZ153	2008-001086	R-FUSIBLE(S);3.3ohm,5%,2W,AG,TP,3.9x12mm	
4	RZ154	2003-000532	R-METAL OXIDE(S);18ohm,5%,2W,AF,TP,4x12m	
4	RZ156	2001-001159	R-CARBON(S);510OHM,5%,1/2W,AA,TP,2.4X6.4	
4	RZ165	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	RZ166	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	RZ167	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	RZ167A	2001-000554	R-CARBON;270OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	RZ168	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
4	RZ169	2001-000019	R-CARBON(S);10OHM,5%,1/2W,AA,TP,2.4X6.4M	
4	RZ170	2001-000666	R-CARBON;33OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	RZ171	2001-000666	R-CARBON;33OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	RZ172	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	RZ173	2001-001139	R-CARBON(S);39KOHM,5%,1/2W,AA,TP,2.4X6.4	
4	RZ174	2001-001139	R-CARBON(S);39KOHM,5%,1/2W,AA,TP,2.4X6.4	
4	RZ175	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	RZ176	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	RZ177	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	RZ178	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	RZ179	2003-000713	R-METAL OXIDE(S);47ohm,5%,2W,AF,TP,4x12m	
4	RZ180	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
4	RZ181	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
4	RZ182	2003-000713	R-METAL OXIDE(S);47ohm,5%,2W,AF,TP,4x12m	
4	RZ183	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
4	RZ184	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
4	VR101	2103-000672	VR-SEMI;20Kohm,25%,1/5W,TOP	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2		AA95-00007A	ASSY-P/CONVERTER;..SVP-434JM,KPT51A,NTSC	
3	CON01	3711-002709	CONNECTOR-HEADER;NOWALL,12P,1R,2.5MM,ANG	
3	CON02	3711-002703	CONNECTOR-HEADER;NOWALL,5P,1R,2.5mm,ANGL	
3	IC03	AA13-30021E	IC-MCU;Z90234,R3911,SZM-374FC,ST,24K,	
3	IC04	1103-001208	IC-EEPROM;AT24C02,PC27,C,256x8Bit,DIP8P	
3	S/CASE	AA63-40037A	SHIELD-CASE;..SPTE,T0.5,SCT12A.	S.N.A
3	XTR01	2804-001213	OSCILLATOR-CLOCK;90MHz,100ppm,10TTL,&..	
3		AA99-20043V	ASSY PCB SUB,AUTO;.AA95-00007A..V	S.N.A
4	CF10	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
4	CF11	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11.5	
4	CF12	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
4	CF13	2401-001513	C-AL;47uF,20%,16V,WT,TP,5x11.5	
4	CF14	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
4	CF15	2203-000429	C-CERAMIC,CHIP;0.018nF,5%,50V,NP0,TP,201	
4	CF16	2203-000634	C-CERAMIC,CHIP;0.022nF,5%,50V,NP0,TP,201	
4	CF17	2203-000429	C-CERAMIC,CHIP;0.018nF,5%,50V,NP0,TP,201	
4	CF18	2203-000683	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,201	
4	CF19	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
4	CF21	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
4	CF22	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
4	CF23	2401-001513	C-AL;47uF,20%,16V,WT,TP,5x11.5	
4	CF24	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
4	CF25	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
4	CF26	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
4	CF27	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
4	CF28	2401-001513	C-AL;47uF,20%,16V,WT,TP,5x11.5	
4	CF29	2401-001513	C-AL;47uF,20%,16V,WT,TP,5x11.5	
4	CF30	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
4	CF31	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
4	CF32	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
4	CF33	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
4	CF34	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
4	CF35	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
4	CF37	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
4	CF38	2401-001513	C-AL;47uF,20%,16V,WT,TP,5x11.5	
4	CF39	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
4	CF40	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
4	CF41	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
4	CF42	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
4	CF44	2404-000151	C-TA,CHIP;1uF,20%,16V,..TP,3216,-	
4	CF45	2203-001158	C-CERAMIC,CHIP;0.068nF,5%,50V,NP0,TP,201	
4	CF46	2404-000151	C-TA,CHIP;1uF,20%,16V,..TP,3216,-	
4	CF47	2203-001158	C-CERAMIC,CHIP;0.068nF,5%,50V,NP0,TP,201	
4	CF48	2404-000151	C-TA,CHIP;1uF,20%,16V,..TP,3216,-	
4	CF49	2203-001158	C-CERAMIC,CHIP;0.068nF,5%,50V,NP0,TP,201	
4	CF50	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
4	CF51	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
4	CF52	2203-000316	C-CERAMIC,CHIP;0.12nF,5%,50V,NP0,TP,2012	
4	CF53	2203-000316	C-CERAMIC,CHIP;0.12nF,5%,50V,NP0,TP,2012	
4	CF54	2402-000173	C-AL,SMD;4.7uF,20%,35V,GP,TP,4.3x4.3x5.	
4	CF55	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
4	CF56	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
4	CF57	2402-000173	C-AL,SMD;4.7uF,20%,35V,GP,TP,4.3x4.3x5.	
4	CF58	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
4	CF60	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11.5	
4	CF61	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
4	CF62	2401-001513	C-AL;47uF,20%,16V,WT,TP,5x11.5	
4	CF63	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
4	CF64	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
4	CF65	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
4	CF66	2401-001513	C-AL;47uF,20%,16V,WT,TP,5x11.5	
4	CF67	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
4	CF68	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
4	CF69	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
4	CF70	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
4	CF71	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
4	CF72	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
4	CF75	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11.5	
4	CF76	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
4	CF77	2203-000429	C-CERAMIC,CHIP;0.018nF,5%,50V,NP0,TP,201	
4	CF78	2203-000429	C-CERAMIC,CHIP;0.018nF,5%,50V,NP0,TP,201	
4	CF79	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11.5	
4	CF80	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
4	CF81	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
4	CF84	2203-000858	C-CERAMIC,CHIP;0.039nF,5%,50V,NP0,TP,201	
4	CF85	2203-000839	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,2012	
4	CF86	2203-000858	C-CERAMIC,CHIP;0.039nF,5%,50V,NP0,TP,201	

Level	Loc. No.	Code No.	Description ; Specification	Remark
4	CF87	2203-000839	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,2012	
4	CF88	2203-000858	C-CERAMIC,CHIP;0.039nF,5%,50V,NP0,TP,201	
4	CF89	2203-000839	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,2012	
4	DF01	0401-000008	DIODE-SWITCHING,DAN217,80V,100mA,SOT 23,	
4	DF02	0401-000008	DIODE-SWITCHING,DAN217,80V,100mA,SOT 23,	
4	DF03	0401-000008	DIODE-SWITCHING,DAN217,80V,100mA,SOT 23,	
4	FF13	2901-000226	FILTER-EMI SMD;25V,0.3A,..100pF,3.2x1.25	
4	FF14	2901-000226	FILTER-EMI SMD;25V,0.3A,..100pF,3.2x1.25	
4	FF15	2901-000233	FILTER-EMI SMD;50V,0.3A,..330pF,4.5x3.2x	
4	FF16	2901-000233	FILTER-EMI SMD;50V,0.3A,..330pF,4.5x3.2x	
4	FF17	2901-000233	FILTER-EMI SMD;50V,0.3A,..330pF,4.5x3.2x	
4	IC01	1204-001406	IC-VIDEO PROCESS;FS310KBC,QFP,128P,1100M	
4	IC02	1105-001270	IC-DRAM;72V161621,2x524Kx16BITBit,TSOP	
4	IC05	1203-001419	IC-VOLTAGE REGULATOR;4931,TO-252,3P,6.6x	
4	LF10	2901-000297	FILTER-EMI ON BOARD;..3A,..,3.5x5,TP,-	
4	LF11	2701-000116	INDUCTOR-AXIAL;10uH,10%,4.2x9.8mm	
4	LF12	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
4	LF13	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
4	LF14	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
4	LF15	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
4	LF16	2701-000149	INDUCTOR-AXIAL;2.7uH,10%,2.5x3.4mm	
4	LF17	2701-000149	INDUCTOR-AXIAL;2.7uH,10%,2.5x3.4mm	
4	LF18	2701-000149	INDUCTOR-AXIAL;2.7uH,10%,2.5x3.4mm	
4	PCB	AA41-109978	PCB-FORMAT CONNERTER;KPM51A,4L,FR-4,245X	S.N.A
4	RF11	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RF13	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RF15	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RF16	2007-000477	R-CHIP;1MOHM,5%,1/10W,DA,TP,2012	
4	RF17	2007-000477	R-CHIP;1MOHM,5%,1/10W,DA,TP,2012	
4	RF18	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
4	RF19	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
4	RF21	2007-000642	R-CHIP;270OHM,5%,1/10W,DA,TP,2012	
4	RF22	2007-001118	R-CHIP;680OHM,5%,1/10W,DA,TP,2012	
4	RF23	2007-000401	R-CHIP;150OHM,5%,1/10W,DA,TP,2012	
4	RF24	2007-000401	R-CHIP;150OHM,5%,1/10W,DA,TP,2012	
4	RF25	2007-000518	R-CHIP;2.7KOHM,5%,1/10W,DA,TP,2012	
4	RF26	2007-000518	R-CHIP;2.7KOHM,5%,1/10W,DA,TP,2012	
4	RF27	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RF29	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
4	RF30	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
4	RF31	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
4	RF32	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
4	RF33	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
4	RF34	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
4	RF35	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
4	RF36	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
4	RF37	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
4	RF38	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
4	RF39	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
4	RF40	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
4	RF41	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
4	RF42	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
4	RF43	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
4	RF44	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
4	RF45	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
4	RF46	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
4	RF47	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
4	RF48	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
4	RF49	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
4	RF51	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
4	RF52	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
4	RF53	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
4	RF54	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
4	RF55	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
4	RF56	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
4	RF57	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
4	RF58	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
4	RF59	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
4	RF60	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
4	RF61	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
4	RF62	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
4	RF64	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RF66	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
4	RF67	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
4	RF68	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RF70	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	

Level	Loc. No.	Code No.	Description ; Specification	Remark
4	RF71	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
4	RF72	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
4	RF73	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
4	RF74	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
4	RF75	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
4	RF76	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
4	RF78	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
4	RF79	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
4	RF80	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
4	RF81	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
4	RF82	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RF83	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
4	RF84	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
4	RF85	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
4	RF86	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
4	RF87	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
4	RF88	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
4	XTR02	2801-000152	CRYSTAL-UNIT;14.31818MHz,40ppm,28-AAM,16	
4	XTR04	2801-000724	CRYSTAL-UNIT;6MHz,50ppm,28-AAM,20pF,40ohm	
2		AA96-00427B	ASSY SOUND;..SP43J5P3S/XTT,J51A,AA95-004	
3	C614	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11.5	
3	C615	2203-000695	C-CERAMIC,CHIP;0.22nF,5%,50V,NP0,TP,2012	
3	C616	2203-000938	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,2012	
3	C617	2203-000142	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,2012	
3	C618	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,	
3	C619	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,	
3	C620	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11.5	
3	C621	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11.5	
3	C622	2203-000701	C-CERAMIC,CHIP;0.002nF,0.25pF,50V,NP0,TP	
3	C623	2203-000701	C-CERAMIC,CHIP;0.002nF,0.25pF,50V,NP0,TP	
3	C624	2203-001077	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,201	
3	C625	2203-001077	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,201	
3	C626	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11.5	
3	C627	2203-000938	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,2012	
3	C628	2203-000142	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,2012	
3	C629	2203-001077	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,201	
3	C630	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11.5	
3	C631	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
3	C632	2401-002229	C-AL;470nF,20%,50V,WT,TP,5x11.5	
3	C633	2401-002229	C-AL;470nF,20%,50V,WT,TP,5x11.5	
3	C634	2203-000784	C-CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP,2012	
3	C635	2203-000784	C-CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP,2012	
3	C636	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
3	C637	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11.5	
3	C638	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
3	C639	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
3	C640	2203-000938	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,2012	
3	C641	2203-000142	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,2012	
3	C642	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11.5	
3	C643	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11.5	
3	C644	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11.5	
3	C645	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11.5	
3	C646	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11.5	
3	C649	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11.5	
3	C650	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C651	2401-000365	C-AL;100uF,20%,50V,WT,TP,10x12.5mm,	
3	C653	2203-000784	C-CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP,2012	
3	C654	2401-002229	C-AL;470nF,20%,50V,WT,TP,5x11.5	
3	C655	2203-000784	C-CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP,2012	
3	C656	2401-002229	C-AL;470nF,20%,50V,WT,TP,5x11.5	
3	C657	2401-002229	C-AL;470nF,20%,50V,WT,TP,5x11.5	
3	C658	2203-000784	C-CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP,2012	
3	C661	2203-000784	C-CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP,2012	
3	C662	2401-002229	C-AL;470nF,20%,50V,WT,TP,5x11.5	
3	C663	2401-002229	C-AL;470nF,20%,50V,WT,TP,5x11.5	
3	C664	2203-000784	C-CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP,2012	
3	C667	2203-000784	C-CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP,2012	
3	C668	2401-002229	C-AL;470nF,20%,50V,WT,TP,5x11.5	
3	C669	2401-002229	C-AL;470nF,20%,50V,WT,TP,5x11.5	
3	C670	2203-000784	C-CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP,2012	
3	C684	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11.5	
3	C688	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11.5	
3	C691	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11.5	
3	C692	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
3	C695	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP,2012	
3	C696	2203-000170	C-CERAMIC,CHIP;1.8nF,10%,50V,X7R,TP,2012	

Level	Loc. No.	Code No.	Description ; Specification	Remark
3	C687	2203-000170	C CERAMIC,CHIP:1.8nF,10%,50V,X7R,TP,2012	
3	C81	2401-000365	C AL,100uF,20%,50V,WT,TP,10x12.5mm	
3	C2601	2203-000250	C CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012	
3	C2602	2203-000142	C CERAMIC,CHIP:1.5nF,10%,50V,X7R,TP,2012	
3	C2603	2401-000962	C AL,22uF,20%,50V,GP,TP,5x11.5	
3	C2604	2203-000595	C CERAMIC,CHIP:0.22nF,5%,50V,NP0,TP,2012	
3	C2605	2203-000938	C CERAMIC,CHIP:0.47nF,5%,50V,NP0,TP,2012	
3	C2606	2401-000962	C AL,22uF,20%,50V,GP,TP,5x11.5	
3	C2607	2203-000938	C CERAMIC,CHIP:0.47nF,5%,50V,NP0,TP,2012	
3	C2608	2203-000142	C CERAMIC,CHIP:1.5nF,10%,50V,X7R,TP,2012	
3	C2609	2203-000181	C CERAMIC,CHIP:100nF,-80,20%,25V,Y5V,TP	
3	C2610	2401-000480	C AL,10uF,20%,50V,GP,TP,5x11.5	
3	C2611	2203-000181	C CERAMIC,CHIP:100nF,-80,20%,25V,Y5V,TP	
3	C2612	2401-000027	C AL,4.7uF,20%,50V,GP,TP,5x11.5	
3	C2613	2401-000660	C AL,2.2uF,20%,50V,GP,TP,5x11.5	
3	C2615	2401-000660	C AL,2.2uF,20%,50V,GP,TP,5x11.5	
3	C2616	2203-000444	C CERAMIC,CHIP,1nF,10%,50V,X7R,TP,2012	
3	C2618	2203-000444	C CERAMIC,CHIP,1nF,10%,50V,X7R,TP,2012	
3	C2619	2401-002235	C AL,10uF,20%,16V,GP,TP,5x11mm,5mm	
3	C2620	2401-002235	C AL,10uF,20%,16V,GP,TP,5x11mm,5mm	
3	C2621	2203-000938	C CERAMIC,CHIP,0.47nF,5%,50V,NP0,TP,2012	
3	C2622	2203-000142	C CERAMIC,CHIP,1.5nF,10%,50V,X7R,TP,2012	
3	C2623	2401-000480	C AL,10uF,20%,50V,GP,TP,5x11.5	
3	C2624	2203-000495	C CERAMIC,CHIP,2.2nF,10%,50V,X7R,TP,2012	
3	C2625	2401-000962	C AL,22uF,20%,50V,GP,TP,5x11.5	
3	C2626	2203-000495	C CERAMIC,CHIP,2.2nF,10%,50V,X7R,TP,2012	
3	C2627	2401-000962	C AL,22uF,20%,50V,GP,TP,5x11.5	
3	C2628	2203-000260	C CERAMIC,CHIP,10nF,10%,50V,X7R,TP,2012	
3	C2629	2401-000365	C AL,100uF,20%,50V,WT,TP,10x12.5mm	
3	C2630	2203-000761	C CERAMIC,CHIP,330nF,10%,16V,X7R,TP,2012	
3	C2B1	2401-000365	C AL,100uF,20%,50V,WT,TP,10x12.5mm	
3	CN601A	3711-003626	CONNECTOR HEADER,NOWALL,20P1R,2.5mm,ANG	
3	CN602A	3711-003626	CONNECTOR HEADER,NOWALL,20P1R,2.5mm,ANG	
3	IC601	1204-001689	IC SOUND PROCESSOR,MSP3410D -I3,PLCC,68P	
3	IC604	1201-000541	IC OP AMP,062,SOP,8P,153MIL,DUAL,5V,mVP	
3	IC2601	1204-001198	IC DECODER,DPL3519A-A2,PLCC,68P,PLASTI	
3	IC2602	1201-000541	IC OP AMP,062,SOP,8P,153MIL,DUAL,5V,mVP	
3	L601	2701-000170	INDUCTOR,AXIAL,3.9uH,10%,3x7mm	
3	L602	2701-000170	INDUCTOR,AXIAL,3.9uH,10%,3x7mm	
3	L603	2701-000112	INDUCTOR,AXIAL,100uH,10%,3x7mm	
3	L2601	2701-000170	INDUCTOR,AXIAL,3.9uH,10%,3x7mm	
3	L2602	2701-000112	INDUCTOR,AXIAL,100uH,10%,3x7mm	
3	L2603	2701-000170	INDUCTOR,AXIAL,3.9uH,10%,3x7mm	
3	PCB	AA41-00087A	PCB,AUDIO,PL51A,2LFR,4.180(245)X160X1.6T,3A	S.N.A
3	Q606	0501-000727	TR,SMALL SIGNAL,BC848C,NPN,310mW,SOT-23,	
3	Q607	0501-000727	TR,SMALL SIGNAL,BC848C,NPN,310mW,SOT-23,	
3	R601	2007-000029	R,CHIP,0OHM,5%,1/10W,DA,TP,2012	
3	R602	2007-000029	R,CHIP,0OHM,5%,1/10W,DA,TP,2012	
3	R610	2007-000290	R,CHIP,100OHM,5%,1/10W,DA,TP,2012	
3	R611	2007-000290	R,CHIP,100OHM,5%,1/10W,DA,TP,2012	
3	R614	2007-000468	R,CHIP,1KOHM,5%,1/10W,DA,TP,2012	
3	R617	2007-000931	R,CHIP,470OHM,5%,1/10W,DA,TP,2012	
3	R618	2007-000931	R,CHIP,470OHM,5%,1/10W,DA,TP,2012	
3	R619	2007-000290	R,CHIP,100OHM,5%,1/10W,DA,TP,2012	
3	R620	2007-000290	R,CHIP,100OHM,5%,1/10W,DA,TP,2012	
3	R621	2007-000290	R,CHIP,100OHM,5%,1/10W,DA,TP,2012	
3	R622	2007-000290	R,CHIP,100OHM,5%,1/10W,DA,TP,2012	
3	R623	2007-000477	R,CHIP,1MOHM,5%,1/10W,DA,TP,2012	
3	R624	2007-000477	R,CHIP,1MOHM,5%,1/10W,DA,TP,2012	
3	R625	2007-000477	R,CHIP,1MOHM,5%,1/10W,DA,TP,2012	
3	R626	2007-000477	R,CHIP,1MOHM,5%,1/10W,DA,TP,2012	
3	R632	2007-000931	R,CHIP,470OHM,5%,1/10W,DA,TP,2012	
3	R633	2007-000931	R,CHIP,470OHM,5%,1/10W,DA,TP,2012	
3	R634	2007-000931	R,CHIP,470OHM,5%,1/10W,DA,TP,2012	
3	R635	2007-000931	R,CHIP,470OHM,5%,1/10W,DA,TP,2012	
3	R636	2007-000931	R,CHIP,470OHM,5%,1/10W,DA,TP,2012	
3	R637	2007-000931	R,CHIP,470OHM,5%,1/10W,DA,TP,2012	
3	R638	2007-000931	R,CHIP,470OHM,5%,1/10W,DA,TP,2012	
3	R660	2007-000872	R,CHIP,4.7KOHM,5%,1/10W,DA,TP,2012	
3	R661	2007-000872	R,CHIP,4.7KOHM,5%,1/10W,DA,TP,2012	
3	R664	2007-001177	R,CHIP,8.2KOHM,5%,1/10W,DA,TP,2012	
3	R665	2007-000774	R,CHIP,33KOHM,5%,1/10W,DA,TP,2012	
3	R666	2007-000872	R,CHIP,4.7KOHM,5%,1/10W,DA,TP,2012	
3	R669	2007-001177	R,CHIP,8.2KOHM,5%,1/10W,DA,TP,2012	
3	R670	2007-000774	R,CHIP,33KOHM,5%,1/10W,DA,TP,2012	
3	R672	2007-000586	R,CHIP,22KOHM,5%,1/10W,DA,TP,2012	
3	R673	2007-000586	R,CHIP,22KOHM,5%,1/10W,DA,TP,2012	
3	R674	2007-000300	R,CHIP,10KOHM,5%,1/10W,DA,TP,2012	
3	R675	2007-000300	R,CHIP,10KOHM,5%,1/10W,DA,TP,2012	
3	RB1	2007-000941	R,CHIP,47KOHM,5%,1/10W,DA,TP,2012	
3	RB2	2007-000941	R,CHIP,47KOHM,5%,1/10W,DA,TP,2012	
3	RB3	2007-000328	R,CHIP,11KOHM,5%,1/10W,DA,TP,2012	
3	RB4	2007-000328	R,CHIP,11KOHM,5%,1/10W,DA,TP,2012	
3	RD601	2007-000468	R,CHIP,1KOHM,5%,1/10W,DA,TP,2012	
3	RD602	2007-000672	R,CHIP,4.7KOHM,5%,1/10W,DA,TP,2012	
3	RD604	2007-001177	R,CHIP,8.2KOHM,5%,1/10W,DA,TP,2012	
3	RD605	2007-000774	R,CHIP,33KOHM,5%,1/10W,DA,TP,2012	
3	RD610	2007-001177	R,CHIP,8.2KOHM,5%,1/10W,DA,TP,2012	
3	RD611	2007-000774	R,CHIP,33KOHM,5%,1/10W,DA,TP,2012	
3	RD627	2007-000872	R,CHIP,4.7KOHM,5%,1/10W,DA,TP,2012	
3	RDB1	2007-000941	R,CHIP,47KOHM,5%,1/10W,DA,TP,2012	
3	RDB2	2007-000941	R,CHIP,47KOHM,5%,1/10W,DA,TP,2012	
3	RDB3	2007-000328	R,CHIP,11KOHM,5%,1/10W,DA,TP,2012	
3	RDB4	2007-000328	R,CHIP,11KOHM,5%,1/10W,DA,TP,2012	
3	X601	2801-000186	CRYSTAL-UNIT,18.432MHz,25ppm,28 AAM,8pF,	
3		AA63-40273A	SHIELD CASE,,,SPTE,T0.5,,,,CX724AHD	
3		0202-000187	SOLDER WIRE FLUX,,,RS60S,D1.2,63Sn/37Pb	S.N.A
2		AA96-00519E	ASSY PCB,PROSCAN,,,SPS3J5HF,J51A,,,,	
3	CNP601	3711-003543	CONNECTOR HEADER,NOWALL,16P1R,2.54MM,AN	
3	CNP602	3711-001283	CONNECTOR HEADER,NOWALL,14P1R,2.5mm,ANG	
3	CNP603	3711-001283	CONNECTOR HEADER,NOWALL,14P1R,2.5mm,ANG	
3	CNP604	3711-001283	CONNECTOR HEADER,NOWALL,14P1R,2.5mm,ANG	
3	XP101	2801-000019	CRYSTAL-UNIT,20.25MHz,30ppm,28 AAM,13pF,	
3	XP501	2801-000811	CRYSTAL-UNIT,24.576MHZ,20PPM,28 AAM,30PF	
3		AA99-20079H	ASSY PCB SUB,AUTO; AA96-00519E ,,,V	S.N.A
4	CP101	2203-000938	C CERAMIC,CHIP,0.47nF,5%,50V,NP0,TP,2012	
4	CP102	2203-000938	C CERAMIC,CHIP,0.47nF,5%,50V,NP0,TP,2012	
4	CP103	2203-000761	C CERAMIC,CHIP,330nF,10%,16V,X7R,TP,2012	
4	CP104	2203-000761	C CERAMIC,CHIP,330nF,10%,16V,X7R,TP,2012	
4	CP105	2203-000444	C CERAMIC,CHIP,1nF,10%,50V,X7R,TP,2012,	
4	CP109	2203-000181	C CERAMIC,CHIP,100nF,-80,20%,25V,Y5V,TP,	
4	CP110	2401-001496	C AL,47uF,20%,16V,GP,TP,5x7.5	
4	CP111	2203-000979	C CERAMIC,CHIP,47nF,10%,50V,X7R,TP,2012	
4	CP112	2401-000436	C AL,10uF,20%,50V,GP,TP,5,3x7mm,5	
4	CP113	2203-001172	C CERAMIC,CHIP,0.006nF,0.25pF,50V,NP0,TP	
4	CP114	2203-001172	C CERAMIC,CHIP,0.006nF,0.25pF,50V,NP0,TP	
4	CP115	2203-000181	C CERAMIC,CHIP,100nF,-80,20%,25V,Y5V,TP,	
4	CP116	2401-002009	C AL,100uF,20%,16V,GP,TP,5,3x7.5	
4	CP117	2203-000181	C CERAMIC,CHIP,100nF,-80,20%,25V,Y5V,TP,	
4	CP118	2401-002009	C AL,100uF,20%,16V,GP,TP,6,3x7.5	
4	CP119	2203-000181	C CERAMIC,CHIP,100nF,-80,20%,25V,Y5V,TP,	
4	CP120	2203-001002	C CERAMIC,CHIP,0.047nF,5%,50V,NP0,TP,201	
4	CP121	2203-001002	C CERAMIC,CHIP,0.047nF,5%,50V,NP0,TP,201	
4	CP122	2203-000761	C CERAMIC,CHIP,330nF,10%,16V,X7R,TP,2012	
4	CP126	2203-000181	C CERAMIC,CHIP,100nF,-80,20%,25V,Y5V,TP,	
4	CP127	2401-002009	C AL,100uF,20%,16V,GP,TP,6,3x7.5	
4	CP128	2401-002009	C AL,100uF,20%,16V,GP,TP,6,3x7.5	
4	CP129	2203-000181	C CERAMIC,CHIP,100nF,-80,20%,25V,Y5V,TP,	
4	CP130	2401-002009	C AL,100uF,20%,16V,GP,TP,6,3x7.5	
4	CP131	2203-000181	C CERAMIC,CHIP,100nF,-80,20%,25V,Y5V,TP,	
4	CP132	2401-000486	C AL,10uF,20%,50V,GP,TP6,3x7mm,5	
4	CP133	2203-000181	C CERAMIC,CHIP,100nF,-80,20%,25V,Y5V,TP,	
4	CP135	2203-000575	C CERAMIC,CHIP,220NF,10%,25V,X7R,TP,2012	
4	CP137	2203-000181	C CERAMIC,CHIP,100nF,-80,20%,25V,Y5V,TP,	
4	CP139	2203-000575	C CERAMIC,CHIP,220NF,10%,25V,X7R,TP,2012	
4	CP141	2203-000181	C CERAMIC,CHIP,100nF,-80,20%,25V,Y5V,TP,	
4	CP142	2203-000938	C CERAMIC,CHIP,0.47nF,5%,50V,NP0,TP,2012	
4	CP143	2203-000938	C CERAMIC,CHIP,0.47nF,5%,50V,NP0,TP,2012	
4	CP144	2203-000938	C CERAMIC,CHIP,0.47nF,5%,50V,NP0,TP,2012	
4	CP145	2203-000761	C CERAMIC,CHIP,330nF,10%,16V,X7R,TP,2012	
4	CP301	2203-000181	C CERAMIC,CHIP,100nF,-80,20%,25V,Y5V,TP,	
4	CP302	2203-000181	C CERAMIC,CHIP,100nF,-80,20%,25V,Y5V,TP,	
4	CP303	2203-000181	C CERAMIC,CHIP,100nF,-80,20%,25V,Y5V,TP,	
4	CP304	2203-000181	C CERAMIC,CHIP,100nF,-80,20%,25V,Y5V,TP,	
4	CP305	2401-001496	C AL,47uF,20%,16V,GP,TP,5x7.5	
4	CP306	2203-000181	C CERAMIC,CHIP,100nF,-80,20%,25V,Y5V,TP,	
4	CP307	2401-001496	C AL,47uF,20%,16V,GP,TP,5x7.5	
4	CP308	2203-000181	C CERAMIC,CHIP,100nF,-80,20%,25V,Y5V,TP,	
4	CP309	2401-001496	C AL,47uF,20%,16V,GP,TP,5x7.5	
4	CP310	2203-000181	C CERAMIC,CHIP,100nF,-80,20%,25V,Y5V,TP,	
4	CP311	2401-001496	C AL,47uF,20%,16V,GP,TP,5x7.5	
4	CP312	2203-000181	C CERAMIC,CHIP,100nF,-80,20%,25V,Y5V,TP,	
4	CP313	2203-000181	C CERAMIC,CHIP,100nF,-80,20%,25V,Y5V,TP,	
4	CP314	2203-000181	C CERAMIC,CHIP,100nF,-80,20%,25V,Y5V,TP,	

Level	Loc. No.	Code No.	Description ; Specification	Remark
4	CP315	2203-000181	C CERAMIC,CHIP:100nF,-80,20%,25V,Y5V,TP	
4	CP316	2203-000181	C CERAMIC,CHIP:100nF,-80,20%,25V,Y5V,TP	
4	CP317	2203-000181	C CERAMIC,CHIP:100nF,-80,20%,25V,Y5V,TP	
4	CP401	2203-000181	C CERAMIC,CHIP:100nF,-80,20%,25V,Y5V,TP	
4	CP402	2203-000181	C CERAMIC,CHIP:100nF,-80,20%,25V,Y5V,TP	
4	CP403	2401-002009	C AL,100uF,20%,16V,GP,TP,5,3x7.5	
4	CP404	2203-000181	C CERAMIC,CHIP:100nF,-80,20%,25V,Y5V,TP	
4	CP405	2203-000181	C CERAMIC,CHIP:100nF,-80,20%,25V,Y5V,TP	
4	CP406	2203-000142	C CERAMIC,CHIP:1.5nF,10%,50V,X7R,TP,2012	
4	CP407	2203-000239	C CERAMIC,CHIP:0.1nF,5%,50V,NP0,TP,2012	
4	CP408	2203-000181	C CERAMIC,CHIP:100nF,-80,20%,25V,Y5V,TP	
4	CP409	2203-000555	C CERAMIC,CHIP:0.02nF,5%,50V,NP0,TP,2012	
4	CP410	2203-000181	C CERAMIC,CHIP:100nF,-80,20%,25V,Y5V,TP	
4	CP411	2203-000181	C CERAMIC,CHIP:100nF,-80,20%,25V,Y5V,TP	
4	CP412	2203-000555	C CERAMIC,CHIP:0.02nF,5%,50V,NP0,TP,2012	
4	CP413	2203-000555	C CERAMIC,CHIP:0.02nF,5%,50V,NP0,TP,2012	
4	CP414	2203-000181	C CERAMIC,CHIP:100nF,-80,20%,25V,Y5V,TP	
4	CP415	2203-000181	C CERAMIC,CHIP:100nF,-80,20%,25V,Y5V,TP	
4	CP416	2203-000181	C CERAMIC,CHIP:100nF,-80,20%,25V,Y5V,TP	
4	CP417	2203-000181	C CERAMIC,CHIP:100nF,-80,20%,25V,Y5V,TP	
4	CP418	2404-001020	C TA,CHIP,10uF,20%,10V,GP,TP,3216,3.2	
4	CP419	2404-001020	C TA,CHIP,10uF,20%,10V,GP,TP,3216,3.2	
4	CP420	2404-001020	C TA,CHIP,10uF,20%,10V,GP,TP,3216,3.2	
4	CP501	2203-002494	C CERAMIC,CHIP:470nF,10%,16V,X7R,TP,2012	
4	CP502	2203-002494	C CERAMIC,CHIP:470nF,10%,16V,X7R,TP,2012	
4	CP503	2203-002494	C CERAMIC,CHIP:470nF,10%,16V,X7R,TP,2012	
4	CP504	2203-002494	C CERAMIC,CHIP:470nF,10%,16V,X7R,TP,2012	
4	CP505	2203-002494	C CERAMIC,CHIP:470nF,10%,16V,X7R,TP,2012	
4	CP506	2401-001496	C AL,47uF,20%,16V,GP,TP,5x7.5	
4	CP507	2203-000181	C CERAMIC,CHIP:100nF,-80,20%,25V,Y5V,TP,	
4	CP508	2203-002494	C CERAMIC,CHIP:470nF,10%,16V,X7R,TP,2012	
4	CP509	2203-002494	C CERAMIC,CHIP:470nF,10%,16V,X7R,TP,2012	
4	CP510	2203-002494	C CERAMIC,CHIP:470nF,10%,16V,X7R,TP,2012	
4	CP511	2203-002494	C CERAMIC,CHIP:470nF,10%,16V,X7R,TP,2012	
4	CP512	2203-002494	C CERAMIC,CHIP:470nF,10%,16V,X7R,TP,2012	
4	CP513	2203-002494	C CERAMIC,CHIP:470nF,10%,16V,X7R,TP,2012	
4	CP514	2203-002494	C CERAMIC,CHIP:470nF,10%,16V,X7R,TP,2012	
4	CP515	2203-002494	C CERAMIC,CHIP:470nF,10%,16V,X7R,TP,2012	
4	CP516	2203-002494	C CERAMIC,CHIP:470nF,10%,16V,X7R,TP,2012	
4	CP517	2203-002494	C CERAMIC,CHIP:470nF,10%,16V,X7R,TP,2012	
4	CP518	2401-000598	C AL,1uF,20%,50V,GP,TP,4x7.5	
4	CP519	2203-002494	C CERAMIC,CHIP:470nF,10%,16V,X7R,TP,2012	
4	CP520	2203-002494	C CERAMIC,CHIP:470nF,10%,16V,X7R,TP,2012	
4	CP521	2203-002494	C CERAMIC,CHIP:470nF,10%,16V,X7R,TP,2012	
4	CP522	2203-002494	C CERAMIC,CHIP:470nF,10%,16V,X7R,TP,2012	
4	CP523	2203-002494	C CERAMIC,CHIP:470nF,10%,16V,X7R,TP,2012	
4	CP524	2203-000260	C CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012	
4	CP525	2203-000181	C CERAMIC,CHIP:100nF,-80,20%,25V,Y5V,TP,	
4	CP527	2203-000181	C CERAMIC,CHIP:100nF,-80,20%,25V,Y5V,TP,	
4	CP528	2401-001496	C AL,47uF,20%,16V,GP,TP,5x7.5	
4	CP529	2203-000575	C CERAMIC,CHIP:220NF,10%,25V,X7R,TP,2012	
4	CP530	2203-000575	C CERAMIC,CHIP:220NF,10%,25V,X7R,TP,2012	
4	CP531	2203-000575	C CERAMIC,CHIP:220NF,10%,25V,X7R,TP,2012	
4	CP532	2203-002494	C CERAMIC,CHIP:470nF,10%,16V,X7R,TP,2012	
4	CP533	2401-000486	C AL,10uF,20%,50V,GP,TP6,3x7mm,5	
4	CP534	2203-000260	C CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012	
4	CP535	2203-000260	C CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012	
4	CP536	2203-000260	C CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012	
4	CP537	2203-000260	C CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012	
4	CP538	2203-000260	C CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012	
4	CP539	2203-000260	C CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012	
4	CP540	2401-000486	C AL,10uF,20%,50V,GP,TP6,3x7mm,5	
4	CP541	2203-001002	C CERAMIC,CHIP:0.047nF,5%,50V,NP0,TP,201	
4	CP542	2203-001002	C CERAMIC,CHIP:0.047nF,5%,50V,NP0,TP,201	
4	CP545	2203-002494	C CERAMIC,CHIP:470nF,10%,16V,X7R,TP,2012	
4	CP546	2203-000260	C CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012	
4	CP547	2203-000260	C CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012	
4	CP548	2203-000260	C CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012	
4	CP549	2203-000181	C CERAMIC,CHIP:100nF,-80,20%,25V,Y5V,TP,	
4	CP550	2203-000181	C CERAMIC,CHIP:100nF,-80,20%,25V,Y5V,TP,	
4	CP551	2203-000181	C CERAMIC,CHIP:100nF,-80,20%,25V,Y5V,TP,	
4	CP552	2401-001496	C AL,47uF,20%,16V,GP,TP,5x7.5	
4	CP553	2203-000181	C CERAMIC,CHIP:100nF,-80,20%,25V,Y5V,TP,	
4	CP554	2203-000181	C CERAMIC,CHIP:100nF,-80,20%,25V,Y5V,TP,	
4	CP555	2203-000181	C CERAMIC,CHIP:100nF,-80,20%,25V,Y5V,TP,	
4	CP556	2203-000181	C CERAMIC,CHIP:100nF,-80,20%,25V,Y5V,TP,	
4	CP557	2203-000181	C CERAMIC,CHIP:100nF,-80,20%,25V,Y5V,TP,	
4	CP601	2203-001088	C CERAMIC,CHIP:0.005nF,0.25pF,50V,NP0,TP	
4	CP602	2203-001088	C CERAMIC,CHIP:0.005nF,0.25pF,50V,NP0,TP	
4	CP603	2203-002454	C CERAMIC,CHIP:470nF,10%,16V,X7R,TP,2012	
4	CP604	2203-000938	C CERAMIC,CHIP:0.47nF,5%,50V,NP0,TP,2012	
4	CP605	2203-000444	C CERAMIC,CHIP:1nF,10%,50V,X7R,TP,2012,	
4	CP607	2203-000181	C CERAMIC,CHIP:100nF,-80,20%,25V,Y5V,TP	
4	CP608	2203-000181	C CERAMIC,CHIP:100nF,-80,20%,25V,Y5V,TP	
4	CP610	2203-000181	C CERAMIC,CHIP:100nF,-80,20%,25V,Y5V,TP	
4	CP611	2203-000444	C CERAMIC,CHIP:1nF,10%,50V,X7R,TP,2012	
4	CP612	2203-000444	C CERAMIC,CHIP:1nF,10%,50V,X7R,TP,2012	
4	CP613	2203-000444	C CERAMIC,CHIP:1nF,10%,50V,X7R,TP,2012	
4	CP614	2203-000181	C CERAMIC,CHIP:100nF,-80,20%,25V,Y5V,TP	
4	CP615	2203-000181	C CERAMIC,CHIP:100nF,-80,20%,25V,Y5V,TP	
4	CP616	2203-001002	C CERAMIC,CHIP:0.047nF,5%,50V,NP0,TP,201	
4	CP617	2203-000181	C CERAMIC,CHIP:100nF,-80,20%,25V,Y5V,TP	
4	CP618	2203-000239	C CERAMIC,CHIP:0.1nF,5%,50V,NP0,TP,2012	
4	CP619	2203-000181	C CERAMIC,CHIP:100nF,-80,20%,25V,Y5V,TP	
4	CP620	2203-000181	C CERAMIC,CHIP:100nF,-80,20%,25V,Y5V,TP	
4	CP621	2203-000239	C CERAMIC,CHIP:0.1nF,5%,50V,NP0,TP,2012	
4	CP622	2203-000142	C CERAMIC,CHIP:1.5nF,10%,50V,X7R,TP,2012	
4	CP623	2203-000181	C CERAMIC,CHIP:100nF,-80,20%,25V,Y5V,TP	
4	CP624	2401-001496	C AL,47uF,20%,16V,GP,TP,5x7.5	
4	CP625	2203-000181	C CERAMIC,CHIP:100nF,-80,20%,25V,Y5V,TP	
4	CP626	2401-002009	C AL,100uF,20%,16V,GP,TP6,3x7.5	
4	CP627	2203-000181	C CERAMIC,CHIP:100nF,-80,20%,25V,Y5V,TP	
4	CP628	2401-002009	C AL,100uF,20%,16V,GP,TP6,3x7.5	
4	CP629	2203-000181	C CERAMIC,CHIP:100nF,-80,20%,25V,Y5V,TP	
4	CP630	2203-000181	C CERAMIC,CHIP:100nF,-80,20%,25V,Y5V,TP	
4	CP631	2401-000598	C AL,1uF,20%,50V,GP,TP,4x7.5	
4	CP901	2404-001229	C TA,CHIP,4.7uF,20%,25V,GP,TP,3528	
4	CP902	2203-000181	C CERAMIC,CHIP:100nF,-80,20%,25V,Y5V,TP	
4	CP904	2203-001088	C CERAMIC,CHIP:0.005nF,0.25pF,50V,NP0,TP	
4	CP905	2203-002454	C CERAMIC,CHIP:470nF,10%,16V,X7R,TP,2012	
4	CP906	2203-000495	C CERAMIC,CHIP:2.2nF,10%,50V,X7R,TP,2012	
4	CP501	0403-001117	DIODE,ZENER,RLZ12B,5%,500mW,LL 34,TP	
4	CP502	0403-001117	DIODE,ZENER,RLZ12B,5%,500mW,LL 34,TP	
4	CP503	0403-001117	DIODE,ZENER,RLZ12B,5%,500mW,LL 34,TP	
4	CP504	0403-000620	DIODE,ZENER,RLZ5.6B,5.6,500mW,LL 34,TP	
4	CP501	0401-000133	DIODE,SWITCHING,RLS4148,100V,200mA,SOD-8	
4	CP502	0403-000620	DIODE,ZENER,RLZ5.6B,5.6,500mW,LL 34,TP	
4	CP503	0401-000133	DIODE,SWITCHING,RLS4148,100V,200mA,SOD-8	
4	CP504	0401-000160	DIODE,SWITCHING,ISS314,30V,100mA,USC,TP	
4	CP505	0401-000160	DIODE,SWITCHING,ISS314,30V,100mA,USC,TP	
4	CP506	0401-000133	DIODE,SWITCHING,RLS4148,100V,200mA,SOD-8	
4	CP507	0403-000620	DIODE,ZENER,RLZ5.6B,5.6,500mW,LL 34,TP	
4	CP901	0401-000133	DIODE,SWITCHING,RLS4148,100V,200mA,SOD-8	
4	CP902	0401-000133	DIODE,SWITCHING,RLS4148,100V,200mA,SOD-8	
4	CP903	0401-000133	DIODE,SWITCHING,RLS4148,100V,200mA,SOD-8	
4	CP904	0401-000133	DIODE,SWITCHING,RLS4148,100V,200mA,SOD-8	
4	FP101	2501-001120	FILTER,EMI,SMD,25V,100mA,,,,3.2x1.6x1.T	
4	FP102	2501-001120	FILTER,EMI,SMD,25V,100mA,,,,3.2x1.6x1.T	
4	FP301	2501-001120	FILTER,EMI,SMD,25V,100mA,,,,3.2x1.6x1.T	
4	FP901	2501-000226	FILTER,EMI,SMD,25V,0.3A,,100pF,3.2x1.25	
4	FP902	2501-000226	FILTER,EMI,SMD,25V,0.3A,,100pF,3.2x1.25	
4	FP903	2501-000226	FILTER,EMI,SMD,25V,0.3A,,100pF,3.2x1.25	
4	FP904	2501-000226	FILTER,EMI,SMD,25V,0.3A,,100pF,3.2x1.25	
4	FP905	2501-000226	FILTER,EMI,SMD,25V,0.3A,,100pF,3.2x1.25	
4	FP906	2501-000226	FILTER,EMI,SMD,25V,0.3A,,100pF,3.2x1.25	
4	FP907	2501-000226	FILTER,EMI,SMD,25V,0.3A,,100pF,3.2x1.25	
4	FP908	2501-000226	FILTER,EMI,SMD,25V,0.3A,,100pF,3.2x1.25	
4	IC101	1204-001362	IC,VIDEO PROCESS,VPC3215C 88,PLCC,43P,	
4	IC103	1205-001172	IC,INTERFACE,CIP3250A B1,PLCC,68P,,PLAS	
4	IC301	1204-001623	IC,VERTICAL PROCESSO;SDA9400,QFP64P ,P	
4	IC302	1203-001419	IC,VOLTAGE REGULATOR;4931,TO-252,3P5,fix	
4	IC401	1002-001045	IC,D/A CONVERTER,8280,8BIT,PLCC,68P, ,	
4	IC501	1204-001550	IC,VIDEO PROCESS,CXA2101AQ,QFP80P ,PLA	
4	IC601	1204-001372	IC,HOR,VER,PROCESSO;SDA9361,QFP44P, ,P	
4	IC901	1202-000001	IC,VOLTAGE COMP;7533,TO-92,3P, ,SINGLE,	
4	LP101	3301-001324	CORE,FERRITE BEAD;A

Level	Loc. No.	Code No.	Description ; Specification	Remark
4	LP307	3301-001324	CORE FERRITE BEAD;AB,150HM,2X1.25X0.9MM	S.N.A
4	LP302	3301-001324	CORE FERRITE BEAD;AB,150HM,2X1.25X0.9MM	S.N.A
4	LP303	3301-001324	CORE FERRITE BEAD;AB,150HM,2X1.25X0.9MM	S.N.A
4	LP401	3301-001324	CORE FERRITE BEAD;AB,150HM,2X1.25X0.9MM	S.N.A
4	LP402	3301-001324	CORE FERRITE BEAD;AB,150HM,2X1.25X0.9MM	S.N.A
4	LP403	3301-001324	CORE FERRITE BEAD;AB,150HM,2X1.25X0.9MM	S.N.A
4	LP404	3301-001324	CORE FERRITE BEAD;AB,150HM,2X1.25X0.9MM	S.N.A
4	LP501	3301-001324	CORE FERRITE BEAD;AB,150HM,2X1.25X0.9MM	S.N.A
4	LP502	3301-001324	CORE FERRITE BEAD;AB,150HM,2X1.25X0.9MM	S.N.A
4	LP503	2703-001717	INDUCTOR SMD;1.2uH,5%,3.2x2.6x2.2mm	
4	LP001	3301-001186	CORE FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m	S.N.A
4	LP002	3301-001186	CORE FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m	S.N.A
4	LP003	3301-001324	CORE FERRITE BEAD;AB,150HM,2X1.25X0.9MM	S.N.A
4	LP004	3301-001184	CORE FERRITE BEAD;AB,1.3ohm,4.5x3.2x1.3	S.N.A
4	LP005	3301-001184	CORE FERRITE BEAD;AB,1.3ohm,4.5x3.2x1.3	S.N.A
4	LP006	3301-001184	CORE FERRITE BEAD;AB,1.3ohm,4.5x3.2x1.3	S.N.A
4	JP501	0501-000280	TR SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
4	JP502	0501-000344	TR SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT	
4	JP503	0501-000344	TR SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT	
4	JP504	0501-000280	TR SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
4	JP505	0501-000280	TR SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
4	JP506	0501-000280	TR SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
4	JP508	0501-000344	TR SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT	
4	JP602	0501-000344	TR SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT	
4	JP902	0501-000280	TR SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
4	RP101	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
4	RP102	2007-000947	R-CHIP;47OHM,5%,1/10W,DA,TP2012	
4	RP106	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP112	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP113	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP114	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP115	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP117	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
4	RP134	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP135	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP136	2011-000585	R-NETWORK;47ohm,5%,63mW,LCHP8P,TP	
4	RP137	2011-000585	R-NETWORK;47ohm,5%,63mW,LCHP8P,TP	
4	RP138	2011-000585	R-NETWORK;47ohm,5%,63mW,LCHP8P,TP	
4	RP139	2011-000585	R-NETWORK;47ohm,5%,63mW,LCHP8P,TP	
4	RP140	2011-000585	R-NETWORK;47ohm,5%,63mW,LCHP8P,TP	
4	RP141	2011-000585	R-NETWORK;47ohm,5%,63mW,LCHP8P,TP	
4	RP142	2011-000585	R-NETWORK;47ohm,5%,63mW,LCHP8P,TP	
4	RP143	2011-000585	R-NETWORK;47ohm,5%,63mW,LCHP8P,TP	
4	RP153	2007-000401	R-CHIP;150OHM,5%,1/10W,DA,TP2012	
4	RP154	2007-000308	R-CHIP;10OHM,5%,1/10W,DA,TP2012	
4	RP155	2007-000947	R-CHIP;47OHM,5%,1/10W,DA,TP2012	
4	RP156	2007-000947	R-CHIP;47OHM,5%,1/10W,DA,TP2012	
4	RP157	2007-000947	R-CHIP;47OHM,5%,1/10W,DA,TP2012	
4	RP159	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
4	RP161	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP301	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP302	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP303	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP304	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP305	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP401	2011-000585	R-NETWORK;47ohm,5%,63mW,LCHP8P,TP	
4	RP402	2011-000585	R-NETWORK;47ohm,5%,63mW,LCHP8P,TP	
4	RP403	2011-000585	R-NETWORK;47ohm,5%,63mW,LCHP8P,TP	
4	RP404	2011-000585	R-NETWORK;47ohm,5%,63mW,LCHP8P,TP	
4	RP405	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP406	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP407	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP408	2007-001055	R-CHIP;8.2KOHM,5%,1/10W,DA,TP2012	
4	RP409	2007-000401	R-CHIP;150OHM,5%,1/10W,DA,TP2012	
4	RP411	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
4	RP412	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
4	RP413	2007-000401	R-CHIP;150OHM,5%,1/10W,DA,TP2012	
4	RP415	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
4	RP416	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
4	RP417	2007-000380	R-CHIP;13KOHM,5%,1/10W,DA,TP2012	
4	RP418	2007-000401	R-CHIP;150OHM,5%,1/10W,DA,TP2012	
4	RP419	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
4	RP421	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
4	RP422	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP2012	
4	RP423	2007-000401	R-CHIP;150OHM,5%,1/10W,DA,TP2012	
4	RP501	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
4	RP502	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
4	RP503	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
4	RP504	2007-000030	R-CHIP;560OHM,5%,1/10W,DA,TP2012	
4	RP505	2007-000572	R-CHIP;220OHM,5%,1/10W,DA,TP2012	
4	RP506	2007-000493	R-CHIP;2.2KOHM,5%,1/10W,DA,TP2012	
4	RP507	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
4	RP509	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP2012	
4	RP510	2007-000938	R-CHIP;47KOHM,1%,1/10W,DA,TP2012	
4	RP513	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP514	2007-000210	R-CHIP;1.1KOHM,1%,1/10W,DA,TP2012	
4	RP515	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
4	RP516	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
4	RP517	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP518	2007-000210	R-CHIP;1.1KOHM,1%,1/10W,DA,TP2012	
4	RP519	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP521	2007-000210	R-CHIP;1.1KOHM,1%,1/10W,DA,TP2012	
4	RP522	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP523	2007-000210	R-CHIP;1.1KOHM,1%,1/10W,DA,TP2012	
4	RP524	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP525	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP526	2007-000210	R-CHIP;1.1KOHM,1%,1/10W,DA,TP2012	
4	RP527	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP528	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP529	2007-000210	R-CHIP;1.1KOHM,1%,1/10W,DA,TP2012	
4	RP530	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP537	2007-000689	R-CHIP;3.3MOHM,5%,1/10W,DA,TP2012	
4	RP542	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP543	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP544	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
4	RP546	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP547	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP549	2007-000671	R-CHIP;2KOHM,5%,1/10W,DA,TP2012	
4	RP550	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP553	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP554	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP555	2007-000582	R-CHIP;22KOHM,1%,1/10W,DA,TP2012	
4	RP556	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP560	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
4	RP562	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
4	RP565	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
4	RP566	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
4	RP567	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
4	RP568	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
4	RP569	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
4	RP570	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP2012	
4	RP571	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP601	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP602	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP603	2007-001208	R-CHIP;82KOHM,5%,1/10W,DA,TP2012	
4	RP604	2007-000947	R-CHIP;47OHM,5%,1/10W,DA,TP2012	
4	RP605	2007-000518	R-CHIP;2.7KOHM,5%,1/10W,DA,TP2012	
4	RP606	2007-000518	R-CHIP;2.7KOHM,5%,1/10W,DA,TP2012	
4	RP609	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
4	RP611	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
4	RP613	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP2012	
4	RP614	2007-000001	R-CHIP;68KOHM,5%,1/10W,DA,TP2012	
4	RP619	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
4	RP620	2007-000947	R-CHIP;47OHM,5%,1/10W,DA,TP2012	
4	RP621	2007-000947	R-CHIP;47OHM,5%,1/10W,DA,TP2012	
4	RP622	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
4	RP623	2007-000822	R-CHIP;390OHM,5%,1/10W,DA,TP2012	
4	RP624	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP625	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
4	RP626	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP2012	
4	RP627	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
4	RP628	2007-000267	R-CHIP;1.8KOHM,5%,1/10W,DA,TP2012	
4	RP629	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
4	RP630	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
4	RP631	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
4	RP709	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
4	RP719	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
4	RP727	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
4	RP735	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
4	RP736	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
4	RP737	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
4	RP738	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
4	RP901	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP904	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	

Level	Loc. No.	Code No.	Description ; Specification	Remark
4	RP907	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP908	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP912	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP913	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP914	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP915	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP916	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP917	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP918	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP920	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP921	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP924	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
4	RP925	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP926	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP927	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP929	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
4	RP931	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
4	RP933	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
4	RP935	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
4	RP936	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
4	RP943	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
4	RP944	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP2012	
4	RP945	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP980	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
4		AA41-002038	PCB;PROSCAN;SVP 5335PFR 4.4L,B,1.ST,245	S.N.A
3		AA63-40272A	SHIELD-CASE;-;SPTE,T0.5,-,CX724AHD	S.N.A
2		AA95-00529A	ASSY;PCB,PIP;-,SPK3,USHP,151A,-,-	
3	CNP01	3711-002709	CONNECTOR-HEADER;NOWALL,12P,1R,2.5MM,ANG	
3	CNP03	3711-002709	CONNECTOR-HEADER;NOWALL,12P,1R,2.5MM,ANG	
3	ICP101	1204-000530	IC PAL/NTSC DECODER;TDA9160A,DIP,32P,400	
3	ICP102	1204-000560	IC DEMODULATOR;TDA9815,DIP,32P,400MIL,PL	
3	RP126	2103-000665	VR SEMI;20Kohm,25%,1/5W,SIDE	
3	TP101	AA26-10004E	TRANS IF;-,7MG,VIF,-,7mm,8pF,116.7MHz,S	
3	ZP102	2904-000253	FILTER SAW AV;38.9MHz,DIP10K,ST,18dB,B/G	
3		AA99-20066Z	ASSY;PCB SUB,AUTO;-,AA95-00529A,-,V	S.N.A
4	CP101	2203-000221	C CERAMIC,CHIP;100nF,20%,50V,Y5V,TP,3216	
4	CP102	2401-000922	C AL,22uF,20%,16V,CP,TP,5x5.5	
4	CP103	2203-000429	C CERAMIC,CHIP;0.018nF,5%,50V,NP0,TP,201	
4	CP104	2203-000181	C CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
4	CP105	2203-000717	C CERAMIC,CHIP;3.3nF,10%,50V,X7R,TP,3216	
4	CP106	2203-000221	C CERAMIC,CHIP;100nF,20%,50V,Y5V,TP,3216	
4	CP107	2203-000221	C CERAMIC,CHIP;100nF,20%,50V,Y5V,TP,3216	
4	CP108	2203-000221	C CERAMIC,CHIP;100nF,20%,50V,Y5V,TP,3216	
4	CP109	2401-001840	C AL,100uF,20%,16V,CP,TP,6.3x11.5	
4	CP110	2203-000221	C CERAMIC,CHIP;100nF,20%,50V,Y5V,TP,3216	
4	CP111	2203-000716	C CERAMIC,CHIP;3.3nF,10%,50V,X7R,TP,2012	
4	CP112	2401-000660	C AL,2.2uF,20%,50V,CP,TP,5x11.5	
4	CP114	2203-000221	C CERAMIC,CHIP;100nF,20%,50V,Y5V,TP,3216	
4	CP115	2203-000221	C CERAMIC,CHIP;100nF,20%,50V,Y5V,TP,3216	
4	CP116	2203-000753	C CERAMIC,CHIP;330nF,+80-20%,50V,Y5V,TP	
4	CP117	2401-002144	C AL,47uF,20%,16V,CP,TP,5x11.5	
4	CP118	2203-000221	C CERAMIC,CHIP;100nF,20%,50V,Y5V,TP,3216	
4	CP119	2201-000692	C CERAMIC,DISC,0.008nF,0.5pF,50V,U,U,TP,4	
4	CP120	2203-000578	C CERAMIC,CHIP;220nF,20%,50V,Y5V,TP,3216	
4	CP121	2401-000660	C AL,2.2uF,20%,50V,CP,TP,5x11.5	
4	CP123	2203-000260	C CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
4	CP124	2401-000660	C AL,2.2uF,20%,50V,CP,TP,5x11.5	
4	CP125	2203-000260	C CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
4	CP126	2401-001840	C AL,100uF,20%,16V,CP,TP,6.3x11.5	
4	CP127	2203-000221	C CERAMIC,CHIP;100nF,20%,50V,Y5V,TP,3216	
4	CP129	2203-000260	C CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
4	CP130	2203-000239	C CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,2012	
4	CP131	2201-000692	C CERAMIC,DISC,0.008nF,0.5pF,50V,U,U,TP,4	
4	CP132	2203-000239	C CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,2012	
4	CP133	2203-000221	C CERAMIC,CHIP;100nF,20%,50V,Y5V,TP,3216	
4	CP134	2401-001840	C AL,100uF,20%,16V,CP,TP,6.3x11.5	
4	CP135	2401-002144	C AL,47uF,20%,16V,CP,TP,5x11.5	
4	CP136	2203-000260	C CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
4	CP137	2203-000938	C CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,2012	
4	CP142	2401-000199	C AL,1000uF,20%,6.3V,CP,TP,10x12.5,	
4	CP143	2401-002144	C AL,47uF,20%,16V,CP,TP,5x11.5	
4	CP144	2203-000221	C CERAMIC,CHIP;100nF,20%,50V,Y5V,TP,3216	
4	CP145	2203-000221	C CERAMIC,CHIP;100nF,20%,50V,Y5V,TP,3216	
4	CP201	2203-000325	C CERAMIC,CHIP;12nF,10%,50V,X7R,TP,3216,	
4	CP203	2401-002144	C AL,47uF,20%,16V,CP,TP,5x11.5	
4	CP204	2203-000221	C CERAMIC,CHIP;100nF,20%,50V,Y5V,TP,3216	
4	CP205	2401-001840	C AL,100uF,20%,16V,CP,TP,6.3x11.5	
4	CP206	2203-000221	C CERAMIC,CHIP;100nF,20%,50V,Y5V,TP,3216	
4	CP207	2401-001840	C AL,100uF,20%,16V,CP,TP,6.3x11.5	
4	CP208	2203-000221	C CERAMIC,CHIP;100nF,20%,50V,Y5V,TP,3216	
4	CP209	2401-001914	C AL,1uF,20%,50V,BP,TP,5x11.5	
4	CP210	2401-001840	C AL,100uF,20%,16V,CP,TP,6.3x11.5	
4	CP211	2401-000603	C AL,1uF,20%,50V,CP,TP,5x11.5	
4	CP213	2401-000603	C AL,1uF,20%,50V,CP,TP,5x11.5	
4	CP214	2203-000578	C CERAMIC,CHIP;220nF,20%,50V,Y5V,TP,3216	
4	CP215	2401-000603	C AL,1uF,20%,50V,CP,TP,5x11.5	
4	CP216	2203-000221	C CERAMIC,CHIP;100nF,20%,50V,Y5V,TP,3216	
4	CP217	2203-000578	C CERAMIC,CHIP;220nF,20%,50V,Y5V,TP,3216	
4	CP218	2203-002085	C CERAMIC,CHIP;56nF,10%,50V,X7R,TP,3216	
4	CP219	2203-000495	C CERAMIC,CHIP;2.2nF,10%,50V,X7R,TP,2012	
4	CP220	2203-000578	C CERAMIC,CHIP;220nF,20%,50V,Y5V,TP,3216	
4	CP221	2203-000221	C CERAMIC,CHIP;100nF,20%,50V,Y5V,TP,3216	
4	CP301	2401-001840	C AL,100uF,20%,16V,CP,TP,6.3x11.5	
4	CP302	2203-000221	C CERAMIC,CHIP;100nF,20%,50V,Y5V,TP,3216	
4	CP303	2401-001840	C AL,100uF,20%,16V,CP,TP,6.3x11.5	
4	CP304	2203-000221	C CERAMIC,CHIP;100nF,20%,50V,Y5V,TP,3216	
4	CP305	2203-001077	C CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,201	
4	CP306	2203-001077	C CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,201	
4	DP101	0401-000160	DIODE;SWITCHING,ISS314,30V,100mA,USC,TP	
4	DP103	0403-000720	DIODE;ZENER,MTZJ,9.1B,9.1V,8.57-9.01V,500	
4	DP105	0401-000160	DIODE;SWITCHING,ISS314,30V,100mA,USC,TP	
4	DP201	0403-000334	DIODE;ZENER,UZ2.7BSA,2.7V,2.54-2.75V,500	
4	ICP103	AA13-20004A	IC;HYBRID;,PAP102T,SIP6PPRE,AMPTP	
4	ICP105	1204-000635	IC PICTURE PROCESS;SDA9188X,SOP,32P,350M	
4	ICP201	1002-000205	IC A/D CONVERTER;SDA9187 ZX,6BIT,SOP,28P	
4	LP102	2701-000219	INDUCTOR;AXIAL,820nH,10%,2.5x3.4mm	
4	LP103	2701-000114	INDUCTOR;AXIAL,10uH,10%,2.5x3.4mm	
4	LP104	2701-000114	INDUCTOR;AXIAL,10uH,10%,2.5x3.4mm	
4	LP105	2701-000114	INDUCTOR;AXIAL,10uH,10%,2.5x3.4mm	
4	LP201	2701-000197	INDUCTOR;AXIAL,5.6uH,10%,2.5x3.4mm	
4	LP301	2701-000114	INDUCTOR;AXIAL,10uH,10%,2.5x3.4mm	
4	PCB	AA41-11003A	PCB;PIP;SCT53A,2L,FR-4,330x245x1.6T,A6	S.N.A
4	QP104	0501-000342	TR;SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT	
4	QP105	0501-000342	TR;SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT	
4	QP106	0501-000342	TR;SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT	
4	QP201	0501-000342	TR;SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT	
4	QP202	0501-000342	TR;SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT	
4	QP203	0501-000280	TR;SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
4	QP204	0501-000342	TR;SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT	
4	QP205	0501-000342	TR;SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT	
4	QP206	0501-000342	TR;SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT	
4	QP302	0501-000342	TR;SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT	
4	QP303	0501-000280	TR;SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
4	QP304	0501-000280	TR;SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
4	QP305	0501-000280	TR;SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
4	RC129	2007-000586	R-CHIP;22KOHM,5%,1/10W,DA,TP2012	
4	RP101	2007-001208	R-CHIP;82KOHM,5%,1/10W,DA,TP2012	
4	RP104	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
4	RP105	2007-000328	R-CHIP;11KOHM,5%,1/10W,DA,TP2012	
4	RP106	2007-000774	R-CHIP;33KOHM,5%,1/10W,DA,TP2012	
4	RP107	2007-000409	R-CHIP;15KOHM,5%,1/10W,DA,TP2012	
4	RP108	2007-000493	R-CHIP;2.2KOHM,5%,1/10W,DA,TP2012	
4	RP109	2007-000830	R-CHIP;39KOHM,5%,1/10W,DA,TP2012	
4	RP110	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP2012	
4	RP111	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
4	RP112	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP2012	
4	RP113	2007-000774	R-CHIP;33KOHM,5%,1/10W,DA,TP2012	
4	RP114	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP115	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP116	2007-000493	R-CHIP;2.2KOHM,5%,1/10W,DA,TP2012	
4	RP118	2001-000117	R-CARBON;S;680OHM,5%,1/2W,AA,TP2,40B,4M	
4	RP119	2007-000262	R-CHIP;100KOHM,5%,1/10W,DA,TP2012	
4	RP122	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP2012	
4	RP123	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP2012	
4	RP124	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP2012	
4	RP125	2007-000401	R-CHIP;150OHM,5%,1/10W,DA,TP2012	
4	RP127	2007-000330	R-CHIP;560OHM,5%,1/10W,DA,TP2012	
4	RP128	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP2012	
4	RP130	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
4	RP131	2007-000586	R-CHIP;22KOHM,5%,1/10W,DA,TP2012	
4	RP132	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
4	RP135	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	

Level	Loc. No.	Code No.	Description ; Specification	Remark
4	RP136	2007-000872	R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012	
4	RP137	2007-001039	R-CHIP:56KOHM,5%,1/10W,DA,TP,2012	
4	RP138	2007-000586	R-CHIP:22KOHM,5%,1/10W,DA,TP,2012	
4	RP140	2007-000029	R-CHIP:0OHM,5%,1/10W,DA,TP,2012	
4	RP201	2007-001039	R-CHIP:56KOHM,5%,1/10W,DA,TP,2012	
4	RP202	2007-000401	R-CHIP:150OHM,5%,1/10W,DA,TP,2012	
4	RP203	2007-000703	R-CHIP:3.6KOHM,5%,1/10W,DA,TP,2012	
4	RP204	2007-000593	R-CHIP:220HM,5%,1/10W,DA,TP,2012	
4	RP205	2007-000477	R-CHIP:1MOHM,5%,1/10W,DA,TP,2012	
4	RP206	2007-000931	R-CHIP:470OHM,5%,1/10W,DA,TP,2012	
4	RP207	2007-001009	R-CHIP:51KOHM,5%,1/10W,DA,TP,2012	
4	RP208	2007-000774	R-CHIP:33KOHM,5%,1/10W,DA,TP,2012	
4	RP209	2007-000401	R-CHIP:150OHM,5%,1/10W,DA,TP,2012	
4	RP210	2007-000221	R-CHIP:1.2KOHM,5%,1/10W,DA,TP,2012	
4	RP211	2007-001001	R-CHIP:510OHM,5%,1/10W,DA,TP,2012	
4	RP212	2007-000931	R-CHIP:470OHM,5%,1/10W,DA,TP,2012	
4	RP213	2007-000872	R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012	
4	RP215	2007-000872	R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012	
4	RP216	2007-000672	R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012	
4	RP217	2007-000409	R-CHIP:15KOHM,5%,1/10W,DA,TP,2012	
4	RP301	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP,2012	
4	RP303	2007-000468	R-CHIP:1KOHM,5%,1/10W,DA,TP,2012	
4	RP304	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP,2012	
4	RP307	2007-000518	R-CHIP:2.7KOHM,5%,1/10W,DA,TP,2012	
4	RP308	2007-000401	R-CHIP:150OHM,5%,1/10W,DA,TP,2012	
4	RP309	2007-000931	R-CHIP:470OHM,5%,1/10W,DA,TP,2012	
4	RP310	2007-000931	R-CHIP:470OHM,5%,1/10W,DA,TP,2012	
4	RP311	2007-000931	R-CHIP:470OHM,5%,1/10W,DA,TP,2012	
4	RP312	2007-000300	R-CHIP:10KOHM,5%,1/10W,DA,TP,2012	
4	RP313	2007-000798	R-CHIP:360OHM,5%,1/10W,DA,TP,2012	
4	RP314	2007-000798	R-CHIP:360OHM,5%,1/10W,DA,TP,2012	
4	RP315	2007-000798	R-CHIP:360OHM,5%,1/10W,DA,TP,2012	
4	RP316	2001-001146	R-CARBON(S),4.70HM,5%,1/2W,AA,TP2 4X6.4	
4	RP317	2001-001146	R-CARBON(S):4.70HM,5%,1/2W,AA,TP2 4X6.4	
4	XP101	2801-000235	CRYSTAL-UNIT:3.579545MHZ,40ppm,28 AAM,S	
4	XP102	2801-000274	CRYSTAL-UNIT:4.433619MHZ,30PPM,28 AAM,20	
4	XP301	2802-000121	RESONATOR:CERAMIC,20.48MHz,0.5%,TP,10.0x	
3		AA63-40013A	SHIELD CASE, SPTE,T0.5,SCT51A,WZ74,	S.N.A
3		0202-000187	SOLDER-WIRE,FLUX, ,RS60S,D1.2,63Sn/37Pb	S.N.A
2		AA95-00644A	ASSY PCB,TTX, ,SP4L/SHF,,51A, , ,ENG VER	
3	CNT01	3711-002709	CONNECTOR,HEADER,NOWALL,12P,1R,2.5MM,ANG	
3	CNT02	3711-002707	CONNECTOR,HEADER,NOWALL,9P,1R,2.5mm,ANGL	
3	ICT01	AA13-00046A	IC-MCU,SDA545x,OTP,13B,OTP,S,E64K, ,D	
3	ICT02	1103-001209	IC-EEPROM,AT24C04,PC27,0.512Kx8bLDIP8	
3	ICT04	1001-000223	IC-VIDEO SWITCH,TEA5114A, ,DIP16P333MI	
3	XT01	2801-000724	CRYSTAL-UNIT,6MHz,50ppm,28 AAM,20pF,40oh	
3		AA99-20079Q	ASSY PCB SUB,AUTO; AA99-30187G , ,V	S.N.A
4	CT01	2401-002009	C-AL:100uF,20%,16V,GP,TP6.3x7.5	
4	CT02	2203-000181	C-CERAMIC,CHIP:100nF,-80-20%,25V,Y5V,TP,	
4	CT03	2203-000181	C-CERAMIC,CHIP:100nF,-80-20%,25V,Y5V,TP,	
4	CT04	2203-000818	C-CERAMIC,CHIP:0.033nF,5%,50V,NP0,TP,201	
4	CT05	2203-000818	C-CERAMIC,CHIP:0.033nF,5%,50V,NP0,TP,201	
4	CT06	2401-000486	C-AL:10uF,20%,50V,GP,TP5.3x7mm,5	
4	CT07	2203-000802	C-CERAMIC,CHIP:33nF,10%,50V,X7R,TP,2012	
4	CT08	2401-002009	C-AL:100uF,20%,16V,GP,TP6.3x7.5	
4	CT09	2203-000181	C-CERAMIC,CHIP:100nF,-80-20%,25V,Y5V,TP,	
4	CT10	2203-000260	C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012	
4	CT12	2203-000802	C-CERAMIC,CHIP:33nF,10%,50V,X7R,TP,2012	
4	CT13	2401-002009	C-AL:100uF,20%,16V,GP,TP6.3x7.5	
4	CT14	2203-000181	C-CERAMIC,CHIP:100nF,-80-20%,25V,Y5V,TP,	
4	CT15	2203-000575	C-CERAMIC,CHIP:220NF,10%,25V,X7R,TP,2012	
4	CT16	2203-000575	C-CERAMIC,CHIP:220NF,10%,25V,X7R,TP,2012	
4	CT17	2203-000575	C-CERAMIC,CHIP:220NF,10%,25V,X7R,TP,2012	
4	CT18	2203-000575	C-CERAMIC,CHIP:220NF,10%,25V,X7R,TP,2012	
4	CT19	2203-000575	C-CERAMIC,CHIP:220NF,10%,25V,X7R,TP,2012	
4	CT20	2203-000575	C-CERAMIC,CHIP:220NF,10%,25V,X7R,TP,2012	
4	CT21	2401-000302	C-AL:100uF,20%,25V,GP,TP5.3x11.5	
4	CT22	2203-000181	C-CERAMIC,CHIP:100nF,-80-20%,25V,Y5V,TP,	
4	CT23	2401-002009	C-AL:100uF,20%,16V,GP,TP6.3x7.5	
4	CT24	2203-000181	C-CERAMIC,CHIP:100nF,-80-20%,25V,Y5V,TP,	
4	DZT01	0403-001016	DIODE ZENER:RLZ6.2B,6.2V,5.06 6.27V,400m	
4	DZT02	0403-001117	DIODE ZENER:RLZ12B,5%,500mW,LL 34,TP	
4	ICT03	1203-000515	IC-VOL DETECTOR;7042,TO-92,3P,177MIL,PL	
4	ICT05	0801-000410	IC-CMOS LOGIC,74HC32,OR GATE,SOP14P150	
4	JT03	2007-000029	R-CHIP:0OHM,5%,1/10W,DA,TP,2012	
4	LT01	2702-001094	INDUCTOR:RADIAL,10uH,10%,6x4mm	
4	LT02	2702-001094	INDUCTOR:RADIAL,10uH,10%,6x4mm	

Level	Loc. No.	Code No.	Description ; Specification	Remark
4	LT03	2702-001094	INDUCTOR:RADIAL,10uH,10%,6x4mm	
4	LT04	2702-001094	INDUCTOR:RADIAL,10uH,10%,6x4mm	
4	LT05	2702-001094	INDUCTOR:RADIAL,10uH,10%,6x4mm	
4	PCB	AA41-00276A	PCB,TTX,SP4L/SMFFR,4.2LA,1.6T,180x24	S.N.A
4	RT01	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP,2012	
4	RT02	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP,2012	
4	RT03	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP,2012	
4	RT04	2007-000300	R-CHIP:10KOHM,5%,1/10W,DA,TP,2012	
4	RT05	2007-000300	R-CHIP:10KOHM,5%,1/10W,DA,TP,2012	
4	RT06	2007-000300	R-CHIP:10KOHM,5%,1/10W,DA,TP,2012	
4	RT07	2007-000872	R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012	
4	RT08	2007-000872	R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012	
4	RT09	2007-000672	R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012	
4	RT10	2007-000300	R-CHIP:10KOHM,5%,1/10W,DA,TP,2012	
4	RT11	2007-000300	R-CHIP:10KOHM,5%,1/10W,DA,TP,2012	
4	RT12	2007-000941	R-CHIP:47KOHM,5%,1/10W,DA,TP,2012	
4	RT13	2007-000518	R-CHIP:2.7KOHM,5%,1/10W,DA,TP,2012	
4	RT14	2007-000653	R-CHIP:27KOHM,5%,1/10W,DA,TP,2012	
4	RT15	2007-000477	R-CHIP:1MOHM,5%,1/10W,DA,TP,2012	
4	RT16	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP,2012	
4	RT18	2007-000300	R-CHIP:10KOHM,5%,1/10W,DA,TP,2012	
4	RT22	2007-000300	R-CHIP:10KOHM,5%,1/10W,DA,TP,2012	
4	RT26	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP,2012	
4	RT27	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP,2012	
4	RT28	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP,2012	
4	RT29	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP,2012	
4	RT30	2007-000290	R-CHIP:100OHM,5%,1/10W,DA,TP,2012	
4	RT31	2007-000572	R-CHIP:220OHM,5%,1/10W,DA,TP,2012	
4	RT32	2007-000728	R-CHIP:3000HM,5%,1/10W,DA,TP,2012	
4	RT33	2007-000572	R-CHIP:220OHM,5%,1/10W,DA,TP,2012	
4	RT34	2007-000728	R-CHIP:3000HM,5%,1/10W,DA,TP,2012	
4	RT35	2007-000572	R-CHIP:220OHM,5%,1/10W,DA,TP,2012	
4	RT36	2007-000728	R-CHIP:3000HM,5%,1/10W,DA,TP,2012	
3		0202-000187	SOLDER-WIRE,FLUX, ,RS60S,D1.2,63Sn/37Pb	S.N.A
3		1202-001004	SOLDER-CREAM,SO-2030M,SZH-1,563A,D0.64 5	S.N.A
3		AA63-40014A	SHIELD CASE,T, ,SPTE,T0.5,SCT51A,	S.N.A
2		AA39-20577A	LEAD CONNECTOR-ASSY,6P,3PYF-806-06-300	
2		AA39-20010C	LEAD CONNECTOR-ASSY,1P,YFH-800-01,5-300	
2		3301-001201	CORE-FERRITE,AE,21x11x32mm,1500,280G	
2		0202-000187	SOLDER-WIRE,FLUX, ,RS60S,D1.2,63Sn/37Pb	S.N.A
2		AA59-00171A	MODULE,FOCUS,PACK,SVP-5200,S300,P3,	
2		AA65-30109A	CLAMP,FBT,NYLON-66,V2,BLK, ,	S.N.A
2		AA65-30105A	CLAMP-WIRE,NYLON-66,V2,NTR,15MM,ALL MODE	S.N.A
2		AA65-30104B	CLAMP-WIRE,NYLON-66,V2,BLK,W2.75,ALL MOD	S.N.A
2		AA65-30013A	CLAMP-WIRE,NYLON-66,V0,NTR,DAWH 45N ,	S.N.A

ASSY CRT-(G)

1	*	AA94-02870B	ASSY CRT-(G);P16L,SC03HKA,-380MG,7,BARE,	
2	BC-AL	AA60-10011A	SCREW-TAPTITE,HH,-,PCM4,L12,ZPC(BLK),SW	
2		AA91-00449A	ASSY-BRACKET,CRT, , ,SECC T1.0,PJT	
3		AA61-00473B	BRACKET-CRT,S,SECC,T1.6, ,	S.N.A
3		AA61-00478A	SPRING-WIRE,CRT,PJT,STS, , , , , , , , ,	S.N.A
3		AA61-00615B	BRACKET-EARTH,S4UB,PBS,T0.5, ,	S.N.A
2		AA65-30114A	CLAMP-LOCK,NYLON-66,V2,NTR, ,PROJECTION,	S.N.A
2		AA61-00555B	HOLDER-LANS,S3,UB,PC-ABS,BLK, , ,GF20%	S.N.A
2		AA61-00476B	BRACKET-LENS,S3,SECC,T1.6, ,	S.N.A
2		AA64-01315B	CASE-COUPLER,GREEN;43,53,61,T2.0,AL SHE	S.N.A
2		AA26-30006F	TRANS-FLYBACK, ,FWZ-50A001C,55,30KV	
2		AA67-10071A	LENS;DELTA 77 79, ,GREEN,C ELEMENT,	
2		AA67-10005A	LENS ASSY, ,DELTA,CLEAR,S43BB, ,77,	
2		AA91-00491A	ASSY-HOLDER,PACK, , ,FILM PP RUBBER,54, 8	
3		AA60-00062B	SPACER,O,RING,S3,SILICON, , , ,GRAY, ,	S.N.A
3		AA61-00477B	HOLDER-PACK,43,53,61,J8,PP, ,HB, ,	S.N.A
2		AA27-50005C	DEFLECTION YOKE, ,DPD-4392AL,ST,3,PJTCRT	
2		AA03-00201A	CRT-MONO;P16L,SC03HKA, ,7inch, , , ,FLAT	S.N.A
2		AA60-00074A	SPACER-DYP,ITS,SILICON RUBBER, , , ,GRAY,	S.N.A
2		AA60-00063B	SPACER-CLENS,S3,SILICON, , , ,GRAY, , ,	S.N.A
2		AA60-00061B	SPACER-CRT,S3,SILICON, , , ,GRAY, , ,	S.N.A
2		AA39-00018A	LEAD CONNECTOR-ASSY,1P,YFH-800-01,Y6=187	
2		AA33-00006A	MAGNET-CONVERGENCE,JH-92LT-29A, ,29.1=n.0	

Level	Loc. No.	Code No.	Description ; Specification	Remark
1	*	AA96-20130E	ASSY POWER CORD;,,CP2/NO4,ORI,H,S,3mm,	
2		3711-000401	WIRE-PVC CU,SCWA,300V,ROLL,17/0.15mm,#22	S.N.A
2		AA39-10003B	POWER CORD; ,K,P,140,KLCE,2P,2.4mm,OUS,S	
2		AA61-20284A	HOLDER; ,P CORD,PPVO,BLK,KE-002	S.N.A

ASSY PCB CRT

1	*	AA95-00923A	ASSY PCB CRT;,,51A,43/54,PAL	
2	SCW-GN	AA39-20009G	LEAD CONNECTOR-ASSY,,1P,YFH-800-01,700,TS	
2	C511	2201-002117	C-CERAMIC,DISC,4.7nF,20%,2kV,Y5U,TP,16x6	
2	C541	2201-002117	C-CERAMIC,DISC,4.7nF,20%,2kV,Y5U,TP,16x6	
2	C571	2201-002117	C-CERAMIC,DISC,4.7nF,20%,2kV,Y5U,TP,16x6	
2	CN501	3711-003051	CONNECTOR-HEADER,BOX,8P,1R,2.5mm,STRAIGHT	
2	CN502	3711-003052	CONNECTOR-HEADER,BOX,10P,1R,2.5mm,STRAIGH	
2	CN502B	3711-003052	CONNECTOR-HEADER,BOX,10P,1R,2.5mm,STRAIGH	
2	CN503	3711-003052	CONNECTOR-HEADER,BOX,10P,1R,2.5mm,STRAIGH	
2	CN503B	3711-003052	CONNECTOR-HEADER,BOX,10P,1R,2.5mm,STRAIGH	
2	CNW401	AA39-20027B	LEAD CONNECTOR-ASSY,6P,67096-006,S,400	
2	CNW501	AA39-00127A	LEAD CONNECTOR-ASSY,,6P,35155-0800,S,400	
2	CNW502	AA39-00112A	LEAD CONNECTOR-ASSY,,10P,35155-1000,S,30	
2	CNW503	AA39-00112A	LEAD CONNECTOR-ASSY,,10P,35155-1000,S,30	
2	FOCUS-	AA39-20115A	LEAD CONNECTOR-ASSY,,1P,BUSHING,500,3239	
2	FOCUS-	AA39-20115A	LEAD CONNECTOR-ASSY,,1P,BUSHING,500,3239	
2	FOCUS-	AA39-20115B	LEAD CONNECTOR-ASSY,,1P,BUSHING, ,700MM,	
2	GBW GN	3811-000446	WIRE-PVC CU,TCWA,600V,ROLL,17/0.16mm,#22	S.N.A
2	GBW SC	3811-000480	WIRE-PVC CU,BCWA,1KV,ROLL,17/0.16mm,#22	S.N.A
2	GDW GN	AA39-20009D	LEAD CONNECTOR-ASSY,,1P,YFH-800-01,500,15	
2	GRW GN	3811-000446	WIRE-PVC CU,TCWA,600V,ROLL,17/0.16mm,#22	S.N.A
2	GRW SC	3811-000480	WIRE-PVC CU,BCWA,1KV,ROLL,17/0.16mm,#22	S.N.A
2	IC501	AA96-50151B	ASSY-H/S, ,AMP,AA61-10060A,TDA6111Q,	
3		1201-001131	IC-VIDEO AMP;S111,SIP9P, ,SINGLE, ,PLAS	
3		6001-000057	SCREW-MACHINE,PH, ,M3,L8,ZPC(BLK),SWP,T=	
3		6021-000222	NUT-HEXAGON,2C,WG,ZPC(YEL),SM2.0, , ,T	S.N.A
3		AA61-10060A	BRACKET-TR, , ,CUS-1,1/2H,T0.5, , ,	S.N.A
2	IC531	AA96-50151B	ASSY-H/S, ,AMP,AA61-10060A,TDA6111Q,	
2	IC561	AA96-50151B	ASSY-H/S, ,AMP,AA61-10060A,TDA6111Q,	
2	PCB	AA41-00357B	PCB-CRT;PC,533B,FR-1,1L,B,1.6T,245x245	S.N.A
2	RDW-GN	AA39-20009F	LEAD CONNECTOR-ASSY,,1P,YFH-800-01,200,15	
2	SG502	AA27-00084A	COIL-S-23, , , , , , , , ,S-23,5000hm/m	
2	SG532	AA27-00084A	COIL-S-23, , , , , , , , ,S-23,5000hm/m	
2	SG562	AA27-00084A	COIL-S-23, , , , , , , , ,S-23,5000hm/m	
2	V501	3704-001019	SOCKET-CRT,10P,29.1P,35.5P,AL,90U	
2	V531	3704-001019	SOCKET-CRT,10P,29.1P,35.5P,AL,90U	
2	V561	3704-001019	SOCKET-CRT,10P,29.1P,35.5P,AL,90U	
2	VR501	2101-000321	VR-ROTARY,1Mohm, ,0.6W,SIDE	
2	VR531	2101-000321	VR-ROTARY,1Mohm, ,0.6W,SIDE	
2	VR561	2101-000321	VR-ROTARY,1Mohm, ,0.6W,SIDE	
2		AA99-20089J	ASSY PCB SUB,AUTO; AA95-00923A , ,V	S.N.A
3	C502	2401-000027	C-AL:4.7uF,20%,50V,GP,TP5x11.5	
3	C503	2201-000119	C-CERAMIC,DISC,100nF,-80-20%,50V,Y5V,TP,	
3	C504	2401-001537	C-AL:47uF,20%,25V,GP,TP6.3x7mm,5mm	
3	C505	2305-000149	C-FILM,MPEF,100nF,5%,100V,TP,12x12.5x6.5	
3	C506	2401-000430	C-AL:10uF,20%,250V,GP,TP10x16mm,5m	
3	C507	2305-000154	C-FILM,MPEF,100nF,5%,400V,TP,21.5x6.5x11	
3	C510	2401-000430	C-AL:10uF,20%,250V,GP,TP10x16mm,5m	
3	C512	2401-000133	C-AL:1000uF,20%,16V,GP,TP,10x20,5	
3	C513	2201-000983	C-CERAMIC,DISC,1nF,10%,2kV,Y5P,TP,5x5,7	
3	C514	2201-000599	C-CERAMIC,DISC,0.56nF,10%,500V,Y5P,TP,5	
3	C532	2401-000027	C-AL:4.7uF,20%,50V,GP,TP5x11.5	
3	C533	2201-000119	C-CERAMIC,DISC,100nF,-80-20%,50V,Y5V,TP,	
3	C534	2401-001537	C-AL:47uF,20%,25V,GP,TP6.3x7mm,5mm	
3	C535	2305-000149	C-FILM,MPEF,100nF,5%,100V,TP,12x12.5x6.5	
3	C536	2401-000430	C-AL:10uF,20%,250V,GP,TP10x16mm,5m	
3	C537	2305-000154	C-FILM,MPEF,100nF,5%,400V,TP,21.5x6.5x11	
3	C540	2401-000430	C-AL:10uF,20%,250V,GP,TP10x16mm,5m	
3	C542	2201-000983	C-CERAMIC,DISC,1nF,10%,2kV,Y5P,TP,5x5,7	
3	C543	2201-000599	C-CERAMIC,DISC,0.56nF,10%,500V,Y5P,TP,5	
3	C562	2401-000027	C-AL:4.7uF,20%,50V,GP,TP5x11.5	
3	C563	2201-000119	C-CERAMIC,DISC,100nF,-80-20%,50V,Y5V,TP,	
3	C564	2401-001537	C-AL:47uF,20%,25V,GP,TP6.3x7mm,5mm	

Level	Loc. No.	Code No.	Description ; Specification	Remark
3	C565	2305-000149	C-FILM,MPEF,100nF,5%,100V,TP,12x12.5x6.5	
3	C566	2401-000430	C-AL:10uF,20%,250V,GP,TP10x16mm,5m	
3	C567	2305-000154	C-FILM,MPEF,100nF,5%,400V,TP,21.5x6.5x11	
3	C570	2401-000430	C-AL:10uF,20%,250V,GP,TP10x16mm,5m	
3	C572	2201-000983	C-CERAMIC,DISC,1nF,10%,2kV,Y5P,TP,5x5,7	
3	C573	2201-000599	C-CERAMIC,DISC,0.56nF,10%,500V,Y5P,TP,5	
3	CN401	3711-002645	CONNECTOR-HEADER,BOX,6P,1R,2.5MM,STRAIGH	
3	D501	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
3	D502	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
3	D503	0402-000493	DIODE-RECTIFIER;1RSGU41,400V,1.5A,DO-15L	
3	D504	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
3	D505	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
3	D510	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
3	D531	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
3	D532	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
3	D533	0402-000493	DIODE-RECTIFIER;1RSGU41,400V,1.5A,DO-15L	
3	D561	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
3	D562	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
3	D563	0402-000493	DIODE-RECTIFIER;1RSGU41,400V,1.5A,DO-15L	
3	DZ501	0403-000334	DIODE-ZENER;UZ2.7BSA,2.7V,2.54,2.75V,500	
3	DZ502	0403-000508	DIODE-ZENER;MTZJ-5.6B,5.6V,5.45,5.73V,500	
3	DZ503	0403-000708	DIODE-ZENER;MTZJ-13B,13V,12.55,13.21V,500	
3	DZ531	0403-000334	DIODE-ZENER;UZ2.7BSA,2.7V,2.54,2.75V,500	
3	DZ532	0403-000508	DIODE-ZENER;MTZJ-5.6B,5.6V,5.45,5.73V,500	
3	DZ533	0403-000708	DIODE-ZENER;MTZJ-13B,13V,12.55,13.21V,500	
3	DZ561	0403-000334	DIODE-ZENER;UZ2.7BSA,2.7V,2.54,2.75V,500	
3	DZ562	0403-000508	DIODE-ZENER;MTZJ-5.6B,5.6V,5.45,5.73V,500	
3	DZ563	0403-000708	DIODE-ZENER;MTZJ-13B,13V,12.55-13.21V,500	
3	L501	2701-000114	INDUCTOR,AXIAL,10uH,10%,2.5x3.4mm	
3	L531	2701-000114	INDUCTOR,AXIAL,10uH,10%,2.5x3.4mm	
3	L561	2701-000114	INDUCTOR,AXIAL,10uH,10%,2.5x3.4mm	
3	Q501	0502-000006	TR-POWER,KSC1507,NPN,15W,TO-220,TP,120	
3	Q502	0501-000389	TR-SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q504	0501-000283	TR-SMALL SIGNAL,KSA539,PNP,400mW,TO-92,T	
3	Q531	0502-000006	TR-POWER,KSC1507,NPN,15W,TO-220,TP,120	
3	Q533	0501-000283	TR-SMALL SIGNAL,KSA539,PNP,400mW,TO-92,T	
3	Q561	0502-000006	TR-POWER,KSC1507,NPN,15W,TO-220,TP,120	
3	Q563	0501-000283	TR-SMALL SIGNAL,KSA539,PNP,400mW,TO-92,T	
3	R500	2001-000449	R-CARBON,2.2KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R502	2001-000995	R-CARBON,820OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R503	2001-000429	R-CARBON,1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R504	2001-000006	R-CARBON,2.4KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R505	2001-000362	R-CARBON,150OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R506	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP2.4X6.4M	
3	R507	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R508	2003-000738	R-METAL OXIDE(S);56Kohm,5%,2W,AA,TP4x12	
3	R509	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R510	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R511	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R513	2008-000252	R-FUSIBLE(S);0.47ohm,10%,1/2W,AF,TP2.5x	
3	R514	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP2.4X6.	
3	R515	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP3.7x9	
3	R516	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R517	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP2.4X6.	
3	R518	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP3.7	
3	R519	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP3.7	
3	R520	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP2.4X6.4	
3	R521	2001-001052	R-CARBON(S);1.5MOHM,5%,1/2W,AA,TP2.4X6.	
3	R522	2002-001006	R-COMPOSITION;4.7Kohm,5%,1/2W,AA,TP3.7x	
3	R523	2002-001006	R-COMPOSITION;4.7Kohm,5%,1/2W,AA,TP3.7x	
3	R524	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP2.4X6.4	
3	R526	2001-000539	R-CARBON;24KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R527	2001-000677	R-CARBON;2KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R528	2001-001015	R-CARBON;9.1KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R529	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP3.7	
3	R532	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R533	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R536	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP2.4X6.4M	
3	R537	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R538	2003-000738	R-METAL OXIDE(S);56Kohm,5%,2W,AA,TP4x12	
3	R540	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R541	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R543	2008-000252	R-FUSIBLE(S);0.47ohm,10%,1/2W,AF,TP2.5x	
3	R544	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP2.4X6.	
3	R545	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP3.7x9	
3	R546	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	

Level	Loc. No.	Code No.	Description ; Specification	Remark
3	R547	2001-000085	R CARBON(S);100KOHM,5%,1/2W,AA,TP2.4X6.	
3	R548	2002-001021	R COMPOSITION 560KOHM,10%,1/2W,AA,TP3.7	
3	R549	2002-001021	R COMPOSITION 560KOHM,10%,1/2W,AA,TP3.7	
3	R550	2001-000066	R CARBON(S);10KOHM,5%,1/2W,AA,TP2.4X6.4	
3	R551	2001-001052	R CARBON(S);1.5KOHM,5%,1/2W,AA,TP2.4X6.	
3	R552	2002-001006	R COMPOSITION 4.7Kohm,5%,1/2W,AA,TP3.7x	
3	R553	2002-001006	R COMPOSITION 4.7Kohm,5%,1/2W,AA,TP3.7x	
3	R554	2001-000028	R CARBON(S);100OHM,5%,1/2W,AA,TP2.4X6.4	
3	R555	2001-000734	R CARBON 4.7KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R556	2001-000472	R CARBON 2.7KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R557	2001-000362	R CARBON;150OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R559	2002-001015	R COMPOSITION 47Kohm,5%,1/2W,AA,TP3.7x9	
3	R562	2001-000232	R CARBON;1.3KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R563	2001-000429	R CARBON;1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R564	2001-001031	R CARBON;91KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R566	2001-001088	R CARBON(S);1.1KOHM,5%,1/2W,AA,TP2.4X6.4M	
3	R567	2001-000429	R CARBON;1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R568	2001-000734	R CARBON 4.7KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R569	2001-000006	R CARBON;2.4KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R570	2001-000362	R CARBON;150OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R571	2001-000281	R CARBON;100OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R572	2003-000738	R METAL OXIDE(S);.56KOHM,5%,2W,AA,TP4x12	
3	R573	2008-000252	R FUSIBLE(S);0.47OHM,10%,1/2W,AF,TP2.5x	
3	R574	2001-001122	R CARBON(S);3.9KOHM,5%,1/2W,AA,TP2.4X6.	
3	R575	2002-001017	R COMPOSITION;1Kohm,10%,1/2W,AA,TP3.7x9	
3	R576	2001-000099	R CARBON;20KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R577	2001-000085	R CARBON(S);100KOHM,5%,1/2W,AA,TP2.4X6.	
3	R578	2002-001021	R COMPOSITION;560KOHM,10%,1/2W,AA,TP3.7	
3	R579	2002-001021	R COMPOSITION;560KOHM,10%,1/2W,AA,TP3.7	
3	R580	2001-000066	R CARBON(S);10KOHM,5%,1/2W,AA,TP2.4X6.4	
3	R581	2001-001052	R CARBON(S);1.5MOHM,5%,1/2W,AA,TP2.4X6.	
3	R582	2002-001006	R COMPOSITION 4.7Kohm,5%,1/2W,AA,TP3.7x	
3	R583	2002-001006	R COMPOSITION 4.7Kohm,5%,1/2W,AA,TP3.7x	
3	R584	2001-000028	R CARBON(S);100OHM,5%,1/2W,AA,TP2.4X6.4	
3	R589	2002-001015	R COMPOSITION 47Kohm,5%,1/2W,AA,TP3.7x9	
3	SG351	4715-001036	SURGE ABSORBER;500V,20%,...TP	
3	SG501	4715-001036	SURGE ABSORBER;500V,20%,...TP	
3	SG503	4715-001036	SURGE ABSORBER;500V,20%,...TP	
3	SG533	4715-001036	SURGE ABSORBER;500V,20%,...TP	
3	SG561	4715-001036	SURGE ABSORBER;500V,20%,...TP	
3	SG563	4715-001036	SURGE ABSORBER;500V,20%,...TP	
2		AA63-10002A	BAND-TIE;.NYLON66 V2,..,L100,NTR,..	S.N.A
2		0202-000187	SOLDER WIRE FLUX;.RS60S,D1.2,63Sn/37Pb	S.N.A

ASSY-A/V FRONT

1	*	AA95-00818A	ASSY-A/V FRONT;.SP43J49F,J51B,-,-,MVT	
2	CNW02	AA39-20032J	LEAD CONNECTOR ASSY;,12P57096-012,S,130	
2	CNY01	3711-000641	CONNECTOR HEADER;BOX,12P1R,2.5mm,STRAIG	
2	CP01	2202-000263	C CERAMIC,MLC AXIAL;470pF,10%,50V,YSP,TP	
2	CP02	2202-000263	C CERAMIC,MLC AXIAL;470pF,10%,50V,YSP,TP	
2	CP03	2202-000263	C CERAMIC,MLC AXIAL;470pF,10%,50V,YSP,TP	
2	CP04	2401-002009	C AL,100uF,20%,16V,GP,TP5.3x7.5	
2	CP05	2401-002009	C AL,100uF,20%,16V,GP,TP6.3x7.5	
2	CP06	2401-002009	C AL,100uF,20%,16V,GP,TP6.3x7.5	
2	CP07	2401-002009	C AL,100uF,20%,16V,GP,TP6.3x7.5	
2	CP08	2401-002009	C AL,100uF,20%,16V,GP,TP6.3x7.5	
2	CP09	2202-000121	C CERAMIC,MLC AXIAL,100pF,10%,50V,YSP,TP	
2	CP10	2202-000121	C CERAMIC,MLC AXIAL,100pF,10%,50V,YSP,TP	
2	DZ01	0403-000510	DIODE ZENER;MTZJ,6.2B,6.2V,5.96-6.27V,500	
2	DZ02	0403-000510	DIODE ZENER;MTZJ,6.2B,6.2V,5.96-6.27V,500	
2	JK02	3722-001164	JACK-RCA;3P,3.4mm,SN,WH,YE,RE,#16-22	
2	JK101	3722-000544	JACK-VHS;4P,11.5mm,AG,BLK,N	
2	PCB	AA41-00379A	PCB-A/V FRONT;SP43J,SHEJFR0..1E,A,1.6T,24	S.N.A
2	RP01	2001-000273	R CARBON;100KOHM,5%,1/8W,AA,TP1.8X3.2MM	
2	RP02	2001-000969	R CARBON;75OHM,5%,1/8W,AA,TP1.8X3.2MM	
2	RP03	2001-000273	R CARBON;100KOHM,5%,1/8W,AA,TP1.8X3.2MM	
2	RP04	2001-000969	R CARBON;75OHM,5%,1/8W,AA,TP1.8X3.2MM	
2	RP05	2001-000969	R CARBON;75OHM,5%,1/8W,AA,TP1.8X3.2MM	
2		3301-001201	CORE-FERRITE,AE,21x13x32mm,1500,2B0G	
2		AA63-10002A	BAND-TIE;.NYLON66 V2,..,L100,NTR,..	S.N.A
2		AA98-60004J	ASSY SUB;PART,APT51A,A/V,-,ALL	S.N.A
3		0202-000187	SOLDER WIRE FLUX;.RS60S,D1.2,63Sn/37Pb	S.N.A

Level	Loc. No.	Code No.	Description ; Specification	Remark

ASSY-PCB,SUB

1	*	AA95-00425B	ASSY PCB SUB;.SP53J,SHEJ51A PAL	
2	C430	2301-001219	C FILM,MPE,PPF,3nF,3%,1.6KV,TP,29x8.5x	
2	C431	2306-000326	C FILM,MPPF,4.7nF,5%,1.6KV,TP,28.5x16x6m	
2	C432	2306-000257	C FILM,MPPF,8.2nF,5%,1.6KV,TP,28.5x19.5x	
2	C436	2305-000235	C FILM,MPPF,560nF,5%,400V,TP,26*22.5*14.	
2	C438	2306-000267	C FILM,MPPF,8.2nF,5%,1.6KV,TP,28.5x18.5x	
2	C471	2301-001091	C FILM,MPPF,470nF,5%,400V,TP,26x21.5x14.	
2	C473	2306-000322	C FILM,MPPF,12nF,5%,1.6KV,TP,29x20.5x13.	
2	C474	2306-000326	C FILM,MPPF,4.7nF,5%,1.6KV,TP,28.5x16x6m	
2	C477	2301-002213	C FILM,PEF,220nF,5%,250V,TP,21.5x11.7.5	
2	C801	2305-000321	C FILM,MPPF,470NF,5%,275V,TP,.22.5	
2	C802	2305-000321	C FILM,MPPF,470NF,5%,275V,TP,.22.5	
2	C812	2401-003465	C AL,680UF,20%,450V,GP,BK,35X50MM,2	
2	C831	2306-000323	C FILM,MPPF,2.2nF,5%,1.6KV,TP,28.5x15.5x	
2	C862	2401-002225	C AL,3300uF,20%,50V,WT,BK,22x41.7.5	
2	C865	2401-000737	C AL,2200uF,20%,50V,GP,TP18x35.5.7	
2	C868	2401-000737	C AL,2200uF,20%,50V,GP,TP18x35.5.7	
2	C875	2401-002251	C AL,470uF,20%,200V,GP,BK,25x40mm,1	
2	C876	2401-000787	C AL,220uF,20%,160V,GP,TP16x31.5mm	
2	C891	2201-000987	C CERAMIC,DISC,2.2nF,20%,400V,Y5U,TP,12.	
2	C892	2201-000987	C CERAMIC,DISC,2.2nF,20%,400V,Y5U,TP,12.	
2	CN201	AA39-00128A	LEAD CONNECTOR ASSY,.8P,YBNH250-08,35155	
2	CN202	AA39-00115A	LEAD CONNECTOR ASSY,.10P,YBNH250-10,3515	
2	CN203	3711-003052	CONNECTOR HEADER;BOX,10P,1R,2.5mm,STRAGH	
2	CN401	3711-003051	CONNECTOR HEADER;BOX,8P,1R,2.5mm,STRAGHT	
2	CN402	3711-003974	CONNECTOR HEADER;BOX,12P,1R,2.5mm,STRAIG	
2	CN801	AA39-00116A	LEAD CONNECTOR ASSY,.12P,YBNH250,12,3515	
2	CN802	3711-003051	CONNECTOR HEADER;BOX,8P,1R,2.5mm,STRAGHT	
2	CNW406	AA39-00009A	LEAD CONNECTOR ASSY,.3Q2PYF+800-03,S,2	
2	CNW809	AA39-20061G	LEAD CONNECTOR ASSY,.3PYFH800-03,S,.100M	
2	D464	0402-000236	DIODE RECTIFIER;G824,400V,5A,.TP	
2	D604	AA96-50310A	ASSY H/S,.POWER,AA62,30150C,R8V60S,..	
3		AA62-30150C	HEAT SINK ES,.A6063 EXTR,.,WHT,40(24.5)	
3		AA60-30003A	WASHER,...,T1.5,.SBHG,1,	S.N.A
3		6003-000333	SCREW TAPTITE,RH,-,2S,M3,L10,ZPC(YEL),SW	
3		0402-000549	DIODE BRIDGE,RBV606,600V,6A,.BK	
3		0205-000129	GREASE SILICON;SC102,,JAPAN	S.N.A
2	D810	0402-000250	DIODE RECTIFIER;RG4C,1000V,1A,.	
2	D854	AA96-00111C	ASSY H/S,.,.,AA62,30013L,FML,G12S,.	
3		0402-000233	DIODE RECTIFIER;FML,G12S,200V,5A,..	
3		6003-000333	SCREW TAPTITE,RH,-,2S,M3,L10,ZPC(YEL),SW	
3		AA62-30013L	HEAT SINK ES,.,.,.,AA/22,.,WHT,.,.,.,-	
2	D871	AA96-00032A	ASSY H/S,.,.AA62,30173B,FML,G12,FMGG26	
3		0402-000233	DIODE RECTIFIER;FML,G12S,200V,5A,.,..	
3		0402-000231	DIODE RECTIFIER;FMG,G2BS,800V,4A,TO-220F	
3		AA62-30173B	HEAT SINK,ES,...,T1.0,WHT,.,ALL,...,B8B2	
3		6003-000333	SCREW TAPTITE,RH,-,2S,M3,L10,ZPC(YEL),SW	
3		0205-000129	GREASE SILICON;SC102,,JAPAN	S.N.A
2	DZ481	0403-001327	DIODE ZENER;MTZJ,18A,16.22-17.06V,500mW,D	
2	F801	3601-001007	FUSE CARTRIDGE,250V,6.3A,TIME LAG,GLASS,	
2	F802	3601-001137	FUSE AXIAL LEAD,250V,6A,SLOW BLOW,GLASS,	
2	F804	3601-001007	FUSE CARTRIDGE,250V,6.3A,TIME LAG,GLASS,	
2	IC301	AA96-50381A	ASSY H/S,.,.,AA62,30180B,LA7845,	
3		0205-000129	GREASE SILICON;SC102,,JAPAN	S.N.A
3		1204-000517	IC VERTIVAL DEFLA;7845,SIP,7P,,PLASTIC	
3		6003-000333	SCREW TAPTITE,RH,-,2S,M3,L10,ZPC(YEL),SW	
3		AA62-30180B	HEAT SINK ES,.A6063 EXTR,.2,WHT,70MM,..	
2	IC421	1203-000165	IC POSI,ADJUST REG,78R12,TO-220,3P,..	
2	IC430	1203-000162	IC POSI,ADJUST REG,317,TO-220,3P,,PLAS	
2	IC431	1201-000191	IC OP AMP;4558,DIP8P300MIL,DUAL,20V/mV	
2	IC801	AA96-00035A	ASSY H/S,.,POWER,AA62,30181P,STR-F6656,	
3		0205-000129	GREASE SILICON;SC102,,JAPAN	S.N.A
3		6003-000333	SCREW TAPTITE,RH,-,2S,M3,L10,ZPC(YEL),SW	
3		AA13-00018A	IC HYBRID;,STR-F6656,LF1351,5PIN,-,	
3		AA62-30181P	HEAT SINK,ES,...,T1.0,WHITE,SCREW HOLE(2	
2	IC804	1203-001400	IC POWER PRESCALER;SE110N,TO-220(SIP),3P	
2	IC806	0604-001032	PHOTO-COUPLER;TR,170-260%,300mW,DIP 4,ST	
2	L431	AA27-30003M	COIL LINEARITY,.5uH,OWA14a15,USR20,1a6	
2	L432	AA27-40001U	COIL HORIZ WIDTH,.220UH,DR1420,P10,12X1	
2	L482	3301-000374	CORE-FERRITE BEAD;AA,3.5a1.0a9.0mm,..	
2	L800	AA29-30002L	FILTER LINE NOISE,.10mH/MIN,5A,AC90~260V	
2	L801	AA29-30002F	FILTER LINE NOISE,.6mH,2.45A,..	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	L803	AA29-00008A	FILTER LINE NOISE,35-6MH,3A,-,5MHMIN,3A	
2	L954	AA27-10001C	COIL CHOKE,..100uH,K,.5.0A,ST,700UH,KIR	
2	L860	AA27-10001C	COIL CHOKE,..100uH,K,.5.0A,ST,700UH,KIR	
2	L862	AA27-10001C	COIL CHOKE,..100uH,K,.5.0A,ST,700UH,KIR	
2	L872	AA27-10001C	COIL CHOKE,..100uH,K,.5.0A,ST,700UH,KIR	
2	L874	AA27-10002L	COIL CHOKE,..24UH,K,.2A,.24UH,K,10X10MM	
2	PCB	AA41-00197C	PCB,PC,533R,CEM-1,1LC,1.6T,330X24	S.N.A
2	W431	AA96-00033E	ASSY H/S,..H OUT,AA62,30173C,2SC5446,F	
3		AA62-00007A	MICA;DPM-04,MICA,.22x29x0.15mm	
3		AA62-30173C	HEAT SINK ES,...,T1.0,WHITE,SCREW HOLE(2	
3		AA60-30001A	WASHER PLATE,M3,ID3.5,15X8.5,T1.0,.SBHG	S.N.A
3		6003-000333	SCREW TAPTITE,RH,-,2S,M3,L10,ZPC(YEL),SW	
3		0502-001175	TR POWER;2SC5446,NPN,200000mW,TO-3PL,BK	
3		0402-001296	DIODE RECTIFIER;FMP,3FU,1.5KV,5A,TO-3PF	
3		0205-000129	GREASE SILICON;SC102,,JAPAN	S.N.A
2	W433	AA96-60407A	ASSY H/S,...,AA62,30154G,KSD73Y,	
3		0205-000129	GREASE SILICON;SC102,,JAPAN	S.N.A
3		0502-000208	TR POWER;KSD73,NPN,30000mW,TO-220,1P,12	
3		6003-000333	SCREW TAPTITE,RH,-,2S,M3,L10,ZPC(YEL),SW	
3		AA62-30154G	HEAT SINK ES,.A6063 EXTR,.,WHT,50(16,..	
2	Q441	AA96-50383F	ASSY H/S,...,AA62,30180D,2SD921,	
3		0205-000129	GREASE SILICON;SC102,,JAPAN	S.N.A
3		0502-001104	TR POWER;2SD921,NPN,80W,TO-3PBK,700-	
3		6003-000333	SCREW TAPTITE,RH,-,2S,M3,L10,ZPC(YEL),SW	
3		AA62-30180D	HEAT SINK ES,.A6063 EXTR,.2,WHT,50mm,..	
2	Q472	0505-000156	FET SILICON;IRF620,N,200V,5A,0.8ohm,50W,	
2	Q473	AA96-00037A	ASSY H/S,...,AA62,30181N,2SC4125,IRF56	
3		0502-001100	TR POWER;2SC4125,NPN,70W,TO-3PML,BK,B-	
3		AA62-30181N	HEAT SINK,ES,...,T1.0,WHITE,SCREW HOLE(2	
3		AA60-30001A	WASHER PLATE,M3,ID3.5,15X8.5,T1.0,.SBHG	S.N.A
3		6003-000333	SCREW TAPTITE,RH,-,2S,M3,L10,ZPC(YEL),SW	
3		0505-001202	FET SILICON;IRFS640A,N,200V,9.8A,0.18ohm	
3		0205-000129	GREASE SILICON;SC102,,JAPAN	S.N.A
2	R440	2008-001091	R FUSIBLE(S);0.47OHM,10%,1/2W,AC,BK,2.5X	
2	R442	2008-000189	R FUSIBLE;0.47ohm,10%,2W,AA,TP6x15.5mm	
2	R445	2008-001091	R FUSIBLE(S);0.47OHM,10%,1/2W,AC,BK,2.5X	
2	R803	1404-001195	THERMISTOR;NTC,5.1ohm,15%,2900,22mW/C,BK	
2	R815	2003-002162	R METAL OXIDE(S);15KOHM,5%,3W,AC,TP6X16	
2	R815A	2003-002162	R METAL OXIDE(S);15KOHM,5%,3W,AC,TP6X16	
2	R817	2009-001096	R METAL PLATE,0.07ohm,5%,5W,CL,BK,5a14x1	
2	R841	2008-001096	R FUSIBLE(S);3.3OHM,5%,1/2W,AC,BK,2.5X6.	
2	T431	AA26-50001U	TRANS-HORIZ,DRIVE,.,28mH,105uH,4uH,ER28x	
2	T432	AA26-00053A	TRANS,.,1.2mH,.,.EER4445,BK,1.2mH,	
2	T444	AA26-30005A	TRANS-FLYBACK,.,FWZ-50A001,50,108V	
2	T461	AA26-50001V	TRANS-HORIZ,DRIVE,.,6.0mH,113uH,4uH,EI19	
2	T481	AA26-50001W	TRANS-HORIZ,DRIVE,.,830uH,23uH,4uH,EI 30	
2	T802	AA26-00006A	TRANS-SWITCHING,.,90~260V,110V/34V/-.30V	
2		AA65-30110A	CLAMP WIRE;NYLON 66,V2,BLK,PAL,TY,ALL M	S.N.A
2		0202-000187	SOLDER WIRE FLUX,.RS60S,D1.2,63Sn/37Pb	S.N.A
2		AA62-00010A	HEAT SINK,.,.,T1.0,SILVER,H/SINK & SHIEL	S.N.A
2		AA65-30109A	CLAMP FBT;NYLON 66,V2,BLK,.,..	S.N.A
2		AA65-30105B	CLAMP WIRE;NYLON 66,V2,NTR,25MM,ALL MODE	S.N.A
2		AA99-20069B	ASSY PCB SUB,AUTO,.AA95-00425B,.,V	S.N.A
3	C301	2305-000149	C FILM,MPEF,100nF,5%,100V,TP,12x12.5x6.5	
3	C302	2201-000292	C CERAMIC,DISC,1nF,10%,50V,YSP,TP,5x3.5,	
3	C303	2305-000149	C FILM,MPEF,100nF,5%,100V,TP,12x12.5x6.5	
3	C304	2201-000292	C CERAMIC,DISC,1nF,10%,50V,YSP,TP,5x3.5,	
3	C305	2201-000022	C CERAMIC,DISC,0.005nF,0.25pF,500V,NP0,T	
3	C307	2401-000365	C AL,100uF,20%,50V,WT,TP,10x12.5mm,	
3	C308	2401-000365	C AL,100uF,20%,50V,WT,TP,10x12.5mm,	
3	C309	2305-000285	C FILM,MPEF,220NF,5%,100V,TP,10.5X5.5X15	
3	C311	2305-000149	C FILM,MPEF,100nF,5%,100V,TP,12x12.5x6.5	
3	C412	2301-000383	C FILM,PEF,10nF,5%,50V,TP,5x7x3.2mm,5mm	
3	C413	2401-000360	C AL,100uF,20%,50V,GP,TP,8x11.5,5	
3	C417	2401-001397	C AL,470uF,20%,25V,GP,TP,10x16,5	
3	C418	2401-000360	C AL,100uF,20%,50V,GP,TP,8x11.5,5	
3	C419	2201-000180	C CERAMIC,DISC,10nF,10%,50V,Y5V,TP,7x3,5	
3	C426	2401-000360	C AL,100uF,20%,50V,GP,TP,8x11.5,5	
3	C427	2401-002300	C AL,47uF,20%,50V,GP,TP,8,3x11,5	
3	C428	2306-000122	C FILM,MPPF,100nF,5%,50V,TP,7.3x4.0x5.0m	
3	C437	2401-000114	C AL,4.7uF,20%,250V,WT,TP,10x16,5	
3	C441	2401-000252	C AL,100uF,20%,160V,HR,TP,16x25,7.5	
3	C445	2401-001622	C AL,6.8uF,20%,50V,BP,TP,16x25mm,7	
3	C450	2401-000252	C AL,100uF,20%,160V,HR,TP,16x25,7.5	
3	C451	2401-001160	C AL,33uF,20%,160V,GP,.,16x35mm,7.5	
3	C452	2201-000132	C CERAMIC,DISC,0.1nF,10%,500V,Y5P,TP6.5	
3	C453	2401-002298	C AL,470uF,20%,25V,WT,TP,10x20.5	
3	C454	2401-001429	C AL,470uF,20%,50V,GP,TP,13x20.5	
3	C455	2201-000132	C CERAMIC,DISC,0.1nF,10%,500V,Y5P,TP6.5	
3	C457	2201-000132	C CERAMIC,DISC,0.1nF,10%,500V,Y5P,TP6.5	
3	C458	2401-002298	C AL,470uF,20%,25V,WT,TP,10x20,5	
3	C467	2401-000360	C AL,100uF,20%,50V,GP,TP8x11.5,5	
3	C468	2201-000119	C CERAMIC,DISC,100nF,-80-20%,50V,Y5V,TP	
3	C469	2201-000180	C CERAMIC,DISC,10nF,10%,50V,Y5V,TP,7x3,5	
3	C472	2401-000262	C AL,100uF,20%,160V,HR,TP,16x25,7.5	
3	C475	2401-000647	C AL,2.2uF,20%,50V,BP,TP5x11,5	
3	C478	2301-000020	C FILM,PEF,27nF,5%,100V,TP,7.3x4x12.5mm	
3	C479	2301-000200	C FILM,PEF,2.2nF,5%,200V,TP,11.0x6.0x9.0	
3	C483	2401-000660	C AL,2.2uF,20%,50V,GP,TP,5x11.5	
3	C484	2201-000132	C CERAMIC,DISC,0.1nF,10%,500V,Y5P,TP6.5	
3	C809	2201-000551	C CERAMIC,DISC,0.47nF,10%,1kV,Y5P,TP5.5	
3	C814	2201-002941	C CERAMIC,DISC,0.82nF,10%,2kV,Y5P,TP9x5	
3	C815	2201-000406	C CERAMIC,DISC,0.27nF,10%,2kV,Y5P,TP5.3	
3	C816	2201-000332	C CERAMIC,DISC,2.2nF,20%,250V,Y5U,TP9x4	
3	C817	2201-000332	C CERAMIC,DISC,2.2nF,20%,250V,Y5U,TP9x4	
3	C818	2301-001216	C FILM,PPF,47nF,5%,630V,TP,20x14.5x22.7	
3	C819	2201-000332	C CERAMIC,DISC,2.2nF,20%,250V,Y5U,TP9x4	
3	C833	2201-000292	C CERAMIC,DISC,1nF,10%,50V,Y5P,TP5x3.5,	
3	C834	2401-003028	C AL,100uF,20%,25V,WT,TP6.3x11.5	
3	C851	2201-000551	C CERAMIC,DISC,0.47nF,10%,1kV,Y5P,TP6.3	
3	C852	2401-000133	C AL,1000uF,20%,16V,GP,TP,10x20,5	
3	C854	2201-000551	C CERAMIC,DISC,0.47nF,10%,1kV,Y5P,TP6.3	
3	C855	2401-003141	C AL,2200uF,20%,25V,WT,TP,13x25,5mm	
3	C857	2401-000133	C AL,1000uF,20%,16V,GP,TP,10x20,5	
3	C861	2201-000551	C CERAMIC,DISC,0.47nF,10%,1kV,Y5P,TP6.3	
3	C864	2201-000551	C CERAMIC,DISC,0.47nF,10%,1kV,Y5P,TP6.3	
3	C866	2401-000192	C AL,1000uF,20%,50V,GP,TP,16x25,7.5	
3	C869	2401-000192	C AL,1000uF,20%,50V,GP,TP,16x25,7.5	
3	C871	2201-000551	C CERAMIC,DISC,0.47nF,10%,1kV,Y5P,TP6.3	
3	C872	2401-000703	C AL,2200uF,20%,25V,GP,.,12.5x25mm,	
3	C873	2401-001998	C AL,1000uF,20%,25V,GP,TP,10x20.5mm	
3	C874	2201-000551	C CERAMIC,DISC,0.47nF,10%,1kV,Y5P,TP6.3	
3	C877	2305-000427	C FILM,MPEF,47nF,5%,100V,TP,7.5x12.5x3.5	
3	D302	0402-000546	DIODE RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
3	D433	0402-000537	DIODE RECTIFIER;RH1A,600V,0.6A,DO-204AC	
3	D435	0402-000132	DIODE RECTIFIER;1N4004,400V,1A,DO-41,TP	
3	D436	0401-000005	DIODE SWITCHING;1N4148,100V,200mA,DO-35,	
3	D438	0402-000546	DIODE RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
3	D440	0402-000534	DIODE RECTIFIER;RG10V,400V,1.2A,DO 201,T	
3	D441	0402-000534	DIODE RECTIFIER;RG10V,400V,1.2A,DO 201,T	
3	D444	0402-000546	DIODE RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
3	D445	0402-000534	DIODE RECTIFIER;RG10V,400V,1.2A,DO 201,T	
3	D472	0402-000546	DIODE RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
3	D474	0402-000546	DIODE RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
3	D801	1405-000187	VARISTOR;750V,1250A,12.5x7mm,TP	
3	D802	1405-000187	VARISTOR;750V,1250A,12.5x7mm,TP	
3	D834	0402-000546	DIODE RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
3	D843	0402-000546	DIODE RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
3	D851	0402-000493	DIODE RECTIFIER;1RSGU41,400V,1.5A,DO-15L	
3	DZ301	0403-001328	DIODE ZENER;MTZJ,22A,20.15-21.20V,500mW,D	
3	DZ304	0403-001327	DIODE ZENER;MTZJ,18A,16.22-17.06V,500mW,D	
3	DZ305	0403-001329	DIODE ZENER;MTZJ,24B,22.61-23.77V,500mW,D	
3	DZ306	0403-001167	DIODE ZENER;MTZJ,30D,30V,29.02-30.51V,500	
3	DZ307	0403-001329	DIODE ZENER;MTZJ,24B,22.61-23.77V,500mW,D	
3	DZ413	0403-001319	DIODE ZENER;MTZJ,4.7C,4.68-4.93V,500mW,DO	
3	DZ473	0403-000720	DIODE ZENER;MTZJ,9.1B,9.1V,8.57-9.01V,500	
3	DZ842	0403-000700	DIODE ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
3	DZ858	0403-001325	DIODE ZENER;MTZJ,15C,14.35-15.09V,500mW,D	
3	F801A	3602-000114	FUSE HOLDER;...,30mohm	
3	F801B	3602-000114	FUSE HOLDER;...,30mohm	
3	F804A	3602-000114	FUSE HOLDER;...,30mohm	
3	F804B	3602-000114	FUSE HOLDER;...,30mohm	
3	F805	3601-001086	FUSE AXIAL LEAD;125V,5A,FAST ACTING,GLAS	
3	F806	3601-001065	FUSE AXIAL LEAD;125V,3.5A,FAST ACTING,CE	
3	F854	3601-001086	FUSE AXIAL LEAD;125V,5A,FAST ACTING,GLAS	
3	F855	3601-001163	FUSE AXIAL LEAD;125V,7A,.,EPOXY,2.4X7.1M	
3	F871	3601-001086	FUSE AXIAL LEAD;125V,5A,FAST ACTING,GLAS	
3	L481	3301-000287	CORE FERRITE BEAD;AA,3.5a1.0a6.0mm,1500,	
3	L483	2901-000299	FILTER EMI ON BOARD;.,6A,UL/CSA,.,9x7.5,	
3	L492	2701-000115	INDUCTOR AXIAL;10uH,10%,3x7mm	
3	L493	2901-000297	FILTER EMI ON BOARD;.,3A,.,3.5x5.TP,	
3	L494	3301-000287	CORE FERRITE BEAD;AA,3.5a1.0a6.0mm,1500,	

Level	Loc. No.	Code No.	Description : Specification	Remark
3	R796	2007-002282	R-CHIP,100KOHM,5%,1/16W,DA,TP,2012	
3	R797	2007-001155	R-CHIP,750OHM,5%,1/10W,DA,TP,2012	
3	R798	2007-000282	R-CHIP,100KOHM,5%,1/10W,DA,TP,2012	
3	R799	2007-000468	R-CHIP,1KOHM,5%,1/10W,DA,TP,2012	
3	R800	2007-001166	R-CHIP,750HM,5%,1/10W,DA,TP,2012	
3	R801	2007-001166	R-CHIP,750HM,5%,1/10W,DA,TP,2012	
3	R802	2007-001166	R-CHIP,750HM,5%,1/10W,DA,TP,2012	
3	R803	2007-000328	R-CHIP,11KOHM,5%,1/10W,DA,TP,2012	
3	R804	2007-000328	R-CHIP,11KOHM,5%,1/10W,DA,TP,2012	
3	R805	2007-000001	R-CHIP,68KOHM,5%,1/10W,DA,TP,2012	
3	R806	2007-000001	R-CHIP,68KOHM,5%,1/10W,DA,TP,2012	
3	R807	2007-000001	R-CHIP,68KOHM,5%,1/10W,DA,TP,2012	
3	R808	2007-000001	R-CHIP,68KOHM,5%,1/10W,DA,TP,2012	
3	R809	2007-000001	R-CHIP,68KOHM,5%,1/10W,DA,TP,2012	
3	R810	2007-000001	R-CHIP,68KOHM,5%,1/10W,DA,TP,2012	
3	R811	2007-000001	R-CHIP,68KOHM,5%,1/10W,DA,TP,2012	
3	R812	2007-000001	R-CHIP,68KOHM,5%,1/10W,DA,TP,2012	
3	R813	2007-000300	R-CHIP,10KOHM,5%,1/10W,DA,TP,2012	
3	R814	2007-000300	R-CHIP,10KOHM,5%,1/10W,DA,TP,2012	
3	R815	2007-000300	R-CHIP,10KOHM,5%,1/10W,DA,TP,2012	
3	R816	2007-000774	R-CHIP,33KOHM,5%,1/10W,DA,TP,2012	
3	R817	2007-000615	R-CHIP,24KOHM,5%,1/10W,DA,TP,2012	
3	R818	2007-000774	R-CHIP,33KOHM,5%,1/10W,DA,TP,2012	
3	R819	2007-000615	R-CHIP,24KOHM,5%,1/10W,DA,TP,2012	
2		AA65-30105A	CLAMP WIRE,NYLON 66,V2,NTR,15MM,ALL MODE	S.N.A
2		0202-001004	SOLDER CREAM SQ 2030M SZH-1,S63A,D0.04.6	S.N.A
2		0202-000187	SOLDER WIRE FLUX, :RS60S,D1.2,63Sn/37Pb	S.N.A

ASSY-PCB,H/V

1	*	AA95-00056C	ASSY PCB,H/V; SP43J5HP3S/XTT,J51A, . .	
2	BK01	AA61-10068A	BRACKET PCB; ,M2160,SPTE,T0.3, . .	S.N.A
2	BK02	AA61-10068A	BRACKET PCB; ,M2160,SPTE,T0.3, . .	S.N.A
2	BK03	AA61-10068A	BRACKET PCB; ,M2160,SPTE,T0.3, . .	S.N.A
2	CN401	3711-001049	CONNECTOR HEADER,BOX,6P,1R,2.5mm,ANGLE	
2	CN402	3711-002709	CONNECTOR HEADER,NOWALL,12P,1R,2.5MM,ANG	
2	CN403	AA35-20052A	LEAD CONNECTOR ASSY,,4P,YBNH025 04,YSH02	
2	CN404	3711-001293	CONNECTOR HEADER,NOWALL,14P,1R,2.5mm,ANG	
2	IC471	1203-000610	IC PWM CONTROLLER,KA4,DIP16P,300MIL,PLA	
2	L351	AA27-10003M	COIL CHOKE, ,6100uH,J,40,34mA,TPEL0607R	
2	PCB	AA41-00190C	PCB H/V MODULE,PS3A,CEM-1,1L,C.1.6T,330x	S.N.A
2	Q371	AA86-50291A	ASSY H/S, . ,AA62-30154B,2SC4536,	
3		0206-000129	GREASE SILICON,SC102,,JAPAN	S.N.A
3		0502-000442	TR POWER,2SC4536RB,NPN,2W,TO-220,ST,10-	
3		6003-000333	SCREW-TAPTITE,RH,+ 2S,M3,L10,ZPC(YELL,SW	
3		AA62-30154B	HEAT SINK-ES, ,AA6063,EXTR, , ,SILVER ANO	
2	Q422	0505-000156	FET-SILICON,IRF620,N,200V,5A,0.8ohm,50W,	
2	R425	2003-000736	R METAL OXIDE(S),560ohm,5%,3W,AA,TP,6x16	
2	R485	2008-001096	R FUSIBLE(S),3.3OHM,5%,1/2W,AC,BK,2.5X6	
2		2001-000262	R CARBON,1.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2		AA99-20071J	ASSY PCB SUB,AUTO; AA95-00056C . .V	S.N.A
3	C341	2401-001914	C AL,1uF,20%,50V,BP,TP5x11.5	
3	C342	2401-000962	C AL,22uF,20%,,50V,GP,TP5x11.5	
3	C351	2301-000175	C FILM,PEF,15nF,5%,50V,TP,7.1x3.5x13mm,5	
3	C352	2401-000480	C AL,10uF,20%,,50V,GP,TP,5x11.5	
3	C353	2301-000204	C FILM,PEF,2.7nF,5%,50V,TP,7.4x3.9x13mm,	
3	C354	2301-000261	C FILM,PEF,4.7nF,5%,100V,TP,10.5x12.5x6.	
3	C355	2401-000480	C AL,10uF,20%,,50V,GP,TP,5x11.5	
3	C356	2201-000180	C CERAMIC,DISC,10nF,10%,,50V,Y5V,TP,7x3.5	
3	C357	2401-001989	C AL,4.7uF,20%,,50V,BP,TP,5x11.5	
3	C359	2401-000471	C AL,10uF,20%,,50V,BP,TP,5x11,5mm	
3	C360	2305-000299	C FILM,MPEF,220nF,5%,63V,TP, ,5mm	
3	C361	2306-000122	C FILM,MPPF,100nF,5%,,50V,TP,7.2x4.0x5.0m	
3	C362	2305-000149	C FILM,MPEF,100nF,5%,,100V,TP,12x12.5x6.5	
3	C371	2401-000302	C AL,100uF,20%,,25V,GP,TP6.3x11.5	
3	C372	2401-000480	C AL,10uF,20%,,50V,GP,TP,5x11.5	
3	C373	2401-000302	C AL,100uF,20%,,25V,GP,TP6.3x11.5	
3	C374	2401-001621	C AL,6.8uF,20%,,450V,GP,TP,13x20.5	
3	C405	2201-000558	C CERAMIC,DISC,0.47nF,10%,,50V,Y5P,TP,5x3	
3	C406	2201-000370	C CERAMIC,DISC,0.22nF,10%,,50V,Y5P,TP,4x3	
3	C421	2401-000302	C AL,100uF,20%,,25V,GP,TP6.3x11.5	
3	C429	2305-000704	C FILM,MPEF,100nF,5%,,250V,TP,16.5x10.3x5	
3	C454	2303-000331	C FILM,PPF,4.7nF,5%,,630V,TP,19.5x12x7.7,	
3	C455	2401-001527	C AL,47uF,20%,,250V,HR,TP,13x25mm,5m	

Level	Loc. No.	Code No.	Description : Specification	Remark
3	C456	2201-000132	C CERAMIC,DISC,0.1nF,10%,,500V,Y5P,TP,6.5	
3	C461	2201-000600	C CERAMIC,DISC,0.56nF,10%,,50V,Y5P,TP,5x3	
3	C462	2301-000245	C FILM,PEF,33nF,5%,,100V,TP,7x5.6x9.5mm,5	
3	C480	2306-000122	C FILM,MPPF,100nF,5%,,50V,TP,7.2x4.0x5.0m	
3	C481	2401-000914	C AL,22uF,20%,,16V,GP,TP,5x11.5	
3	C482	2305-000178	C FILM,MPEF,10nF,5%,,100V,TP, ,5mm	
3	C484	2401-001026	C AL,3.3uF,20%,,50V,GP,TP,5X11.5	
3	C485	2201-000146	C CERAMIC,DISC,0.1nF,5%,,50V,SL,TP,5x3.5,	
3	C486	2201-000146	C CERAMIC,DISC,0.1nF,5%,,50V,SL,TP,5x3.5,	
3	C487	2401-001026	C AL,3.3UF,20%,,50V,GP,TP,5X11.5	
3	C488	2401-002144	C AL,47uF,20%,,16V,GP,TP,5x11.5	
3	C489	2401-001840	C AL,100uF,20%,,16V,GP,TP6.3x11.5	
3	C490	2201-000119	C CERAMIC,DISC,100nF,-80,20%,,50V,Y5V,TP,	
3	C492	2401-002144	C AL,47uF,20%,,16V,GP,TP,5x11.5	
3	C493	2201-000119	C CERAMIC,DISC,100nF,-80,20%,,50V,Y5V,TP	
3	C494	2201-000471	C CERAMIC,DISC,0.33nF,10%,,50V,Y5P,TP,4x3	
3	C495	2301-000192	C FILM,PEF,1nF,5%,,50V,TP,5.3x10mm,5mm	
3	C496	2401-000832	C AL,220uF,20%,,25V,GP,TP,8x11.5,5	
3	D342	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D343	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D344	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D345	0403-001325	DIODE ZENER:MTZJ,15C,14.35-15.09V,500mW,D	
3	D352	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D353	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D355	0402-000546	DIODE RECTIFIER:TVR10G,400V,1.0A,DO 41,T	
3	D363	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D364	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D371	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D372	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35	
3	D373	0402-000243	DIODE RECTIFIER:RG2 V1,2000V,0.2A,DO-201	
3	D384	0402-000132	DIODE RECTIFIER:1N4004,400V,1A,DO 41,TP	
3	D385	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D386	0403-001316	DIODE ZENER:MTZJ,3.0A,2.85-3.07V,500mW,DO	
3	D395	0403-001319	DIODE ZENER:MTZJ,4.7C,4.68-4.93V,500mW,DO	
3	D442	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D443	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D451	0402-000534	DIODE RECTIFIER:RG10V,400V,1.2A,DO 201,T	
3	D456	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35	
3	D457	0403-000714	DIODE ZENER:MTZJ,3.3B,3.3V,3.32-3.53V,500	
3	D474	0403-000734	DIODE ZENER:TZP15B,15V,14.7-16.5V,1W,DO	
3	D475	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D476	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D477	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D478	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D479	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35	
3	D480	0402-000132	DIODE RECTIFIER:1N4004,400V,1A,DO 41,TP	
3	D483	0403-000720	DIODE ZENER:MTZJ,9.1B,9.1V,8.57-9.01V,500	
3	D484	0402-000132	DIODE RECTIFIER:1N4004,400V,1A,DO-41,TP	
3	D491	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D492	0403-000716	DIODE ZENER:MTZJ,4.7B,4.7V,4.55-4.8V,500m	
3	D493	0403-001325	DIODE ZENER:MTZJ,15C,14.35-15.09V,500mW,D	
3	IC481	1203-001217	IC POSI,ADJUST REG,,431,TO-92,3P,4.5MW,L	
3	L341	2701-000116	INDUCTOR AXIAL,10uH,10%,4.2x9.8mm	
3	Q342	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q343	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q344	0501-000283	TR SMALL SIGNAL,KSA539,PNP,400mW,TO-92,T	
3	Q350	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q351	0501-000283	TR SMALL SIGNAL,KSA539,PNP,400mW,TO-92,T	
3	Q352	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q353	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q354	0501-000283	TR SMALL SIGNAL,KSA539,PNP,400mW,TO-92,T	
3	Q355	0501-000366	TR SMALL SIGNAL,KSC2330-Y,NPN,1W,TO-92L	
3	Q381	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q382	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q401	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q402	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q421	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q451	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q452	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q453	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q454	0501-000283	TR SMALL SIGNAL,KSA539,PNP,400mW,TO-92,T	
3	Q461	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q471	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q473	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q481	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q482	0501-000283	TR SMALL SIGNAL,KSA539,PNP,400mW,TO-92,T	
3	Q483	0501-000283	TR SMALL SIGNAL,KSA539,PNP,400mW,TO-92,T	

Level	Loc. No.	Code No.	Description : Specification	Remark
3	Q491	0501-000389	TR,SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	R329	2001-000613	R CARBON,3.9KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R340	2001-000241	R CARBON,1.5KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R341	2001-000429	R CARBON,1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R342	2001-000273	R CARBON,100KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R343	2001-000812	R CARBON,5.6KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R344	2001-000890	R CARBON,6.8KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R345	2001-001088	R CARBON(S),1KOHM,5%,1/2W,AA,TP2.4X6.4M	
2	R345A	2001-000429	R CARBON,1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R346	2001-000290	R CARBON,10KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R347	2001-001088	R CARBON(S),1KOHM,5%,1/2W,AA,TP2.4X6.4M	
3	R348	2001-000591	R CARBON,3.3KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R349	2001-000252	R CARBON,1.6KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R351	2001-001178	R CARBON(S),680OHM,5%,1/2W,AA,TP2.4X6.4	
3	R352	2001-000003	R CARBON,330ohm,5%,1/8W,AA,TP1.8x3.2mm	
3	R353	2001-000890	R CARBON,6.8KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R354	2001-000890	R CARBON,6.8KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R355	2001-000006	R CARBON,2.4KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R357	2001-000613	R CARBON,3.9KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R358	2001-000008	R CARBON,15KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R359	2001-000766	R CARBON,43KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R360	2001-000857	R CARBON,560OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R361	2001-001191	R CARBON(S),820KOHM,5%,1/2W,AA,TP2.4X6.	
3	R362	2001-000660	R CARBON,33KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R363	2001-000723	R CARBON,4.3KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R364	2001-000838	R CARBON,68OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R365	2001-001120	R CARBON(S),3.3OHM,5%,1/2W,AA,TP2.4X6.4	
3	R366	2001-000109	R CARBON(S),470OHM,5%,1/2W,AA,TP2.4X6.4	
3	R367	2001-001065	R CARBON(S),110KOHM,5%,1/2W,AA,TP2.4X6	
3	R368	2001-001065	R CARBON(S),110KOHM,5%,1/2W,AA,TP2.4X6	
3	R369	2001-001065	R CARBON(S),110KOHM,5%,1/2W,AA,TP2.4X6	
3	R369A	2001-001065	R CARBON(S),110KOHM,5%,1/2W,AA,TP2.4X6.	
3	R370	2001-001065	R CARBON(S),110KOHM,5%,1/2W,AA,TP2.4X6.	
2	R371	2001-001065	R CARBON(S),110KOHM,5%,1/2W,AA,TP2.4X6.	
3	R372	2001-001110	R CARBON(S),240KOHM,5%,1/2W,AA,TP2.4X6	
3	R373	2001-001110	R CARBON(S),240KOHM,5%,1/2W,AA,TP2.4X6.	
3	R374	2001-001110	R CARBON(S),240KOHM,5%,1/2W,AA,TP2.4X6	
3	R375	2001-001113	R CARBON(S),270KOHM,5%,1/2W,AA,TP2.4X6.	
3	R376	2001-000613	R CARBON,3.9KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R377	2004-001892	R METAL(S),162Kohm,1%,1/2W,AA,TP2.5x6.5	
3	R378	2004-001892	R METAL(S),162Kohm,1%,1/2W,AA,TP2.5x6.5	
3	R379	2004-001892	R METAL(S),162Kohm,1%,1/2W,AA,TP2.5x6.5	
3	R380	2004-001892	R METAL(S),162Kohm,1%,1/2W,AA,TP2.5x6.5	
3	R381	2001-001088	R CARBON(S),1KOHM,5%,1/2W,AA,TP2.4X6.4M	
3	R384	2001-001150	R CARBON(S),470KOHM,5%,1/2W,AA,TP2.4X6	
3	R385	2001-000577	R CARBON,2KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R386	2001-000786	R CARBON,47KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R387	2001-000009	R CARBON,20KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R388	2001-000522	R CARBON,22KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R389	2001-000577	R CARBON,2KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R395	2001-000734	R CARBON,4.7KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R397	2001-000429	R CARBON,1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R411	2001-000734	R CARBON,4.7KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R412	2001-001088	R CARBON(S),1KOHM,5%,1/2W,AA,TP2.4X6.4M	
3	R413	2001-000515	R CARBON,220OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R414	2001-000290	R CARBON,10KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R415	2001-000734	R CARBON,4.7KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R416	2001-000006	R CARBON,2.4KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R420	2001-000281	R CARBON,100OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R421	2003-002159	R METAL OXIDE,150OHM,5%,1W,AG,TP4.3X12M	
3	R422	2001-000028	R CARBON(S),100OHM,5%,1/2W,AA,TP2.4X6.4	
3	R423	2001-000613	R CARBON,3.9KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R437	2008-001087	R FUSIBLE(S),1.8ohm,5%,2W,AG,TP3.9x12mm	
3	R438	2001-000085	R CARBON(S),100KOHM,5%,1/2W,AA,TP2.4X6.	
3	R439	2001-000085	R CARBON(S),100KOHM,5%,1/2W,AA,TP2.4X6.	
3	R442	2008-000254	R FUSIBLE(S),0.68ohm,5%,2W,AF,TP3.9x10m	
3	R442A	2008-000254	R FUSIBLE(S),0.68ohm,5%,2W,AF,TP3.9x10m	
3	R443	2003-002156	R METAL OXIDE,560OHM,5%,2W,AG,TP5X16MM	
3	R443A	2003-002156	R METAL OXIDE,560OHM,5%,2W,AG,TP5X16MM	
3	R445	2001-000258	R CARBON,1.8KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R446	2001-000522	R CARBON,22KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R447	2001-000812	R CARBON,5.6KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R448	2001-000411	R CARBON,18KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R449	2001-000660	R CARBON,33KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R450	2001-000290	R CARBON,10KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R451	2001-000812	R CARBON,5.6KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R452	2001-000241	R CARBON,1.5KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R454	2001-000761	R CARBON,430OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R455	2001-000761	R CARBON,430OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R456	2001-000761	R CARBON,430OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R458	2001-000577	R CARBON,2KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R459	2001-001192	R CARBON(S),820OHM,5%,1/2W,AA,TP2.4X6.4	
3	R460	2003-002044	R METAL OXIDE(S),100ohm,5%,1W,AE,TP2.5x	
3	R461	2001-000613	R CARBON,3.9KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R464	2001-000734	R CARBON,4.7KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R471	2001-001146	R CARBON(S),4.70HM,5%,1/2W,AA,TP2.4X6.4	
3	R472	2001-000800	R CARBON,5.1KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R473	2001-000800	R CARBON,5.1KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R474	2001-000009	R CARBON,20KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R474A	2001-000508	R CARBON,220KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R475	2004-001023	R METAL,5.6Kohm,1%,1/8W,AA,TP1.8x3.2m	
3	R475B	2001-000734	R CARBON,4.7KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R477	2001-000429	R CARBON,1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R479	2001-000005	R CARBON,390ohm,5%,1/8W,AA,TP1.8x3.2mm	
3	R480	2001-000449	R CARBON,2.2KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R481	2001-000290	R CARBON,10KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R482	2001-001031	R CARBON,91KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R483	2001-000429	R CARBON,1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R484	2001-000429	R CARBON,1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R487	2001-000924	R CARBON,680OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R489	2001-000522	R CARBON,22KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R490	2001-000723	R CARBON,4.3KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R491	2001-001178	R CARBON(S),680OHM,5%,1/2W,AA,TP2.4X6.4	
3	R492	2001-000591	R CARBON,3.3KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R493	2001-000429	R CARBON,1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R494	2001-000066	R CARBON(S),10KOHM,5%,1/2W,AA,TP2.4X6.4	
3	R495	2001-000037	R CARBON(S),330OHM,5%,1/2W,AA,TP2.4X6.4	
3	R496	2001-000347	R CARBON,13KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R497	2001-000003	R CARBON,330ohm,5%,1/8W,AA,TP1.8x3.2mm	
3	R498	2001-001070	R CARBON(S),120OHM,5%,1/2W,AA,TP2.4X6.4	
2		0202-000187	SOLDER WIRE FLUX, :RS60S,D1.2,63Sn/37Pb	S.N.A
2		AA65-30109C	CLAMP WIRE,ALL MODEL,NYLON 66,V2,NTR,15MM	S.N.A

ASSY-PCB,CONV AMP

1	*	AA95-00055L	ASSY PCB,CONV AMP; SP53J5HFJ51A, . .	
2	CN203	AA39-00115A	LEAD CONNECTOR ASSY,,10P,YBNH250 10,3515	
2	CN401	AA39-00128A	LEAD CONNECTOR ASSY,,8P,YBNH250 08,3515S	
2	CN402	AA39-00116A	LEAD CONNECTOR ASSY,,12P,YBNH250 12,3515	
2	CN802	AA39-00128A	LEAD CONNECTOR ASSY,,8P,YBNH250 08,3515S	
2	IC2101	AA96-50152C	ASSY H/S, ,TR,AA62-30012A,KA7806A,30MM	
3		1203-000284	IC POSI,FIXED REG,,7806,TO-220,3P,,PLAS	
3		6003-000333	SCREW TAPTITE,RH,+,2S,M3,L10,ZPC(YELL,SW	
3		AA62-30012A	HEAT SINK ES, ,AA6063 EXTR, , ,T0220, . .	
2	IC2102	1203-000121	IC NEGA,FIXED REG,,7906,TO-220,3P,,PLAS	
2	IC2103	AA96-00034A	ASSY H/S; ,CONVERGENCE,AA62-30173D,STIC3	
3		0206-000129	GREASE SILICON;SC102,,JAPAN	S.N.A
3		1201-001225	IC-VIDEO AMP,392,SIP22P, ,TRIPLE, ,PLAS	
3		6003-001021	SCREW TAPTITE,RH,+,B,M3,L15,ZPC(YEL),SWR	
3		AA62-30173D	HEAT SINK ES, , ,T1.0,WHITE,SCREW HOLE@	
2	IC2104	AA96-00034A	ASSY H/S, ,CONVERGENCE,AA62-30173D,STIC	
2	PCB	AA41-00135D	PCB CONVERGENCE AMP,PS1A,1L,CEM-1,330x24	S.N.A
2	SG303	4715-001050	SURGE ABSORBER,2.4kV,20%,1500A, ,DISC RA	
2		0202-000187	SOLDER WIRE FLUX, :RS60S,D1.2,63Sn/37Pb	S.N.A
2		AA99-20071E	ASSY PCB SUB,AUTO; AA95-00055L . .V	S.N.A
3	CN403	3711-002643	CONNECTOR HEADER,BOX,4P,1R,2.5MM,STRAIGH	
3	CZ101	2401-001429	C AL,470uF,20%,,50V,GP,TP13x20.5	
3	CZ102	2401-001429	C AL,470uF,20%,,50V,GP,TP13x20.5	
3	CZ103	2401-000689	C AL,2200uF,20%,,16V,GP,TP13x25.5	
3	CZ105	2401-000689	C AL,2200uF,20%,,16V,GP,TP13x25.5	
3	CZ106	2201-000180	C CERAMIC,DISC,10nF,10%,,50V,Y5V,TP,7x3.5	
3	CZ107	2201-000180	C CERAMIC,DISC,10nF,10%,,50V,Y5V,TP,7x3.5	
3	CZ108	2201-000499	C CERAMIC,DISC,0.39nF,5%,,50V,SL,TP,5x3	
3	CZ109	2201-000499	C CERAMIC,DISC,0.39nF,5%,,50V,SL,TP,5x3	
3	CZ110	2201-000499	C CERAMIC,DISC,0.39nF,5%,,50V,SL,TP,5x3	
3	CZ111	2201-000976	C CERAMIC,DISC,0.022nF,5%,,50V,NP0,TP,5x3	
3	CZ112	2201-000863	C CERAMIC,DISC,0.68nF,10%,,50V,Y5P,TP,5x3	
3	CZ113	2201-000976	C CERAMIC,DISC,0.022nF,5%,,50V,NP0,TP,5x3	
3	CZ114	2201-000863	C CERAMIC,DISC,0.68nF,10%,,50V,Y5P,TP,5x3	

Level	Loc. No.	Code No.	Description ; Specification	Remark
3	L805	2901-000297	FILTER-EMI ON BOARD; ,3A, , ,3.5x5.7P	
3	L806	2901-000297	FILTER-EMI ON BOARD; ,3A, , ,3.5x5.7P	
3	L807	2901-000297	FILTER-EMI ON BOARD; ,3A, , ,3.5x5.7P	
3	L808	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500.	
3	L810	2901-000297	FILTER-EMI ON BOARD; ,3A, , ,3.5x5.7P	
3	L811	2901-000297	FILTER-EMI ON BOARD; ,3A, , ,3.5x5.7P	
3	L812	2901-000297	FILTER-EMI ON BOARD; ,3A, , ,3.5x5.7P	
3	L813	2901-000297	FILTER-EMI ON BOARD; ,3A, , ,3.5x5.7P	
3	L814	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500.	
3	L815	2901-000297	FILTER-EMI ON BOARD; ,3A, , ,3.5x5.7P	
3	L816	2901-000297	FILTER-EMI ON BOARD; ,3A, , ,3.5x5.7P	
3	L831	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500.	
3	L832	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500.	
3	L851	2901-000297	FILTER-EMI ON BOARD; ,3A, , ,3.5x5.7P	
3	L857	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500.	
3	L859	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500.	
3	Q301	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
3	Q432	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
3	R301	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP2.5x6.	
3	R302	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP2.5x6	
3	R303	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP2.4x6.	
3	R305	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP2.4x6.	
3	R306	2003-001036	R-METAL OXIDE(S);3.3ohm,5%,2W,AF,TP3.9x	
3	R307	2003-001036	R-METAL OXIDE(S);3.3ohm,5%,2W,AF,TP3.9x	
3	R308	2001-000016	R-CARBON(S);10HM,5%,1/2W,AA,TP2.4X6.4MM	
3	R310	2003-002150	R-METAL OXIDE,270OHM,5%,2W,AG,TP5X16MM	
3	R312	2001-000290	R-CARBON,10KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R313	2001-000761	R-CARBON,430OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R314	2001-000761	R-CARBON,430OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R332	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP2.4x6.4	
3	R333	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP2.4x6.4	
3	R334	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP2.4x6.4	
3	R405	2009-001109	R-TEMPERATURE,240ohm,5%,1/4W,AA,TP2.3x6	
3	R406	2004-001983	R-METAL(S);2.49Kohm,1%,1/2W,AA,TP2.4x6.	
3	R407	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP2.5x6	
3	R408	2004-001402	R-METAL(S);6.8Kohm,1%,1/2W,AA,TP2.4x6.4	
3	R409	2001-001178	R-CARBON(S);680OHM,5%,1/2W,AA,TP2.4X6.4	
3	R410	2001-000052	R-CARBON(S);3.3KOHM,5%,1/2W,AA,TP2.4X6.	
3	R412	2001-000362	R-CARBON,150OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R419	2001-000290	R-CARBON,10KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R424	2008-000299	R-FUSIBLE(S);47ohm,5%,2W,AF,TP3.9x10mm	
3	R426	2003-002153	R-METAL OXIDE,4.7OHM,5%,2W,AG,TP6X16MM	
3	R427	2003-002152	R-METAL OXIDE,10HM,5%,2W,AG,TP5X16MM	
3	R427A	2003-002152	R-METAL OXIDE,10HM,5%,2W,AG,TP5X16MM	
3	R428	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP3.7x9	
3	R428A	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP3.7x9	
3	R429	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP4x12	
3	R430	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP4x12	
3	R433	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP2.4X6.	
3	R434	2001-001693	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP2.4X6.	
3	R441	2008-000189	R-FUSIBLE;0.47ohm,10%,2W,AA,TP5x15.5mm	
3	R444	2003-000995	R-METAL OXIDE(S);3.3Kohm,5%,2W,AE,TP3.9	
3	R462	2003-002026	R-METAL OXIDE(S);4.7ohm,5%,1W,AE,TP2.5x	
3	R463	2003-001024	R-METAL OXIDE(S);150ohm,5%,2W,AE,TP3.9x	
3	R464	2003-002158	R-METAL OXIDE;0.68OHM,5%,1W,AG,TP4.3X12	
3	R465	2001-001043	R-CARBON(S);00HM,5%,1/2W,AA,TP2.4X6.4MM	
3	R466	2004-001386	R-METAL(S);16.9Kohm,1%,1/2W,AA,TP2.4x6.	
3	R467	2004-001986	R-METAL(S);35.7Kohm,1%,1/2W,AA,TP2.4x6.	
3	R468	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP2.4X6.	
3	R469	2004-001390	R-METAL(S);1Kohm,2%,1/2W,AA,TP2.4x6.4mm	
3	R470	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP2.4X6.4	
3	R471	2004-002011	R-METAL(S);110Kohm,1%,1/2W,AA,TP2.4x6.4	
3	R472	2008-000252	R-FUSIBLE(S);0.47ohm,10%,1/2W,AF,TP2.5x	
3	R473	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP2.4x6.4	
3	R486	2003-002014	R-METAL OXIDE(S);0.60HM,5%,2W,AF,TP3.9X	
3	R488	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R808	2001-000002	R-CARBON(S);200KOHM,5%,1/2W,AA,TP5.4X2.	
3	R808A	2001-000002	R-CARBON(S);200KOHM,5%,1/2W,AA,TP5.4X2.	
3	R810	2002-001010	R-COMPOSITION;1.8Mohm,5%,1/2W,AA,TP3.7x	
3	R812	2003-002151	R-METAL OXIDE,18KOHM,5%,2W,AG,TP5X16MM	
3	R814	2003-002151	R-METAL OXIDE,18KOHM,5%,2W,AG,TP5X16MM	
3	R816	2004-004029	R-METAL(S);10Kohm,1%,1/2W,AA,TP2.5x6.5m	
3	R825	2002-001010	R-COMPOSITION;1.8Mohm,5%,1/2W,AA,TP3.7x	
3	R832	2001-001178	R-CARBON(S);680OHM,5%,1/2W,AA,TP2.4X6.4	
3	R834	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP2.4X6.	
3	R837	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP2.4X6.	
3	R838	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP2.4X6.	
3	R855	2001-001196	R-CARBON(S);9.1KOHM,5%,1/2W,AA,TP2.4X6.	
3	R856	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP2.4X6.	
3	R857	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP2.4X6.	
3	R871	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP2.4X6.4M	
3	R872	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP2.4X6.4M	
3	R873	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP2.4X6.	
3	R891	2002-001012	R-COMPOSITION;8.2Mohm,5%,1/2W,AA,TP3.7x	
3	VR471	2103-001024	VR-SEMI;50Kohm,25%,0.3W,TOP	
2		0403-001325	DIODE-ZENER;MTZJ;5C;14.3;5.15;0.5W;500mW;D	
2		6003-001023	SCREW-TAPTITE,RWH-B,M3,L10,ZPC(YEL);SW	

ASSY-PCB,TERMINAL

Level	Loc. No.	Code No.	Description ; Specification	Remark
1	*	AA95-00219E	ASSY-PCB,TERMINAL;,SP43JSHF,51A,,,2	
2	CNT01	3711-003630	CONNECTOR-HEADER;BOX,32P2R,2.54mm,ANGLE	
2	CNT02	3711-003630	CONNECTOR-HEADER;BOX,32P2R,2.54mm,ANGLE	
2	CNT03	3711-003601	CONNECTOR-HEADER;BOX,12P1R,2.5mm,ANGLE,	
2	IC703	0904-001121	IC-I/O SUPPORT CHIP;8574,88IT,DIP,16P,30	
2	IC704	1001-001022	IC-ANALOG SWITCH;TDA8601,BLANKING,DIP,16	
2	IC705	0801-000213	IC-CMOS LOGIC;4052,-MULTIPLEXER,DIP,16P,3	
2	JKV01	3722-000498	JACK-SCART;21P,-SN,BLK,NO	
2	JKV02	3722-001486	JACK-RCA;3P/3P,3.5mm,NI,BLK,-	
2	JKV03	3722-001382	JACK-RCA;5P/6P,3.4MM,NI,R/W/G/BLUE,	
2	JKV04	3722-001350	JACK-RCA,7P/3P,3.4MM,NI,BLK,	
2	JKV05	3701-001013	CONNECTOR-DSUB;15P,3R,FEMALE,STRAIGHT,AU	
2	JKV06	3701-001013	CONNECTOR-DSUB;15P,3R,FEMALE,STRAIGHT,AU	
2	JKV07	3722-000544	JACK-VHS;4P,11.5mm,AG,BLK,N	
2	JKV08	3722-000498	JACK-SCART;21P,-SN,BLK,NO	
2	RN701	2011-000160	R-NETWORK;10Kohm,5%,1/8W,A,SIP9P,TP	
2		AA99-20082V	ASSY-PCB SUB,AUTO ,AA95-00219E, ,V	S.N.A
3	C701	2401-000009	C-AL;100uF,20%,16V,GP,TP5.3x7.5	
3	C702	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
3	C703	2401-000009	C-AL;100uF,20%,16V,GP,TP5.3x7.5	
3	C704	2203-000818	C-CERAMIC,CHIP;0.033nF,5%,50V,NP0,TP,201	
3	C705	2203-000818	C-CERAMIC,CHIP;0.033nF,5%,50V,NP0,TP,201	
3	C706	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C707	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C708	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C709	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C710	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C711	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C712	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
3	C713	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C714	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C715	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C716	2401-002009	C-AL;100uF,20%,16V,GP,TP6.3x7.5	
3	C717	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
3	C718	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C719	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C720	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C721	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C722	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C723	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
3	C724	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C725	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
3	C726	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
3	C727	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C730	2401-002299	C-AL;4.7uF,20%,50V,GP,TP5x7.5	
3	C731	2401-002299	C-AL;4.7uF,20%,50V,GP,TP5x7.5	
3	C732	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,	
3	C733	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,	
3	C734	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,	
3	C735	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,	
3	C736	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,	
3	C737	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,	
3	C740	2401-001840	C-AL;100uF,20%,16V,GP,TP6.3x11,5	
3	C741	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
3	C742	2401-001840	C-AL;100uF,20%,16V,GP,TP6.3x11,5	
3	C743	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
3	C744	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
3	C745	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
3	C746	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
3	C747	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
3	C748	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	

Level	Loc. No.	Code No.	Description ; Specification	Remark
3	C749	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
3	C750	2401-000667	C-AL;2.2uF,20%,50V,WT,TP5x11.5	
3	C751	2401-000667	C-AL;2.2uF,20%,50V,WT,TP5x11.5	
3	C762	2401-000667	C-AL;2.2uF,20%,50V,WT,TP5x11.5	
3	C763	2401-000667	C-AL;2.2uF,20%,50V,WT,TP5x11.5	
3	C764	2401-000667	C-AL;2.2uF,20%,50V,WT,TP5x11.5	
3	C765	2401-000667	C-AL;2.2uF,20%,50V,WT,TP5x11.5	
3	C766	2401-000667	C-AL;2.2uF,20%,50V,WT,TP5x11.5	
3	C767	2401-000667	C-AL;2.2uF,20%,50V,WT,TP5x11.5	
3	C768	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C769	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C770	2203-000683	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,201	
3	C771	2203-000683	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,201	
3	C772	2203-000683	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,201	
3	C773	2203-000239	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,2012	
3	C774	2203-000239	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,2012	
3	C775	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,	
3	C776	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,	
3	C777	2401-001496	C-AL;47uF,20%,16V,GP,TP5x7.5	
3	C780	2401-000360	C-AL;100uF,20%,50V,GP,TP8x11.5,5	
3	C782	2401-000471	C-AL;10uF,20%,50V,BP,TP5x11.5mm	
3	C783	2401-000471	C-AL;10uF,20%,50V,BP,TP5x11.5mm	
3	DZ701	0403-000314	DIODE-ZENER;RLZ,9.1B,9.1V,8.80-9.30V,400	
3	DZ702	0403-000314	DIODE-ZENER;RLZ,9.1B,9.1V,8.80-9.30V,400	
3	DZ703	0403-000314	DIODE-ZENER;RLZ,9.1B,9.1V,8.80-9.30V,400	
3	DZ704	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL 34,TP	
3	DZ705	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL 34,TP	
3	IC701	1001-001030	IC-VIDEO SWITCH;TDA6920X,-,SOP,28P,300Mil	
3	IC702	1001-001030	IC-VIDEO SWITCH;TDA6920X,-,SOP,28P,300Mil	
3	J701	2007-000029	R-CHIP;00HM,5%,1/10W,DA,TP2012	
3	J702	2007-000029	R-CHIP;00HM,5%,1/10W,DA,TP2012	
3	L701	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	L702	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	L703	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	L704	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	L705	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	L706	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	L707	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	L708	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	L709	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	L710	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	L719	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	L720	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	L721	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	L722	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	L723	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	L724	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	L725	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	L726	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	PCB	AA41-00076B	PCB-AV TERMINAL;SP43JSHF,FR-4,2L,B,1.6T,	S.N.A
3	Q701	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
3	Q702	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
3	Q703	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
3	Q704	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
3	Q705	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
3	Q706	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
3	Q707	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
3	Q708	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
3	Q709	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
3	Q710	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
3	Q711	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
3	Q712	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
3	Q713	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
3	R701	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R702	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP2012	
3	R703	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
3	R704	2007-000511	R-CHIP;2.4KOHM,5%,1/10W,DA,TP2012	
3	R705	2007-001166	R-CHIP;750HM,5%,1/10W,DA,TP2012	
3	R706	2007-001166	R-CHIP;750HM,5%,1/10W,DA,TP2012	
3	R708	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R709	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R710	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R711	2007-001166	R-CHIP;750HM,5%,1/10W,DA,TP2012	
3	R712	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R713	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R714	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R715	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R716	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP2012	
3	R717	2007-000401	R-CHIP;150OHM,5%,1/10W,DA,TP2012	
3	R718	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP2012	
3	R719	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
3	R720	2007-000511	R-CHIP;2.4KOHM,5%,1/10W,DA,TP2012	
3	R721	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R722	2007-001166	R-CHIP;750HM,5%,1/10W,DA,TP2012	
3	R723	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R724	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R725	2007-001166	R-CHIP;750HM,5%,1/10W,DA,TP2012	
3	R726	2007-001166	R-CHIP;750HM,5%,1/10W,DA,TP2012	
3	R727	2007-001166	R-CHIP;750HM,5%,1/10W,DA,TP2012	
3	R728	2007-001166	R-CHIP;750HM,5%,1/10W,DA,TP2012	
3	R729	2007-001166	R-CHIP;750HM,5%,1/10W,DA,TP2012	
3	R730	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP2012	
3	R731	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP2012	
3	R732	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP2012	
3	R733	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP2012	
3	R734	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP2012	
3	R735	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP2012	
3	R736	2007-001166	R-CHIP;750HM,5%,1/10W,DA,TP2012	
3	R737	2007-000766	R-CHIP;330HM,5%,1/10W,DA,TP2012	
3	R740	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
3	R741	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
3	DZ704	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL 34,TP	
3	R743	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
3	R744	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
3	R745	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
3	R746	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
3	R748	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
3	R749	2007-000029	R-CHIP;00HM,5%,1/10W,DA,TP2012	
3	R750	2007-000572	R-CHIP;220OHM,5%,1/10W,DA,TP2012	
3	R751	2007-000029	R-CHIP;00HM,5%,1/10W,DA,TP2012	
3	R752	2007-000572	R-CHIP;220OHM,5%,1/10W,DA,TP2012	
3	R753	2007-000029	R-CHIP;00HM,5%,1/10W,DA,TP2012	
3	R754	2007-000572	R-CHIP;220OHM,5%,1/10W,DA,TP2012	
3	R755	2007-000029	R-CHIP;00HM,5%,1/10W,DA,TP2012	
3	R756	2007-000994	R-CHIP;5.1KOHM,5%,1/10W,DA,TP2012	
3	R757	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
3	R758	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
3	R759	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
3	R760	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R761	2007-000221	R-CHIP;1.2KOHM,5%,1/10W,DA,TP2012	
3	R762	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R763	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R764	2007-000221	R-CHIP;1.2KOHM,5%,1/10W,DA,TP2012	
3	R765	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R766	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R767	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R768	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R769	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R770	2007-000766	R-CHIP;330HM,5%,1/10W,DA,TP2012	
3	R771	2007-001166	R-CHIP;750HM,5%,1/10W,DA,TP2012	
3	R772	2007-001166	R-CHIP;750HM,5%,1/10W,DA,TP2012	
3	R773	2007-001166	R-CHIP;750HM,5%,1/10W,DA,TP2012	
3	R774	2007-001166	R-CHIP;750HM,5%,1/10W,DA,TP2012	
3	R775	2007-001166	R-CHIP;750HM,5%,1/10W,DA,TP2012	
3	R776	2007-001166	R-CHIP;750HM,5%,1/10W,DA,TP2012	
3	R777	2007-000781	R-CHIP;330HM,5%,1/10W,DA,TP2012	
3	R778	2007-000781	R-CHIP;330HM,5%,1/10W,DA,TP2012	
3	R779	2007-001100	R-CHIP;620HM,5%,1/10W,DA,TP2012	
3	R780	2007-001100	R-CHIP;620HM,5%,1/10W,DA,TP2012	
3	R781	2007-001100	R-CHIP;620HM,5%,1/10W,DA,TP2012	
3	R782	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP2012	
3	R783	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP2012	
3	R784	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP2012	
3	R785	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
3	R786	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R787	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R788	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
3	R791	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R792	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R793	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R794	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
3	R795	2007-001155	R-CHIP;750OHM,5%,1/10W,DA,TP2012	

Level	Loc. No.	Code No.	Description ; Specification	Remark
3	R796	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
3	R797	2007-001155	R-CHIP;750OHM,5%,1/10W,DA,TP,2012	
3	R798	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
3	R799	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
3	R800	2007-001156	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
3	R801	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
3	R802	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
3	R803	2007-000328	R-CHIP;11KOHM,5%,1/10W,DA,TP,2012	
3	R804	2007-000328	R-CHIP;11KOHM,5%,1/10W,DA,TP,2012	
3	R805	2007-000001	R-CHIP;68KOHM,5%,1/10W,DA,TP,2012	
3	R806	2007-000001	R-CHIP;68KOHM,5%,1/10W,DA,TP,2012	
3	R807	2007-000001	R-CHIP;68KOHM,5%,1/10W,DA,TP,2012	
3	R808	2007-000001	R-CHIP;68KOHM,5%,1/10W,DA,TP,2012	
3	R809	2007-000001	R-CHIP;68KOHM,5%,1/10W,DA,TP,2012	
3	R810	2007-000001	R-CHIP;68KOHM,5%,1/10W,DA,TP,2012	
3	R811	2007-000001	R-CHIP;68KOHM,5%,1/10W,DA,TP,2012	
3	R812	2007-000001	R-CHIP;68KOHM,5%,1/10W,DA,TP,2012	
3	R813	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
3	R814	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
3	R815	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
3	R816	2007-000774	R-CHIP;33KOHM,5%,1/10W,DA,TP,2012	
3	R817	2007-000615	R-CHIP;24KOHM,5%,1/10W,DA,TP,2012	
3	R818	2007-000774	R-CHIP;33KOHM,5%,1/10W,DA,TP,2012	
3	R819	2007-000615	R-CHIP;24KOHM,5%,1/10W,DA,TP,2012	
2		AA65-30105A	CLAMP-WIRE;NYLON 66,V2,NTR,15MM,ALL MODE	S.N.A
2		0202-001004	SOLDER-CREAM;SQ 2030M SZH-1,S63A,D0.04,6	S.N.A
2		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A

ASSY-PCB,H/V

Level	Loc. No.	Code No.	Description ; Specification	Remark
1	-	AA95-00056C	ASSY PCB,H/V;-SP43J5HP3S/XTT,J51A,-	
2	BK01	AA61-10068A	BRACKET-PCB;-M2160,SPTE,T0.3,-	S.N.A
2	BK02	AA61-10068A	BRACKET-PCB;-M2160,SPTE,T0.3,-	S.N.A
2	BK03	AA61-10068A	BRACKET-PCB;-M2160,SPTE,T0.3,	S.N.A
2	CN401	3711-001049	CONNECTOR-HEADER;BOX,6P,1R,2.5mm,ANGLE	
2	CN402	3711-002709	CONNECTOR-HEADER;NOWALL,12P,1R,2.5MM,ANG	
2	CN403	AA39-20052A	LEAD CONNECTOR ASSY;4P,YBNH025-04,YSH02	
2	CN404	3711-001283	CONNECTOR-HEADER;NOWALL,14P,1R,2.5mm,ANG	
2	IC471	1203-000610	IC-PWM CONTROLLER;494,DIP,16P,300MIL,PLA	
2	L351	AA27-10003M	COIL-CHOKE;-,6100uH,J,40,34mA,TP,EL0607R	
2	PCB	AA41-00199C	PCB-H/V MODULE;P53A,CEM-1,1L,C,1.6T,330x	S.N.A
2	Q371	AA96-50291A	ASSY-H/S;-,-,AA62-30154B,2SC4636,	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
3		0502-000442	TR-POWER;2SC4636RB,NPN,2W,TO-220,ST,10-	
3		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
3		AA62-30154B	HEAT SINK-ES;-,A6063,EXTR,-,-,SILVER ANO	
2	Q422	0505-000156	FET-SILICON;IRF620,N,200V,5A,0.8ohm,50W,	
2	R425	2003-000736	R-METAL OXIDE(S);560ohm,5%,3W,AA,TP,6x16	
2	R485	2008-001096	R-FUSIBLE(S);3.3OHM,5%,1/2W,AC,BK,2.5X6.	
2		2001-000262	R-CARBON;1.8MOHM,5%,1/8W,AA,TP,1.8X3.2M	
2		AA99-20071J	ASSY-PCB SUB,AUTO;-AA95-00056C,-,V	S.N.A
3	C341	2401-001914	C-AL;1uF,20%,50V,BP,TP,5x11,5	
3	C342	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
3	C351	2301-000175	C-FILM,PEF;15nF,5%,50V,TP,7.1x3.5x13mm,5	
3	C352	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
3	C353	2301-000204	C-FILM,PEF;2.7nF,5%,50V,TP,7.4x3.9x13mm,	
3	C354	2301-000261	C-FILM,PEF;4.7nF,5%,100V,TP,10.5x12.5x6.	
3	C355	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
3	C356	2201-000180	C-CERAMIC,DISC;10nF,10%,50V,Y5V,TP,7x3,5	
3	C357	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
3	C358	2401-000471	C-AL;10uF,20%,50V,BP,TP,5x11,5mm	
3	C360	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
3	C361	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0m	
3	C362	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
3	C371	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
3	C372	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
3	C373	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
3	C374	2401-001621	C-AL;6.8uF,20%,450V,GP,TP,13x20,5	
3	C405	2201-000558	C-CERAMIC,DISC;0.47nF,10%,50V,Y5P,TP,5x3	
3	C406	2201-000370	C-CERAMIC,DISC;0.22nF,10%,50V,Y5P,TP,4x3	
3	C421	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
3	C429	2305-000704	C-FILM,MPEF;100nF,5%,250V,TP,16.5x10.3x5	
3	C454	2303-000331	C-FILM,PPF;4.7nF,5%,630V,TP,19.5x12x7,7.	
3	C455	2401-001527	C-AL;47uF,20%,250V,HR,TP,13x25mm,5m	
3	C456	2201-000132	C-CERAMIC,DISC;0.1nF,10%,500V,Y5P,TP,6.5	
3	C461	2201-000600	C-CERAMIC,DISC;0.56nF,10%,50V,Y5P,TP,5x3	
3	C462	2301-000246	C-FILM,PEF;33nF,5%,100V,TP,7x5.0x9.5mm,5	
3	C480	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0m	
3	C481	2401-000914	C-AL;22uF,20%,16V,GP,TP,5x11,5	
3	C482	2305-000178	C-FILM,MPEF;10nF,5%,100V,TP,-,5mm	
3	C484	2401-001026	C-AL;3.3uF,20%,50V,GP,TP,5X11,5	
3	C485	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,	
3	C486	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,	
3	C487	2401-001026	C-AL;3.3uF,20%,50V,GP,TP,5X11,5	
3	C488	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
3	C489	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11.5	
3	C490	2201-000119	C-CERAMIC,DISC;100nF,-80-20%,50V,Y5V,TP	
3	C492	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
3	C493	2201-000119	C-CERAMIC,DISC;100nF,-80-20%,50V,Y5V,TP	
3	C494	2201-000471	C-CERAMIC,DISC;0.33nF,10%,50V,Y5P,TP,4x3	
3	C495	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
3	C496	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
3	D342	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
3	D343	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
3	D344	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
3	D345	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
3	D352	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
3	D353	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
3	D355	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
3	D363	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
3	D364	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
3	D371	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
3	D372	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35.	
3	D373	0402-000243	DIODE-RECTIFIER;RC2-V1,2000V,0.2A,DO-201	
3	D384	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
3	D385	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
3	D386	0403-001316	DIODE-ZENER;MTZJ3.0A,2.85-3.07V,500mW,DO	
3	D395	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
3	D442	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
3	D443	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
3	D451	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
3	D456	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
3	D457	0403-000714	DIODE-ZENER;MTZJ3.3B,3.3V,3.32-3.53V,500	
3	D474	0403-000734	DIODE-ZENER;TZP15B,15V,14.7-16.5V,1W,DO-	
3	D475	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
3	D476	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
3	D477	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
3	D478	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
3	D479	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
3	D480	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
3	D483	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
3	D484	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
3	D491	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
3	D492	0403-000716	DIODE-ZENER;MTZJ4.7B,4.7V,4.55-4.8V,500m	
3	D493	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
3	IC481	1203-001217	IC-POSI.ADJUST REG.;431,TO-92,3P,4.58MIL	
3	L341	2701-000116	INDUCTOR-AXIAL;10uH,10%,4.2x9.8mm	
3	Q342	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
3	Q343	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
3	Q344	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
3	Q350	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
3	Q351	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
3	Q352	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
3	Q353	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
3	Q354	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
3	Q355	0501-000366	TR-SMALL SIGNAL;KSC2330-Y,NPN,1W,TO-92L,	
3	Q381	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
3	Q382	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
3	Q401	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
3	Q402	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
3	Q421	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
3	Q451	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
3	Q452	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
3	Q453	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
3	Q454	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
3	Q461	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
3	Q471	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
3	Q473	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
3	Q481	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
3	Q482	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
3	Q483	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	

Electrical Parts List

Level	Loc. No.	Code No.	Description ; Specification	Remark
3	Q491	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
3	R339	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R340	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R341	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R342	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R343	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R344	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R345	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
3	R345A	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R346	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R347	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
3	R348	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R349	2001-000252	R-CARBON;1.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R351	2001-001178	R-CARBON(S);680OHM,5%,1/2W,AA,TP,2.4X6.4	
3	R352	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
3	R353	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R354	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R355	2001-000006	R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R357	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R358	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R359	2001-000766	R-CARBON;43KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R360	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R361	2001-001191	R-CARBON(S);820KOHM,5%,1/2W,AA,TP,2.4X6.	
3	R362	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R363	2001-000723	R-CARBON;4.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R364	2001-000938	R-CARBON;68OHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R365	2001-001120	R-CARBON(S);3.3OHM,5%,1/2W,AA,TP,2.4X6.4	
3	R366	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4	
3	R367	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	
3	R368	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	
3	R369	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	
3	R369A	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	
3	R370	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6	
3	R371	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	
3	R372	2001-001110	R-CARBON(S);240KOHM,5%,1/2W,AA,TP,2.4X6.	
3	R373	2001-001110	R-CARBON(S);240KOHM,5%,1/2W,AA,TP,2.4X6.	
3	R374	2001-001110	R-CARBON(S);240KOHM,5%,1/2W,AA,TP,2.4X6	
3	R375	2001-001113	R-CARBON(S);270KOHM,5%,1/2W,AA,TP,2.4X6.	
3	R376	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R377	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
3	R378	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
3	R379	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
3	R380	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
3	R381	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
3	R384	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA,TP,2.4X6.	
3	R385	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R386	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R387	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R388	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R389	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R395	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R397	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R411	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R412	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
3	R413	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R414	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R415	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R416	2001-000006	R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R420	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R421	2003-002159	R-METAL OXIDE;150OHM,5%,1W,AG,TP,4.3X12M	
3	R422	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
3	R423	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R437	2008-001087	R-FUSIBLE(S);1.8ohm,5%,2W,AG,TP,3.9x12mm	
3	R438	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
3	R439	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
3	R442	2008-000254	R-FUSIBLE(S);0.68ohm,5%,2W,AF,TP,3.9x10m	
3	R442A	2008-000254	R-FUSIBLE(S);0.68ohm,5%,2W,AF,TP,3.9x10m	
3	R443	2003-002156	R-METAL OXIDE;560OHM,5%,2W,AG,TP,6X16MM	
3	R443A	2003-002156	R-METAL OXIDE;560OHM,5%,2W,AG,TP,6X16MM	
3	R445	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R446	2001-000622	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R447	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R448	2001-000411	R-CARBON;18KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R449	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R450	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R451	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R452	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R454	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R455	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R456	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R458	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R459	2001-001192	R-CARBON(S);820OHM,5%,1/2W,AA,TP,2.4X6.4	
3	R460	2003-002044	R-METAL OXIDE(S);100ohm,5%,1W,AF,TP,2.5x	
3	R461	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R464	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R471	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
3	R472	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R473	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R474	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R474A	2001-000508	R-CARBON;220KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R475	2004-001023	R-METAL;5.6Kohm,1%,1/8W,AA,TP,1.8x3.2m	
3	R475B	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R477	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R479	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm	
3	R480	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R481	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R482	2001-001031	R-CARBON;91KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R483	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R484	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R487	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R489	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R490	2001-000723	R-CARBON;4.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R491	2001-001178	R-CARBON(S);680OHM,5%,1/2W,AA,TP,2.4X6.4	
3	R492	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R493	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R494	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
3	R495	2001-000037	R-CARBON(S);330OHM,5%,1/2W,AA,TP,2.4X6.4	
3	R496	2001-000347	R-CARBON;13KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R497	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
3	R498	2001-001070	R-CARBON(S);120OHM,5%,1/2W,AA,TP,2.4X6.4	
2		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
2		AA65-30105C	CLAMP-WIRE;ALL MODEL,NYLON 66,V2,NTR,5MM	S.N.A

ASSY-PCB,CONV AMP

Level	Loc. No.	Code No.	Description ; Specification	Remark
1	-	AA95-00055L	ASSY PCB,CONV AMP;-,SP53J5HF,J51A,-,-	
2	C491	2306-000322	C-FILM,MPPF;12nF,5%,1.6KV,TP,29x20.5x13,	
2	CN203	AA39-00115A	LEAD CONNECTOR ASSY;-,10P,YBNH250-10,3515	
2	CN401	AA39-00128A	LEAD CONNECTOR ASSY;8P,YBNH250-08,35155	
2	CN402	AA39-00116A	LEAD CONNECTOR ASSY;12P,YBNH250-12,3515	
2	CN802	AA39-00128A	LEAD CONNECTOR ASSY;8P,YBNH250-08,35155	
2	ICZ101	AA96-50152C	ASSY-H/S;-,TR,AA62-30012A,KA7806A,30MM	
3		1203-000284	IC-POSI.FIXED REG.;7806,TO-220,3P,-,PLAS	
3		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
3		AA62-30012A	HEAT SINK-ES;-,A6063,EXTR,-,-,TO220,-,-	
2	ICZ102	1203-000121	IC-NEGA.FIXED REG.;7906,TO-220,3P,-,PLAS	
2	ICZ103	AA96-00034A	ASSY-H/S;-,CONVERGENCE,AA62-30173D,STK3	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
3		1201-001225	IC-VIDEO AMP;392,SIP,22P,-,TRIPLE,-,PLAS	
3		6003-001021	SCREW-TAPTITE;RH,+,B,M3,L15,ZPC(YEL),SWR	
3		AA62-30173D	HEAT SINK-ES;-,-,T1.0,WHITE,SCREW HOLE(2	
2	ICZ104	AA96-00034A	ASSY-H/S;-,CONVERGENCE,AA62-30173D,STK3	
2	PCB	AA41-00135D	PCB-CONVERGENCE AMP;P51A,1L,CEM-1,330x24	S.N.A
2	SG303	4715-001050	SURGE ABSORBER;2.4kV,20%,1500A,-,DISC-RA	
2		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
2		AA99-20071E	ASSY-PCB SUB,AUTO;-AA95-00055L,-,V	S.N.A
3	CN403	3711-002643	CONNECTOR-HEADER;BOX,4P,1R,2.5MM,STRAIGH	
3	CZ101	2401-001429	C-AL;470uF,20%,50V,GP,TP,13x20,5	
3	CZ102	2401-001429	C-AL;470uF,20%,50V,GP,TP,13x20,5	
3	CZ103	2401-000689	C-AL;2200uF,20%,16V,GP,TP,13x25,5	
3	CZ105	2401-000689	C-AL;2200uF,20%,16V,GP,TP,13x25,5	
3	CZ106	2201-000180	C-CERAMIC,DISC;10nF,10%,50V,Y5V,TP,7x3,5	
3	CZ107	2201-000180	C-CERAMIC,DISC;10nF,10%,50V,Y5V,TP,7x3,5	
3	CZ108	2201-000499	C-CERAMIC,DISC;0.39nF,5%,50V,SL,TP,8.5x3	
3	CZ109	2201-000499	C-CERAMIC,DISC;0.39nF,5%,50V,SL,TP,8.5x3	
3	CZ110	2201-000499	C-CERAMIC,DISC;0.39nF,5%,50V,SL,TP,8.5x3	
3	CZ111	2201-000976	C-CERAMIC,DISC;0.022nF,5%,50V,NP0,TP,5x3	
3	CZ112	2201-000863	C-CERAMIC,DISC;0.68nF,10%,50V,Y5P,TP,5x3	
3	CZ113	2201-000976	C-CERAMIC,DISC;0.022nF,5%,50V,NP0,TP,5x3	
3	CZ114	2201-000863	C-CERAMIC,DISC;0.68nF,10%,50V,Y5P,TP,5x3	

Level	Loc. No.	Code No.	Description : Specification	Remark
3	R134	2007-000981	R-CHIP;5.6KOHM,5%,1/10W,DA,TP,2012	
3	R135	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R136	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R137	2007-000465	R-CHIP;1KOHM,1%,1/10W,DA,TP,2012	
3	R138	2007-000868	R-CHIP;4.7KOHM,1%,1/10W,DA,TP,2012	
3	R139	2007-000981	R-CHIP;5.6KOHM,5%,1/10W,DA,TP,2012	
3	R140	2007-000465	R-CHIP;1KOHM,1%,1/10W,DA,TP,2012	
3	R141	2007-000868	R-CHIP;4.7KOHM,1%,1/10W,DA,TP,2012	
3	R142	2007-000981	R-CHIP;5.6KOHM,5%,1/10W,DA,TP,2012	
3	R143	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R144	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R145	2007-000465	R-CHIP;1KOHM,1%,1/10W,DA,TP,2012	
3	R146	2007-000868	R-CHIP;4.7KOHM,1%,1/10W,DA,TP,2012	
3	R147	2007-000981	R-CHIP;5.6KOHM,5%,1/10W,DA,TP,2012	
3	R148	2007-000465	R-CHIP;1KOHM,1%,1/10W,DA,TP,2012	
3	R149	2007-000868	R-CHIP;4.7KOHM,1%,1/10W,DA,TP,2012	
3	R150	2007-000981	R-CHIP;5.6KOHM,5%,1/10W,DA,TP,2012	
3	R151	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R152	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
3	R153	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
3	R154	2007-000774	R-CHIP;33KOHM,5%,1/10W,DA,TP,2012	
3	R155	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
3	R156	2007-001055	R-CHIP;6.2KOHM,5%,1/10W,DA,TP,2012	
3	R157	2007-000671	R-CHIP;2KOHM,5%,1/10W,DA,TP,2012	
3	R158	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
3	R159	2007-001166	R-CHIP;750HM,5%,1/10W,DA,TP,2012	
3	R160	2007-000766	R-CHIP;330OHM,5%,1/10W,DA,TP,2012	
3	R161	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R162	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R163	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R164	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
3	R165	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
3	R166	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
3	R167	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
3	R168	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
3	R169	2007-000703	R-CHIP;3.6KOHM,5%,1/10W,DA,TP,2012	
3	R170	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
3	R171	2007-000221	R-CHIP;1.2KOHM,5%,1/10W,DA,TP,2012	
3	R172	2007-000642	R-CHIP;270OHM,5%,1/10W,DA,TP,2012	
3	R173	2007-000030	R-CHIP;560OHM,5%,1/10W,DA,TP,2012	
3	R174	2007-000030	R-CHIP;560OHM,5%,1/10W,DA,TP,2012	
3	R175	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
3	R176	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
3	R177	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
3	R178	2007-000728	R-CHIP;300OHM,5%,1/10W,DA,TP,2012	
3	R179	2007-000728	R-CHIP;300OHM,5%,1/10W,DA,TP,2012	
3	R180	2007-000728	R-CHIP;300OHM,5%,1/10W,DA,TP,2012	
3	R181	2007-000728	R-CHIP;300OHM,5%,1/10W,DA,TP,2012	
3	R182	2007-000728	R-CHIP;300OHM,5%,1/10W,DA,TP,2012	
3	R183	2007-000728	R-CHIP;300OHM,5%,1/10W,DA,TP,2012	
3	R184	2007-000830	R-CHIP;39KOHM,5%,1/10W,DA,TP,2012	
3	R201	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
3	R203	2007-000565	R-CHIP;220KOHM,5%,1/10W,DA,TP,2012	
3	R204	2007-000565	R-CHIP;220KOHM,5%,1/10W,DA,TP,2012	
3	R205	2007-000565	R-CHIP;220KOHM,5%,1/10W,DA,TP,2012	
3	R206	2007-000565	R-CHIP;220KOHM,5%,1/10W,DA,TP,2012	
3	R207	2007-000565	R-CHIP;220KOHM,5%,1/10W,DA,TP,2012	
3	R208	2007-000565	R-CHIP;220KOHM,5%,1/10W,DA,TP,2012	
3	X101	2801-003860	CRYSTAL SMD;24MHz,30ppm,28 ABV,20pf,50ohm	

ASSY-FRONT,BOT

1	*	AA91-00497H	ASSY FRONT,BOT,VO G4309 PAL,HIPS,SP43J8	
2	PF-DCFB	6002-000522	SCREW-TAPPING,TH,-,2,M4,L15,ZPC(BLK),SWR	
2		AA64-70124C	BADGE-BRAND,AL,R2500,SILVER,L=70,SAMSUNG	
2		AA64-013960	INLAY-AV,43,54,62,IBJPS SHEET,T0.5, BLK	S.N.A
2		AA64-01386C	PANEL FRONT,DECORATION,43,54,62J8,HIPS,V	
2		AA64-013810	CABINET FRONT,BOT,43J8,HIPS,VO,G4309	
2		AA60-00090A	SPACER-FELT;43,54J8,FELT, , , , ,T0.35,	S.N.A
2		AA60-00079B	SPACER JERSEY;43J8,JERSEY,GRAY,SP-700G	S.N.A
2		AA60-00077A	SPACER DUAL LOCK,54J8,#250, , , , , , , ,4	S.N.A

ASSY-CONTROL

1	*	AA91-00476F	ASSY CONTROL,-,B SLK,ABS PAL,51A,SP54J3	
2	BM-MS	6003-001023	SCREW-TAPTITE,RWH,-,3,M3,L10,ZPC(YEL),SW	
2	KNOPOW	AA61-60003J	SPRING-CS, , SUS304 0.5 OD6 H12 N7, , ,	
2	PC-BM	6003-000334	SCREW-TAPTITE,RH,-,2S,M3,L6,ZPC(YEL),SWR	
2	PCB-PC	6003-001026	SCREW-TAPTITE,RH,-,3,M4,L15,ZPC(BLK),SWR	
2		AA64-013918	INDICATOR LED,43,54,62,,8,ACRYL, SMOK, ,	
2		AA64-01469F	WINDOW-CONTROL,43,54,62,8,ACRYL,SHEET,T3	
2		AA64-01503A	KNOB-CONTACT,54,,8,C503, , , , ,	
2		AA98-00094A	ASSY PCB CONTROL, SP43,8HF,,51A, , ,	
2		AA98-00097A	ASSY PCB POWER S/W, SP43,,8HF,,51A,	
2		AA61-00561B	BRACKET-MASTER;54,,8,SECC,T1.0,	S.N.A
2		AA64-01387B	PANEL CONTROL,43,54,62,,8,ABS, ,HB,IVORY,	
2		AA64-01388B	KNOB CONTROL,43,54,62,,8,ABS, ,BLK, ,HB,	
2		AA64-01389E	KNOB POWER,43,54,62,,8,ABS,GRAY,LG-807P,M	
2		AA64-01390B	WINDOW-REMOCON,43,54,62,,8,PC, , , , ,W0	

ASSY CHASSIS PART

1	*	AA90-00635C	ASSY CHASSIS PART,,51A,43J8	S.N.A
2	CON-HC	6003-001023	SCREW-TAPTITE,RWH,-,3,M3,L10,ZPC(YEL),SW	
2	DF-FBT	6003-001023	SCREW-TAPTITE,RWH,-,3,M3,L10,ZPC(YEL),SW	
2	DF-HC	6003-001023	SCREW-TAPTITE,RWH,-,3,M3,L10,ZPC(YEL),SW	
2	PM-HC	6003-001023	SCREW-TAPTITE,RWH,-,3,M3,L10,ZPC(YEL),SW	
2		AA61-00504B	HOLDER CHASSIS,43,54,62,J8,ABS,GRAY,VO, ,	

ASSY CABINET

1	*	AA90-00634L	ASSY CABINET,43,J8,SP43,,8HF,M,SED	S.N.A
2	AC-WFB	6002-000522	SCREW-TAPPING,TH,-,2,M4,L15,ZPC(BLK),SWR	
2	AC-BCM	AA60-10011A	SCREW-TAPTITE,HH,-,PC,M4,L12,ZPC(BLK),SW	
2	AV-CFD	6003-001023	SCREW-TAPTITE,RWH,-,3,M3,L10,ZPC(YEL),SW	
2	BM-CBT	6003-001026	SCREW-TAPTITE,RH,-,3,M4,L15,ZPC(BLK),SWR	
2	CBBAPT	6003-001019	SCREW-TAPTITE,RH,-,3,M4,L12,ZPC(BLK),SWR	
2	CBT-CW	AA63-60002V	SPACER-FELT,FELT,T0.3,BLK,60X40, , ,	S.N.A
2	CFB	AA65-00011C	CLAMP WIRE;ALL MODEL,NYLON 66,V2,NTR,25M	S.N.A
2	CW-CBT	6005-001003	SCREW-WOOD;HH,-,M4,L20,ZPC(BLK),SWRCH18A	S.N.A
2	CWBBCM	6005-001094	SCREW-ASSY WOOD;WW,HH,-,M7,L32,ZPC(YEL)	S.N.A
2	CWBCB8	6005-001003	SCREW-WOOD;HH,-,M4,L20,ZPC(BLK),SWRCH18A	S.N.A
2	CWBCBS	6005-001003	SCREW-WOOD;HH,-,M4,L20,ZPC(BLK),SWRCH18A	S.N.A
2	CWBCFB	6005-001003	SCREW-WOOD;HH,-,M4,L20,ZPC(BLK),SWRCH18A	S.N.A
2	CWBHC	6005-001003	SCREW-WOOD;HH,-,M4,L20,ZPC(BLK),SWRCH18A	S.N.A
2	FP-BCM	AA60-10011A	SCREW-TAPTITE;HH,-,PC,M4,L12,ZPC(BLK),SW	
2	HV-BCM	AA60-10011A	SCREW-TAPTITE;HH,-,PC,M4,L12,ZPC(BLK),SW	
2		AA67-00079A	MIRROR-BACK;43,J8,GLASS,812*580*S4(3S)*3	
2		AA64-01395H	INLAY TERMINAL,,J7,,8HFPS SHEET,T0.5,BLK	
2		AA67-00030A	SUN SCREEN,HC, ,43NEW,H/C,A/S,PMMA,T=93%	
2		AA65-00006A	CLAMP CORD;PE,HB,BLK, , , ,	S.N.A
2		AA64-60449B	INLAY-COVER;SP 43,IMPS,T0.5,149.3X69.5	
2		AA64-01392C	DOOR-AV;43,54,62,J8,ABS,HB,GRAY,LG-807P	S.N.A
2		AA67-00115A	SCREEN LENT;43N, ,T1,308*690, , ,TINT=1	
2		AA67-00115B	SCREEN-FRESNEL;43N, ,T2,910*692, , ,	
2		AA91-00489B	ASSY-BRKT,MIRROR, , ,SECC,T1.6,	
3		AA60-00073A	SPACER-FELT;54J8,FELT, , , , ,T1.0, 210	S.N.A
3		AA61-00512B	BRACKET-MIRROR;43,53,61J8,SECC,T1,T1.0,	S.N.A
2		AA61-00600A	SPRING-EARTH;43J8,STS, , , , , , , , ,0,	S.N.A
2		AA61-00475B	BRACKET-CRT,MAIN;54,SECC,T1.6,	
2		AA60-00091N	SPACER-FELT; FELT,100X10, , ,BLK,T1.0, ,	S.N.A
2		AA60-00072B	SPACER COVER,DUST,43,54,62,J9,SPONGE 94HF	S.N.A
2		AA60-00069E	SPACER SCREEN;43,53,61J8,ABS, , , ,BLK,	S.N.A
2		AA60-00069D	SPACER SCREEN;43,53,61J8,ABS, , , ,BLK,	S.N.A
2		AA26-30005E	TRANS-FLYBACK, ,FW2 50A0018C),50KV,	
2		AA61-00618B	GUIDE FLOW,54J8,J7,ABS,HB,BLK,	
2		AA64-01385B	CABINET BACK,SIDE;43,54,62J8, ,HIPS,HB,B	
2		AA64-01384B	CABINET BACK,BOT,43,54,62J8, ,HIPS,VO,BL	
2		AA64-01378B	CABINET BACK,TOP;43J8, ,HIPS,HB,BLK	
2		AA63-60131F	SPACER FELT,PC,J612P,FELT, , , BLK,T0.5,	S.N.A
2		AA63-10007C	BAND PP, , , , W18, CLEAR,1G,	S.N.A

Level	Loc. No.	Code No.	Description : Specification	Remark
2		AA61-20285A	HOLDER BOX, , ,3456,PPVO,WHT,	
2		AA61-00642A	SPRING EARTH,MAIN,PRO,U27,J8,J9,STS,67	S.N.A

ASSY CRT-(B)

1	*	AA94-02869A	ASSY CRT-(B),P16LSC038M8,-,380MC7,BARE	
2	BC-AL	AA60-10011A	SCREW-TAPTITE,HH,-,PC,M4,L12,ZPC(BLK),SW	
2		AA65-30114A	CLAMP LOCK;NYLON 66,V2,NTR, ,PROJECTION,	S.N.A
2		AA67-10005A	LENS-ASSY, ,DELTA,CLEAR,54J8B, ,77,	
2		AA91-00449A	ASSY BRACKET,CRT, , ,SECC,T1.0,PJT	
3		AA61-00473B	BRACKET-CRT;53,SECC,T1.6, ,	S.N.A
3		AA61-00478A	SPRING-WIRE,CRT,PJT,STS, , , , , , , ,	S.N.A
3		AA61-00615B	BRACKET-EARTH;54J8,PBS,T0.5, ,	S.N.A
2		AA91-00491A	ASSY-HOLDER,PACK, , ,FILM PP RUBBER,54J8	
3		AA60-00062B	SPACER-O.RING,53,SILICON, , , ,GRAY, ,	S.N.A
3		AA61-00477B	HOLDER-PACK,43,53,61J8,PP, ,HB, ,	S.N.A
2		AA60-00074A	SPACER DYPJT,SILICON RUBBER, , , ,GRAY	S.N.A
2		AA61-00602B	BRACKET-LENS,RB,PROJECTION,SECC,T1.6,	
2		AA67-10007A	LENS, ,DELTA,CLEAR,PJT, ,77,79,	
2		AA26-30006F	TRANS-FLYBACK, ,FW2 50A001C,55,30KV	
2		AA64-013168	CASE COUPLER,BLUE,53,T2.0,AL SHEET,	S.N.A
2		AA27-50005C	DEFLECTION-YOKE, ,DPD-4392AL,ST,3,PJT,TCRT	
2		AA03-00202A	CRT-MONO;P16LSC038M8, ,7inch, , , ,FLAT	S.N.A
2		AA61-00555B	HOLDER-LANS,53,J8,PC ABS,BLK, , ,GF20%	S.N.A
2		AA60-00063B	SPACER-CLENS,53,SILICON, , , ,GRAY, ,	S.N.A
2		AA60-00061B	SPACER-CRT,53,SILICON, , , ,GRAY, , ,	S.N.A
2		AA39-00018A	LEAD CONNECTOR ASSY,1P,YFH800 01,YFH187	
2		AA33-00005A	MAGNET CONVERGENCE,JH 92LTU 036, ,29.1m,	

ASSY CRT-(R)

1	*	AA94-02868A	ASSY CRT-(R),P16LSC038J,A, ,380MC7,BARE	
2	BC-AL	AA60-10011A	SCREW-TAPTITE,HH, ,PC,M4,L12,ZPC(BLK),SW	
2		AA65-30114A	CLAMP LOCK;NYLON 66,V2,NTR, ,PROJECTION,	S.N.A
2		AA64-013148	CASE COUPLER,RED,53,T2.0,AL SHEET,	S.N.A
2		AA67-10005A	LENS ASSY, ,DELTA,CLEAR,54J8B, ,77,	
2		AA67-10008A	LENS, ,DELTA,RED,PJT, ,77,79,	
2		AA91-00449A	ASSY BRACKET,CRT, , ,SECC T1.0,PJT	
3		AA61-00473B	BRACKET-CRT;53,SECC,T1.6, ,	S.N.A
3		AA61-00478A	SPRING-WIRE,CRT,PJT,STS, , , , , , , ,	S.N.A
3		AA61-00615B	BRACKET-EARTH;54J8,PBS,T0.5, ,	S.N.A
2		AA91-00491A	ASSY-HOLDER,PACK, , ,FILM PP RUBBER,54J8	
3		AA60-00062B	SPACER-O.RING,53,SILICON, , , ,GRAY, ,	S.N.A
3		AA61-00477B	HOLDER-PACK,43,53,61J8,PP, ,HB, ,	S.N.A
2		AA60-00074A	SPACER DYPJT,SILICON RUBBER, , , ,GRAY	S.N.A
2		AA26-30006F	TRANS-FLYBACK, ,FW2 50A001C,55,30KV	
2		AA61-00602B	BRACKET-LENS,RB,PROJECTION,SECC,T1.6,	
2		AA27-50005C	DEFLECTION-YOKE, ,DPD-4392AL,ST,3,PJT,TCRT	
2		AA03-00200A	CRT-MONO;P16LSC038J,A, ,7inch, , , ,FLAT	S.N.A
2		AA61-00555B	HOLDER-LANS,53,J8,PC ABS,BLK, , ,GF20%	S.N.A
2		AA60-00063B	SPACER-CLENS,53,SILICON, , , ,GRAY, ,	S.N.A
2		AA60-00061B	SPACER-CRT,53,SILICON, , , ,GRAY, , ,	S.N.A
2		AA39-00018A	LEAD CONNECTOR-ASSY,,1P,YFH800 01,YFH187	
2		AA33-00006A	MAGNET CONVERGENCE,JH 92LT 29A, ,29.1m,0	

ASSY-WOOD

1	*	AA91-00621A	ASSY-WOOD;,WOOD KBM21 58,SVP 43J8SR,,J7	
2	AWTAWB	6005-001094	SCREW-ASSY WOOD;WW,HH,-,M7,L32,ZPC(YEL)	S.N.A
2		AA91-00485A	ASSY-WOOD,TOP, , ,WOOD,SVP 43J8SR,,J7	
3	CWTHCW	AA60-10051A	SCREW-WOOD;PH,-,M4,L16,ZPC(BLK),SWRCH18A	
3		AA64-01396A	CABINET WOOD,TOP;43J8, ,WOOD, ,	S.N.A
3		AA61-00510E	HOLDER-SCREEN;43,J8,ABS,BLK,HB, ,	
3		AA61-00510D	HOLDER-SCREEN;43,J8,ABS,BLK,HB, ,	
3		AA61-00507B	HOLDER CABINET,WOOD;43,54,62,J8,ABS,BLK,H	
2		AA91-00496A	ASSY-WOOD,BOT, , ,WOOD,SVP 43J8SR,,J7	
3	CASCWB	AA60-10051A	SCREW-WOOD;PH,-,M4,L16,ZPC(BLK),SWRCH18A	
3	HCMCWB	AA60-10051A	SCREW-WOOD;PH,-,M4,L16,ZPC(BLK),SWRCH18A	
3	-W-CWB	AA60-10051B	SCREW-WOOD;RH,-,M3.5,L11,ZPC(YEL),SWRC,-1	
3	CRTCWB	AA60-10051A	SCREW-WOOD;PH,-,M4,L16,ZPC(BLK),SWRCH18A	
3		AA61-00508B	HOLDER-JERSEY;43,54,62,,8,ABS,BLK,HB, ,	
2		AA61-00533B	BRACKET-GRILLE;43,54,62,,8,SECC T ,T0.5,	
3		AA63-00347B	COVER-DUCT,43J8,HIPS, ,HB,BLK, ,	
3		AA98-00040A	ASSY-LEAD,CON; ,LEAD CON,CORE,AA39 20565	
4		3301-001201	CORE-FERRITE,AE,21x11x32mm,1500,2B0G	
3		AA39-00086A	LEAD CONNECTOR ASSY,2,2J2,REC,REC,200MM	
2		AA60-00043A	SPACER-SPEAKER,FELT,T2, , ,43J8,	
3		AA64-01401A	CABINET-WOOD,BOT,43J8, ,WOOD, ,	S.N.A
3		AA61-00506B	HOLDER-CRT,MAIN;43,54,62,,8,HIPS,BLK,HB,	
3		3001-000279	SPEAKER;30W,8ohm,91dB,20Hz	
3		3001-001107	SPEAKER;20W,8ohm,95dB,1300Hz	
3		AA60-00078A	SPACER-DUAL LOCK,54,,8,#250,40X25	
2		AA61-00094C	HOLDER RAIL, ,PCJ533R,ABS,,+B,BLK,180	
2		AA61-00097A	HOLDER-WIRE, , ,NYLON 6/6, NTR,	
3		AA61-00458A	CASTER, , ,TP4015-05,NYLON47, ,SR4	S.N.A

ASSY CABINET MASK

1	*	AA91-00498C	ASSY CABINET MASK, ,+B,GRAY,C906~D902,PA	
2	CFRON	AA63-00380A	COVER-CORNER;PJT,POLYESTER, , ,CLR,#572	
2		AA64-01544C	CABINET FRONT,MASK,43,J8,CD906P~DD902P,DO	
3		AA64-01544A	CABINET FRONT,MASK,43,J8,LB84,4 APCH,UL,AB	S.N.A
2		AA64-01545B	CABINET-MASK,SIDE,43,J8,CD906P~DD902,ABS,	
3		AA64-01545A	CABINET-MASK,SIDE,43,J8,L665,4 APCH,UL,ABS	S.N.A
2		AA64-01544H	CABINET FRONT,MASK,SPK,3,BHF,C906~D902, ,S	
3		AA64-01544A	CABINET FRONT,MASK,43,J8,LB84,4 APCH,UL,AB	S.N.A
2		AA61-00505B	HOLDER CORNER,43,54,62,,8,ABS,GRAY,HB	

ASSY ACCESSORY

1	*	AA94-02817A	ASSY ACCESSORY;SPK, , ,SPK,SED, ,51A,,SASS	S.N.A
2		AA68-01331B	MANUAL USERS,SP43,,5,43J8,FRE,W/P100KG,1	S.N.A
2		AA68-01137B	MANUAL USERS,SP43,/5/43J8,GER,W/P100KG,1	S.N.A
2		AA68-00856B	MANUAL USERS SP43,,5,4F 43J8HF, ENG, W/P	S.N.A
2		AA69-30009C	BAG-SHEET,LOPE,T0.08,W150,L120, , ,	S.N.A
2		AA61-20126A	HOLDER-LEG, , ,ABS HB BLK	S.N.A
2		AA39-40018	CABLE RCA,,1500MM	

REMOCON

1	*	AA59-00100A	REMOCON, ,TM57,KS8BP0416S,53J,/GRAY,S/	
2		AA09-00100A	IC MICOM,Z8L1808SSC R 50MQ, ,28PIN,2~3	
2		2802-000194	RESONATOR-CERAMIC,8MHz,1.0%,TP,8.5x4.5x5	

7-4 SP54J8HFX/SED

ASSY PCB MAIN(OPT)

Level	Loc. No.	Code No.	Description ; Specification	Remark
1		AA94-03459L	ASSY PCB MAIN(OPT);SP54J8HFX,SED,J51A,SW	
2	C564	2401-001068	C-AL;3300uF,20%,50V,GP,BK,22x40,10	
2	C565	2401-000737	C-AL;2200uF,20%,50V,GP,TP,18x35.5,7	
2	CN801	3711-003974	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,STRAIG	
2	CNT01	3710-001208	CONNECTOR-SOCKET;32P,2R,2.54mm,STRAIGHT	
2	CNT02	3710-001208	CONNECTOR-SOCKET;32P,2R,2.54mm,STRAIGHT,	
2	CS803	2401-003370	C-AL;47uF,20%,450V,GP,BK,16X35,5,7	
2	H001	AA40-10006S	TUNER F/S;TECC2949PG30A(S),PAL B/G,TR,18	
2	C101	AA96-00110C	ASSY-H/S;,,AA62-30013K,SI-3090C,	
..3		1203-000577	IC-VOLTAGE REGULATOR;3090,ZIP5P,PLASTI	
3		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
3		AA62-30013K	HEATSINK-ES;,,,44/18,,WHT,A6063 EX	
2	IC102	AA96-00110A	ASSY-H/S;,,AA62-30013K,SI-3050C,	
..3		1203-000203	IC-POSI.ADJUST REG.;3050,TO-220,5P,,PLA	
..3		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
..3		AA62-30013K	HEATSINK-ES;,,,44/18,,WHT,A6063 EX	
.2	IC103	1204-001276	IC-SOUND PROCESSOR;TDA9810,DIP24P,400MI	
..2	IC502	AA96-00110A	ASSY-H/S;,,AA62-30013K,SI-3050C,	
..2	IC503	AA96-00110A	ASSY-H/S;,,AA62-30013K,SI-3050C,	
..2	IC504	AA96-00110A	ASSY-H/S;,,AA62-30013K,SI-3050C,	
..2	IC665	AA96-00038A	ASSY-H/S;,SOUND AMP,AA62-30173E,TDA726	
..3		0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
..3		1201-001026	IC-POWER AMP;7265,ZIP,11P,19.6MIL,DUAL,1	
..3		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
..3		AA62-30173E	HEAT SINK;ES,,,T1.0,WHITE,SCREW HOLE(1	S.N.A
..2	IF/CAB	AA39-30007B	IF CABLE;,T,150mm,1365#26	
2	L201	AA27-10001C	COIL CHOKE;,100uH,K,5.0A,ST,100UH,K(R	
..2	L603	AA29-00004A	FILTER LINE NOISE;,20UH,3A,AC30,250V,TO	
..2	QZ107	AA96-50162F	ASSY-H/S;,POWER,AA62-30013E,2SA1011,30	
..3		0502-000131	TR POWER;2SA1011 D,PNP,1.2W,TO-220,,60	
..3		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
.3		AA62-30013E	HEAT SINK;ES,,A6063 EXTR,,,30(21),T02	
..2	QZ108	AA96-50162G	ASSY-H/S;,AMP,AA62-30013E,2SC2344,30MM	
..3		0502-000153	TR POWER;2SC2344-D,NPN,1.2W,TO-220,,60	
..3		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
..3		AA62-30013E	HEAT SINK;ES,,A6063 EXTR,,,30(21),T02	
..2	R913	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..2	RL801	3501-001053	RELAY-POWER;5Vdc,530mW,10A,1FormA,15mS,5	
..2	TS801	AA26-00019A	TRANS-SWITCHING;,AC80~260V,,US,,4MH,B	
..2	X901	2801-003224	CRYSTAL-UNIT;32.768KHZ,20PPM,28-AAY,12.5	
..2		AA95-00519E	ASSY PCB,PROSCAN;,SP53J5HF,J51A,,,	
...3	CNP901	3711-003543	CONNECTOR-HEADER;NOWALL,16P,1R,2.54MM,AN	
..3	CNP902	3711-001283	CONNECTOR-HEADER;NOWALL,14P,1R,2.5mm,ANG	
..3	CNP903	3711-001283	CONNECTOR-HEADER;NOWALL,14P,1R,2.5mm,ANG	
..3	CNP904	3711-001283	CONNECTOR-HEADER;NOWALL,14P,1R,2.5mm,ANG	
..3	XP101	2801-004019	CRYSTAL-UNIT;20.25MHz,30ppm,28-AAM,13pF,	
..3	XP601	2801-003811	CRYSTAL-UNIT;24.576MHZ,20PPM,28-AAM,30PF	
..3		AA99-20079H	ASSY PCB SUB,AUTO;,AA95-00519E,,V	S.N.A
...4	CP101	2203-000938	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,2012	
...4	CP102	2203-000938	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,2012	
...4	CP103	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP,2012	
...4	CP104	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP,2012	
...4	CP106	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,	
...4	CP109	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...4	CP110	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
...4	CP111	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
...4	CP112	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
...4	CP113	2203-001172	C-CERAMIC,CHIP;0.006nF,0.25pF,50V,NP0,TP	
...4	CP114	2203-001172	C-CERAMIC,CHIP;0.006nF,0.25pF,50V,NP0,TP	
...4	CP115	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...4	CP116	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7.5	
...4	CP117	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...4	CP118	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7.5	
...4	CP119	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...4	CP120	2203-001002	C-CERAMIC,CHIP;0.047nF,5%,50V,NP0,TP,201	
...4	CP121	2203-001002	C-CERAMIC,CHIP;0.047nF,5%,50V,NP0,TP,201	
...4	CP122	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP,2012	
..4	CP126	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...4	CP127	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7.5	
4	CP128	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7.5	
.4	CP129	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...4	CP130	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7.5	
.4	CP131	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.4	CP132	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
.4	CP133	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
4	CP135	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
.4	CP137	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
4	CP139	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
4	CP141	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
..4	CP142	2203-000938	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,2012	
.4	CP143	2203-000938	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,2012	
..4	CP144	2203-000938	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,2012	
.4	CP145	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP,2012	
...4	CP301	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4	CP302	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
..4	CP303	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...4	CP304	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.4	CP305	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
..4	CP306	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...4	CP307	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
...4	CP308	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...4	CP309	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
...4	CP310	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...4	CP311	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
...4	CP312	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...4	CP313	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...4	CP314	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.4	CP315	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...4	CP316	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.4	CP317	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.4	CP401	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
..4	CP402	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CP403	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7.5	
...4	CP404	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.4	CP405	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CP406	2203-000142	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,2012	
...4	CP407	2203-000239	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,2012	
...4	CP408	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...4	CP409	2203-000555	C-CERAMIC,CHIP;0.02nF,5%,50V,NP0,TP,2012	
...4	CP410	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...4	CP411	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...4	CP412	2203-000555	C-CERAMIC,CHIP;0.02nF,5%,50V,NP0,TP,2012	
...4	CP413	2203-000555	C-CERAMIC,CHIP;0.02nF,5%,50V,NP0,TP,2012	
...4	CP414	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...4	CP415	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...4	CP416	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...4	CP417	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...4	CP418	2404-001020	C-TA,CHIP;10uF,20%,10V,GP,TP,3216,3.2	
...4	CP419	2404-001020	C-TA,CHIP;10uF,20%,10V,GP,TP,3216,3.2	
...4	CP420	2404-001020	C-TA,CHIP;10uF,20%,10V,GP,TP,3216,3.2	
...4	CP501	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
...4	CP502	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
...4	CP503	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
...4	CP504	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
...4	CP505	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
...4	CP506	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
...4	CP507	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...4	CP508	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
...4	CP509	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
...4	CP510	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
...4	CP511	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
...4	CP512	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
...4	CP513	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
...4	CP514	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
...4	CP515	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
...4	CP516	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
...4	CP517	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
...4	CP518	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
...4	CP519	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
...4	CP520	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
...4	CP521	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	

Level	Loc. No.	Code No.	Description ; Specification	Remark
4	CP522	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
4	CP523	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
4	CP524	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
4	CP525	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
.4	CP527	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.4	CP528	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
4	CP529	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
4	CP530	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
4	CP531	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
4	CP532	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
4	CP533	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
4	CP534	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
4	CP535	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
4	CP536	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
4	CP537	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
4	CP538	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
4	CP539	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
.4	CP540	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
..4	CP541	2203-001002	C-CERAMIC,CHIP;0.047nF,5%,50V,NP0,TP,201	
.4	CP542	2203-001002	C-CERAMIC,CHIP;0.047nF,5%,50V,NP0,TP,201	
.4	CP545	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.4	CP546	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
.4	CP547	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
...4	CP548	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
.4	CP549	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...4	CP550	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.4	CP551	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
..4	CP552	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.4	CP553	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
..4	CP554	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.4	CP555	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.4	CP556	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.4	CP559	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
4	CP601	2203-001088	C-CERAMIC,CHIP;0.005nF,0.25pF,50V,NP0,TP	
.4	CP602	2203-001088	C-CERAMIC,CHIP;0.005nF,0.25pF,50V,NP0,TP	
4	CP603	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.4	CP604	2203-000938	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,2012	
.4	CP605	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012	
4	CP607	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
..4	CP609	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
4	CP610	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
4	CP611	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,	
4	CP612	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
.4	CP613	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
...4	CP614	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4	CP615	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...4	CP616	2203-001002	C-CERAMIC,CHIP;0.047nF,5%,50V,NP0,TP,201	
...4	CP617	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...4	CP618	2203-000239	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,2012	
...4	CP619	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...4	CP620	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
..4	CP621	2203-000239	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,2012	
...4	CP622	2203-000142	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,2012	
...4	CP623	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.4	CP624	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7.5	
.4	CP625	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...4	CP626	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7.5	
...4	CP627	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
..4	CP628	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7.5	
...4	CP629	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...4	CP630	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...4	CP631	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
...4	CP901	2404-001229	C-TA,CHIP;4.7uF,20%,25V,GP,TP,3528	
.4	CP902	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...4	CP904	2203-001088	C-CERAMIC,CHIP;0.005nF,0.25pF,50V,NP0,TP	
....4	CP905	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
..4	CP906	2203-000495	C-CERAMIC,CHIP;2.2nF,10%,50V,X7R,TP,2012	
...4	DP501	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
...4	DP502	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
...4	DP503	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
..4	DP504	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
..4	DP505	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
..4	DP601	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
...4	DP602	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
.4	DP603	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
...4	DP604	0401-000160	DIODE-SWITCHING;1SS314,30V,100mA,USC,TP	
4	DP605	0401-000160	DIODE-SWITCHING;1SS314,30V,100mA,USC,TP	
4	DP606	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
.4	DP607	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
4	DP901	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
4	DP902	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
4	DP903	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
4	DP904	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
4	FP101	2901-001120	FILTER-EMI SMD;25V,100mA,,,3.2x1.6x1.1	
4	FP102	2901-001120	FILTER-EMI SMD;25V,100mA,,,3.2x1.6x1.1	
4	FP301	2901-001120	FILTER-EMI SMD;25V,100mA,,,3.2x1.6x1.1	
4	FP901	2901-000226	FILTER-EMI SMD;25V,0.3A,,100pF,3.2x1.25	
4	FP902	2901-000226	FILTER-EMI SMD;25V,0.3A,,100pF,3.2x1.25	
4	FP903	2901-000226	FILTER-EMI SMD;25V,0.3A,,100pF,3.2x1.25	
4	FP904	2901-000226	FILTER-EMI SMD;25V,0.3A,,100pF,3.2x1.25	
4	FP905	2901-000226	FILTER-EMI SMD;25V,0.3A,,100pF,3.2x1.25	
4	FP906	2901-000226	FILTER-EMI SMD;25V,0.3A,,100pF,3.2x1.25	
.4	FP907	2901-000226	FILTER-EMI SMD;25V,0.3A,,100pF,3.2x1.25	
.4	FP908	2901-000226	FILTER-EMI SMD;25V,0.3A,,100pF,3.2x1.25	
4	ICP101	1204-001362	IC-VIDEO PROCESS;VPC3215C,B8,PLCC,44P	
..4	ICP103	1205-001172	IC-INTERFACE;CIP3250A,B1,PLCC,68P,,PLAS	
.4	ICP301	1204-001623	IC-VERTICAL PROCESSO;SDA9400,QFP64P,,P	
..4	ICP302	1203-001419	IC-VOLTAGE REGULATOR;4931,TO-252,3P,6.6x	
.4	ICP401	1002-001045	IC-D/A CONVERTER;9280,8BIT,PLCC,68P	
.4	ICP501	1204-001550	IC-VIDEO PROCESS;CXA2101AQ,QFP80P,,PLA	
...4	ICP601	1204-001372	IC-HOR./VER.PROCESSO;SDA9361,QFP44P,,P	
.4	ICP901	1202-000001	IC-VOLTAGE COMP;7533,TO-92,3P,,SINGLE,	
..4	LP101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	S.N.A
.4	LP102	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	S.N.A
..4	LP103	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	S.N.A
.4	LP105	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	S.N.A
4	LP106	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	S.N.A
4	LP107	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	S.N.A
4	LP301	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	S.N.A
4	LP302	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	S.N.A
4	LP303	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	S.N.A
4	LP401	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	S.N.A
4	LP402	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	S.N.A
4	LP403	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	S.N.A
4	LP404	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	S.N.A
.4	LP601	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	S.N.A
..4	LP602	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	S.N.A
4	LP603	2703-001717	INDUCTOR SMD;1.2uH,5%,3.2x2.5x2.2mm	
...4	LP901	3301-001186	CORE-FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m	S.N.A
...4	LP902	3301-001186	CORE-FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m	S.N.A
....4	LP903	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	S.N.A
...4	LP904	3301-001184	CORE-FERRITE BEAD;AB,1.3kohm,4.5x3.2x1.3	S.N.A
...4	LP905	3301-001184	CORE-FERRITE BEAD;AB,1.3kohm,4.5x3.2x1.3	S.N.A
...4	LP906	3301-001184	CORE-FERRITE BEAD;AB,1.3kohm,4.5x3.2x1.3	S.N.A
...4	QP501	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
...4	QP502	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
...4	QP503	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
...4	QP504	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
...4	QP505	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
..4	QP506	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
..4	QP508	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
4	QP602	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.4	QP902	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
..4	RP101	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
4	RP102	2007-000947	R-CHIP;47OHM,5%,1/10W,DA,TP,2012	
.4	RP106	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
.4	RP112	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
.4	RP113	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
..4	RP114	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
.4	RP115	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
..4	RP117	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
...4	RP134	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
...4	RP135	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
...4	RP136	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
...4	RP137	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
...4	RP138	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
..4	RP139	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
..4	RP140	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
...4	RP141	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
..4	RP142	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
4	RP143	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
.4	RP153	2007-000401	R-CHIP;150OHM,5%,1/10W,DA,TP,2012	

Level	Loc. No.	Code No.	Description ; Specification	Remark
4	RP154	2007-000308	R-CHIP;10GHM,5%,1/10W,DA,TP,2012	
4	RP155	2007-000947	R-CHIP;470HM,5%,1/10W,DA,TP,2012	
4	RP156	2007-000947	R-CHIP;470HM,5%,1/10W,DA,TP,2012	
4	RP157	2007-000947	R-CHIP;470HM,5%,1/10W,DA,TP,2012	
4	RP159	2007-001166	R-CHIP;750HM,5%,1/10W,DA,TP,2012	
4	RP161	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RP301	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RP302	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RP303	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RP304	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RP305	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RP401	2011-000585	R-NETWORK;47ohm,5%,63mW,L CHIP8P,TP	
4	RP402	2011-000585	R-NETWORK;47ohm,5%,63mW,L CHIP8P,TP	
4	RP403	2011-000585	R-NETWORK;47ohm,5%,63mW,L CHIP8P,TP	
4	RP404	2011-000585	R-NETWORK;47ohm,5%,63mW,L CHIP8P,TP	
4	RP405	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RP406	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RP407	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RP408	2007-001055	R-CHIP;6.2KOHM,5%,1/10W,DA,TP,2012	
4	RP409	2007-000401	R-CHIP;150OHM,5%,1/10W,DA,TP,2012	
4	RP411	2007-001166	R-CHIP;750HM,5%,1/10W,DA,TP,2012	
4	RP412	2007-001166	R-CHIP;750HM,5%,1/10W,DA,TP,2012	
4	RP413	2007-000401	R-CHIP;150OHM,5%,1/10W,DA,TP,2012	
4	RP415	2007-001166	R-CHIP;750HM,5%,1/10W,DA,TP,2012	
4	RP416	2007-001166	R-CHIP;750HM,5%,1/10W,DA,TP,2012	
4	RP417	2007-000380	R-CHIP;13KOHM,5%,1/10W,DA,TP,2012	
4	RP418	2007-000401	R-CHIP;150OHM,5%,1/10W,DA,TP,2012	
4	RP419	2007-001166	R-CHIP;750HM,5%,1/10W,DA,TP,2012	
4	RP421	2007-001166	R-CHIP;750HM,5%,1/10W,DA,TP,2012	
4	RP422	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
4	RP423	2007-000401	R-CHIP;150OHM,5%,1/10W,DA,TP,2012	
4	RP501	2007-000029	R-CHIP;00HM,5%,1/10W,DA,TP,2012	
4	RP502	2007-000029	R-CHIP;00HM,5%,1/10W,DA,TP,2012	
4	RP503	2007-000029	R-CHIP;00HM,5%,1/10W,DA,TP,2012	
4	RP504	2007-000030	R-CHIP;560OHM,5%,1/10W,DA,TP,2012	
4	RP505	2007-000572	R-CHIP;220OHM,5%,1/10W,DA,TP,2012	
4	RP506	2007-000493	R-CHIP;2.2KOHM,5%,1/10W,DA,TP,2012	
4	RP507	2007-001166	R-CHIP;750HM,5%,1/10W,DA,TP,2012	
4	RP509	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP,2012	
4	RP510	2007-000938	R-CHIP;47KOHM,1%,1/10W,DA,TP,2012	
4	RP513	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RP514	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP,2012	
4	RP515	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
4	RP516	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
4	RP517	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RP518	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP,2012	
4	RP519	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RP521	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP,2012	
4	RP522	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RP523	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP,2012	
4	RP524	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RP525	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RP526	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP,2012	
4	RP527	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RP528	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RP529	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP,2012	
4	RP530	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RP537	2007-000689	R-CHIP;3.3KOHM,5%,1/10W,DA,TP,2012	
4	RP542	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RP543	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RP544	2007-000029	R-CHIP;00HM,5%,1/10W,DA,TP,2012	
4	RP546	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RP547	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RP549	2007-000671	R-CHIP;2KOHM,5%,1/10W,DA,TP,2012	
4	RP550	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RP553	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RP554	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RP555	2007-000582	R-CHIP;22KOHM,1%,1/10W,DA,TP,2012	
4	RP556	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RP560	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
4	RP562	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
4	RP565	2007-000029	R-CHIP;00HM,5%,1/10W,DA,TP,2012	
4	RP566	2007-000029	R-CHIP;00HM,5%,1/10W,DA,TP,2012	
4	RP567	2007-000029	R-CHIP;00HM,5%,1/10W,DA,TP,2012	
4	RP568	2007-000029	R-CHIP;00HM,5%,1/10W,DA,TP,2012	
4	RP569	2007-000029	R-CHIP;00HM,5%,1/10W,DA,TP,2012	
4	RP570	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	

Level	Loc. No.	Code No.	Description ; Specification	Remark
4	RP571	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RP501	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RP502	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RP503	2007-001208	R-CHIP;82KOHM,5%,1/10W,DA,TP,2012	
4	RP604	2007-000947	R-CHIP;470HM,5%,1/10W,DA,TP,2012	
4	RP605	2007-000518	R-CHIP;2.7KOHM,5%,1/10W,DA,TP,2012	
4	RP606	2007-000518	R-CHIP;2.7KOHM,5%,1/10W,DA,TP,2012	
4	RP609	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
4	RP611	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
4	RP613	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP,2012	
4	RP614	2007-000001	R-CHIP;58KOHM,5%,1/10W,DA,TP,2012	
4	RP619	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
4	RP620	2007-000947	R-CHIP;470HM,5%,1/10W,DA,TP,2012	
4	RP621	2007-000947	R-CHIP;470HM,5%,1/10W,DA,TP,2012	
4	RP622	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
4	RP623	2007-000822	R-CHIP;390OHM,5%,1/10W,DA,TP,2012	
4	RP624	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RP625	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
4	RP626	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP,2012	
4	RP627	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
4	RP628	2007-000267	R-CHIP;1.8KOHM,5%,1/10W,DA,TP,2012	
4	RP629	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
4	RP630	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
4	RP631	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
4	RP709	2007-000029	R-CHIP;00HM,5%,1/10W,DA,TP,2012	
4	RP719	2007-000029	R-CHIP;00HM,5%,1/10W,DA,TP,2012	
4	RP727	2007-000029	R-CHIP;00HM,5%,1/10W,DA,TP,2012	
4	RP735	2007-000029	R-CHIP;00HM,5%,1/10W,DA,TP,2012	
4	RP736	2007-000029	R-CHIP;00HM,5%,1/10W,DA,TP,2012	
4	RP737	2007-000029	R-CHIP;00HM,5%,1/10W,DA,TP,2012	
4	RP738	2007-000029	R-CHIP;00HM,5%,1/10W,DA,TP,2012	
4	RP901	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RP904	2007-000029	R-CHIP;00HM,5%,1/10W,DA,TP,2012	
4	RP907	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RP908	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RP912	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RP913	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RP914	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RP915	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RP916	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RP917	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RP918	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RP920	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RP921	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RP924	2007-000029	R-CHIP;00HM,5%,1/10W,DA,TP,2012	
4	RP925	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RP926	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RP927	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RP929	2007-000029	R-CHIP;00HM,5%,1/10W,DA,TP,2012	
4	RP931	2007-000029	R-CHIP;00HM,5%,1/10W,DA,TP,2012	
4	RP933	2007-000029	R-CHIP;00HM,5%,1/10W,DA,TP,2012	
4	RP935	2007-000029	R-CHIP;00HM,5%,1/10W,DA,TP,2012	
4	RP936	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
4	RP943	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
4	RP944	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP,2012	
4	RP945	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RP980	2007-000029	R-CHIP;00HM,5%,1/10W,DA,TP,2012	
4		AA41-00233B	PCB-PROSCAN,SVP 53USPFR 4.4L,B,1.6T,245	S.N.A
3		AA63-40272A	SHIELD-CASE, ,SPTE,T0.5, ,CX724AHD	S.N.A
2		AA95-00427B	ASSY SOUND; ,SPK3J,SP2S,XTT,U51A,AA95-004	
3	C614	2401-000962	C-AL,22uF,20%,50V,CP,TP,5x11,5	
3	C615	2203-000595	C-CERAMIC,CHIP,0.22nF,5%,50V,NP0,TP,2012	
3	C616	2203-000938	C-CERAMIC,CHIP,0.47nF,5%,50V,NP0,TP,2012	
3	C617	2203-000142	C-CERAMIC,CHIP,1.5nF,10%,50V,X7R,TP,2012	
3	C618	2203-000444	C-CERAMIC,CHIP,1nF,10%,50V,X7R,TP,2012,	
3	C619	2203-000444	C-CERAMIC,CHIP,1nF,10%,50V,X7R,TP,2012,	
3	C620	2401-000660	C-AL,2.2uF,20%,50V,CP,TP,5x11,5	
3	C621	2401-000660	C-AL,2.2uF,20%,50V,CP,TP,5x11,5	
3	C622	2203-000701	C-CERAMIC,CHIP,0.002nF,0.25pF,50V,NP0,TP	
3	C623	2203-000701	C-CERAMIC,CHIP,0.002nF,0.25pF,50V,NP0,TP	
3	C624	2203-001077	C-CERAMIC,CHIP,0.056nF,5%,50V,NP0,TP,201	
3	C625	2203-001077	C-CERAMIC,CHIP,0.056nF,5%,50V,NP0,TP,201	
3	C626	2401-000962	C-AL,22uF,20%,50V,CP,TP,5x11,5	
3	C627	2203-000938	C-CERAMIC,CHIP,0.47nF,5%,50V,NP0,TP,2012	
3	C628	2203-000142	C-CERAMIC,CHIP,1.5nF,10%,50V,X7R,TP,2012	
3	C629	2203-001077	C-CERAMIC,CHIP,0.056nF,5%,50V,NP0,TP,201	
3	C630	2401-000480	C-AL,10uF,20%,50V,CP,TP,5x11,5	

Level	Loc. No.	Code No.	Description ; Specification	Remark
3	C631	2203-000181	C-CERAMIC,CHIP,100nF,-80-20%,25V,Y5V,TP	
3	C632	2401-002229	C-AL,470nF,20%,50V,WT,TP,5x11,5	
3	C633	2401-002229	C-AL,470nF,20%,50V,WT,TP,5x11,5	
3	C634	2203-000784	C-CERAMIC,CHIP,0.33nF,5%,50V,NP0,TP,2012	
3	C635	2203-000784	C-CERAMIC,CHIP,0.33nF,5%,50V,NP0,TP,2012	
3	C636	2203-000181	C-CERAMIC,CHIP,100nF,-80-20%,25V,Y5V,TP	
3	C637	2401-000027	C-AL,4.7uF,20%,50V,CP,TP,5x11,5	
3	C638	2401-002235	C-AL,10uF,20%,16V,GP,TP,5x11mm,5mm	
3	C639	2401-002235	C-AL,10uF,20%,16V,GP,TP,5x11mm,5mm	
3	C640	2203-000938	C-CERAMIC,CHIP,0.47nF,5%,50V,NP0,TP,2012	
3	C641	2203-000142	C-CERAMIC,CHIP,1.5nF,10%,50V,X7R,TP,2012	
3	C642	2401-000480	C-AL,10uF,20%,50V,CP,TP,5x11,5	
3	C643	2401-000027	C-AL,4.7uF,20%,50V,CP,TP,5x11,5	
3	C644	2401-000027	C-AL,4.7uF,20%,50V,CP,TP,5x11,5	
3	C645	2401-000027	C-AL,4.7uF,20%,50V,CP,TP,5x11,5	
3	C646	2401-000027	C-AL,4.7uF,20%,50V,CP,TP,5x11,5	
3	C649	2401-002300	C-AL,47uF,20%,50V,GP,TP,8,3x11,5	
3	C650	2203-000979	C-CERAMIC,CHIP,47nF,10%,50V,X7R,TP,2012	
3	C651	2401-000365	C-AL,100uF,20%,50V,WT,TP,10x12,5mm	
3	C653	2203-000784	C-CERAMIC,CHIP,0.33nF,5%,50V,NP0,TP,2012	
3	C654	2401-002229	C-AL,470nF,20%,50V,WT,TP,5x11,5	
3	C655	2203-000784	C-CERAMIC,CHIP,0.33nF,5%,50V,NP0,TP,2012	
3	C656	2401-002229	C-AL,470nF,20%,50V,WT,TP,5x11,5	
3	C657	2401-002229	C-AL,470nF,20%,50V,WT,TP,5x11,5	
3	C658	2203-000784	C-CERAMIC,CHIP,0.33nF,5%,50V,NP0,TP,2012	
3	C661	2203-000784	C-CERAMIC,CHIP,0.33nF,5%,50V,NP0,TP,2012	
3	C662	2401-002229	C-AL,470nF,20%,50V,WT,TP,5x11,5	
3	C663	2401-002229	C-AL,470nF,20%,50V,WT,TP,5x11,5	
3	C664	2203-000784	C-CERAMIC,CHIP,0.33nF,5%,50V,NP0,TP,2012	
3	C667	2203-000784	C-CERAMIC,CHIP,0.33nF,5%,50V,NP0,TP,2012	
3	C668	2401-002229	C-AL,470nF,20%,50V,WT,TP,5x11,5	
3	C669	2401-002229	C-AL,470nF,20%,50V,WT,TP,5x11,5	
3	C670	2203-000784	C-CERAMIC,CHIP,0.33nF,5%,50V,NP0,TP,2012	
3	C684	2401-000480	C-AL,10uF,20%,50V,CP,TP,5x11,5	
3	C688	2401-000962	C-AL,22uF,20%,50V,CP,TP,5x11,5	
3	C691	2401-000962	C-AL,22uF,20%,50V,CP,TP,5x11,5	
3	C692	2203-000260	C-CERAMIC,CHIP,10nF,10%,50V,X7R,TP,2012	
3	C695	2203-000761	C-CERAMIC,CHIP,330nF,10%,16V,X7R,TP,2012	
3	C696	2203-000170	C-CERAMIC,CHIP,1.8nF,10%,50V,X7R,TP,2012	
3	C697	2203-000170	C-CERAMIC,CHIP,1.8nF,10%,50V,X7R,TP,2012	
3	CB1	2401-000365	C-AL,100uF,20%,50V,WT,TP,10x12,5mm,	
3	CD601	2203-000260	C-CERAMIC,CHIP,10nF,10%,50V,X7R,TP,2012	
3	CD602	2203-000142	C-CERAMIC,CHIP,1.5nF,10%,50V,X7R,TP,2012	
3	CD603	2401-000962	C-AL,22uF,20%,50V,CP,TP,5x11,5	
3	CD604	2203-000595	C-CERAMIC,CHIP,0.22nF,5%,50V,NP0,TP,2012	
3	CD605	2203-000938	C-CERAMIC,CHIP,0.47nF,5%,50V,NP0,TP,2012	
3	CD606	2401-000962	C-AL,22uF,20%,50V,CP,TP,5x11,5	
3	CD607	2203-000938	C-CERAMIC,CHIP,0.47nF,5%,50V,NP0,TP,2012	
3	CD608	2203-000142	C-CERAMIC,CHIP,1.5nF,10%,50V,X7R,TP,2012	
3	CD609	2203-000181	C-CERAMIC,CHIP,100nF,-80-20%,25V,Y5V,TP	
3	CD610	2401-000480	C-AL,10uF,20%,50V,CP,TP,5x11,5	
3	CD611	2203-000181	C-CERAMIC,CHIP,100nF,-80-20%,25V,Y5V,TP	
3	CD612	2401-000027	C-AL,4.7uF,20%,50V,CP,TP,5x11,5	
3	CD613	2401-000660	C-AL,2.2uF,20%,50V,CP,TP,5x11,5	
3	CD615	2401-000660	C-AL,2.2uF,20%,50V,CP,TP,5x11,5	
3	CD616	2203-000444	C-CERAMIC,CHIP,1nF,10%,50V,X7R,TP,2012,	
3	CD618	2203-000444	C-CERAMIC,CHIP,1nF,10%,50V,X7R,TP,2012,	
3	CD619	2401-002235	C-AL,10uF,20%,16V,GP,TP,5x11mm,5mm	
3	CD620	2401-002235	C-AL,10uF,20%,16V,GP,TP,5x11mm,5mm	
3	CD621	2203-000938	C-CERAMIC,CHIP,0.47nF,5%,50V,NP0,TP,2012	
3	CD622	2203-000142	C-CERAMIC,CHIP,1.5nF,10%,50V,X7R,TP,2012	
3	CD623	2401-000480	C-AL,10uF,20%,50V,CP,TP,5x11,5	
3	CD624	2203-000495	C-CERAMIC,CHIP,2.2nF,10%,50V,X7R,TP,2012	
3	CD625	2401-000962	C-AL,22uF,20%,50V,CP,TP,5x11,5	
3	CD626	2203-000495	C-CERAMIC,CHIP,2.2nF,10%,50V,X7R,TP,2012	
3	CD627	2401-000962	C-AL,22uF,20%,50V,CP,TP,5x11,5	
3	CD628	2203-000260	C-CERAMIC,CHIP,10nF,10%,50V,X7R,TP,2012	
3	CD629	2401-000365	C-AL,100uF,20%,50V,WT,TP,10x12,5mm,	
3	CD630	2203-000761	C-CERAMIC,CHIP,330nF,10%,16V,X7R,TP,2012	
3	CDB1	2401-000365	C-AL,100uF,20%,50V,WT,TP,10x12,5mm,	
3	CN601A	3711-000626	CONNECTOR-HEADER;NOWALL,20P,1R,2.5mm,ANG	
3	CN602A	3711-000626	CONNECTOR-HEADER;NOWALL,20P,1R,2.5mm,ANG	
3	IC601	1204-001689	IC-SOUND PROCESSOR;MSP3410D-CS,PLCC,68P,	
3	IC604	1201-000541	IC-OP AMP;062,SOP8P,153MIL,DUAL,6V/mVP	
3	ICD601	1204-001198	IC-DECODER;DPL3519A-A2,PLCC,68P, ,PLASTI	
3	ICD602	1201-000541	IC-OP AMP;062,SOP8P,153MIL,DUAL,6V/mVP	

Level	Loc. No.	Code No.	Description ; Specification	Remark
3	L601	2701-000170	INDUCTOR-AXIAL,3.9uH,10%,3x7mm	
3	L602	2701-000170	INDUCTOR-AXIAL,3.9uH,10%,3x7mm	
3	L603	2701-000112	INDUCTOR-AXIAL,100uH,10%,3x7mm	
3	LD601	2701-000170	INDUCTOR-AXIAL,3.9uH,10%,3x7mm	
3	LD602	2701-000112	INDUCTOR-AXIAL,100uH,10%,3x7mm	
3	LD603	2701-000170	INDUCTOR-AXIAL,3.9uH,10%,3x7mm	
3	PCB	AA41-00087A	PCB-AUDIO;PLT51A,ZLFR,4.1800245X1.6T,3A	S.N.A
3	Q606	0501-000727	TR-SMALL SIGNAL,BC848C,NPN,330mW,SOT-23	
3	Q607	0501-000727	TR-SMALL SIGNAL,BC848C,NPN,330mW,SOT-23	
3	R601	2007-000029	R-CHIP;00HM,5%,1/10W,DA,TP,2012	
3	R602	2007-000029	R-CHIP;00HM,5%,1/10W,DA,TP,2012	
3	R610	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R611	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R614	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
3	R617	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP,2012	
3	R618	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP,2012	
3	R619	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R620	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R621	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R622	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R623	2007-000477	R-CHIP;1MOHM,5%,1/10W,DA,TP,2012	
3	R624	2007-000477	R-CHIP;1MOHM,5%,1/10W,DA,TP,2012	
3	R625	2007-000477	R-CHIP;1MOHM,5%,1/10W,DA,TP,2012	
3	R626	2007-000477	R-CHIP;1MOHM,5%,1/10W,DA,TP,2012	
3	R632	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP,2012	
3	R633	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP,2012	
3	R634	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP,2012	
3	R635	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP,2012	
3	R636	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP,2012	
3	R637	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP,2012	
3	R638	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP,2012	
3	R660	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
3	R661	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
3	R664	2007-001177	R-CHIP;8.2KOHM,5%,1/10W,DA,TP,2012	
3	R665	2007-000774	R-CHIP;33KOHM,5%,1/10W,DA,TP,2012	
3	R666	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
3	R669	2007-001177	R-CHIP;8.2KOHM,5%,1/10W,DA,TP,2012	
3	R670	2007-000774	R-CHIP;33KOHM,5%,1/10W,DA,TP,2012	
3	R672	2007-000586	R-CHIP;22KOHM,5%,1/10W,DA,TP,2012	
3	R673	2007-000586	R-CHIP;22KOHM,5%,1/10W,DA,TP,2012	
3	R674	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
3	R675	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
3	RB1	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP,2012	
3	RB2	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP,2012	
3	RB3	2007-000328	R-CHIP;11KOHM,5%,1/10W,DA,TP,2012	
3	RB4	2007-000328	R-CHIP;11KOHM,5%,1/10W,DA,TP,2012	
3	RD601	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
3	RD602	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
3	RD604	2007-001177	R-CHIP;8.2KOHM,5%,1/10W,DA,TP,2012	
3	RD605	2007-000774	R-CHIP;33KOHM,5%,1/10W,DA,TP,2012	
3	RD610	2007-001177	R-CHIP;8.2KOHM,5%,1/10W,DA,TP,2012	
3	RD611	2007-000774	R-CHIP;33KOHM,5%,1/10W,DA,TP,2012	
3	RD627	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
3	RDB1	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP,2012	
3	RDB2	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP,2012	
3	RDB3	2007-000328	R-CHIP;11KOHM,5%,1/10W,DA,TP,2012	
3	RDB4	2007-000328	R-CHIP;11KOHM,5%,1/10W,DA,TP,2012	
3	X601	2801-000186	CRYSTAL-UNIT;18.432MHz,25ppm,28 AAM,8pF	
		AA63-40273A	SHIELD-CASE, ,SPTE,T0.5, ,CX724AHD	
3		0202-000187	SOLDER-WIRE,FLUX, ,RS60S,D1.2,63Sn/37Pb	S.N.A
2		AA95-00007A	ASSY F/CONVERTER; ,SVP 434,AM,KPT51A,NTSC	
3	CON01	3711-002709	CONNECTOR-HEADER;NOWALL,12P,1R,2.5MM,ANG	
3	CON02	3711-002703	CONNECTOR-HEADER;NOWALL,5P,1R,2.5mm,ANGL	
3	IC03	AA13-30021E	IC-MCU,Z50234,R3911,SZM,374P,C,ST,24K,	
3	IC04	1103-001208	IC-EEPROM,AT24C02,PC27,C,256x8Bit,DIP8P	
3	S/CASE	AA63-40037A	SHIELD-CASE, ,SPTE,T0.5,SCT12A,	S.N.A
3	XTR01	2804-001213	OSCILLATOR-CLOCK,80MHz,100ppm,10TTL & CM	
3		AA99-20043V	ASSY PCB SUB,AUTO; ,AA95-00007A ,,V	S.N.A
4	C610	2203-000260	C-CERAMIC,CHIP,10nF,10%,50V,X7R,TP,2012	
4	CF11	2401-001840	C-AL,100uF,20%,16V,GP,TP,6,3x11,5	
4	CF12	2203-000181	C-CERAMIC,CHIP,100nF,-80-20%,25V,Y5V,TP	
4	CF13	2401-001513	C-AL,47uF,20%,16V,WT,TP,5x11,5	
4	CF14	2203-000181	C-CERAMIC,CHIP,100nF,-80-20%,25V,Y5V,TP	
4	CF15	2203-000429	C-CERAMIC,CHIP,0.018nF,5%,50V,NP0,TP,201	
4	CF16	2203-000634	C-CERAMIC,CHIP,0.022nF,5%,50V,NP0,TP,201	
4	CF17	2203-000429	C-CERAMIC,CHIP,0.018nF,5%,50V,NP0,TP,201	

Level	Loc. No.	Code No.	Description ; Specification	Remark
4	CF18	2203-000683	C-CERAMIC,CHIP:0.027nF,5%,50V,NP0,TP201	
4	CF19	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
..4	CF21	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
4	CF22	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
4	CF23	2401-001513	C-AL,47uF,20%,16V,WT,TP,5x11.5	
.4	CF24	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
..4	CF25	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
4	CF26	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
4	CF27	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
4	CF28	2401-001513	C-AL,47uF,20%,16V,WT,TP,5x11.5	
..4	CF29	2401-001513	C-AL,47uF,20%,16V,WT,TP,5x11.5	
4	CF30	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
4	CF31	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
4	CF32	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
.4	CF33	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
..4	CF34	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
.4	CF35	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
4	CF37	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF38	2401-001513	C-AL,47uF,20%,16V,WT,TP,5x11.5	
...4	CF39	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF40	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
..4	CF41	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF42	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
..4	CF44	2404-000151	C-TA,CHIP;1uF,20%,16V,-,TP,3216,	
...4	CF45	2203-001158	C-CERAMIC,CHIP;0.068nF,5%,50V,NP0,TP201	
...4	CF46	2404-000151	C-TA,CHIP;1uF,20%,16V,-,TP,3216,-	
...4	CF47	2203-001158	C-CERAMIC,CHIP;0.068nF,5%,50V,NP0,TP201	
...4	CF48	2404-000151	C-TA,CHIP;1uF,20%,16V,-,TP,3216,-	
...4	CF49	2203-001158	C-CERAMIC,CHIP;0.068nF,5%,50V,NP0,TP201	
...4	CF50	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF51	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF52	2203-000316	C-CERAMIC,CHIP;0.12nF,5%,50V,NP0,TP2012	
..4	CF53	2203-000316	C-CERAMIC,CHIP;0.12nF,5%,50V,NP0,TP2012	
...4	CF54	2402-000173	C-AL,SMD;4.7uF,20%,35V,GP,TP,4.3x4.3x5.	
..4	CF55	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF56	2203-000250	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP2012	
.4	CF57	2402-000173	C-AL,SMD;4.7uF,20%,35V,GP,TP,4.3x4.3x5.	
...4	CF58	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF60	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11.5	
...4	CF61	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF62	2401-001513	C-AL,47uF,20%,16V,WT,TP,5x11.5	
...4	CF63	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF64	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF65	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF66	2401-001513	C-AL;47uF,20%,16V,WT,TP,5x11.5	
...4	CF67	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF68	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF69	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF70	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF71	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF72	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF75	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11.5	
...4	CF76	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF77	2203-000429	C-CERAMIC,CHIP;0.018nF,5%,50V,NP0,TP201	
...4	CF78	2203-000429	C-CERAMIC,CHIP;0.018nF,5%,50V,NP0,TP201	
...4	CF79	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11.5	
...4	CF80	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
..4	CF81	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
...4	CF84	2203-000858	C-CERAMIC,CHIP;0.039nF,5%,50V,NP0,TP201	
..4	CF85	2203-000839	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP2012	
...4	CF86	2203-000858	C-CERAMIC,CHIP;0.039nF,5%,50V,NP0,TP201	
...4	CF87	2203-000839	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP2012	
...4	CF88	2203-000858	C-CERAMIC,CHIP;0.039nF,5%,50V,NP0,TP201	
...4	CF89	2203-000839	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP2012	
...4	DF01	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
...4	DF02	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
...4	DF03	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
...4	FF13	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
...4	FF14	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
...4	FF15	2901-000233	FILTER-EMI SMD;50V,0.3A,-,330pF,4.5x3.2x	
...4	FF16	2901-000233	FILTER-EMI SMD;50V,0.3A,-,330pF,4.5x3.2x	
...4	FF17	2901-000233	FILTER-EMI SMD;50V,0.3A,-,330pF,4.5x3.2x	
...4	IC01	1204-001406	IC-VIDEO PROCESS;FS310KBC,QFP,128P,1100M	
..4	IC02	1105-001270	IC-DRAM;72V161621,2x524Kx16BITBit,TSOP	
...4	IC05	1203-001419	IC-VOLTAGE REGULATOR;4931,TO-252,3P,6.6x	
.4	LF10	2901-000297	FILTER-EMI ON BOARD;-,3A,-,3.5x6,TP,-	
..4	LF11	2701-000116	INDUCTOR-AXIAL;10uH,10%,4.2x9.8mm	

Level	Loc. No.	Code No.	Description ; Specification	Remark
4	LF12	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
4	LF13	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
4	LF14	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
.4	LF15	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
.4	LF16	2701-000149	INDUCTOR-AXIAL;2.7uH,10%,2.5x3.4mm	
.4	LF17	2701-000149	INDUCTOR-AXIAL;2.7uH,10%,2.5x3.4mm	
.4	LF18	2701-000149	INDUCTOR-AXIAL;2.7uH,10%,2.5x3.4mm	
.4	PCB	AA41-109978	PCB-FORMAT CONNERTER;KPM51A,4L,FR-4,245x	S.N.A
..4	RF11	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
..4	RF13	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
.4	RF15	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
..4	RF16	2007-000477	R-CHIP;1MOHM,5%,1/10W,DA,TP2012	
..4	RF17	2007-000477	R-CHIP;1MOHM,5%,1/10W,DA,TP2012	
..4	RF18	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
..4	RF19	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
.4	RF21	2007-000642	R-CHIP;270OHM,5%,1/10W,DA,TP2012	
.4	RF22	2007-001118	R-CHIP;680OHM,5%,1/10W,DA,TP2012	
..4	RF23	2007-000401	R-CHIP;150OHM,5%,1/10W,DA,TP2012	
...4	RF24	2007-000401	R-CHIP;150OHM,5%,1/10W,DA,TP2012	
..4	RF25	2007-000518	R-CHIP;2.7KOHM,5%,1/10W,DA,TP2012	
..4	RF26	2007-000518	R-CHIP;2.7KOHM,5%,1/10W,DA,TP2012	
...4	RF27	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RF29	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF30	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
.4	RF31	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
...4	RF32	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
.4	RF33	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF34	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF35	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF36	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF37	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
.4	RF38	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF39	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF40	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF41	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF42	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF43	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF44	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
...4	RF45	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
.4	RF46	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF47	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF48	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF49	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF51	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
...4	RF52	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
...4	RF53	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
...4	RF54	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
...4	RF55	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
...4	RF56	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
...4	RF57	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
...4	RF58	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
...4	RF59	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
...4	RF60	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
...4	RF61	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
...4	RF62	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
...4	RF64	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RF66	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF67	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
...4	RF68	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RF70	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
..4	RF71	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
..4	RF72	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
..4	RF73	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
...4	RF74	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
...4	RF75	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
...4	RF76	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
...4	RF78	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
...4	RF79	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
...4	RF80	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
...4	RF81	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
...4	RF82	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RF83	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
...4	RF84	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
...4	RF85	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
..4	RF86	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
..4	RF87	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
..4	RF88	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	

Level	Loc. No.	Code No.	Description ; Specification	Remark
.4	XTR02	2801-000152	CRYSTAL-UNIT,14.31818MHz,40ppm,28-AAM,16	
4	XTR04	2801-000724	CRYSTAL-UNIT,6MHz,50ppm,28-AAM,20pF,40or	
2		AA59-00171A	MODULE FOCUS,PACK;SVP-5200,5300-P3,,	
2		AA95-00529A	ASSY PCB,PIP;-,SP43J5HPJ51A,,	
.3	CNP01	3711-002709	CONNECTOR-HEADER;NOWALL,12P,1R,2.5MM,ANG	
.3	CNP03	3711-002709	CONNECTOR-HEADER;NOWALL,12P,1R,2.5MM,ANG	
3	ICP101	1204-000530	IC-PAL/NTSC DECODER;TDA9160A,DIP,32P,400	
3	ICP102	1204-000560	IC-DEMODULATOR;TDA9815,DIP,32P,400MIL,PL	
3	RP125	2103-000665	VR-SEMI;20Kohm,25%,1/5W,SIDE	
3	TP101	AA25-10004E	TRANS-IF;-,7MG VIF,-,7mm,8pF,116.7MHz,S	
3	ZP102	2904-000253	FILTER-SAW;AV,38.9MHz,DIP10K,ST,18dB,B/G	
3		AA99-20066Z	ASSY PCB SUB,AUTO;AA95-00529A,-,V	S.N.A
.4	CP101	2203-000221	C-CERAMIC,CHIP;100nF,20%,50V,Y5V,TP,3216	
4	CP102	2401-000922	C-AL,22uF,20%,16V,GP,TP,5x5.5	
4	CP103	2203-000429	C-CERAMIC,CHIP;0.018nF,5%,50V,NP0,TP201	
..4	CP104	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
4	CP105	2203-000717	C-CERAMIC,CHIP;3.3nF,10%,50V,X7R,TP,3216	
.4	CP106	2203-000221	C-CERAMIC,CHIP;100nF,20%,50V,Y5V,TP,3216	
.4	CP107	2203-000221	C-CERAMIC,CHIP;100nF,20%,50V,Y5V,TP,3216	
.4	CP108	2203-000221	C-CERAMIC,CHIP;100nF,20%,50V,Y5V,TP,3216	
..4	CP109	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11.5	
.4	CP110	2203-000221	C-CERAMIC,CHIP;100nF,20%,50V,Y5V,TP,3216	
.4	CP111	2203-000716	C-CERAMIC,CHIP;3.3nF,10%,50V,X7R,TP,2012	
..4	CP112	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11.5	
.4	CP114	2203-000221	C-CERAMIC,CHIP;100nF,20%,50V,Y5V,TP,3216	
...4	CP115	2203-000221	C-CERAMIC,CHIP;100nF,20%,50V,Y5V,TP,3216	
...4	CP116	2203-000753	C-CERAMIC,CHIP;330nF,+80-20%,50V,Y5V,TP,	
..4	CP117	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11.5	
..4	CP118	2203-000221	C-CERAMIC,CHIP;100nF,20%,50V,Y5V,TP,3216	
..4	CP119	2201-000692	C-CERAMIC,DISC;0.008nF,0.5pF,50V,UJ,TP,4	
.4	CP120	2203-000578	C-CERAMIC,CHIP;220nF,20%,50V,Y5V,TP,3216	
.4	CP121	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11.5	
4	CP123	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
.4	CP124	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11.5	
4	CP125	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
.4	CP126	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11.5	
4	CP127	2203-000221	C-CERAMIC,CHIP;100nF,20%,50V,Y5V,TP,3216	
.4	CP129	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
...4	CP130	2203-000239	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,2012	
4	CP131	2201-000692	C-CERAMIC,DISC;0.008nF,0.5pF,50V,UJ,TP,4	
..4	CP132	2203-000239	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,2012	
4	CP133	2203-000221	C-CERAMIC,CHIP;100nF,20%,50V,Y5V,TP,3216	
..4	CP134	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11.5	
...4	CP135	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11.5	
...4	CP136	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
...4	CP137	2203-000938	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,2012	
...4	CP142	2401-000199	C-AL;1000uF,20%,6.3V,GP,TP,10x12.5,	
...4	CP143	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11.5	
...4	CP144	2203-000221	C-CERAMIC,CHIP;100nF,20%,50V,Y5V,TP,3216	
...4	CP145	2203-000221	C-CERAMIC,CHIP;100nF,20%,50V,Y5V,TP,3216	
...4	CP201	2203-000325	C-CERAMIC,CHIP;12nF,10%,50V,X7R,TP,3216,	
...4	CP203	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11.5	
...4	CP204	2203-000221	C-CERAMIC,CHIP;100nF,20%,50V,Y5V,TP,3216	
...4	CP205	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11.5	
...4	CP206	2203-000221	C-CERAMIC,CHIP;100nF,20%,50V,Y5V,TP,3216	
...4	CP207	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11.5	
..4	CP208	2203-000221	C-CERAMIC,CHIP;100nF,20%,50V,Y5V,TP,3216	
.4	CP209	2401-001914	C-AL;1uF,20%,50V,BP,TP,5x11.5	
..4	CP210	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11.5	
..4	CP211	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11.5	
..4	CP213	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11.5	
...4	CP214	2203-000578	C-CERAMIC,CHIP;220nF,20%,50V,Y5V,TP,3216	
...4	CP215	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11.5	
...4	CP216	2203-000221	C-CERAMIC,CHIP;100nF,20%,50V,Y5V,TP,3216	
...4	CP217	2203-000578	C-CERAMIC,CHIP;220nF,20%,50V,Y5V,TP,3216	
...4	CP218	2203-002085	C-CERAMIC,CHIP;56nF,10%,50V,X7R,TP,2012,	
...4	CP219	2203-000495	C-CERAMIC,CHIP;2.2nF,10%,50V,X7R,TP,2012	
...4	CP220	2203-000578	C-CERAMIC,CHIP;220nF,20%,50V,Y5V,TP,3216	
...4	CP221	2203-000221	C-CERAMIC,CHIP;100nF,20%,50V,Y5V,TP,3216	
...4	CP301	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11.5	
...4	CP302	2203-000221	C-CERAMIC,CHIP;100nF,20%,50V,Y5V,TP,3216	
...4	CP303	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11.5	
...4	CP304	2203-000221	C-CERAMIC,CHIP;100nF,20%,50V,Y5V,TP,3216	
...4	CP305	2203-001077	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,201	
...4	CP306	2203-001077	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,201	
...4	DP101	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	

Level	Loc. No.	Code No.	Description ; Specification	Remark
4	DP103	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DP105	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
4	DP201	0403-000334	DIODE-ZENER;UZ2.7BSA,2.7V,2.54-2.75V,500	
.4	ICP103	AA13-20004A	IC-HYBRID;-,PAP102T,SIP,6P,PRE AMP,TP	
4	ICP105	1204-000635	IC-PICTURE PROCESS;SDA9189X,SOP,32P,350M	
.4	ICP201	1002-000206	IC-A/D CONVERTER;SDA9187-2X,6BIT,SOP,28P	
4	LP102	2701-000219	INDUCTOR-AXIAL;820nH,10%,2.5x3.4mm	
.4	LP103	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
..4	LP104	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
.4	LP105	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
.4	LP201	2701-000197	INDUCTOR-AXIAL;5.6uH,10%,2.5x3.4mm	
..4	LP301	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
...4	PCB	AA41-11003A	PCB-PIP;SCT53A,2L,FR-4,330x245x1.6T,A6	S.N.A
.4	QP104	0501-000342	TR-SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT	
..4	QP105	0501-000342	TR-SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT	
.4	QP106	0501-000342	TR-SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT-	
..4	QP201	0501-000342	TR-SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT	
.4	QP202	0501-000342	TR-SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT-	
.4	QP203	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
...4	QP204	0501-000342	TR-SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT-	
...4	QP205	0501-000342	TR-SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT-	
...4	QP206	0501-000342	TR-SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT-	
.4	QP302	0501-000342	TR-SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT	
..4	QP303	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
...4	QP304	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
..4	QP305	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
...4	RC129	2007-000586	R-CHIP;22KOHM,5%,1/10W,DA,TP2012	
..4	RP101	2007-001208	R-CHIP;82KOHM,5%,1/10W,DA,TP2012	
..4	RP104	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
.4	RP105	2007-000328	R-CHIP;11KOHM,5%,1/10W,DA,TP2012	
.4	RP106	2007-000774	R-CHIP;33KOHM,5%,1/10W,DA,TP2012	
...4	RP107	2007-000409	R-CHIP;15KOHM,5%,1/10W,DA,TP2012	
4	RP108	2007-000493	R-CHIP;2.2KOHM,5%,1/10W,DA,TP2012	
..4	RP109	2007-000830	R-CHIP;39KOHM,5%,1/10W,DA,TP2012	
4	RP110	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP2012	
.4	RP111	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
4	RP112	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP2012	
.4	RP113	2007-000774	R-CHIP;33KOHM,5%,1/10W,DA,TP2012	
4	RP114	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
.4	RP115	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
..4	RP116	2007-000493	R-CHIP;2.2KOHM,5%,1/10W,DA,TP2012	
..4	RP118	2001-000117	R-CARBON(S);68OHM,5%,1/2W,AA,TP,2.4X6.4M	
.4	RP119	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP2012	
...4	RP122	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP2012	
...4	RP123	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP2012	
...4	RP124	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP2012	
...4	RP125	2007-000401	R-CHIP;150OHM,5%,1/10W,DA,TP2012	
...4	RP127	2007-000030	R-CHIP;560OHM,5%,1/10W,DA,TP2012	
...4	RP128	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP2012	
...4	RP130	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
...4	RP131	2007-000586	R-CHIP;22KOHM,5%,1/10W,DA,TP2012	
...4	RP132	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
...4	RP135	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
...4	RP136	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
...4	RP137	2007-001039	R-CHIP;56KOHM,5%,1/10W,DA,TP2012	
...4	RP138	2007-000586	R-CHIP;22KOHM,5%,1/10W,DA,TP2012	
...4	RP140	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
.4	RP201	2007-001039	R-CHIP;56KOHM,5%,1/10W,DA,TP2012	
..4	RP202	2007-000401	R-CHIP;150OHM,5%,1/10W,DA,TP2012	
...4	RP203	2007-000703	R-CHIP;3.6KOHM,5%,1/10W,DA,TP2012	
...4	RP204	2007-000593	R-CHIP;22OHM,5%,1/10W,DA,TP2012	
.4	RP205	2007-000477	R-CHIP;1MOHM,5%,1/10W,DA,TP2012	
.4	RP206	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP2012	
..4	RP207	2007-001009	R-CHIP;51KOHM,5%,1/10W,DA,TP2012	
...4	RP208	2007-000774	R-CHIP;33KOHM,5%,1/10W,DA,TP2012	
...4	RP209	2007-000401	R-CHIP;150OHM,5%,1/10W,DA,TP2012	
...4	RP210	2007-000221	R-CHIP;1.2KOHM,5%,1/10W,DA,TP2012	
...4	RP211	2007-001001	R-CHIP;510OHM,5%,1/10W,DA,TP2012	
...4	RP212	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP2012	
...4	RP213	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
...4	RP215	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
...4	RP216	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
..4	RP217	2007-000409	R-CHIP;15KOHM,5%,1/10W,DA,TP2012	
...4	RP301	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
..4	RP303	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
...4	RP304	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	

Level	Loc. No.	Code No.	Description ; Specification	Remark
4	RP307	2007-000518	R CHIP;2.7KOHM,5%,1/10W,DA,TP2012	
4	RP308	2007-000401	R CHIP;150OHM,5%,1/10W,DA,TP2012	
4	RP309	2007-000931	R CHIP;470OHM,5%,1/10W,DA,TP2012	
4	RP310	2007-000931	R CHIP;470OHM,5%,1/10W,DA,TP2012	
4	RP311	2007-000931	R CHIP;470OHM,5%,1/10W,DA,TP2012	
4	RP312	2007-000300	R CHIP;10KOHM,5%,1/10W,DA,TP2012	
4	RP313	2007-000798	R CHIP;360OHM,5%,1/10W,DA,TP2012	
4	RP314	2007-000798	R CHIP;360OHM,5%,1/10W,DA,TP2012	
4	RP315	2007-000798	R CHIP;360OHM,5%,1/10W,DA,TP2012	
4	RP316	2001-001146	R CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
4	RP317	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
4	XP101	2801-000235	CRYSTAL UNIT;3.579545MHz,40ppm,28-AAM,S,	
4	XP102	2801-000274	CRYSTAL UNIT;4.433619MHZ,30PPM,28-AAM,20	
4	XP301	2802-000121	RESONATOR CERAMIC;20.48MHz,0.5%,TP,10.0x	
3		AA63-40013A	SHIELD CASE;-,SPTE,T0.5,SCT51A,-W274.	S.N.A
3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
3		AA95-00644A	ASSY PCB,TTX;-,SP43J5HF,J51A,-,ENG VER	
3	CNT01	3711-002709	CONNECTOR-HEADER;NOWALL,12P,1R,2.5MM,ANG	
3	CNT02	3711-002707	CONNECTOR HEADER;NOWALL,3P,1R,2.5mm,ANGL	
3	ICT01	AA13-00046A	IC MCU;SDA545x-OTP,138,OTP,ST,64K,-,D	
3	ICT02	1103-001209	IC EEPROM;AT24C04-PC27,C,512x8Bit,DIP,8	
3	ICT04	1001-000223	IC-VIDEO SWITCH;TEA5114A,-,DIP,16P,334MI	
3	XT01	2801-000724	CRYSTAL UNIT;6MHz,50ppm,28-AAM,20pF,40ohm	
3		AA99-20079Q	ASSY PCB SUB,AUTO; AA99-30187G ,V	S.N.A
4	CT01	2401-002009	C AL;100uF,20%,16V,GP,TP,6.3x7.5	
4	CT02	2203-000181	C CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
4	CT03	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
4	CT04	2203-000818	C CERAMIC,CHIP;0.033nF,5%,50V,NP0,TP,201	
4	CT05	2203-000818	C-CERAMIC,CHIP;0.033nF,5%,50V,NP0,TP,201	
4	CT06	2401-000486	C AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
4	CT07	2203-000802	C CERAMIC,CHIP;33nF,10%,50V,X7R,TP,2012	
4	CT08	2401-002009	C AL;100uF,20%,16V,GP,TP,6.3x7.5	
4	CT09	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
4	CT10	2203-000260	C CERAMIC,CHIP;10nF,10%,50V,X7R,TP2012	
4	CT12	2203-000802	C CERAMIC,CHIP;33nF,10%,50V,X7R,TP,2012	
4	CT13	2401-002009	C AL;100uF,20%,16V,GP,TP,6.3x7.5	
4	CT14	2203-000181	C CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
4	CT15	2203-000575	C CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
4	CT16	2203-000575	C CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
4	CT17	2203-000575	C CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
4	CT18	2203-000575	C CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
4	CT19	2203-000575	C CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
4	CT20	2203-000575	C CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
4	CT21	2401-000302	C AL;100uF,20%,25V,GP,TP,6.3x11.5	
4	CT22	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
4	CT23	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7.5	
4	CT24	2203-000181	C CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
4	DZT01	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
4	DZT02	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
4	ICT03	1203-000515	IC VOL. DETECTOR;7042,TO-92,3P,177MIL,PL	
4	ICT05	0801-000410	IC-CMOS LOGIC;74HC32,OR GATE,SOP,14P,150	
4	JT03	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
4	LT01	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
4	LT02	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
4	LT03	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
4	LT04	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
4	LT05	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
4	PCB	AA41-00276A	PCB-TTX;SP43J5MF,FR-4,2L,A,1.6T,180x24	S.N.A
4	RT01	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RT02	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RT03	2007-000290	R CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RT04	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP2012	
4	RT05	2007-000300	R CHIP;10KOHM,5%,1/10W,DA,TP2012	
4	RT06	2007-000300	R CHIP;10KOHM,5%,1/10W,DA,TP2012	
4	RT07	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
4	RT08	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
4	RT09	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
4	RT10	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP2012	
4	RT11	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP2012	
4	RT12	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP2012	
4	RT13	2007-000518	R-CHIP;2.7KOHM,5%,1/10W,DA,TP2012	
4	RT14	2007-000653	R-CHIP;27KOHM,5%,1/10W,DA,TP2012	
4	RT15	2007-000477	R-CHIP;1MOHM,5%,1/10W,DA,TP2012	
4	RT16	2007-000290	R CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RT18	2007-000300	R CHIP;10KOHM,5%,1/10W,DA,TP2012	
4	RT22	2007-000300	R CHIP;10KOHM,5%,1/10W,DA,TP2012	
4	RT26	2007-000290	R CHIP;100OHM,5%,1/10W,DA,TP2012	

Level	Loc. No.	Code No.	Description ; Specification	Remark
4	RT27	2007-000290	R CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RT28	2007-000290	R CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RT29	2007-000290	R CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RT30	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RT31	2007-000572	R-CHIP;220OHM,5%,1/10W,DA,TP2012	
4	RT32	2007-000728	R-CHIP;300OHM,5%,1/10W,DA,TP2012	
4	RT33	2007-000572	R-CHIP;220OHM,5%,1/10W,DA,TP2012	
4	RT34	2007-000728	R-CHIP;300OHM,5%,1/10W,DA,TP2012	
4	RT35	2007-000672	R-CHIP;220OHM,5%,1/10W,DA,TP2012	
4	RT36	2007-000728	R CHIP;300OHM,5%,1/10W,DA,TP2012	
3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
3		0202-001004	SOLDER-CREAM;SQ-2030M,SZH-1,S63A,D0.04,S	S.N.A
3		AA63-40014A	SHIELD-CASE,T;-,SPTE,T0.5,SCT51A,-	S.N.A
2		AA99-30213P	ASSY-PCB ROBOT; AA94-03459L ,ER	S.N.A
3	CN201	3711-003051	CONNECTOR-HEADER;BOX,8P,1R,2.5mm,STRAGHT	
3	CN202	3711-003052	CONNECTOR-HEADER;BOX,10P,1R,2.5mm,STRAGH	
3	CN501	3711-003051	CONNECTOR-HEADER;BOX,8P,1R,2.5mm,STRAGHT	
3	CNY01	3711-003973	CONNECTOR HEADER;BOX,11P,1R,2.5mm,STRAIG	
3	CS810	2201-000446	C CERAMIC,DISC;3.3nF,20%,400V,Y5U,TP,15x	
3	CS811	2201-000446	C CERAMIC,DISC;3.3nF,20%,400V,Y5U,TP,15x	
3	DS801	0402-000102	DIODE-BRIDGE;D2SB60,600V,1.5A,-	
3	FI101	2904-000253	FILTER-SAW AV;38.9MHz,DIP,10K,ST,18dB,B/G	
3	FI102	2904-001010	FILTER SAW AV;32.9~33.4MHz,SIP,5P,ST,14.4	
3	H002	AA40-10006T	TUNER-F/S;TECC2849PG29A(S),PAL-B/G,TR,18	
3	IC501	AA96-00111L	ASSY-H/S;-,-,AA62-30013L,KA78R12,-	
4		1203-000165	IC-POSI.ADJUST REG.;78R12,TO-220,3P,-,-	
4		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
4		AA62-30013L	HEATSINK-ES;-,-,-,44/22,-,WHT,-,-,-	
3	IC807	AA96-50147A	ASSY-H/S;-,TR,AA62-30012B,KA7805A,-	S.N.A
4		1203-000274	IC-POSI.FIXED REG.;7805,TO-220,3P,-,PLAS	
4		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
4		AA62-30012B	HEAT SINK-ES,-,A6063 EXTR,-,-,45(16),T02	S.N.A
3	IC901	AA09-00093A	IC MICOM;Z90356,12PSC-R50P3,SP43J5HF,52P	
3	IC902	1103-001106	IC-EEPROM;C81DC,1028x8Bit,DIP,8P,300MIL	
3	ICS801	AA13-00024A	IC-HYBRID;-,TNY253P,-,8PIN,-,-	
3	ICS802	0604-001032	PHOTO COUPLER;TR,170-260%,300mW,DIP,4,ST	
3		AA99-10208C	ASSY PCB MAIN,AUTO; AA99-30213P ,V	S.N.A
4	C103	2201-000119	C-CERAMIC,DISC;100nF,-80-20%,50V,Y5V,TP	
4	C104	2401-001840	C AL;100uF,20%,16V,GP,TP,6.3x11.5	
4	C105	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11.5	
4	C107	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
4	C109	2201-000119	C CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
4	C110	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11.5	
4	C119	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
4	C121	2305-000665	C FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
4	C125	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11.5	
4	C126	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
4	C130	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
4	C131	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
4	C132	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
4	C133	2401-001363	C-AL;470uF,20%,16V,GP,TP,10x12.5,5	
4	C134	2401-002273	C-AL;220uF,20%,25V,HR,TP,10x20mm,5m	
4	C135	2401-000287	C-AL;100uF,20%,16V,WT,TP,6.3x11.5	
4	C136	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11.5	
4	C137	2401-002212	C AL;10uF,20%,25V,WT,TP,5x11.5	
4	C138	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
4	C139	2201-000180	C CERAMIC,DISC;10nF,10%,50V,Y5V,TP,7x3.5	
4	C140	2201-000292	C CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
4	C141	2201-000292	C CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
4	C142	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
4	C143	2401-000667	C AL;2.2uF,20%,50V,WT,TP,5x11.5	
4	C144	2201-000180	C CERAMIC,DISC;10nF,10%,50V,Y5V,TP,7x3.5	
4	C145	2305-000665	C FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
4	C146	2305-000665	C FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
4	C147	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11.5	
4	C148	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
4	C149	2401-000947	C AL;22uF,20%,35V,GP,TP,5x11.5	
4	C180	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11.5	
4	C185	2401-001363	C-AL;470uF,20%,16V,GP,TP,10x12.5,5	
4	C191	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11.5	
4	C501	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
4	C502	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16.5	
4	C503	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
4	C504	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
4	C505	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
4	C506	2401-002594	C AL;220uF,20%,16V,GP,TP,8x11.5,5	
4	C507	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	

Level	Loc. No.	Code No.	Description ; Specification	Remark
4	C508	2401-002286	C AL;470uF,20%,16V,WT,TP,10x12.5,5	
4	C509	2305-000665	C FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
4	C510	2401-000133	C AL;1000uF,20%,16V,GP,TP,10x20.5	
4	C511	2305-000665	C FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
4	C512	2401-000689	C AL;2200uF,20%,16V,GP,TP,13x25,5	
4	C519	2305-000665	C FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
4	C520	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16.5	
4	C521	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
4	C522	2401-002286	C AL;470uF,20%,16V,WT,TP,10x12.5,5	
4	C523	2201-000292	C CERAMIC,DISC,1nF,10%,50V,Y5P,TP,5x3.5.	
4	C537	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
4	C538	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11.5	
4	C539	2401-001840	C AL;100uF,20%,16V,GP,TP,6.3x11.5	
4	C540	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
4	C543	2201-000144	C CERAMIC,DISC;0.1nF,5%,50V,NP0,TP,8.5x3	
4	C544	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11.5	
4	C601	2401-002299	C-AL;4.7uF,20%,50V,GP,TP,5x7.5	
4	C602	2401-002299	C AL;4.7uF,20%,50V,GP,TP,5x7.5	
4	C666	2305-000665	C FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
4	C667	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11.5	
4	C668	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11.5	
4	C669	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11.5	
4	C670	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11.5	
4	C671	2401-001537	C-AL;47uF,20%,25V,GP,TP,6.3x7mm,5mm	
4	C676	2401-001192	C-AL;33uF,20%,50V,GP,TP,6.3x11.5	
4	C686	2201-000411	C CERAMIC,DISC;0.27nF,10%,50V,Y5P,TP,4x3	
4	C687	2201-000411	C CERAMIC,DISC;0.27nF,10%,50V,Y5P,TP,4x3	
4	C688	2401-000192	C AL;1000uF,20%,50V,GP,TP,16x25,7.5	
4	C689	2305-000665	C FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
4	C690	2305-000665	C FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
4	C691	2401-000192	C AL;1000uF,20%,50V,GP,TP,16x25,7.5	
4	C701	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11.5	
4	C801	2401-002300	C AL;47uF,20%,50V,GP,TP,6.3x11.5	
4	C901	2202-000796	C CERAMIC,MLC AXIAL;1NF,10%,50V,Y5P,TP,3	
4	C905	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7.5	
4	C906	2305-000149	C FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
4	C908	2201-000292	C CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5.	
4	C909	2201-000292	C CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
4	C912	2201-000119	C CERAMIC,DISC,100nF,-80-20%,50V,Y5V,TP,	
4	C913	2201-000193	C-CERAMIC,DISC;0.01nF,0.25pF,50V,NP0,TP,	
4	C914	2201-000573	C-CERAMIC,DISC;0.047nF,5%,50V,NP0,TP,5x3	
4	C915	2201-000119	C-CERAMIC,DISC,100nF,+80-20%,50V,Y5V,TP,	
4	C916	2401-002042	C-AL;220uF,20%,10V,GP,TP,6.3x11.5	
4	C917	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11.5	
4	C918	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
4	C919	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11.5	
4	C920	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
4	C925	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
4	C926	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11.5	
4	C927	2202-000231	C-CERAMIC,MLC-AXIAL;330pF,10%,50V,Y5P,TP	
4	C928	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
4	CN003	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5MM,STRAIGH	
4	CN402	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5MM,STRAIGH	
4	CN403	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5MM,STRAIGH	
4	CN404	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5MM,STRAIGH	
4	CN601	3711-002643	CONNECTOR-HEADER;BOX,4P,1R,2.5MM,STRAIGH	
4	CS801	2201-000332	C-CERAMIC,DISC;2.2nF,20%,250V,Y5U,TP,9x4	
4	CS802	2201-000332	C CERAMIC,DISC;2.2nF,20%,250V,Y5U,TP,9x4	
4	CS804	2201-000119	C CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
4	CS805	2401-002286	C-AL;470uF,20%,16V,WT,TP,10x12.5,5	
4	CS807	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
4	CS808	2401-002286	C-AL;470uF,20%,16V,WT,TP,10x12.5,5	
4	CS809	2201-000556	C CERAMIC,DISC;0.47nF,10%,500V,Y5P,TP,5.	
4	CS812	2201-002076	C CERAMIC,DISC;0.068nF,5%,1kV,SL,TP,8x4m	
4	CZ144	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11.5	
4	CZ146	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
4	CZ147	2201-000193	C CERAMIC,DISC;0.01nF,0.25pF,50V,NP0,TP,	
4	CZ148	2201-000193	C-CERAMIC,DISC;0.01nF,0.25pF,50V,NP0,TP,	
4	CZ149	2201-000516	C-CERAMIC,DISC;4.7nF,+100-0%,500V,Y5U,TP	
4	CZ150	2201-000516	C CERAMIC,DISC;4.7nF,+100-0%,500V,Y5U,TP	
4	CZ151	2401-001513	C-AL;47uF,20%,16V,WT,TP,5x11.5	
4	CZ152	2401-001157	C AL;33uF,20%,160V,GP,TP,12.5x20.5	
4	CZ153	2401-001513	C AL;47uF,20%,16V,WT,TP,5x11.5	
4	CZ155	2201-000604	C CERAMIC,DISC;0.056nF,+100-0%,500V,SL,T	
4	CZ167	2401-001220	C-AL;4.7uF,20%,160V,GP,TP,8x11.5,5	
4	CZ167A	2401-001220	C-AL;4.7uF,20%,160V,GP,TP,8x11.5,5	

Level	Loc. No.	Code No.	Description ; Specification	Remark
4	D101	0401-001088	DIODE-SWITCHING;BAW76,50V,300mA,DO-35,TP	
4	D102	0401-001088	DIODE-SWITCHING;BAW76,50V,300mA,DO-35,TP	
4	D103	0401-001088	DIODE-SWITCHING;BAW76,50V,300mA,DO-35,TP	
4	D501	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35.	
4	D664	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
4	D665	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35.	
4	D666	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35.	
4	D667	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35.	
4	D668	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35.	
4	D669	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35.	
4	D701	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35.	
4	D702	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35.	
4	D703	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35.	
4	D901	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35.	
4	D902	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35	
4	D903	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35	
4	D904	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35.	
4	D905	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35	
4	D906	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35	
4	D907	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35.	
4	DS802	1405-000152	VARISTOR;560V,2500A,14x8.5mm,TP	
4	DS803	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
4	DS804	0403-001318	DIODE-ZENER;MTZJ4.3B,4.17-4.43V,500mW,DO	
4	DS805	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
4	DS806	1405-001030	VARISTOR;120V,2500A,14x8.5mm,TP	
4	DS807	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
4	DS808	1405-000152	VARISTOR;560V,2500A,14x8.5mm,TP	
4	DS809	0404-001056	DIODE-SCHOTTKY;RK16,60V,1.5A,DO-204AC,TP	
4	DS810	1405-000152	VARISTOR;560V,2500A,14x8.5mm,TP	
4	DZ116	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35.	
4	DZ117	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35.	
4	DZ118	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
4	DZ119	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35	
4	DZ120	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
4	DZ121	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
4	DZ501	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
4	DZ502	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
4	DZ503	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ504	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ505	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ506	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
4	DZ507	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
4	DZ508	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
4	DZ665	0403-001039	DIODE-ZENER;MA2560,56V,52-60V,1W,DO-41,T	
4	DZ666	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
4	DZ667	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
4	DZ701	0403-001140	DIODE-ZENER;RD10ESAB-T4,10V,9.19-10.30V,	
4	DZ801	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
4	DZ901	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
4	DZ902	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
4	DZ903	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
4	DZ904	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
4	DZ905	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
4	DZ906	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
4	DZ907	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
4	DZ911	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
4	DZ912	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
4	DZ914	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
4	DZ915	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
4	F901	2901-000297	FILTER EMI ON BOARD;-,3A,-,-,3.5x6,TP,	
4	FI103	2903-000181	FILTER CERAMIC;BR,5.5MHz,-,-,TP,TP5.5,5	
4	FI104	2903-000129	FILTER CERAMIC;BR,4.5MHz,-,-,TP	
4	IC506	1203-000293	IC POSI.FIXED REG.;7808,TO-220,3P,PLAS	
4	IC904	1203-000515	IC VOL. DETECTOR;7042,TO-92,3P,177MIL,PL	
4	L101	2701-000115	INDUCTOR AXIAL;10uH,10%,3x7mm	
4	L103	2701-000115	INDUCTOR AXIAL;10uH,10%,3x7mm	
4	L106	2701-000115	INDUCTOR AXIAL;10uH,10%,3x7mm	
4	L107	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
4	L108	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
4	L109	2701-000101	INDUCTOR-AXIAL;1.2uH,10%,2.5x3.4mm	
4	L110	2701-000115	INDUCTOR AXIAL;10uH,10%,3x7mm	
4	L111	2701-000120	INDUCTOR AXIAL;12uH,10%,2.5x3.4mm	
4	L112	2701-000299	INDUCTOR AXIAL;13UH,10%,2.5X3.4MM	
4	L113	AA26-10006G	TRANS IF;-,7mG,VIF,-,7mm,8pF,77.8MHz,ST	
4	L114	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
4	L115	2701-000114	INDUCTOR AXIAL;10uH,10%,2.5x3.4mm	

Level	Loc. No.	Code No.	Description ; Specification	Remark
4	L115	2701-000114	INDUCTOR AXIAL 10uH 10% 2.5x3.4mm	
4	L117	2701-000114	INDUCTOR AXIAL 10uH 10% 2.5x3.4mm	
4	L118	2701-000115	INDUCTOR AXIAL 10uH 10% 3x7mm	
4	L501	2701-000114	INDUCTOR AXIAL 10uH 10% 2.5x3.4mm	
4	L502	2701-000114	INDUCTOR AXIAL 10uH 10% 2.5x3.4mm	
4	L503	2701-000114	INDUCTOR AXIAL 10uH 10% 2.5x3.4mm	
4	L504	2701-000114	INDUCTOR AXIAL 10uH 10% 2.5x3.4mm	
4	L505	3901-000297	FILTER-EMI ON BOARD; .3A, . . .3.5x5.TP.	
4	L506	3301-000287	CORE-FERRITE BEAD,AA,3.5x1.0x6.0mm 1500.	
4	L507	3301-000287	CORE-FERRITE BEAD,AA,3.5x1.0x6.0mm 1500.	
4	L514	3301-000287	CORE-FERRITE BEAD,AA,3.5x1.0x6.0mm 1500.	
4	L515	3301-000287	CORE-FERRITE BEAD,AA,3.5x1.0x6.0mm 1500.	
4	L601	2701-000114	INDUCTOR AXIAL 10uH 10% 2.5x3.4mm	
4	L602	2701-000114	INDUCTOR AXIAL 10uH 10% 2.5x3.4mm	
4	L604	3301-000287	CORE-FERRITE BEAD,AA,3.5x1.0x6.0mm 1500.	
4	L901	2901-000297	FILTER-EMI ON BOARD; .3A, . . .3.5x5.TP.	
4	L902	2701-000115	INDUCTOR AXIAL 10uH 10% 3x7mm	
4	L903	2701-001040	INDUCTOR AXIAL 10uH 10% 4.5x14mm	
4	L907	3301-000287	CORE-FERRITE BEAD,AA,3.5x1.0x6.0mm 1500.	
4	L909	2701-000114	INDUCTOR AXIAL 10uH 10% 2.5x3.4mm	
4	L910	2701-000114	INDUCTOR AXIAL 10uH 10% 2.5x3.4mm	
4	L911	2701-000114	INDUCTOR AXIAL 10uH 10% 2.5x3.4mm	
4	L912	2701-000114	INDUCTOR AXIAL 10uH 10% 2.5x3.4mm	
4	LD901	2701-000115	INDUCTOR AXIAL 10uH 10% 3x7mm	
4	LS801	2901-000297	FILTER-EMI ON BOARD; .3A, . . .3.5x5.TP.	
4	LS802	2901-000297	FILTER-EMI ON BOARD; .3A, . . .3.5x5.TP.	
4	LS803	3301-000287	CORE-FERRITE BEAD,AA,3.5x1.0x6.0mm 1500.	
4	LZ112	2701-000002	INDUCTOR AXIAL 100uH 10% 4.2x9.8mm	
4	PCB	AA41-00075B	PCB-MAIN;SP41J78PEFR-1,J1L,B,1.6T,330X24	S.N.A
4	Q101	0504-000137	TR DIGITAL,KSR1202-NPN,300mW,10K/10K,TO-	
4	Q102	0504-000123	TR DIGITAL,KSR1010-NPN,300mW,10K,TO-92,T	
4	Q103	0501-000245	TR SMALL SIGNAL,9C548C-NPN,500mW,TO-92,T	
4	Q104	0504-000123	TR DIGITAL,KSR1010-NPN,300mW,10K,TO-92,T	
4	Q105	0501-000389	TR SMALL SIGNAL,KSC815-NPN,400mW,TO-92,T	
4	Q106	0504-000150	TR DIGITAL,KSR2010-PNP,300mW,10K,TO-92,T	
4	Q107	0504-000123	TR DIGITAL,KSR1010-NPN,300mW,10K,TO-92,T	
4	Q665	0501-000389	TR SMALL SIGNAL,KSC815-NPN,400mW,TO-92,T	
4	Q666	0501-000389	TR SMALL SIGNAL,KSC815-NPN,400mW,TO-92,T	
4	Q667	0501-000389	TR SMALL SIGNAL,KSC815-NPN,400mW,TO-92,T	
4	Q701	0501-000389	TR SMALL SIGNAL,KSC815-NPN,400mW,TO-92,T	
4	Q702	0501-000389	TR SMALL SIGNAL,KSC815-NPN,400mW,TO-92,T	
4	Q901	0501-000389	TR SMALL SIGNAL,KSC815-NPN,400mW,TO-92,T	
4	Q902	0501-000389	TR SMALL SIGNAL,KSC815-NPN,400mW,TO-92,T	
4	Q903	0501-000389	TR SMALL SIGNAL,KSC815-NPN,400mW,TO-92,T	
4	Q909	0501-000283	TR SMALL SIGNAL,KSA539-PNP,400mW,TO-92,T	
4	Q910	0501-000389	TR SMALL SIGNAL,KSC815-NPN,400mW,TO-92,T	
4	QS801	0501-000389	TR SMALL SIGNAL,KSC2331-Y-NPN,1000mW,TO-	
4	QZ103	0501-000389	TR SMALL SIGNAL,KSC815-NPN,400mW,TO-92,T	
4	QZ104	0501-000389	TR SMALL SIGNAL,KSC815-NPN,400mW,TO-92,T	
4	QZ105	0501-000389	TR SMALL SIGNAL,KSC815-NPN,400mW,TO-92,T	
4	QZ106	0501-000283	TR SMALL SIGNAL,KSA539-PNP,400mW,TO-92,T	
4	R123	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R131	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R132	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP1.8X3.2M	
4	R142	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R145	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP1.8X3.2M	
4	R146	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R148	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R149	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R150	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R151	2001-000313	R-CARBON;11KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R152	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP1.8X3.2M	
4	R153	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP1.8X3.2M	
4	R154	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP1.8X3.2M	
4	R155	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R156	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP1.8X3.2M	
4	R157	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP1.8X3.2M	
4	R158	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R159	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R160	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R161	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP1.8x3.2mm	
4	R162	2001-000969	R-CARBON;750HM,5%,1/8W,AA,TP1.8X3.2MM	
4	R163	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R164	2001-000490	R-CARBON;200OHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R165	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R166	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R167	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R168	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R169	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP1.8X3.2M	
4	R501	2001-000866	R-CARBON(S);3.0KOHM,5%,1/2W,AA,TP2.4X6.4	
4	R502	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R503	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R504	2001-000405	R-CARBON;180OHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R509	2008-000266	R-FUSIBLE(S);1ohm,5%,2W,AF,TP3.9x10mm	
4	R510	2008-000266	R-FUSIBLE(S);1ohm,5%,2W,AF,TP3.9x10mm	
4	R511	2008-001116	R-FUSIBLE(S);0.68ohm,10%,2W,AG,TP3.9x12	
4	R512	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP1.8x3.2mm	
4	R524	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP1.8X3.2M	
4	R525	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP1.8X3.2M	
4	R526	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP1.8X3.2M	
4	R531	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP1.8X3.2M	
4	R532	2001-000037	R-CARBON(S);330OHM,5%,1/2W,AA,TP2.4X6.4	
4	R533	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP1.8X3.2M	
4	R601	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP2.4X6.4	
4	R602	2001-000605	R-CARBON;3.6KOHM,5%,1/8W,AA,TP1.8X3.2M	
4	R603	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP1.8X3.2M	
4	R661	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP2.4X6.	
4	R662	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP2.4X6.	
4	R665	2001-001188	R-CARBON(S);8.2KOHM,5%,1/2W,AA,TP2.4X6.	
4	R666	2001-001188	R-CARBON(S);8.2KOHM,5%,1/2W,AA,TP2.4X6.	
4	R668	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP2.4X6.4	
4	R669	2001-001144	R-CARBON(S);4.7KOHM,5%,1/2W,AA,TP2.4X6.	
4	R670	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP2.4X6.	
4	R671	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP2.4X6.4	
4	R672	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP2.4X6.4	
4	R673	2001-000411	R-CARBON;18KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R674	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R675	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP2.4X6.4	
4	R676	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP1.8X3.2M	
4	R677	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R678	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R679	2001-001071	R-CARBON(S);12KOHM,5%,1/2W,AA,TP2.4X6.4	
4	R680	2001-001000	R-CARBON;82KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R681	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP2.4X6.	
4	R682	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP2.5x6	
4	R683	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP2.5x6.	
4	R684	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP2.4X6.	
4	R685	2004-001390	R-METAL(S);1Kohm,2%,1/2W,AA,TP2.4x6.4mm	
4	R686	2004-001390	R-METAL(S);1Kohm,2%,1/2W,AA,TP2.4x6.4mm	
4	R687	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP2.4X6.4	
4	R689	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP2.4X6.4	
4	R690	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP1.8X3.2M	
4	R701	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R702	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R703	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R704	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R801	2003-001098	R-METAL OXIDE(S);22Kohm,5%,2W,AA,TP8x16	
4	R901	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP1.8X3.2M	
4	R903	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R904	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R905	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP1.8X3.2M	
4	R906	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R907	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R908	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R909	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R910	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R912	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP1.8x3.2mm	
4	R914	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R915	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R916	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP1.8X3.2M	
4	R917	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP1.8X3.2M	
4	R918	2001-000832	R-CARBON;510OHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R919	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP1.8X3.2M	
4	R921	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP1.8X3.2M	
4	R922	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP1.8X3.2M	
4	R923	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R924	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R925	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP1.8X3.2M	
4	R926	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP1.8X3.2M	
4	R930	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP1.8X3.2M	
4	R931	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP1.8X3.2M	
4	R932	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP1.8X3.2M	
4	R945	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R946	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R947	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R948	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R949	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP1.8X3.2M	
4	R950	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R951	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP1.8X3.2M	
4	R952	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R953	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP1.8X3.2M	
4	R954	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R955	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP1.8X3.2M	
4	R958	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R959	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R960	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R961	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP1.8X3.2M	
4	R962	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R967	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R968	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R970	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP1.8X3.2M	
4	R971	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R974	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP1.8X3.2M	
4	R977	2001-001052	R-CARBON(S);10MOHM,5%,1/2W,AA,TP2.4X6.4	
4	R979	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R980	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R981	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R982	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R983	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R984	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R985	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R986	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R987	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R988	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R989	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R990	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R991	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R992	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP1.8X3.2M	
4	R993	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP1.8X3.2MM	
4	R994	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP1.8X3.2MM	
4	RD901	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP1.8X3.2MM	
4	RD903	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP1.8X3.2M	
4	RF802	2008-000294	R-FUSIBLE(S);33ohm,5%,2W,AF,TP3.9x10mm	
4	RS801	2003-002194	R-METAL OXIDE(S);1.8Kohm,5%,1W,AF,TP2.5	
4	RS802	2001-001192	R-CARBON(S);820OHM,5%,1/2W,AA,TP2.4X6.4	
4	RS803	2001-001159	R-CARBON(S);510OHM,5%,1/2W,AA,TP2.4X6.4	
4	RS804	2001-001182	R-CARBON(S);7.5KOHM,5%,1/2W,AA,TP2.4X6.	
4	RS805	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP2.4x6.4	
4	RS806	2001-001159	R-CARBON(S);510OHM,5%,1/2W,AA,TP2.4X6.4	
4	RS807	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP1.8X3.2M	
4	RZ153	2008-001086	R-FUSIBLE(S);3.3ohm,5%,2W,AG,TP3.9x12mm	
4	RZ154	2003-000532	R-METAL OXIDE(S);18ohm,5%,2W,AF,TP4x12m	
4	RZ155	2001-001159	R-CARBON(S);510OHM,5%,1/2W,AA,TP2.4X6.4	
4	RZ165	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	RZ166	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP1.8X3.2M	
4	RZ167	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP1.8X3.2M	
4	RZ167A	2001-000554	R-CARBON;2700HM,5%,1/8W,AA,TP1.8X3.2MM	
4	RZ168	2003-002157	R-METAL OXIDE,220OHM,5%,2W,AG,TP8X16MM	
4	RZ169	2001-000019	R-CARBON(S);100OHM,5%,1/2W,AA,TP2.4X6.4M	
4	RZ170	2001-000666	R-CARBON;330HM,5%,1/8W,AA,TP1.8X3.2MM	
4	RZ171	2001-000666	R-CARBON;330HM,5%,1/8W,AA,TP1.8X3.2MM	
4	RZ172	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP1.8X3.2M	
4	RZ173	2001-001139	R-CARBON(S);39KOHM,5%,1/2W,AA,TP2.4X6.4	
4	RZ174	2001-001139	R-CARBON(S);39KOHM,5%,1/2W,AA,TP2.4X6.4	
4	RZ175	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP1.8X3.2M	
4	RZ176	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP1.8X3.2M	
4	RZ177	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP1.8X3.2MM	
4	RZ178	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP1.8X3.2M	
4	RZ179	2003-000713	R-METAL OXIDE(S);47ohm,5%,2W,AF,TP4x12m	
4	RZ180	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP2.4X6.4	
4	RZ181	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP2.4X6.4	
4	RZ182	2003-000713	R-METAL OXIDE(S);47ohm,5%,2W,AF,TP4x12m	
4	RZ183	2003-002157	R-METAL OXIDE,220OHM,5%,2W,AG,TP8X16MM	
4	RZ184	2003-002157	R-METAL OXIDE,220OHM,5%,2W,AG,TP8X16MM	
4	VR101	2103-000672	VR-SEMI;20Kohm,25%,1/5W,TOP	
2		AA39-20577A	LEAD CONNECTOR ASSY;,6P/PYH-B06-06.800	
2		AA39-20010C	LEAD CONNECTOR ASSY;,1P/YH-B00-01.5,800,	
2		3301-001201	CORE-FERRITE,AE,21x11x32mm,1500,200Ω,	
2		0202-000187	SOLDER-WIRE FLUX, ;RS605,D1.2,63Sn/37Pb	S.N.A
2		AA65-30013A	CLAMP-WIRE,NYLON 66,V0,NTR,DAWH-45N, .	S.N.A

Level	Loc. No.	Code No.	Description ; Specification	Remark
2		AA65-30109A	CLAMP-FBT,NYLON 66,V2,BLK,	S.N.A
2		AA65-30105A	CLAMP-WIRE,NYLON 66,V2,NTR,15MM,ALL WIDE	S.N.A
2		AA65-30104B	CLAMP-WIRE,NYLON 66,V2,BLK,W2.25,ALL WIDE	S.N.A

ASSY CRT-(G)

Level	Loc. No.	Code No.	Description ; Specification	Remark
1	*	AA94-02870A	ASSY CRT (G),P16LSC03HKA, - 380MC 7,BARE	
2	SC-AL	AA60-10011A	SCREW-TAPTITE,HH,-,PC,M4L12,ZPC(BLK),SW	
2		AA91-00449A	ASSY-BRACKET,CRT, . ,SECC T1.0,P,IT	
3		AA61-00473B	BRACKET-CRT,S3,SECC,T1.6, .	S.N.A
3		AA61-00478A	SPRING-WIRE,CRT,P,IT,STS, ...	S.N.A
3		AA61-00615B	BRACKET-EARTH,S4/J8,PBS,T0.5, .	S.N.A
2		AA67-10066A	LENS-ASSY,DELTA 37, . ,CLEAR A/B, , .	
2		AA65-30114A	CLAMP-LOCK,NYLON 66,V2,NTR, ,PROJECTION,	S.N.A
2		AA61-00555B	HOLDER-LANS,S3J/8,PC ABS,BLK, . ,GF20%	S.N.A
2		AA91-00491A	ASSY-HOLDER,PACK, , ,FILM PP RUBBER,S4J8	
3		AA60-00062B	SPACER-O,RING,S3,SILICON, . . . ,GRAY, .	S.N.A
3		AA61-00477B	HOLDER-PACK,43,S3,61J8,PP, ,HB, .	S.N.A
2		AA60-00074A	SPACER-DYP,IT,SILICON RUBBER, . . ,GRAY,	S.N.A
2		AA67-10071A	LENS,DELTA 77 79, ,GREEN,G ELEMENT,	
2		AA26-30006F	TRANS-FLYBACK; ,PWZ 56A001C,5S,30KV	
2		AA64-01315B	CASE-COUPLER,GREEN;43,S3,61,T2.0,AL SHE	S.N.A
2		AA27-50005C	DEFLECTION-YOKE; ,DPD 4362AL,ST-3JP,TORT	
2		AA03-00201A	CRT-MONO;P16LSC03HKA, ,7inch, . . ,FLAT	S.N.A
2		AA61-00476B	BRACKET-LENS,S3,SECC,T1.6, .	S.N.A
2		AA60-00063B	SPACER-CLENS,S3,SILICON, . . ,GRAY, . .	S.N.A
2		AA60-00061B	SPACER-CRT,S3,SILICON, . . ,GRAY, . .	S.N.A
2		AA39-00018A	LEAD CONNECTOR ASSY;,1P,YFH-B00-01,YR=187	
2		AA33-00006A	MAGNET-CONVERGENCE ,,H 92LT 29A, ,29.1~1.0	

ASSY POWER CORD

Level	Loc. No.	Code No.	Description ; Specification	Remark
1	*	AA06-20130E	ASSY-POWER CORD; ,CP2,NO(1.0R),H/C 50mm,	
2		3811-000401	WIRE-PVC CU,BCW,A,300V/ROLL,17/0.16mm,#22	S.N.A
2		AA39-10003B	POWER CORD; ,KJP 140,KLCE 2F,2.4m,HOLIS S	
2		AA61-20284A	HOLDER; ,P CORD,PP,VO,BLK,KE 002	S.N.A

ASSY PCB CRT

Level	Loc. No.	Code No.	Description ; Specification	Remark
1	*	AA65-00923A	ASSY-PCB CRT,,J51A,43/54,PAL	
2	BDW GN	AA39-20009G	LEAD CONNECTOR-ASSY;,1P,YFH-B00-01.700,16	
2	CS11	2201-002117	C-CERAMIC,DISC,4.7nF,20%,3kV,Y5U,TP,16x6	
2	CS41	2201-002117	C-CERAMIC,DISC,4.7nF,20%,3kV,Y5U,TP,16x6	
2	CS71	2201-002117	C-CERAMIC,DISC,4.7nF,20%,3kV,Y5U,TP,16x6	
2	CN501	3711-000051	CONNECTOR-HEADER,BOX,8P,1R,2.5mm,STRAIGHT	
2	CN502	3711-000052	CONNECTOR-HEADER,BOX,10P,1R,2.5mm,STRAGH	
2	CN502B	3711-000052	CONNECTOR-HEADER,BOX,10P,1R,2.5mm,STRAGH	
2	CN503	3711-000052	CONNECTOR-HEADER,BOX,10P,1R,2.5mm,STRAGH	
2	CN503B	3711-000052	CONNECTOR-HEADER,BOX,10P,1R,2.5mm,STRAGH	
2	CNW401	AA39-20027B	LEAD CONNECTOR ASSY,,6P/57096-006.5,400,	
2	CNW501	AA39-00127A	LEAD CONNECTOR ASSY,,8P,35155-0800,5,400	
2	CNW502	AA39-00112A	LEAD CONNECTOR ASSY;,10P,35155-1000,5,30	
2	CNW503	AA39-00112A	LEAD CONNECTOR ASSY;,10P,35155-1000,5,30	
2	FOCUS	AA39-20115A	LEAD CONNECTOR ASSY;,1P,BUSHING,500,3239	
2	FOCUS	AA39-20115A	LEAD CONNECTOR ASSY;,1P,BUSHING,500,3239	
2	FOCUS	AA39-20115B	LEAD CONNECTOR ASSY;,1P,BUSHING, ,700MM,	
2	GBW GN	3811-000446	WIRE-PVC CU;TCWA,600V/ROLL,17/0.16mm,#22	S.N.A
2	GBW SC	3811-000480	WIRE-PVC CU;BCWA,1KV/ROLL,17/0.16mm,#22,	S.N.A
2	GDW GN	AA39-20009D	LEAD CONNECTOR ASSY;,1P,YFH-B00-01.500,16	
2	GRW GN	3811-000446	WIRE-PVC CU;TCWA,600V/ROLL,17/0.16mm,#22	S.N.A
2	GRW SC	3811-000480	WIRE-PVC CU;BCWA,1KV/ROLL,17/0.16mm,#22,	S.N.A
2	IC501	AA66-50151B	ASSY-H/S, ,AMP,AA61-10060A,TDA6111Q,	
3		1201-001131	IC-VIDEO AMP;6111,SIP9P, ,SINGLE, ,PLUS	
3		6001-000057	SCREW-MACHINE,RH,+,M3,L6,ZPC(BLK),SWRCH1	
3		6021-000222	NUT-HEXAGON;2C,M3,ZPC(YEL),SM20C 1	S.N.A
3		AA61-10060A	BRACKET-TR, ,,CUS-T 1/2H,T0.5, . .	S.N.A
2	IC531	AA66-50151B	ASSY-H/S, ,AMP,AA61-10060A,TDA6111Q,	
2	IC561	AA66-50151B	ASSY-H/S, ,AM

Level	Loc. No.	Code No.	Description ; Specification	Remark
.2	PCB	AA41 00357B	PCB-CRT/PC..S3-R-FR 1.1LB 1-RT 245x245	S.N.A
.2	WCNW-CN	AA39 20009F	LEAD CONNECTOR ASSY;1P/YPH/B09-01,200 16	
.2	SC502	AA27 00084A	COILS 23. . . . . S 23.5000Mohm	
.2	SC532	AA27 00084A	COILS 23. . . . . S 23.5000Mohm	
.2	SC562	AA27 00084A	COILS-23. . . . . S 23.5000Mohm	
.2	VS01	3704 001019	SOCKET-CRT;10P/29.1PI.35.5PI;AU30U	
.2	VS31	3704 001019	SOCKET-CRT;10P/29.1PI.35.5PI;AU30U	
.2	VS61	3704 001019	SOCKET-CRT;10P/29.1PI.35.5PI;AU30U	
.2	VR501	2101 000321	VR-ROTARY;1MOHM, .0.6W;SIDE	
.2	VR531	2101 000321	VR-ROTARY;1MOHM, .0.6W;SIDE	
.2	VR561	2101 000321	VR-ROTARY;1MOHM, .0.6W;SIDE	
.2		AA99 20089J	ASSY;PCB SUB,AUTO; AA96 00923A . .V	S.N.A
.2	C502	2401 000027	C AL;4.7uF,20% ,50V;GP,TP,5x11.5	
.3	C503	2201 000119	C CERAMIC DISC;100nF ~80 ,20% ,50V;Y5V;TP,	
.3	C504	2401 001537	C AL;47uF,20% ,25V;GP,TP5,3x7mm,5mm	
.3	C505	2305 000149	C FILM,MPEF;100nF,5% ,100V;TP,12x12.5x6.5	
.3	C506	2401 000430	C AL;10uF,20% ,250V;GP,TP;10x16mm,5m	
.3	C507	2305 000154	C FILM,MPEF;100nF,5% ,400V;TP,21.5x6.5x11	
.3	C510	2401 000430	C AL;10uF,20% ,250V;GP,TP;10x16mm,5m	
.3	C512	2401 000133	C AL;1000uF,20% ,16V;GP,TP;10x20.5	
.3	C513	2201 000983	C CERAMIC DISC;1nF,10% ,2kV;Y5P,TP;9x5.7,	
.3	C514	2201 000599	C CERAMIC DISC;0.56nF,10% ,500V;Y5P,TP5,	
.3	C532	2401 000027	C AL;4.7uF,20% ,50V;GP,TP;5x11.5	
.3	C533	2201 000119	C CERAMIC DISC;100nF ~80 ,20% ,50V;Y5V,TP,	
.3	C534	2401 001537	C AL;47uF,20% ,25V;GP,TP5,3x7mm,5mm	
.3	C535	2305 000149	C FILM,MPEF;100nF,5% ,100V;TP,12x12.5x6.5	
.3	C536	2401 000430	C AL;10uF,20% ,250V;GP,TP;10x16mm,5m	
.3	C537	2305 000154	C FILM,MPEF;100nF,5% ,400V;TP,21.5x6.5x11	
.3	C540	2401 000430	C AL;10uF,20% ,250V;GP,TP;10x16mm,5m	
.3	C542	2201 000983	C CERAMIC DISC;1nF,10% ,2kV;Y5P,TP;9x5.7,	
.3	C543	2201 000599	C CERAMIC DISC;0.56nF,10% ,500V;Y5P,TP5,	
.3	C562	2401 000027	C AL;4.7uF,20% ,50V;GP,TP;5x11.5	
.3	C563	2201 000119	C CERAMIC DISC;100nF ~80 ,20% ,50V;Y5V,TP,	
.3	C564	2401 001537	C AL;47uF,20% ,25V;GP,TP5,3x7mm,5mm	
.3	C565	2305 000149	C FILM,MPEF;100nF,5% ,100V;TP,12x12.5x6.5	
.3	C566	2401 000430	C AL;10uF,20% ,250V;GP,TP;10x16mm,5m	
.3	C567	2305 000154	C FILM,MPEF;100nF,5% ,400V;TP,21.5x6.5x11	
.3	C570	2401 000430	C AL;10uF,20% ,250V;GP,TP;10x16mm,5m	
.3	C572	2201 000983	C CERAMIC DISC;1nF,10% ,2kV;Y5P,TP;9x5.7,	
.3	C573	2201 000599	C CERAMIC DISC;0.56nF,10% ,500V;Y5P,TP5,	
.3	CN401	3711 002645	CONNECTOR-HEADER;BOX,6P;1R,2.5MM,STRAIGH	
.3	D501	0402 000546	DIODE-RECTIFIER;TVR100G,400V;1.0A,DO-41,T	
.3	D502	0402 000546	DIODE-RECTIFIER;TVR100G,400V;1.0A,DO-41,T	
.3	D503	0402 000493	DIODE-RECTIFIER;1RSGU41,400V;1.5A,DO-15L	
.3	D504	0401 000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.3	D509	0401 000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.3	D510	0401 000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.3	D531	0402 000546	DIODE-RECTIFIER;TVR100G,400V;1.0A,DO-41,T	
.3	D532	0402 000546	DIODE-RECTIFIER;TVR100G,400V;1.0A,DO-41,T	
.3	D533	0402 000493	DIODE-RECTIFIER;1RSGU41,400V;1.5A,DO-15L	
.3	D561	0402 000546	DIODE-RECTIFIER;TVR100G,400V;1.0A,DO-41,T	
.3	D562	0402 000546	DIODE-RECTIFIER;TVR100G,400V;1.0A,DO-41,T	
.3	D563	0402 000493	DIODE-RECTIFIER;1RSGU41,400V;1.5A,DO-15L	
.3	DZ501	0403 000334	DIODE-ZENER;UZ2.7BSA,2.7V;2.54,2.75V,500	
.3	DZ502	0403 000508	DIODE-ZENER;MTZJ5.6B,5.6V;5.45-5.73V,500	
.3	DZ503	0403 000708	DIODE-ZENER;MTZJ13B,13V;12.55-13.21V,500	
.3	DZ531	0403 000334	DIODE-ZENER;UZ2.7BSA,2.7V;2.54,2.75V,500	
.3	DZ532	0403 000508	DIODE-ZENER;MTZJ5.6B,5.6V;5.45-5.73V,500	
.3	DZ533	0403 000708	DIODE-ZENER;MTZJ13B,13V;12.55-13.21V,500	
.3	DZ561	0403 000334	DIODE-ZENER;UZ2.7BSA,2.7V;2.54,2.75V,500	
.3	DZ562	0403 000508	DIODE-ZENER;MTZJ5.6B,5.6V;5.45-5.73V,500	
.3	DZ563	0403 000708	DIODE-ZENER;MTZJ13B,13V;12.55-13.21V,500	
.3	L501	2701 000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
.3	L531	2701 000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
.3	L561	2701 000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
.3	Q501	0502 000006	TR-POWER;KSC1507,NPN,15W,TO-220,TP;120-	
.3	Q502	0501 000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.3	Q504	0501 000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
.3	Q531	0502 000006	TR-POWER;KSC1507,NPN,15W,TO-220,TP;120-	
.3	Q533	0501 000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
.3	Q561	0502 000006	TR-POWER;KSC1507,NPN,15W,TO-220,TP;120-	
.3	Q563	0501 000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
.3	R500	2001 000449	R-CARBON;2.2KOHM,5%,1/8W;AA,TP,1.8X3.2M	
.3	R502	2001 000995	R-CARBON;820OHM,5%,1/8W;AA,TP,1.8X3.2MM	
.3	R503	2001 000429	R-CARBON;1KOHM,5%,1/8W;AA,TP,1.8X3.2MM	
.3	R504	2001 000006	R-CARBON;2.4KOHM,5%,1/8W;AA,TP,1.8X3.2M	
.3	R505	2001 000362	R-CARBON;150OHM,5%,1/8W;AA,TP,1.8X3.2MM	
.3	R506	2001 001088	R-CARBON(S);1KOHM,5%,1/8W;AA,TP2.4X6.4M	
.3	R507	2001 000429	R-CARBON;1KOHM,5%,1/8W;AA,TP1.8X3.2MM	
.3	R508	2003 000738	R-METAL OXIDE(S);56Kohm,5%,2W;AA,TP4x12	
.3	R509	2001 000734	R-CARBON;4.7KOHM,5%,1/8W;AA,TP1.8X3.2M	
.3	R510	2001 000864	R-CARBON;56KOHM,5%,1/8W;AA,TP1.8X3.2MM	
.3	R511	2001 000009	R-CARBON;20KOHM,5%,1/8W;AA,TP1.8X3.2MM	
.3	R513	2008-000252	R-FUSIBLE(S);0.47ohm,10%,1/2W;AF,TP2.5x	
.3	R514	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W;AA,TP2.4X6.	
.3	R515	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W;AA,TP3.7x9	
.3	R516	2001-000009	R-CARBON;20KOHM,5%,1/8W;AA,TP1.8X3.2MM	
.3	R517	2001-000085	R-CARBON(S);100KOHM,5%,1/2W;AA,TP2.4X6.	
.3	R518	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W;AA,TP3.7	
.3	R519	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W;AA,TP3.7	
.3	R520	2001-000066	R-CARBON(S);10KOHM,5%,1/2W;AA,TP2.4X6.4	
.3	R521	2001-001052	R-CARBON(S);1.5MOHM,5%,1/2W;AA,TP2.4X6.	
.3	R522	2002-001006	R-COMPOSITION;4.7Kohm,5%,1/2W;AA,TP3.7x	
.3	R523	2002-001006	R-COMPOSITION;4.7Kohm,5%,1/2W;AA,TP3.7x	
.3	R524	2001-000028	R-CARBON(S);100OHM,5%,1/2W;AA,TP2.4X6.4	
.3	R526	2001-000539	R-CARBON;24KOHM,5%,1/8W;AA,TP1.8X3.2MM	
.3	R527	2001-000577	R-CARBON;2KOHM,5%,1/8W;AA,TP1.8X3.2MM	
.3	R528	2001-001015	R-CARBON;9.1KOHM,5%,1/8W;AA,TP1.8X3.2M	
.3	R529	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W;AA,TP3.7	
.3	R532	2001-000429	R-CARBON;1KOHM,5%,1/8W;AA,TP1.8X3.2MM	
.3	R533	2001-000429	R-CARBON;1KOHM,5%,1/8W;AA,TP1.8X3.2MM	
.3	R536	2001-001088	R-CARBON(S);1KOHM,5%,1/2W;AA,TP2.4X6.4M	
.3	R537	2001-000429	R-CARBON;1KOHM,5%,1/8W;AA,TP1.8X3.2MM	
.3	R538	2003-000738	R-METAL OXIDE(S);56Kohm,5%,2W;AA,TP4x12	
.3	R540	2001-000660	R-CARBON;33KOHM,5%,1/8W;AA,TP1.8X3.2MM	
.3	R541	2001-000009	R-CARBON;20KOHM,5%,1/8W;AA,TP1.8X3.2MM	
.3	R543	2008-000252	R-FUSIBLE(S);0.47ohm,10%,1/2W;AF,TP2.5x	
.3	R544	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W;AA,TP2.4X6.	
.3	R545	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W;AA,TP3.7x9	
.3	R546	2001-000009	R-CARBON;20KOHM,5%,1/8W;AA,TP1.8X3.2MM	
.3	R547	2001-000085	R-CARBON(S);100KOHM,5%,1/2W;AA,TP2.4X6.	
.3	R548	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W;AA,TP3.7	
.3	R549	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W;AA,TP3.7	
.3	R550	2001-000066	R-CARBON(S);10KOHM,5%,1/2W;AA,TP2.4X6.4	
.3	R551	2001-001052	R-CARBON(S);1.5MOHM,5%,1/2W;AA,TP2.4X6.	
.3	R552	2002-001006	R-COMPOSITION;4.7Kohm,5%,1/2W;AA,TP3.7x	
.3	R553	2002-001006	R-COMPOSITION;4.7Kohm,5%,1/2W;AA,TP3.7x	
.3	R554	2001-000028	R-CARBON(S);100OHM,5%,1/2W;AA,TP2.4X6.4	
.3	R555	2001-000734	R-CARBON;4.7KOHM,5%,1/8W;AA,TP1.8X3.2M	
.3	R556	2001-000472	R-CARBON;2.7KOHM,5%,1/8W;AA,TP1.8X3.2MM	
.3	R557	2001-000362	R-CARBON;150OHM,5%,1/8W;AA,TP1.8X3.2MM	
.3	R559	2002-001015	R-COMPOSITION;47Kohm,5%,1/2W;AA,TP3.7x9	
.3	R562	2001-000232	R-CARBON;1.3KOHM,5%,1/8W;AA,TP1.8X3.2M	
.3	R563	2001-000429	R-CARBON;1KOHM,5%,1/8W;AA,TP1.8X3.2MM	
.3	R564	2001-001031	R-CARBON;91KOHM,5%,1/8W;AA,TP1.8X3.2MM	
.3	R566	2001-001088	R-CARBON(S);1KOHM,5%,1/2W;AA,TP2.4X6.4M	
.3	R567	2001-000429	R-CARBON;1KOHM,5%,1/8W;AA,TP1.8X3.2MM	
.3	R568	2001-000734	R-CARBON;4.7KOHM,5%,1/8W;AA,TP1.8X3.2M	
.3	R569	2001-000006	R-CARBON;2.4KOHM,5%,1/8W;AA,TP1.8X3.2M	
.3	R570	2001-000362	R-CARBON;150OHM,5%,1/8W;AA,TP1.8X3.2MM	
.3	R571	2001-000281	R-CARBON;100OHM,5%,1/8W;AA,TP1.8X3.2MM	
.3	R572	2003-000738	R-METAL OXIDE(S);56Kohm,5%,2W;AA,TP4x12	
.3	R573	2008-000252	R-FUSIBLE(S);0.47ohm,10%,1/2W;AF,TP2.5x	
.3	R574	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W;AA,TP2.4X6.	
.3	R575	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W;AA,TP3.7x9	
.3	R576	2001-000009	R-CARBON;20KOHM,5%,1/8W;AA,TP1.8X3.2MM	
.3	R577	2001-000085	R-CARBON(S);100KOHM,5%,1/2W;AA,TP2.4X6.	
.3	R578	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W;AA,TP3.7	
.3	R579	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W;AA,TP3.7	
.3	R580	2001-000066	R-CARBON(S);10KOHM,5%,1/2W;AA,TP2.4X6.4	
.3	R581	2001-001052	R-CARBON(S);1.5MOHM,5%,1/2W;AA,TP2.4X6.	
.3	R582	2002-001006	R-COMPOSITION;4.7Kohm,5%,1/2W;AA,TP3.7x	
.3	R583	2002-001006	R-COMPOSITION;4.7Kohm,5%,1/2W;AA,TP3.7x	
.3	R584	2001-000028	R-CARBON(S);100OHM,5%,1/2W;AA,TP2.4X6.4	
.3	R589	2002-001015	R-COMPOSITION;47Kohm,5%,1/2W;AA,TP3.7x9	
.3	SG351	4715-001036	SURGE ABSORBER;500V,20%, . ,TP	
.3	SG501	4715-001036	SURGE ABSORBER;500V,20%, . ,TP	
.3	SG503	4715-001036	SURGE ABSORBER;500V,20%, . ,TP	
.3	SG533	4715-001036	SURGE ABSORBER;500V,20%, . ,TP	
.3	SG561	4715-001036	SURGE ABSORBER;500V,20%, . ,TP	
.3	SG563	4715-001036	SURGE ABSORBER;500V,20%, . ,TP	
.2		AA63-10002A	BAND-TIE, ;NYLON66 V2, . ,L100,NTR, . .	S.N.A
.2		0202 000187	SOLDER-WIRE FLUX; RS60S,D1.2,63Sn/37Pb	S.N.A

Level	Loc. No.	Code No.	Description ; Specification	Remark

ASSY-A/V FRONT

1	*	AA96-00518A	ASSY-A/V FRONT; SP43J4PF,J51B. . .MVT	
.2	CNW02	AA39 20032J	LEAD CONNECTOR ASSY,;12P/B709/I,012.5,130	
.2	CNY01	3711 003641	CONNECTOR-HEADER;BOX,12P/1R,2.5mm,STRAIG	
.2	CP01	2202 000263	C CERAMIC,MLC AXIAL;470pF,10%,50V;YSP,TP	
.2	CP02	2202 000263	C CERAMIC,MLC AXIAL;470pF,10%,50V;YSP,TP	
.2	CP03	2202 000263	C CERAMIC,MLC AXIAL;470pF,10%,50V;YSP,TP	
.2	CP04	2401 002009	C AL;100uF,20%,16V;GP,TP5,3x7.5	
.2	CP05	2401 002009	C AL;100uF,20%,16V;GP,TP5,3x7.5	
.2	CP06	2401 002009	C AL;100uF,20%,16V;GP,TP5,3x7.5	
.2	CP07	2401 002009	C AL;100uF,20%,16V;GP,TP5,3x7.5	
.2	CP08	2401 002009	C AL;100uF,20%,16V;GP,TP5,3x7.5	
.2	CP09	2202 000121	C CERAMIC,MLC AXIAL;100pF,10%,50V;YSP,TP	
.2	CP10	2202 000121	C CERAMIC,MLC AXIAL;100pF,10%,50V;YSP,TP	
.2	DZ01	0403-000610	DIODE ZENER;MTZJ,6.2B,6.2V,5.96-6.27V,500	
.2	DZ02	0403-000610	DIODE ZENER;MTZJ,6.2B,6.2V,5.96-6.27V,500	
.2	JK02	3722 001164	JACK-RCA;3P,3.4mm,SN,WH;YE,RE,#16-22	
.2	JK101	3722 000544	JACK-VHS,4P,11.5mm,AG,BLK,N	
.2	PCB	AA41 00379A	PCB A/V FRONT;SP43J5HFFRD ,1LA,1.6T,24	S.N.A
.2	RP01	2001-000273	R-CARBON;100KOHM,5%,1/8W;AA,TP1.8X3.2MM	
.2	RP02	2001-000969	R-CARBON;75OHM,5%,1/8W;AA,TP1.8X3.2MM	
.2	RP03	2001-000273	R-CARBON;100KOHM,5%,1/8W;AA,TP1.8X3.2MM	
.2	RP04	2001-000969	R-CARBON;75OHM,5%,1/8W;AA,TP1.8X3.2MM	
.2	RP05	2001-000969	R-CARBON;75OHM,5%,1/8W;AA,TP1.8X3.2MM	
.2		3301-001201	CORE-FERRITE,AE,21x11x32mm,1500,28OG	
.2		AA63-10002A	BAND-TIE, ;NYLON66 V2, . ,L100,NTR, . .	S.N.A
.2		AA98 60004J	ASSY-SUB,PART;APT51AA/V, ,ALL	S.N.A
.3		0202 000187	SOLDER-WIRE FLUX; RS60S,D1.2,63Sn/37Pb	S.N.A

ASSY-PCB,TERMINAL

1	*	AA96-00219E	ASSY-PCB,TERMINAL; SP43J5HFJ51A. . .2	
.2	CNT01	3711-003630	CONNECTOR-HEADER;BOX,32P/2R,2.54mm,ANGLE	
.2	CNT02	3711-003630	CONNECTOR-HEADER;BOX,32P/2R,2.54mm,ANGLE	
.2	CNT03	3711-003601	CONNECTOR-HEADER;BOX,12P/1R,2.5mm,ANGLE	
.2	IC703	0904-001121	IC-I/O SUPPORT CHIP;8574,8BIT,DIP16P,30	
.2	IC704	1001-001022	IC-ANALOG SWITCH,TDA8601,BLANKING,DIP,16	
.2	IC705	0801-000213	IC-CMOS LOGIC,4052,MULTIPLEXER,DIP,16P,3	
.2	JKV01	3722 000498	JACK-SCART,21P, ,SN,BLK,NO	
.2	JKV02	3722 001486	JACK-RCA;3P/9P,3.5mm,NI,BLK,	
.2	JKV03	3722 001382	JACK-RCA;SP6P,3.4MM,NI,R/W/G/BLUE,	
.2	JKV04	3722 001350	JACK-RCA;7P/9P,3.4MM,NI,BLK,	
.2	JKV05	3701-001013	CONNECTOR-DSUB;15P,3R,FEMALE,STRAIGHT,AU	
.2	JKV06	3701-001013	CONNECTOR-DSUB;15P,3R,FEMALE,STRAIGHT,AU	
.2	JKV07	3722 000544	JACK-VHS,4P,11.5mm,AG,BLK,N	
.2	JKV08	3722 000498	JACK-SCART,21P, ,SN,BLK,NO	
.2	RN701	2011 000160	R-NETWORK;10Kohm,5%,1/8W,A,SIP9P,TP	
.2		AA99-20082V	ASSY-PCB SUB,AUTO; AA95-00219E . .V	S.N.A
.3	C701	2401-002009	C AL;100uF,20%,16V;GP,TP5,3x7.5	
.3	C702	2203-000181	C CERAMIC,CHIP;100nF,~80 ,20%,25V;Y5V,TP,	
.3	C703	2401-002009	C AL;100uF,20%,16V;GP,TP5,3x7.5	
.3	C704	2203-000818	C CERAMIC,CHIP;0.033nF,5%,50V;NP0,TP,201	
.3	C705	2203-000818	C CERAMIC,CHIP;0.033nF,5%,50V;NP0,TP,201	
.3	C706	2203-000979	C CERAMIC,CHIP;47nF,10%,50V;X7R,TP,2012	
.3	C707	2203-000979	C CERAMIC,CHIP;47nF,10%,50V;X7R,TP,2012	
.3	C708	2203-000979	C CERAMIC,CHIP;47nF,10%,50V;X7R,TP,2012	
.3	C709	2203-000979	C CERAMIC,CHIP;47nF,10%,50V;X7R,TP,2012	
.3	C710	2203-000979	C CERAMIC,CHIP;47nF,10%,50V;X7R,TP,2012	
.3	C711	2203-000979	C CERAMIC,CHIP;47nF,10%,50V;X7R,TP,2012	
.3	C712	2203-000181	C CERAMIC,CHIP;100nF,~80 ,20%,25V;Y5V,TP,	
.3	C713	2203-000979	C CERAMIC,CHIP;47nF,10%,50V;X7R,TP,2012	
.3	C714	2203-000979	C CERAMIC,CHIP;47nF,10%,50V;X7R,TP,2012	
.3	C715	2203-000979	C CERAMIC,CHIP;47nF,10%,50V;X7R,TP,2012	
.3	C716	2401-002009	C AL;100uF,20%,16V;GP,TP5,3x7.5	
.3	C717	2203-000181	C CERAMIC,CHIP;100nF,~80 ,20%,25V;Y5V,TP,	
.3	C718	2203-000979	C CERAMIC,CHIP;47nF,10%,50V;X7R,TP,2012	
.3	C719	2203-000979	C CERAMIC,CHIP;47nF,10%,50V;X7R,TP,2012	
.3	C720	2203-000979	C CERAMIC,CHIP;47nF,10%,50V;X7R,TP,2012	
.3	C721	2203-000979	C CERAMIC,CHIP;47nF,10%,50V;X7R,TP,2012	
.3	C722	2203-000979	C CERAMIC,CHIP;47nF,10%,50V;X7R,TP,2012	
.3	C723	2203-000181	C CERAMIC,CHIP;100nF,~80 ,20%,25V;Y5V,TP,	
.3	C724	2203-000979	C CERAMIC,CHIP;47nF,10%,50V;X7R,TP,2012	
.3	C725	2203-000181	C CERAMIC,CHIP;100nF,~80 ,20%,25V;Y5V,TP,	
.3	C726	2203-000181	C CERAMIC,CHIP;100nF,~80 ,20%,25V;Y5V,TP,	
.3	C727	2203-000979	C CERAMIC,CHIP;47nF,10%,50V;X7R,TP,2012	
.3	C730	2401-002299	C AL;4.7uF,20%,50V;GP,TP5,5x7.5	
.3	C731	2401-002299	C AL;4.7uF,20%,50V;GP,TP5,5x7.5	
.3	C732	2203-000444	C CERAMIC,CHIP;1nF,10%,50V;X7R,TP,2012,	
.3	C733	2203-000444	C CERAMIC,CHIP;1nF,10%,50V;X7R,TP,2012,	
.3	C734	2203-000444	C CERAMIC,CHIP;1nF,10%,50V;X7R,TP,2012,	
.3	C735	2203-000444	C CERAMIC,CHIP;1nF,10%,50V;X7R,TP,2012,	
.3	C736	2203-000444	C CERAMIC,CHIP;1nF,10%,50V;X7R,TP,2012,	
.3	C737	2203-000444	C CERAMIC,CHIP;1nF,10%,50V;X7R,TP,2012,	
.3	C740	2401-001840	C AL;100uF,20%,16V;GP,TP6.3x11.5	
.3	C741	2203-000181	C CERAMIC,CHIP;100nF,~80 ,20%,25V;Y5V,TP,	
.3	C742	2401-001840	C AL;100uF,20%,16V;GP,TP6.3x11.5	
.3	C743	2203-000181	C CERAMIC,CHIP;100nF,~80 ,20%,25V;Y5V,TP,	
.3	C744	2203-000575	C CERAMIC,CHIP;220NF,10%,25V;X7R,TP,2012	
.3	C745	2203-000575	C CERAMIC,CHIP;220NF,10%,25V;X7R,TP,2012	
.3	C746	2203-000575	C CERAMIC,CHIP;220NF,10%,25V;X7R,TP,2012	
.3	C747	2203-000575	C CERAMIC,CHIP;220NF,10%,25V;X7R,TP,2012	
.3	C748	2203-000575	C CERAMIC,CHIP;220NF,10%,25V;X7R,TP,2012	
.3	C749	2203-000575	C CERAMIC,CHIP;220NF,10%,25V;X7R,TP,2012	
.3	C760	2401-000667	C AL;2.2uF,20%,50V;WT,TP,5x11.5	
.3	C761	2401-000667	C AL;2.2uF,20%,50V;WT,TP,5x11.5	
.3	C762	2401-000667	C AL;2.2uF,20%,50V;WT,TP,5x11.5	
.3	C763	2401-000667	C AL;2.2uF,20%,50V;WT,TP,5x11.5	
.3	C764	2401-000667	C AL;2.2uF,20%,50V;WT,TP,5x11.5	
.3	C765	2401-000667	C AL;2.2uF,20%,50V;WT,TP,5x11.5	
.3	C766	2401-000667	C AL;2.2uF,20%,50V;WT,TP,5x11.5	
.3	C767	2401-000667	C AL;2.2uF,20%,50V;WT,TP,5x11.5	
.3	C768	2203-000979	C CERAMIC,CHIP;47nF,10%,50V;X7R,TP,2012	
.3	C769	2203-000979	C CERAMIC,CHIP;47nF,10%,50V;X7R,TP,2012	
.3	C770	2203-000683	C CERAMIC,CHIP;0.027nF,5%,50V;NP0,TP,201	
.3	C771	2203-000683	C CERAMIC,CHIP;0.027nF,5%,50V;NP0,TP,201	
.3	C772	2203-000683	C CERAMIC,CHIP;0.027nF,5%,50V;NP0,TP,201	
.3	C773	2203-000239	C CERAMIC,CHIP;0.1nF,5%,50V;NP0,TP,2012	
.3	C774	2203-000239	C CERAMIC,CHIP;0.1nF,5%,50V;NP0,TP,2012	
.3	C775	2203-000444	C CERAMIC,CHIP;1nF,10%,50V;X7R,TP,2012,	
.3	C776	2203-000444	C CERAMIC,CHIP;1nF,10%,50V;X7R,TP,2012,	
.3	C777	2401-001496	C AL;47uF,20%,16V;GP,TP5,7.5	
.3	C780	2401-000360	C AL;100uF,20%,50V;GP,TP8x11.5,5	
.3	C782	2401-000471	C AL;10uF,20%,50V;BP,TP5x11.5mm	
.3	C783	2401-000471	C AL;10uF,20%,50V;BP,TP5x11.5mm	
.3	DZ701	0403-000314	DIODE-ZENER;RLZ,9.1B,9.1V;8.80-9.30V,400	
.3	DZ702	0403-000314	DIODE-ZENER;RLZ,9.1B,9.1V;8.80-9.30V,400	
.3	DZ703	0403-000314	DIODE-ZENER;RLZ,9.1B,9.1V;8.80-9.30V,400	
.3	DZ704	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW;LL 34,TP	
.3	DZ705	0403 000620	DIODE-ZENER;RLZ5.6B,5.6,500mW;LL 34,TP	
.3	IC701	1001-001030	IC-VIDEO SWITCH;TDA8920X, ,SOP,28P,300MI	
.3	IC702	1001 001030	IC-VIDEO SWITCH;TDA8920X, ,SOP,28P,300MI	
.3	J701	2007 000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
.3	J702	2007 000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
.3	L701	2702 001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
.3	L702	2702 001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
.3	L703	2702 001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
.3	L704	2702 001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
.3	L705	2702 001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
.3	L706	2702 001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
.3	L707	2702 001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
.3	L708	2702 001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
.3	L709	2702 001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
.3	L710	2702 001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
.3	L719	2702 001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
.3	L720	2702 001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
.3	L721	2702 001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
.3	L722	2702 001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
.3	L723	2702 001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
.3	L724	2702 001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
.3	L725	2702 001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
.3	L726	2702 001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
.3	PCB	AA41 00076B	PCB-AV TERMINAL;SP43J5HF,FR 4,2L,B,1.6T,	S.N.A
.3	Q701	0501 000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT 23,	
.3	Q702	0501 000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT 23,	
.3	Q703	0501 000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT 23,	
.3	Q704	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT 23,	
.3	Q705	0501 000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT 23,	

Level	Loc. No.	Code No.	Description ; Specification	Remark
..3	Q706	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
..3	Q707	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
..3	Q708	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
..3	Q709	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
..3	Q710	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
..3	Q711	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
..3	Q712	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
..3	Q713	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
..3	R701	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
..3	R702	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP2012	
..3	R703	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
..3	R704	2007-000511	R-CHIP;2.4KOHM,5%,1/10W,DA,TP2012	
..3	R705	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
..3	R706	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
..3	R708	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
..3	R709	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
..3	R710	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
..3	R711	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
..3	R712	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
..3	R713	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
..3	R714	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
..3	R715	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
..3	R716	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP2012	
..3	R717	2007-000401	R-CHIP;150OHM,5%,1/10W,DA,TP2012	
..3	R718	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP2012	
..3	R719	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
..3	R720	2007-000511	R-CHIP;2.4KOHM,5%,1/10W,DA,TP2012	
..3	R721	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
..3	R722	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
..3	R723	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
..3	R724	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
..3	R725	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
..3	R726	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
..3	R727	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
..3	R728	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
..3	R729	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
..3	R730	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP2012	
..3	R731	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP2012	
..3	R732	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP2012	
..3	R733	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP2012	
..3	R734	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP2012	
..3	R735	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP2012	
..3	R736	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
..3	R737	2007-000766	R-CHIP;330OHM,5%,1/10W,DA,TP2012	
..3	R740	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
..3	R741	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
..3	R742	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
..3	R743	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
..3	R744	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
..3	R745	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
..3	R746	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
..3	R748	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
..3	R749	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
..3	R750	2007-000572	R-CHIP;220OHM,5%,1/10W,DA,TP2012	
..3	R751	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
..3	R752	2007-000572	R-CHIP;220OHM,5%,1/10W,DA,TP2012	
..3	R753	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
..3	R754	2007-000572	R-CHIP;220OHM,5%,1/10W,DA,TP2012	
..3	R755	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
..3	R756	2007-000964	R-CHIP;5.1KOHM,5%,1/10W,DA,TP2012	
..3	R757	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
..3	R758	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
..3	R759	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
..3	R760	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
..3	R761	2007-000221	R-CHIP;1.2KOHM,5%,1/10W,DA,TP2012	
..3	R762	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
..3	R763	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
..3	R764	2007-000221	R-CHIP;1.2KOHM,5%,1/10W,DA,TP2012	
..3	R765	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
..3	R766	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
..3	R767	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
..3	R768	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
..3	R769	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
..3	R770	2007-000766	R-CHIP;330OHM,5%,1/10W,DA,TP2012	
..3	R771	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
..3	R772	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
..3	R773	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
..3	R774	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
..3	R775	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
..3	R776	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
..3	R777	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..3	R778	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..3	R779	2007-001100	R-CHIP;62OHM,5%,1/10W,DA,TP2012	
..3	R780	2007-001100	R-CHIP;62OHM,5%,1/10W,DA,TP2012	
..3	R781	2007-001100	R-CHIP;62OHM,5%,1/10W,DA,TP2012	
..3	R782	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP2012	
..3	R783	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP2012	
..3	R784	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP2012	
..3	R785	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
..3	R786	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
..3	R787	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
..3	R788	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
..3	R791	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
..3	R792	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
..3	R793	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
..3	R794	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
..3	R795	2007-001155	R-CHIP;750OHM,5%,1/10W,DA,TP2012	
..3	R796	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP2012	
..3	R797	2007-001155	R-CHIP;750OHM,5%,1/10W,DA,TP2012	
..3	R798	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP2012	
..3	R799	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
..3	R800	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
..3	R801	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
..3	R802	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
..3	R803	2007-000328	R-CHIP;11KOHM,5%,1/10W,DA,TP2012	
..3	R804	2007-000328	R-CHIP;11KOHM,5%,1/10W,DA,TP2012	
..3	R805	2007-000001	R-CHIP;68KOHM,5%,1/10W,DA,TP2012	
..3	R806	2007-000001	R-CHIP;68KOHM,5%,1/10W,DA,TP2012	
..3	R807	2007-000001	R-CHIP;68KOHM,5%,1/10W,DA,TP2012	
..3	R808	2007-000001	R-CHIP;68KOHM,5%,1/10W,DA,TP2012	
..3	R809	2007-000001	R-CHIP;68KOHM,5%,1/10W,DA,TP2012	
..3	R810	2007-000001	R-CHIP;68KOHM,5%,1/10W,DA,TP2012	
..3	R811	2007-000001	R-CHIP;68KOHM,5%,1/10W,DA,TP2012	
..3	R812	2007-000001	R-CHIP;68KOHM,5%,1/10W,DA,TP2012	
..3	R813	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP2012	
..3	R814	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP2012	
..3	R815	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP2012	
..3	R816	2007-000774	R-CHIP;33KOHM,5%,1/10W,DA,TP2012	
..3	R817	2007-000615	R-CHIP;24KOHM,5%,1/10W,DA,TP2012	
..3	R818	2007-000774	R-CHIP;33KOHM,5%,1/10W,DA,TP2012	
..3	R819	2007-000615	R-CHIP;24KOHM,5%,1/10W,DA,TP2012	
..2		AA65-30105A	CLAMP-WIRE;NYLON 66,V2,NTR,15MM,ALL MODE	S.N.A
..2		0202-001004	SOLDER-CREAM;SQ-2030M SZH-1,S63A,D0.04.6	S.N.A
..2		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A

ASSY-PCB,H/V

Level	Loc. No.	Code No.	Description ; Specification	Remark
1	*	AA95-00056C	ASSY-PCB,H/V;-,SP43J5HP3S/XTT,J51A,-,-,-	
..2	BK01	AA61-10068A	BRACKET-PCB;-,M2160,SPTE,T0.3,-,-,-	S.N.A
..2	BK02	AA61-10068A	BRACKET-PCB;-,M2160,SPTE,T0.3,-,-,-	S.N.A
..2	BK03	AA61-10068A	BRACKET-PCB;-,M2160,SPTE,T0.3,-,-,-	S.N.A
..2	CN401	3711-001049	CONNECTOR-HEADER;BOX,6P,1R,2.5mm,ANGLE	
..2	CN402	3711-002709	CONNECTOR-HEADER;NOWALL,12P,1R,2.5MM,ANG	
..2	CN403	AA39-20052A	LEAD CONNECTOR-ASSY;-,4P,YBNH025-04,YSH02	
..2	CN404	3711-001283	CONNECTOR-HEADER;NOWALL,14P,1R,2.5mm,ANG	
..2	IC471	1203-000610	IC-PWM CONTROLLER;494,DIP,16P,300MIL,PLA	
..2	L351	AA27-10003M	COIL-CHOKE;-,6100uH,J,40,34mA,TP,EL0607R	
..2	PCB	AA41-00199C	PCB-H/V MODULE;P53A,CEM-1,1L,C,1.6T,330x	S.N.A
..2	Q371	AA96-50291A	ASSY H/S;-,-,AA62-30154B,2SC4636,-	
..3		0206-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
..3		0502-000442	TR-POWER;2SC4636RB,NPN,2W,TO-220,ST,10-	
..3		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
..3		AA62-30154B	HEAT SINK-ES;-,A6063,EXTR,-,-,SILVER ANO	
..2	Q422	0505-000156	FET-SILICON;IRF820,N,200V,5A,0.8ohm,50W,	
..2	R425	2003-000736	R-METAL OXIDE(S);560ohm,5%,3W,AA,TP,6x16	
..2	R485	2008-001096	R-FUSIBLE(S);3.3OHM,5%,1/2W,AC,BK,2.5X6.	
..2		2001-000262	R-CARBON;1.8MOHM,5%,1/8W,AA,TP,1.8X3.2M	
..2		AA99-20071J	ASSY-PCB SUB,AUTO;-,AA95-00056C,-,V	S.N.A
..3	C341	2401-001914	C-AL;1uF,20%,50V,BP,TP,5x11,5	
..3	C342	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
..3	C351	2301-000175	C-FILM,PEF;15nF,5%,50V,TP,7.1x3.5x13mm,5	

Level	Loc. No.	Code No.	Description ; Specification	Remark
..3	C352	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11.5	
..3	C353	2301-000204	C-FILM,PEF;2.7nF,5%,50V,TP,7.4x3.9x13mm	
..3	C354	2301-000261	C-FILM,PEF;4.7nF,5%,100V,TP,10.5x12.5x6	
..3	C355	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11.5	
..3	C356	2201-000180	C-CERAMIC,DISC;10nF,10%,50V,Y5V,TP,7x3.5	
..3	C357	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11.5	
..3	C358	2401-000471	C-AL;10uF,20%,50V,BP,TP,5x11.5mm	
..3	C360	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
..3	C361	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0m	
..3	C362	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
..3	C371	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11.5	
..3	C372	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11.5	
..3	C373	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11.5	
..3	C374	2401-001621	C-AL;6.8uF,20%,450V,GP,TP,13x20.5	
..3	C405	2201-000558	C-CERAMIC,DISC;0.47nF,10%,50V,Y5P,TP,5x3	
..3	C406	2201-000370	C-CERAMIC,DISC;0.22nF,10%,50V,Y5P,TP,4x3	
..3	C421	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11.5	
..3	C429	2305-000704	C-FILM,MPEF;100nF,5%,250V,TP,16.5x10.3x5	
..3	C454	2303-000331	C-FILM,PPF;4.7nF,5%,630V,TP,19.5x12x7.7	
..3	C455	2401-001527	C-AL;47uF,20%,250V,HR,TP,13x25mm,5m	
..3	C456	2201-000132	C-CERAMIC,DISC;0.1nF,10%,500V,Y5P,TP,6.5	
..3	C461	2201-000600	C-CERAMIC,DISC;0.56nF,10%,50V,Y5P,TP,5x3	
..3	C462	2301-000246	C-FILM,PEF;33nF,5%,100V,TP,7x5.0x9.5mm,5	
..3	C480	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0m	
..3	C481	2401-000914	C-AL;22uF,20%,16V,GP,TP,5x11.5	
..3	C482	2305-000178	C-FILM,MPEF;10nF,5%,100V,TP,-,5mm	
..3	C484	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11.5	
..3	C485	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,	
..3	C486	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,	
..3	C487	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11.5	
..3	C488	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11.5	
..3	C489	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11.5	
..3	C490	2201-000119	C-CERAMIC,DISC;100nF,-80-20%,50V,Y5V,TP	
..3	C492	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11.5	
..3	C493	2201-000119	C-CERAMIC,DISC;100nF,-80-20%,50V,Y5V,TP	
..3	C494	2201-000471	C-CERAMIC,DISC;0.33nF,10%,50V,Y5P,TP,4x3	
..3	C495	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
..3	C496	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
..3	D342	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
..3	D343	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
..3	D344	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
..3	D345	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
..3	D352	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
..3	D353	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
..3	D355	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
..3	D363	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
..3	D364	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
..3	D371	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
..3	D372	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
..3	D373	0402-000243	DIODE-RECTIFIER;RC2-V1,2000V,0.2A,DO-201	
..3	D384	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
..3	D385	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
..3	D386	0403-001316	DIODE-ZENER;MTZJ3.0A,2.85-3.07V,500mW,DO	
..3	D395	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
..3	D442	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
..3	D443	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
..3	D451	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
..3	D456	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
..3	D457	0403-000714	DIODE-ZENER;MTZJ3.3B,3.3V,3.32-3.53V,500	
..3	D474	0403-000734	DIODE-ZENER;TZP15B,15V,14.7-15.5V,1W,DO-	
..3	D475	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
..3	D476	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
..3	D477	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
..3	D478	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
..3	D479	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
..3	D480	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
..3	D483	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
..3	D484	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
..3	D491	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
..3	D492	0403-000716	DIODE-ZENER;MTZJ4.7B,4.7V,4.55-4.8V,500m	
..3	D493	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
..3	IC481	1203-001217	IC-POSI.ADJUST REG.;431,TO-92,3P,4.58MIL	
..3	L341	2701-000116	INDUCTOR-AXIAL;10uH,10%,4.2x9.8mm	
..3	Q342	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
..3	Q343	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
..3	Q344	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
..3	Q350	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
..3	Q351	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
..3	Q352	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
..3	Q353	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
..3	Q354	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
..3	Q355	0501-000366	TR-SMALL SIGNAL;KSC2330-Y,NPN,1W,TO-92L	
..3	Q381	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
..3	Q382	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
..3	Q401	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
..3	Q402	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
..3	Q421	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
..3	Q451	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
..3	Q452	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
..3	Q453	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
..3	Q454	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
..3	Q461	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
..3	Q471	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
..3	Q473	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
..3	Q481	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
..3	Q482	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
..3	Q483	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
..3	Q491	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
..3	R339	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..3	R340	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..3	R341	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..3	R342	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..3	R343	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..3	R344	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..3	R345	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
..3	R345A	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..3	R346	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..3	R347	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
..3	R348	2001-000691	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..3	R349	2001-000252	R-CARBON;1.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..3	R351	2001-001178	R-CARBON(S);680OHM,5%,1/2W,AA,TP,2.4X6.4	
..3	R352	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
..3	R353	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..3	R354	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..3	R355	2001-000006	R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..3	R357	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..3	R358	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..3	R359	2001-000766	R-CARBON;43KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..3	R360	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
..3	R361	2001-001191	R-CARBON(S);820KOHM,5%,1/2W,AA,TP,2.4X6.	
..3	R362	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..3	R363	2001-000723	R-CARBON;4.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..3	R364	2001-000938	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
..3	R365	2001-001120	R-CARBON(S);3.3OHM,5%,1/2W,AA,TP,2.4X6.4	
..3	R366	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4	
..3	R367	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	
..3	R368	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	
..3	R369	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	
..3	R369A	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	
..3	R370	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	
..3	R371	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	
..3	R372	2001-001110	R-CARBON(S);240KOHM,5%,1/2W,AA,TP,2.4X6.	
..3	R373	2001-001110	R-CARBON(S);240KOHM,5%,1/2W,AA,TP,2.4X6.	
..3	R374	2001-001110	R-CARBON(S);240KOHM,5%,1/2W,AA,TP,2.4X6.	
..3	R375	2001-001113	R-CARBON(S);270KOHM,5%,1/2W,AA,TP,2.4X6.	
..3	R376	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..3	R377	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
..3	R378	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
..3	R379	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
..3	R380	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
..3	R381	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
..3	R384	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA,TP,2.4X6.	
..3	R385	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..3	R386	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..3	R387	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..3	R388	2001-000622	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..3	R389	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..3	R395	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..3	R397	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..3	R411	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..3	R412	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
..3	R413	2001-000615	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	

Level	Loc. No.	Code No.	Description ; Specification	Remark
3	R414	2001-000200	R CARBON;10KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R415	2001-000734	R CARBON;4.7KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R416	2001-000006	R CARBON;2.4KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R420	2001-000291	R CARBON;100OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R421	2003-002159	R METAL OXIDE;150OHM,5%,1W,AC,TP4.0X12M	
3	R422	2001-000029	R CARBON(S);100OHM,5%,1/2W,AA,TP2.4X6.4	
3	R423	2001-000613	R CARBON;3.9KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R437	2008-001087	R FUSIBLE(S);1.8ohm,5%,2W,AG,TP3.5x12mm	
3	R438	2001-000085	R CARBON(S),100KOHM,5%,1/2W,AA,TP2.4X6	
3	R439	2001-000065	R CARBON(S),100KOHM,5%,1/2W,AA,TP2.4X6	
3	R442	2008-000254	R FUSIBLE(S);0.68ohm,5%,2W,AF,TP3.0x10m	
3	R442A	2008-000254	R FUSIBLE(S);0.68ohm,5%,2W,AF,TP3.0x10m	
3	R443	2003-002166	R METAL OXIDE,560OHM,5%,2W,AG,TP6X16MM	
3	R443A	2003-002166	R METAL OXIDE,560OHM,5%,2W,AG,TP6X16MM	
3	R445	2001-000258	R CARBON;1.8KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R446	2001-000522	R CARBON;22KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R447	2001-000812	R CARBON;5.6KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R448	2001-000411	R CARBON;18KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R449	2001-000660	R CARBON;33KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R450	2001-000290	R CARBON;10KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R451	2001-000812	R CARBON;5.6KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R452	2001-000241	R CARBON;1.5KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R454	2001-000761	R CARBON;430OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R455	2001-000761	R CARBON;430OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R456	2001-000761	R CARBON;430OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R458	2001-000577	R CARBON;2KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R459	2001-001192	R CARBON(S);8200HM,5%,1/2W,AA,TP2.4X6.4	
3	R460	2003-002044	R METAL OXIDE(S);100ohm,5%,1W,AF,TP2.5x	
3	R461	2001-000613	R CARBON;3.9KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R464	2001-000734	R CARBON;4.7KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R471	2001-001146	R CARBON(S);4.7OHM,5%,1/2W,AA,TP2.4X6.4	
3	R472	2001-000800	R CARBON;5.1KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R473	2001-000800	R CARBON;5.1KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R474	2001-000009	R CARBON;20KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R474A	2001-000508	R CARBON;220KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R475	2004-001023	R METAL;5.6Kohm,1%,1/8W,AA,TP1.8x3.2m	
3	R475B	2001-000734	R CARBON;4.7KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R477	2001-000429	R CARBON;1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R479	2001-000005	R CARBON;390ohm,5%,1/8W,AA,TP1.8x3.2mm	
3	R480	2001-000449	R CARBON;2.2KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R481	2001-000290	R CARBON;10KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R482	2001-001031	R CARBON;91KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R483	2001-000429	R CARBON;1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R484	2001-000429	R CARBON;1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R487	2001-000924	R CARBON;680OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R489	2001-000522	R CARBON;22KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R490	2001-000723	R CARBON;4.3KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R491	2001-001178	R CARBON(S);680OHM,5%,1/2W,AA,TP2.4X6.4	
3	R492	2001-000591	R CARBON;3.3KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R493	2001-000429	R CARBON;1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R494	2001-000066	R CARBON(S);10KOHM,5%,1/2W,AA,TP2.4X6.4	
3	R495	2001-000037	R CARBON(S);330OHM,5%,1/2W,AA,TP2.4X6.4	
3	R496	2001-000347	R CARBON;13KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R497	2001-000003	R CARBON;330ohm,5%,1/8W,AA,TP1.8x3.2mm	
3	R498	2001-001070	R CARBON(S);120OHM,5%,1/2W,AA,TP2.4X6.4	
2		0202-000187	SOLDER-WIRE FLUX , RS60S,D1.2,63Sn/37Pb	S.N.A
2		AA65-30105C	CLAMP WIRE;ALL MODEL,NYLON 66,V2 NTR SMM	S.N.A

ASSY-PCB,CONV AMP

1	*	AA86-00059L	ASSY PCB,CONV AMP, ,SP53J,SHF,,51A, , ,	
2	C491	2306-000322	C FILM,MPPF,12nF,5%,1.6KV,TP,29x20.5x13,	
2	CN203	AA39-00115A	LEAD CONNECTOR ASSY,,10PYBNH250-10.3515	
2	CN401	AA39-00128A	LEAD CONNECTOR ASSY,,8PYBNH250-08.35155	
2	CN402	AA39-00116A	LEAD CONNECTOR ASSY,,12PYBNH250-12.3515	
2	CN802	AA39-00128A	LEAD CONNECTOR ASSY,,8PYBNH250-08.35155	
2	IC2101	AA86-50152C	ASSY H/S, ,TRAA62,30012A,KA7806A,30MM	
3		1203-000284	IC POSI,FIXED REG,;7806,TO-220,3P ,PLAS	
3		6003-000333	SCREW-TAPTITE,RH,-,2S,M3,L10,ZPC(YEL),SW	
3		AA62-30012A	HEAT SINK ES, ,A6063 EXTR, , ,T0220, , ,	
2	IC2102	1203-000121	IC NEGA,FIXED REG,;7909,TO-220,3P ,PLAS	
2	IC2103	AA86-00034A	ASSY H/S, ,CONVERGENCE,,AA62 30173D,STK3	
3		0205-000129	GREASE SILICON;SC102,,JAPAN	S.N.A
3		1201-001225	IC VIDEO AMP;3I2,SIP22P, ,TRIPLE, PLAS	

Level	Loc. No.	Code No.	Description ; Specification	Remark
3		6003-001021	SCREW-TAPTITE,RH,-,B,M3,L15,ZPC(YEL),SWR	
3		AA62-30173D	HEAT SINK ES, , , T1.0,WHITE,SCREW HOLE2	
2	CI2104	AA96-00034A	ASSY H/S, ,CONVERGENCE,,AA62 30173D,STK3	
2	PCB	AA41-00135D	PCB;CONVERGENCE AMP,PS1A,1L,CEM-1,330x24	S.N.A
2	SG203	4715-001050	SURGE ABSORBER;2.4kV,20%,1500A, ,DISC,RA	
2		0202-000187	SOLDER-WIRE FLUX , RS60S,D1.2,63Sn/37Pb	S.N.A
2		AA99-20071E	ASSY PCB SUB,AUTO, ,AA95 00055L, ,V	S.N.A
3	CN403	3711-002643	CONNECTOR HEADER;BOX,4P,1R,2.5MM,STRAIGH	
3	CZ101	2401-001429	C AL;470uF,20%,50V,CP,TP13x20.5	
3	CZ102	2401-001429	C AL;470uF,20%,50V,CP,TP13x20.5	
3	CZ103	2401-000689	C AL;2200uF,20%,16V,CP,TP13x25.5	
3	CZ105	2401-000689	C AL;2200uF,20%,16V,CP,TP13x25.5	
3	CZ106	2201-000180	C CERAMIC,DISC,10nF,10%,50V,Y5V,TP7x3.5	
3	CZ107	2201-000180	C CERAMIC,DISC,10nF,10%,50V,Y5V,TP7x3.5	
3	CZ108	2201-000499	C CERAMIC,DISC,0.39nF,5%,50V,SL,TP8.5x3	
3	CZ109	2201-000499	C CERAMIC,DISC,0.39nF,5%,50V,SL,TP8.5x3	
3	CZ110	2201-000499	C CERAMIC,DISC,0.39nF,5%,50V,SL,TP8.5x3	
2	CZ111	2201-000976	C CERAMIC,DISC,0.022nF,5%,50V,NP0,TP5x3	
3	CZ112	2201-000863	C CERAMIC,DISC,0.68nF,10%,50V,Y5P,TP5x3	
3	CZ113	2201-000976	C CERAMIC,DISC,0.022nF,5%,50V,NP0,TP5x3	
3	CZ114	2201-000863	C CERAMIC,DISC,0.68nF,10%,50V,Y5P,TP5x3	
3	CZ115	2201-000976	C CERAMIC,DISC,0.022nF,5%,50V,NP0,TP5x3	
3	CZ116	2201-000863	C CERAMIC,DISC,0.68nF,10%,50V,Y5P,TP5x3	
3	CZ117	2201-000327	C CERAMIC,DISC,2.2nF,10%,50V,Y5V,TP6.5x	
3	CZ118	2201-000327	C CERAMIC,DISC,2.2nF,10%,50V,Y5V,TP6.5x	
3	CZ119	2201-000119	C CERAMIC,DISC,100nF,+80-20%,50V,Y5V,TP	
3	CZ120	2201-000119	C CERAMIC,DISC,100nF,+80-20%,50V,Y5V,TP	
3	CZ121	2201-000764	C CERAMIC,DISC,0.082nF,5%,50V,NP0,TP8x3	
3	CZ126	2201-000499	C CERAMIC,DISC,0.39nF,5%,50V,SL,TP8.5x3	
3	CZ127	2201-000499	C CERAMIC,DISC,0.39nF,5%,50V,SL,TP8.5x3	
3	CZ128	2201-000499	C CERAMIC,DISC,0.39nF,5%,50V,SL,TP8.5x3	
3	CZ132	2201-000976	C CERAMIC,DISC,0.022nF,5%,50V,NP0,TP5x3	
3	CZ133	2201-000863	C CERAMIC,DISC,0.68nF,10%,50V,Y5P,TP5x3	
3	CZ134	2201-000976	C CERAMIC,DISC,0.022nF,5%,50V,NP0,TP5x3	
3	CZ135	2201-000863	C CERAMIC,DISC,0.68nF,10%,50V,Y5P,TP5x3	
3	CZ136	2201-000976	C CERAMIC,DISC,0.022nF,5%,50V,NP0,TP5x3	
3	CZ137	2201-000863	C CERAMIC,DISC,0.68nF,10%,50V,Y5P,TP5x3	
3	CZ138	2201-000327	C CERAMIC,DISC,2.2nF,10%,50V,Y5V,TP6.5x	
3	CZ139	2201-000327	C CERAMIC,DISC,2.2nF,10%,50V,Y5V,TP6.5x	
3	CZ144	2401-001840	C AL,100uF,20%,16V,CP,TP6.3x11.5	
3	CZ145	2201-000119	C CERAMIC,DISC,100nF,+80-20%,50V,Y5V,TP	
3	CZ146	2401-001840	C AL,100uF,20%,16V,CP,TP6.3x11.5	
3	CZ147	2201-000119	C CERAMIC,DISC,100nF,+80-20%,50V,Y5V,TP	
3	CZ151	2202-000796	C CERAMIC,MLC,AXIAL,1NF,10%,50V,Y5P,TP3	
3	CZ152	2202-000796	C CERAMIC,MLC,AXIAL,1NF,10%,50V,Y5P,TP3	
3	CZ153	2202-000796	C CERAMIC,MLC,AXIAL,1NF,10%,50V,Y5P,TP3	
3	CZ154	2202-000796	C CERAMIC,MLC,AXIAL,1NF,10%,50V,Y5P,TP3	
3	CZ155	2202-000796	C CERAMIC,MLC,AXIAL,1NF,10%,50V,Y5P,TP3	
3	CZ156	2202-000796	C CERAMIC,MLC,AXIAL,1NF,10%,50V,Y5P,TP3	
3	D453	0402-001286	DIODE RECTIFIER;RP1H,2000V,1A, ,TP	
3	DS01	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	DZ120	0403-000510	DIODE ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
3	DZ121	0403-000510	DIODE ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
3	DZ122	0403-000510	DIODE ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
3	DZ126	0402-000546	DIODE RECTIFIER,TVR10C,400V,1.0A,DO-41,T	
3	DZ127	0402-000546	DIODE RECTIFIER,TVR10C,400V,1.0A,DO-41,T	
3	DZ128	0403-000510	DIODE ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
3	DZ129	0403-000510	DIODE ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
3	DZ130	0403-000510	DIODE ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
3	DZ131	0403-000510	DIODE ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
3	LZ101	2701-001030	INDUCTOR AXIAL,43uH,10%,5x14mm	
3	LZ102	2701-001030	INDUCTOR AXIAL,43uH,10%,5x14mm	
3	LZ103	2701-000142	INDUCTOR AXIAL,1uH,10%,2.5x3.4mm	
3	LZ104	2701-000142	INDUCTOR AXIAL,1uH,10%,2.5x3.4mm	
3	LZ107	2701-000142	INDUCTOR AXIAL,1uH,10%,2.5x3.4mm	
3	LZ108	2701-000142	INDUCTOR AXIAL,1uH,10%,2.5x3.4mm	
3	LZ109	2701-000142	INDUCTOR AXIAL,1uH,10%,2.5x3.4mm	
3	LZ110	2701-000142	INDUCTOR AXIAL,1uH,10%,2.5x3.4mm	
3	LZ111	2701-000142	INDUCTOR AXIAL,1uH,10%,2.5x3.4mm	
3	LZ112	2701-000142	INDUCTOR AXIAL,1uH,10%,2.5x3.4mm	
3	R382	2002-001006	R COMPOSITION;4.7Kohm,5%,1/2W,AA,TP3.7x	
3	R476	2004-004046	R METAL(S);430Kohm,1%,1/2W,AA,TP2.5x6.5	
3	R476A	2004-004001	R METAL(S);180Kohm,1%,1/2W,AA,TP2.5x6.5	
3	R476B	2004-001892	R METAL(S);162Kohm,1%,1/2W,AA,TP2.5x6.5	
3	R476C	2004-004046	R METAL(S);430Kohm,1%,1/2W,AA,TP2.5x6.5	
3	R478	2004-001892	R METAL(S);162Kohm,1%,1/2W,AA,TP2.5x6.5	
3	R501	2004-001376	R METAL(S);11Kohm,1%,1/2W,AA,TP2.4x6.4m	

Level	Loc. No.	Code No.	Description ; Specification	Remark
3	R502	2004-004366	R METAL(S);1.3Kohm,1%,1/2W,AA,TP2.5x6.5	
3	RF219	2008-000261	R FUSIBLE(S);150ohm,5%,1W,AF,TP3.9x10mm	
3	RF220	2008-000261	R FUSIBLE(S);150ohm,5%,1W,AF,TP3.9x10mm	
3	RF221	2008-000261	R FUSIBLE(S);150ohm,5%,1W,AF,TP3.9x10mm	
3	RF222	2008-000261	R FUSIBLE(S);150ohm,5%,1W,AF,TP3.9x10mm	
3	RF250	2008-000261	R FUSIBLE(S);150ohm,5%,1W,AF,TP3.9x10mm	
3	RF251	2008-000261	R FUSIBLE(S);150ohm,5%,1W,AF,TP3.9x10mm	
3	RF252	2008-000261	R FUSIBLE(S);150ohm,5%,1W,AF,TP3.9x10mm	
3	RF253	2008-000261	R FUSIBLE(S);150ohm,5%,1W,AF,TP3.9x10mm	
3	RZ101	2001-000429	R CARBON;1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	RZ102	2001-000429	R CARBON;1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	RZ103	2001-000429	R CARBON;1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	RZ104	2001-001114	R CARBON(S);270OHM,5%,1/2W,AA,TP2.4X6.4	
3	RZ105	2001-001114	R CARBON(S);270OHM,5%,1/2W,AA,TP2.4X6.4	
3	RZ106	2001-001114	R CARBON(S);270OHM,5%,1/2W,AA,TP2.4X6.4	
3	RZ107	2001-001114	R CARBON(S);270OHM,5%,1/2W,AA,TP2.4X6.4	
3	RZ108	2001-001114	R CARBON(S);270OHM,5%,1/2W,AA,TP2.4X6.4	
3	RZ109	2001-001114	R CARBON(S);270OHM,5%,1/2W,AA,TP2.4X6.4	
3	RZ110	2001-000563	R CARBON;27KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	RZ111	2001-000563	R CARBON;27KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	RZ112	2001-000563	R CARBON;27KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	RZ113	2001-000591	R CARBON;3.3KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	RZ114	2001-000857	R CARBON;560OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	RZ115	2001-000591	R CARBON;3.3KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	RZ116	2001-000857	R CARBON;560OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	RZ117	2001-000591	R CARBON;3.3KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	RZ118	2001-000857	R CARBON;560OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	RZ120	2001-000281	R CARBON;100OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	RZ121	2001-000281	R CARBON;100OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	RZ122	2001-000003	R CARBON;330ohm,5%,1/8W,AA,TP1.8x3.2mm	
3	RZ123	2003-002148	R METAL OXIDE;3.9OHM,2%,2W,AF,TP3.9X10M	
3	RZ124	2003-002148	R METAL OXIDE;3.9OHM,2%,2W,AF,TP3.9X10M	
3	RZ125	2003-002148	R METAL OXIDE;3.9OHM,2%,2W,AF,TP3.9X10M	
3	RZ126	2003-002148	R METAL OXIDE;3.9OHM,2%,2W,AF,TP3.9X10M	
3	RZ127	2003-002148	R METAL OXIDE;3.9OHM,2%,2W,AF,TP3.9X10M	
3	RZ128	2003-002148	R METAL OXIDE;3.9OHM,2%,2W,AF,TP3.9X10M	
3	RZ129	2003-001024	R METAL OXIDE(S);150ohm,5%,2W,AF,TP3.9x	
3	RZ129A	2003-001024	R METAL OXIDE(S);150ohm,5%,2W,AF,TP3.9x	
3	RZ130	2003-001024	R METAL OXIDE(S);150ohm,5%,2W,AF,TP3.9x	
3	RZ130A	2003-001024	R METAL OXIDE(S);150ohm,5%,2W,AF,TP3.9x	
3	RZ131	2003-002157	R METAL OXIDE,220OHM,5%,2W,AG,TP6X16MM	
3	RZ131A	2003-002157	R METAL OXIDE,220OHM,5%,2W,AG,TP6X16MM	
3	RZ132	2003-002157	R METAL OXIDE,220OHM,5%,2W,AG,TP6X16MM	
3	RZ132A	2003-002157	R METAL OXIDE,220OHM,5%,2W,AG,TP6X16MM	
3	RZ133	2001-000563	R CARBON;27KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	RZ134	2001-000563	R CARBON;27KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	RZ135	2001-000563	R CARBON;27KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	RZ136	2001-000591	R CARBON;3.3KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	RZ137	2001-000857	R CARBON;560OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	RZ138	2001-000591	R CARBON;3.3KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	RZ139	2001-000857	R CARBON;560OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	RZ140	2001-000591	R CARBON;3.3KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	RZ141	2001-000857	R CARBON;560OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	RZ142	2003-002148	R METAL OXIDE;3.9OHM,2%,2W,AF,TP3.9X10M	
3	RZ143	2003-002148	R METAL OXIDE;3.9OHM,2%,2W,AF,TP3.9X10M	
3	RZ144	2003-002148	R METAL OXIDE;3.9OHM,2%,2W,AF,TP3.9X10M	
3	RZ145	2003-002148	R METAL OXIDE;3.9OHM,2%,2W,AF,TP3.9X10M	
3	RZ146	2003-002148	R METAL OXIDE;3.9OHM,2%,2W,AF,TP3.9X10M	
3	RZ147	2003-002148	R METAL OXIDE;3.9OHM,2%,2W,AF,TP3.9X10M	
3	RZ148	2003-002157	R METAL OXIDE,220OHM,5%,2W,AG,TP6X16MM	
3	RZ148A	2003-002157	R METAL OXIDE,220OHM,5%,2W,AG,TP6X16MM	
3	RZ149	2003-001024	R METAL OXIDE(S);150ohm,5%,2W,AF,TP3.9x	
3	RZ149A	2003-001024	R METAL OXIDE(S);150ohm,5%,2W,AF,TP3.9x	
3	VR472	2103-001086	VR SEMI;100KOHM,25%,0.3W,TOP	

ASSY-PCB,SUB

1	*	AA95-00425B	ASSY PCB,SUB, ,SP53J,SHF,J51A,PAL, ,	
2	C430	2301-001219	C FILM,MPE,PPF,3.9nF,5%,1.6KV,TP,29x8.5x	
2	C431	2306-000326	C FILM,MPPF,4.7nF,5%,1.6KV,TP,28.5x16x9m	
2	C432	2306-000267	C FILM,MPPF,8.2nF,5%,1.6KV,TP,28.5x18.5x	
2	C436	2306-000235	C FILM,MPPF,560nF,5%,400V,TP,26*22.5*14,	
2	C438	2306-000267	C FILM,MPPF,8.2nF,5%,1.6KV,TP,28.5x18.5x	
2	C471	2301-001091	C FILM,MPPF,470nF,5%,400V,TP,26x21.5x14,	
2	C473	2306-000322	C FILM,MPPF,12nF,5%,1.6KV,TP,29x20.5x13,	
2	C474	2306-000326	C FILM,MPPF,4.7nF,5%,1.6KV,TP,28.5x16x9m	
2	C477	2301-000213	C FILM,PEF,220nF,5%,250V,TP,21.5x11.7,5	
2	C801	2306-000321	C FILM,MPPF,470NF,5%,275V,TP, ,22,5	
2	C802	2306-000321	C FILM,MPPF,470NF,5%,275V,TP, ,22,5	
2	C812	2401-000465	C AL,680UF,20%,450V,CP,BK,35X60MM,2	
2	C831	2306-000323	C FILM,MPPF,2.2nF,5%,1.6KV,TP,28.5x15.5x	
2	C862	2401-002225	C AL,3300uF,20%,50V,WT,BK,22x41.7,5	
2	C865	2401-000737	C AL,2200uF,20%,50V,CP,TP18x35.5,7	
2	C868	2401-000737	C AL,2200uF,20%,50V,CP,TP18x35.5,7	
2	C875	2401-002251	C AL,470uF,20%,200V,CP,BK,25x40mm,1	
2	C876	2401-000787	C AL,220uF,20%,160V,CP,TP16x31.5mm	
2	C891	2201-000987	C CERAMIC,DISC,2.2nF,20%,400V,Y5U,TP,12	
2	C892	2201-000987	C CERAMIC,DISC,2.2nF,20%,400V,Y5U,TP,12	
2	CN201	AA39-00128A	LEAD CONNECTOR ASSY,,8PYBNH250-08.35155	
2	CN202	AA39-00115A	LEAD CONNECTOR ASSY,,10PYBNH250-10.3515	
2	CN203	3711-000052	CONNECTOR HEADER;BOX,10P,1R,2.5mm,,STRAGH	
2	CN401	3711-000051	CONNECTOR HEADER;BOX,8P,1R,2.5mm STRAGHT	
2	CN402	3711-000974	CONNECTOR HEADER;BOX,12P,1R,2.5mm STRAG	
2	CN801	AA39-00116A	LEAD CONNECTOR ASSY,,12PYBNH250-12.3515	
2	CN802	3711-000051	CONNECTOR HEADER;BOX,8P,1R,2.5mm,STRAGHT	
2	CNW406	AA39-00008A	LEAD CONNECTOR ASSY,,3CPYFH800-03,5.2	
2	CNW809	AA39-20061G	LEAD CONNECTOR ASSY,,3PYFH800-03,5,100M	
2	D464	0402-000236	DIODE RECTIFIER;GB24,400V,5A, ,TP	
2	D804	AA86-50310A	ASSY H/S, ,POWER,AA62 30150C,RBV606,	
3		AA62-30150C	HEAT SINK-ES, ,A6063 EXTR, ,WHT,4024,51	
3		AA60-30003A	WASHER, , , T1.5, ,SBHG-1, ,	S.N.A
3		6003-000333	SCREW-TAPTITE,RH,-,2S,M3,L10,ZPC(YEL),SW	
3		0402-000549	DIODE BRIDGE;RBV606,600V,6A, ,BK	
3		0205-000129	GREASE SILICON;SC102,,JAPAN	S.N.A
2	D810	0402-000250	DIODE RECTIFIER;RG4C,1000V,1A,	
2	J854	AA96-00111C	ASSY H/S, , ,AA62 30013L,FML G12S,	
3		0402-000233	DIODE RECTIFIER,FML G12S,200V,5A, ,	
3		6003-000333	SCREW-TAPTITE,RH,-,2S,M3,L10,ZPC(YEL),SW	
3		AA62-30013L	HEATSINK ES, , , , 44/22, ,WHT, , ,	
2	J871	AA96-00032A	ASSY H/S, , ,AA62 30173B,FML G12, FMG26S	
3		0402-000233	DIODE RECTIFIER,FML G12S,200V,5A, ,	
3		0402-000231	DIODE RECTIFIER,FMG G26S,600V,4A,TO-220F	
3		AA62-30173B	HEAT SINK,ES, , ,T1.0,WHT, ,ALL, ,88X2	
3		6003-000333	SCREW-TAPTITE,RH,-,2S,M3,L10,ZPC(YEL),SW	
3		0205-000129	GREASE SILICON;SC102,,JAPAN	S.N.A
2	DZ481	0403-001327	DIODE ZENER;MTZJ18A,16.22-17.06V,500mW,D	
2	F801	3601-001007	FUSE CARTRIDGE,250V,6.3A,TIME LAG,,GLASS,	
2	F802	3601-001137	FUSE AXIAL LEAD,250V,6A,SLOW BLOW,GLASS,	
2	F804	3601-001007	FUSE CARTRIDGE,250V,6.3A,TIME LAG,,GLASS,	
2	IC301	AA86-50381A	ASSY H/S, , ,AA62 30180B,LA7845, ,	
3		0205-000129	GREASE SILICON;SC102,,JAPAN	S.N.A
3		1204-000517	IC VERTINAL DEF,LA7845,SIP,7P, ,PLASTIC	
3		6003-000333	SCREW-TAPTITE,RH,-,2S,M3,L10,ZPC(YEL),SW	
3		AA62-30180B	HEAT SINK-ES, ,A6063 EXTR, ,2,WHT,70MM, ,	
2	IC421	1203-000165	IC-POSI,ADJUST REG,;78R12,TO-220,3P, , ,	
2	IC430	1203-000162	IC-POSI,ADJUST REG,;317,TO-220,3P ,PLAS	
2	IC431	1201-000191	IC OP AMP;4558,DIP8P,300MIL,DUAL,20V/mV	
2	IC801	AA86-00036A	ASSY H/S, ,POWER,AA62 30181P,STR-F6656,	
3		0205-000129	GREASE SILICON;SC102,,JAPAN	S.N.A
3		6003-000333	SCREW-TAPTITE,RH,-,2S,M3,L10,ZPC(YEL),SW	
3		AA13-00018A	IC HYBRID; STR F6656,LF1351,5PIN, ,	
3		AA62-30181P	HEAT SINK,ES, , ,T1.0,WHITE,SCREW HOLE2	
2	IC804	1203-001400	IC POWER PRESCALER,SE110N,TO-220SP,3P	
2	IC806	0604-001032	PHOTO-COUPLER,TR,170-260%,300mW DIP 4 ST	
2	L431	AA27-30003M	COIL LINEARITY, ,5uH,DWA14x15,USRC0 1x6	
2	L432	AA27-40001U	COIL HORIZ WIDTH, ,220uH,DR1420,P10,12X1	
2	L482	3301-000374	CORE FERRITE BEAD;AA,3.5x1.0x9.0mm, ,	
2	L800	AA29-30002L	FILTER LINE NOISE, ,10mH/MIN,5A,AC90-260V	
2	L801	AA29-30002F	FILTER LINE NOISE, ,6mH,2.45A, ,	
2	L803	AA29-00008A	FILTER LINE NOISE,35.6MH.3A, ,6MH/MIN,3A	
2	L854	AA27-10001C	COIL CHOKE, ,100uH,K, ,5.0A,ST,700UH,KIR	
2	L860	AA27-10001C	COIL CHOKE, ,100uH,K, ,5.0A,ST,700UH,KIR	
2	L862	AA27-10001C	COIL CHOKE, ,100uH,K, ,5.0A,ST,700UH,KIR	
2	L872	AA27-10001C	COIL CHOKE, ,100uH,K, ,5.0A,ST,700UH,KIR	
2	L874	AA27-10002L	COIL CHOKE, ,2.4UH,K, ,2A, ,2.4UH,K,10X10M	
2	PCB	AA41-00197C	PCB,PC,S33R,CEM 1,1L,C,1.6T,330X24	S.N.A
2	Q431	AA96-00033E	ASSY H/S, ,H OUT,AA62 30173C,2SC5446,F	
3		AA02-00007A	MICA,DPM 04,MICA,22x29x0.15mm	
3		AA62-30173C	HEAT SINK ES, , ,T1.0,WHITE,SCREW HOLE2	
3		AA60-30001A	WASHER PLATE,M3,OD3.5,ISD3.5,T1.0, ,SBHG	S.N.A

Level	Loc. No.	Code No.	Description ; Specification	Remark
1		6003-000333	SCREW-TAPTITE,RH,-,2S,M3,L10,ZPC(YEL),SW	
1		0502-001175	TR POWER;2SC5446,NPN,200000mW,TO-3PL,BK	
1		0402-001296	DIODE RECTIFIER;FMP-3FU,1.5KV,5A,TO-3PF	
1		0205-000129	GREASE SILICON;SC102,,JAPAN	S.N.A
2	C433	AA96-50407A	ASSY-H/S,,,,AA62-30154C,KSD73Y,	
1		0205-000129	GREASE SILICON;SC102,,JAPAN	S.N.A
1		0502-000298	TR POWER;KSD73,NPN,30000mW,TO-220,TP12	
1		6003-000333	SCREW-TAPTITE,RH,-,2S,M3,L10,ZPC(YEL),SW	
1		AA62-30154G	HEAT SINK ES,,,A6063 EXTR,,,WHT,50/16,,,	
2	C441	AA96-50383F	ASSY-H/S,,,,AA62-30180D,2SD521,	
1		0205-000129	GREASE SILICON;SC102,,JAPAN	S.N.A
1		0502-001104	TR POWER;2SD521,NPN,80W,TO-3PBK,700-	
1		6003-000333	SCREW-TAPTITE,RH,-,2S,M3,L10,ZPC(YEL),SW	
1		AA62-30190D	HEAT SINK ES,,A6063 EXTR,,2,WHT,50mm,,,	
1	C472	0505-000156	FET-SILICON;IRF620,N,200V,5A,0.8ohm,50W,	
1	C473	AA96-00037A	ASSY-H/S,,,,AA62-30181N,2SC4125,-RFS6	
1		0502-001100	TR POWER;2SC4125,NPN,70W,TO-3PML,BK,B-	
1		AA62-30181N	HEAT SINK,ES,,,,T1.0,WHITE,SCREW HOLE(2	
1		AA60-30001A	WASHER-PLATE,M3,ID3.5,T0.5,T1.0,-,SBHG	S.N.A
1		6003-000333	SCREW-TAPTITE,RH,-,2S,M3,L10,ZPC(YEL),SW	
1		0505-001202	FET-SILICON;IRFS640A,N,200V,9.8A,0.18ohm	
1		0205-000129	GREASE SILICON;SC102,,JAPAN	S.N.A
2	R440	2008-001091	R-FUSIBLE;0.47OHM,10%,1/2W,AC,BK,2.5X	
2	R442	2008-000189	R-FUSIBLE;0.47ohm,10%,2W,AA,TP5x15.5mm	
2	R445	2008-001091	R-FUSIBLE;0.47OHM,10%,1/2W,AC,BK,2.5X	
2	R803	1404-001195	THERMISTOR-NTC;5.1ohm,15%,2900,27mW/C,BK	
2	R815	2003-002162	R-METAL OXIDE(S);15KOHM,5%,3W,AG,TP6X16	
2	R815A	2003-002162	R-METAL OXIDE(S);15KOHM,5%,3W,AG,TP6X16	
2	R817	2009-001096	R-METAL PLATE;0.07ohm,5%,5W,CL,BK,5x14x1	
2	R841	2008-001096	R-FUSIBLE(S);3.3OHM,5%,1/2W,AC,BK,2.5X6,	
2	T431	AA26-50001U	TRANS-HORIZ,DRIVE;,,29mH,105uH,4uH,ER28x	
2	T432	AA26-00053A	TRANS,,,1.2mH,,,EER4445,BK,1.2mH,	
2	T444	AA26-30005A	TRANS-FLYBACK,,,FWZ-50A001,50,108V	
2	T461	AA26-50001V	TRANS-HORIZ,DRIVE,,,6.0mH,113uH,4uH,E119	
2	T481	AA26-50001W	TRANS-HORIZ,DRIVE,,,830uH,23uH,4uH,EI-30	
2	T802	AA26-00006A	TRANS SWITCHING,,,90~260V,110V/34V/-30V	
2		AA65-30110A	CLAMP WIRE;NYLON 66,V2,BLK,PAL TVI,ALL M	S.N.A
2		0202-000187	SOLDER-WIRE FLUX,,RS60S,D1.2,63Sn/37Pb	S.N.A
2		AA62-00010A	HEAT SINK,,,,T1.0,SILVER,H/SINK & SHIEL	S.N.A
2		AA65-30109A	CLAMP-FBT;NYLON 66,V2,BLK,-,,,	S.N.A
2		AA65-301058	CLAMP-WIRE;NYLON 66,V2,NTR,2SMM,ALL MODE	S.N.A
2		AA99-200698	ASSY-PCB SUB,AUTO;,AA98-00425B,,,V	S.N.A
3	C301	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
3	C302	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,YSP,TP5x3.5,	
3	C303	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
3	C304	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,YSP,TP5x3.5,	
3	C305	2201-000022	C-CERAMIC,DISC;0.005nF,0.25pF,500V,NP0,T	
3	C307	2401-000365	C-AL;100uF,20%,50V,WT,TP,10x12.5mm,	
3	C308	2401-000365	C-AL;100uF,20%,50V,WT,TP,10x12.5mm,	
3	C309	2305-000285	C-FILM,MPEF;220nF,5%,100V,TP,10.5X5.5X15	
3	C311	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
3	C412	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,5x7x3.2mm,5mm	
3	C413	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
3	C417	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
3	C418	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
3	C419	2201-000180	C-CERAMIC,DISC;10nF,10%,50V,Y5V,TP,7x3,5	
3	C426	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
3	C427	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11,5	
3	C428	2305-000122	C-FILM,MPPF,100nF,5%,50V,TP,7.3x4.0x5.0m	
3	C437	2401-003114	C-AL;4.7uF,20%,250V,WT,TP,10x16,5	
3	C441	2401-000262	C-AL;100uF,20%,160V,HR,TP,16x25,7.5	
3	C445	2401-001622	C-AL;6.8uF,20%,50V,BP,TP,16x25mm,7,	
3	C450	2401-000262	C-AL;100uF,20%,160V,HR,TP,16x25,7.5	
3	C451	2401-001160	C-AL;33uF,20%,160V,GP,,,16x35mm,7.5	
3	C452	2201-000132	C-CERAMIC,DISC;0.1nF,10%,500V,Y5P,TP,6.5	
3	C453	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20,5	
3	C454	2401-001429	C-AL;470uF,20%,50V,GP,TP,13x20,5	
3	C455	2201-000132	C-CERAMIC,DISC;0.1nF,10%,500V,Y5P,TP,6.5	
3	C457	2201-000132	C-CERAMIC,DISC;0.1nF,10%,500V,Y5P,TP,6.5	
3	C458	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20,5	
3	C467	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
3	C468	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
3	C469	2201-000180	C-CERAMIC,DISC;10nF,10%,50V,Y5V,TP,7x3,5	
3	C472	2401-000262	C-AL;100uF,20%,160V,HR,TP,16x25,7.5	
3	C476	2401-000647	C-AL;2.2uF,20%,50V,BP,TP,5x11,5	
3	C478	2301-000020	C-FILM,PEF;27nF,5%,100V,TP,7.3x4x12.5mm,	
3	C479	2301-000200	C-FILM,PEF;2.2nF,5%,200V,TP,11.0x6.0x9.0	

Level	Loc. No.	Code No.	Description ; Specification	Remark
3	L851	2901-000297	FILTER EMI ON BOARD;,3A,,,,3.5x6,TP,	
3	L857	3301-000287	CORE FERRITE BEAD;AA,3.5x10x6.0mm,1500,	
3	L859	3301-000297	CORE FERRITE BEAD;AA,3.5x10x6.0mm,1500,	
3	Q201	0501-000389	TR SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
3	Q432	0501-000283	TR SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
3	R301	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP2.5x6,	
3	R302	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP2.5x6	
3	R303	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP2.4x6,	
3	R305	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP2.4x6,	
3	R306	2003-001036	R-METAL OXIDE(S);3.3ohm,5%,2W,AF,TP3.9x	
3	R307	2003-001036	R-METAL OXIDE(S);3.3ohm,5%,2W,AF,TP3.9x	
3	R308	2001-000016	R-CARBON(S);10HM,5%,1/2W,AA,TP2.4X6.4MM	
3	R310	2003-002150	R-METAL OXIDE;270OHM,5%,2W,AG,TP6X16MM	
3	R312	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R313	2001-000751	R-CARBON;430OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R314	2001-000761	R-CARBON;430HM,5%,1/8W,AA,TP1.8X3.2MM	
3	R332	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP2.4x6.4	
3	R333	2001-001107	R-CARBON(S),220ohm,5%,1/2W,AA,TP2.4x6.4	
3	R334	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP2.4x6.4	
3	R405	2009-001109	R-TEMPERATURE,240ohm,5%,1/4W,AA,TP2.3x6	
3	R406	2004-001983	R-METAL(S);2.49Kohm,1%,1/2W,AA,TP2.4x6	
3	R407	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP2.5x6,	
3	R408	2004-001402	R-METAL(S);6.8Kohm,1%,1/2W,AA,TP2.4x6.4	
3	R409	2001-001178	R-CARBON(S);680OHM,5%,1/2W,AA,TP2.4X6.4	
3	R410	2001-000052	R-CARBON(S);3.3KOHM,5%,1/2W,AA,TP2.4X6.	
3	R412	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R419	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R424	2008-000298	R-FUSIBLE(S);47ohm,5%,2W,AF,TP,3.9x10mm	
3	R426	2003-002153	R-METAL OXIDE;4.7OHM,5%,2W,AG,TP6X16MM	
3	R427	2003-002152	R-METAL OXIDE;10HM,5%,2W,AG,TP6X16MM	
3	R427A	2003-002152	R-METAL OXIDE;10HM,5%,2W,AG,TP6X16MM	
3	R428	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP3.7x9	
3	R428A	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP3.7x9	
3	R429	2003-000586	R METAL OXIDE(S);22Kohm,5%,2W,AF,TP4x12	
3	R430	2003-000586	R METAL OXIDE(S);22Kohm,5%,2W,AF,TP4x12	
3	R433	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP2.4X6.	
3	R434	2001-001093	R-CARBON(S),2.2KOHM,5%,1/2W,AA,TP2.4X6	
3	R441	2008-000189	R FUSIBLE;0.47ohm,10%,2W,AA,TP6x15.5mm	
3	R444	2003-000995	R-METAL OXIDE(S);3.3Kohm,5%,2W,AF,TP3.9	
3	R462	2003-002026	R-METAL OXIDE(S);4.7ohm,5%,1W,AF,TP2.5x	
3	R463	2003-001024	R-METAL OXIDE(S),150ohm,5%,2W,AF,TP3.9x	
3	R464	2003-002158	R-METAL OXIDE;0.68OHM,5%,1W,AG,TP4.3X12	
3	R465	2001-001043	R-CARBON(S);OOHM,5%,1/2W,AA,TP2.4X6.4MM	
3	R466	2004-001386	R-METAL(S);16.9Kohm,1%,1/2W,AA,TP2.4x6,	
3	R467	2004-001986	R-METAL(S);35.7Kohm,1%,1/2W,AA,TP2.4x6,	
3	R468	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP2.4X6.	
3	R469	2004-001930	R-METAL(S);1Kohm,2%,1/2W,AA,TP2.4x6.4mm	
3	R470	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP2.4X6.4	
3	R471	2004-002011	R-METAL(S);110Kohm,1%,1/2W,AA,TP2.4x6.4	
3	R472	2008-000252	R-FUSIBLE(S);0.47ohm,10%,1/2W,AF,TP2.5x	
3	R473	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP2.4x6.4	
3	R486	2003-002014	R-METAL OXIDE(S);0.6OHM,5%,2W,AF,TP3.9X	
3	R488	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R808	2001-000002	R-CARBON(S),200KOHM,5%,1/2W,AA,TP6.4X2.	
3	R808A	2001-000002	R-CARBON(S);200KOHM,5%,1/2W,AA,TP6.4X2	
3	R810	2002-001010	R-COMPOSITION;1.8Mohm,5%,1/2W,AA,TP3.7x	
3	R812	2003-002151	R-METAL OXIDE;18KOHM,5%,2W,AG,TP6X16MM	
3	R814	2001-000151	R-METAL OXIDE;18KOHM,5%,2W,AG,TP6X16MM	
3	R816	2004-004029	R-METAL(S);10Kohm,1%,1/2W,AA,TP2.5x6.5m	
3	R825	2002-001010	R-COMPOSITION;1.8Mohm,5%,1/2W,AA,TP3.7x	
3	R832	2001-001178	R-CARBON(S);680OHM,5%,1/2W,AA,TP2.4X6.4	
3	R834	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP2.4X6.	
3	R837	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP2.4X6.	
3	R838	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP2.4X6.	
3	R855	2001-001196	R-CARBON(S);9.1KOHM,5%,1/2W,AA,TP2.4X6.	
3	R856	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP2.4X6.	
3	R857	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP2.4X6.	
3	R871	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP2.4X6.4M	
3	R872	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP2.4X6.4M	
3	R873	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP2.4X6.	
3	R891	2002-001012	R-COMPOSITION;8.2Mohm,5%,1/2W,AA,TP3.7x	
3	VR471	2103-001024	VR SEMI;50Kohm,25%,0.3W,TOP	
2		0403-001325	DIODE ZENER;MTZJ,15C,14.35-15.09V,500mW,D	
2		6003-001023	SCREW-TAPTITE,RWH,-,B,M3,L10,ZPC(YEL),SW	

ASSY-PCB,CONV MDL

Level	Loc. No.	Code No.	Description ; Specification	Remark
1		AA99-00422B	ASSY PCB,CONV MDL;SP41,5HP,,51A,,,,	
2	C163	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,,5mm	
2	CN101	3711-002709	CONNECTOR-HEADER,NOWALL,12P,1R,2.5MM,ANG	
2	CN102	3711-002709	CONNECTOR-HEADER,NOWALL,12P,1R,2.5MM,ANG	
2	C113	1203-000641	IC-RESET,7442,TO-92,3P,,PLASTIC,,0.3/7	
2		0202-001004	SOLDER-CREAM;SQ,2030M,SZH-1,SB3A,20,04,5	S.N.A
2		0202-000187	SOLDER-WIRE FLUX,,RS60S,D1.2,63Sn/37Pb	S.N.A
2		AA63-00143A	SHIELD CASE,,,SPTE,T0.5,T0.5,ALL,MICHT,CO	S.N.A
2		AA99-20068A	ASSY PCB SUB,AUTO;,AA98-00422B,,,V	S.N.A
3	C101	2404-000275	C-TA,CHIP;100UF,10%,10V,CP,TP,7343	
3	C102	2404-000275	C-TA,CHIP;100UF,10%,10V,CP,TP,7343	
3	C103	2404-000256	C-TA,CHIP;47UF,20%,16V,CP,TP,7343	
3	C104	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,,25V,Y5V,TP,	
3	C105	2203-000858	C-CERAMIC,CHIP;0.039nF,5%,50V,NP0,TP,201	
3	C106	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,,25V,Y5V,TP,	
3	C107	2203-000716	C-CERAMIC,CHIP;3.3nF,10%,50V,X7R,TP,2012	
3	C108	2203-005809	C-CERAMIC,CHIP;1000nF,10%,16V,X7R,TP,201	
3	C109	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,,25V,Y5V,TP,	
3	C110	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,	
3	C111	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,,25V,Y5V,TP,	
3	C112	2203-000683	C-CERAMIC,CHIP;0.027nF,5%,,50V,NP0,TP,201	
3	C113	2203-000683	C-CERAMIC,CHIP;0.027nF,5%,,50V,NP0,TP,201	
3	C114	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,,25V,Y5V,TP,	
3	C115	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,,25V,Y5V,TP,	
3	C116	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,,25V,Y5V,TP,	
3	C117	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,,25V,Y5V,TP,	
3	C118	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,,25V,Y5V,TP,	
3	C119	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,,25V,Y5V,TP,	
3	C120	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,,25V,Y5V,TP,	
3	C121	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,,25V,Y5V,TP,	
3	C122	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,,25V,Y5V,TP,	
3	C123	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,,25V,Y5V,TP,	
3	C124	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,,25V,Y5V,TP,	
3	C125	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,,25V,Y5V,TP,	
3	C126	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,,25V,Y5V,TP,	
3	C127	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,,25V,Y5V,TP,	
3	C128	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,,25V,Y5V,TP,	
3	C129	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,,25V,Y5V,TP,	
3	C130	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,,25V,Y5V,TP,	
3	C131	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,,25V,Y5V,TP,	
3	C132	2203-000408	C-CERAMIC,CHIP;0.18nF,5%,50V,NP0,TP,2012	
3	C133	2404-000284	C-TA,CHIP;10uF,20%,16V,,,TP,3528,	
3	C134	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,,25V,Y5V,TP,	
3	C135	2203-000716	C-CERAMIC,CHIP;3.3nF,10%,50V,X7R,TP,2012	
3	C136	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,,25V,Y5V,TP,	
3	C137	2203-000716	C-CERAMIC,CHIP;3.3nF,10%,50V,X7R,TP,2012	
3	C138	2203-000408	C-CERAMIC,CHIP;0.18nF,5%,50V,NP0,TP,2012	
3	C139	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,,25V,Y5V,TP,	
3	C140	2404-000284	C-TA,CHIP;10uF,20%,16V,,,TP,3528,	
3	C141	2203-000408	C-CERAMIC,CHIP;0.18nF,5%,50V,NP0,TP,2012	
3	C142	2404-000284	C-TA,CHIP;10uF,20%,16V,,,TP,3528,	
3	C143	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,,25V,Y5V,TP,	
3	C144	2203-000716	C-CERAMIC,CHIP;3.3nF,10%,50V,X7R,TP,2012	
3	C145	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,,25V,Y5V,TP,	
3	C146	2203-000716	C-CERAMIC,CHIP;3.3nF,10%,50V,X7R,TP,2012	
3	C147	2203-000408	C-CERAMIC,CHIP;0.18nF,5%,50V,NP0,TP,2012	
3	C148	2404-000284	C-TA,CHIP;10uF,20%,16V,,,TP,3528,	
3	C149	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,,25V,Y5V,TP,	
3	C150	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,,25V,Y5V,TP,	
3	C151	2203-000408	C-CERAMIC,CHIP;0.18nF,5%,50V,NP0,TP,2012	
3	C152	2404-000284	C-TA,CHIP;10uF,20%,16V,,,TP,3528,	
3	C153	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,,25V,Y5V,TP,	
3	C154	2203-000716	C-CERAMIC,CHIP;3.3nF,10%,50V,X7R,TP,2012	
3	C155	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,,25V,Y5V,TP,	
3	C156	2203-000716	C-CERAMIC,CHIP;3.3nF,10%,50V,X7R,TP,2012	
3	C157	2203-000408	C-CERAMIC,CHIP;0.18nF,5%,50V,NP0,TP,2012	
3	C158	2404-000284	C-TA,CHIP;10uF,20%,16V,,,TP,3528,	
3	C159	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,,25V,Y5V,TP,	
3	C160	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,,25V,Y5V,TP,	
3	C161	2404-000256	C-TA,CHIP;47UF,20%,16V,CP,TP,7343	
3	C162	2404-000256	C-TA,CHIP;47UF,20%,16V,CP,TP,7343	
3	C164	2402-000173	C-AL,SMD;4.7uF,20%,35V,CP,TP,4.3x4.3x5,	
3	C165	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,,25V,Y5V,TP,	

Level	Loc. No.	Code No.	Description ; Specification	Remark
3	C166	2202-000181	C CERAMIC CHIP 100nF ~80 20% 25V Y5V TP	
3	C167	2404-000123	C TA CHIP 10uF 20% 16V TP6032 2.0mm	
3	C168	2202-000181	C CERAMIC CHIP 100nF ~80 20% 25V Y5V TP	
3	C169	2202-000181	C CERAMIC CHIP 100nF ~80 20% 25V Y5V TP	
3	C170	2202-000181	C CERAMIC CHIP 100nF ~80 20% 25V Y5V TP	
3	C171	2404-000294	C TA CHIP 10uF 20% 16V TP3528	
3	C172	2404-000256	C TA CHIP 47UF 20% 16V CP TP7343	
3	C173	2404-000256	C TA CHIP 47UF 20% 16V CP TP7343	
3	C174	2404-000256	C TA CHIP 47UF 20% 16V CP TP7343	
3	C201	2202-000408	C CERAMIC CHIP 0.18nF 5% 50V NP0 TP 2012	
3	C202	2202-000408	C CERAMIC CHIP 0.18nF 5% 50V NP0 TP 2012	
3	C203	2202-000408	C CERAMIC CHIP 0.18nF 5% 50V NP0 TP 2012	
3	C204	2202-000408	C CERAMIC CHIP 0.18nF 5% 50V NP0 TP 2012	
3	C205	2202-000408	C CERAMIC CHIP 0.18nF 5% 50V NP0 TP 2012	
3	C206	2202-000408	C CERAMIC CHIP 0.18nF 5% 50V NP0 TP 2012	
3	D101	0401-000150	DIODE SWITCHING ISS314 30V 100mA USC TP	
3	D102	0401-000150	DIODE SWITCHING ISS314 30V 100mA USC TP	
3	DZ101	0403-001016	DIODE ZENER RLZ6.2B 6.2V 5.96 6.27V 400m	
3	DZ102	0403-001016	DIODE ZENER RLZ6.2B 6.2V 5.96 6.27V 400m	
3	DZ104	0403-001016	DIODE ZENER RLZ6.2B 6.2V 5.96 6.27V 400m	
3	DZ105	0403-001016	DIODE ZENER RLZ6.2B 6.2V 5.96 6.27V 400m	
3	DZ106	0403-001016	DIODE ZENER RLZ6.2B 6.2V 5.96 6.27V 400m	
3	DZ107	0403-001016	DIODE ZENER RLZ6.2B 6.2V 5.96 6.27V 400m	
3	DZ108	0403-001016	DIODE ZENER RLZ6.2B 6.2V 5.96 6.27V 400m	
3	DZ109	0403-001016	DIODE ZENER RLZ6.2B 6.2V 5.96 6.27V 400m	
3	DZ110	0403-001016	DIODE ZENER RLZ6.2B 6.2V 5.96 6.27V 400m	
3	DZ111	0403-001016	DIODE ZENER RLZ6.2B 6.2V 5.96 6.27V 400m	
3	DZ112	0403-001016	DIODE ZENER RLZ6.2B 6.2V 5.96 6.27V 400m	
3	DZ113	0403-001016	DIODE ZENER RLZ6.2B 6.2V 5.96 6.27V 400m	
3	DZ114	0403-001016	DIODE ZENER RLZ6.2B 6.2V 5.96 6.27V 400m	
3	DZ115	0403-001016	DIODE ZENER RLZ6.2B 6.2V 5.96 6.27V 400m	
3	DZ116	0403-001016	DIODE ZENER RLZ6.2B 6.2V 5.96 6.27V 400m	
3	DZ117	0403-001284	DIODE ZENER RLZ3.3A 3.16 3.38V 500MW LL	
3	EF101	2901-000229	FILTER EMI SMD 50V 0.3A 22000pF 4.5x3	
3	EF102	2901-000229	FILTER EMI SMD 50V 0.3A 22000pF 4.5x3	
3	EF104	2901-000226	FILTER EMI SMD 25V 0.3A 100pF 3.2x1.25	
3	EF105	2901-000226	FILTER EMI SMD 25V 0.3A 100pF 3.2x1.25	
3	EF106	2901-000226	FILTER EMI SMD 25V 0.3A 100pF 3.2x1.25	
3	EF107	2901-000226	FILTER EMI SMD 25V 0.3A 100pF 3.2x1.25	
3	EF108	2901-000226	FILTER EMI SMD 25V 0.3A 100pF 3.2x1.25	
3	EF109	2901-000226	FILTER EMI SMD 25V 0.3A 100pF 3.2x1.25	
3	EF110	2901-000226	FILTER EMI SMD 25V 0.3A 100pF 3.2x1.25	
3	EF111	2901-000226	FILTER EMI SMD 25V 0.3A 100pF 3.2x1.25	
3	EF112	2901-000226	FILTER EMI SMD 25V 0.3A 100pF 3.2x1.25	
3	EF113	2901-000226	FILTER EMI SMD 25V 0.3A 100pF 3.2x1.25	
3	EF114	2901-000226	FILTER EMI SMD 25V 0.3A 100pF 3.2x1.25	
3	EF115	2901-000226	FILTER EMI SMD 25V 0.3A 100pF 3.2x1.25	
3	EF116	2901-000226	FILTER EMI SMD 25V 0.3A 100pF 3.2x1.25	
3	IC101	AA13-00071A	IC ASIC SDC91 0FP208P CONV CONTROLL	
3	IC102	0809-001043	IC CMOS LOGIC 74HC4046 PHASE LOCKED LOOP	
3	IC103	AA09-00032A	IC MCU TSC87251G2D-OTP TSC87251G2D OT	
3	IC104	1103-001167	IC EEPROM 28C64 8K 90BT TSOP 28P 120NS	
3	IC105	1209-001520	IC VIDEO AMP 2210 SOP8P 150MIL DUAL 7dB	
3	IC106	1209-001504	IC OP AMP 072 SOP8P 150MIL DUAL PLAST	
3	IC107	1209-001504	IC OP AMP 072 SOP8P 150MIL DUAL PLAST	
3	IC108	1209-001504	IC OP AMP 072 SOP8P 150MIL DUAL PLAST	
3	IC109	0809-001156	IC CMOS LOGIC 74HC4066 BILATERAL SWITCH	
3	IC110	0809-001156	IC CMOS LOGIC 74HC4066 BILATERAL SWITCH	
3	IC111	1009-000105	IC ANALOG SWITCH CD4066BM BILATERAL CMOS	
3	IC112	1009-000105	IC ANALOG SWITCH CD4066BM BILATERAL CMOS	
3	PCB	AA41-00188D	PCB CONVERGENCE MODULE SVP 43/44M FR 4 4L S.N.A	
3	Q101	0501-000280	TR SMALL SIGNAL KSA1182 PNP 150mW SOT 23	
3	Q102	0501-000342	TR SMALL SIGNAL KSC1623 Y NPN 200mW SOT	
3	Q103	0501-000342	TR SMALL SIGNAL KSC1623 Y NPN 200mW SOT	
3	Q104	0501-000280	TR SMALL SIGNAL KSA1182 PNP 150mW SOT 23	
3	Q105	0501-000342	TR SMALL SIGNAL KSC1623 Y NPN 200mW SOT	
3	Q106	0501-000342	TR SMALL SIGNAL KSC1623 Y NPN 200mW SOT	
3	Q107	0501-000342	TR SMALL SIGNAL KSC1623 Y NPN 200mW SOT	
3	Q108	0501-000280	TR SMALL SIGNAL KSA1182 PNP 150mW SOT 23	
3	Q109	0505-000257	FET SILICON 2SK217 N ,20mA , 150mW SOT	
3	Q110	0505-000257	FET SILICON 2SK217 N ,20mA , 150mW SOT	
3	Q111	0505-000257	FET SILICON 2SK217 N ,20mA , 150mW SOT	
3	Q112	0505-000257	FET SILICON 2SK217 N ,20mA , 150mW SOT	
3	Q113	0505-000257	FET SILICON 2SK217 N ,20mA , 150mW SOT	
3	Q114	0505-000257	FET SILICON 2SK217 N ,20mA , 150mW SOT	
3	R101	2007-000881	R CHIP 4.7OHM 5% 1/10W DA TP2012	
3	R102	2007-000881	R CHIP 4.7OHM 5% 1/10W DA TP2012	
3	R103	2007-000881	R CHIP 4.7OHM 5% 1/10W DA TP2012	
3	R104	2007-000881	R CHIP 4.7OHM 5% 1/10W DA TP2012	
3	R105	2007-000415	R CHIP 150HM 5% 1/10W DA TP2012	
3	R106	2007-000947	R CHIP 47OHM 5% 1/10W DA TP2012	
3	R107	2007-000282	R CHIP 100KOHM 5% 1/10W DA TP2012	
3	R108	2007-000872	R CHIP 4.7KOHM 5% 1/10W DA TP2012	
3	R109	2007-000493	R CHIP 2.2KOHM 5% 1/10W DA TP2012	
3	R110	2007-000221	R CHIP 1.2KOHM 5% 1/10W DA TP2012	
3	R111	2007-000380	R CHIP 13KOHM 5% 1/10W DA TP2012	
3	R112	2007-000468	R CHIP 1KOHM 5% 1/10W DA TP2012	
3	R113	2007-001097	R CHIP 52KOHM 5% 1/10W DA TP2012	
3	R114	2007-000468	R CHIP 1KOHM 5% 1/10W DA TP2012	
3	R115	2007-000468	R CHIP 1KOHM 5% 1/10W DA TP2012	
3	R117	2007-000468	R CHIP 1KOHM 5% 1/10W DA TP2012	
3	R118	2007-000468	R CHIP 1KOHM 5% 1/10W DA TP2012	
3	R119	2007-000468	R CHIP 1KOHM 5% 1/10W DA TP2012	
3	R120	2007-000401	R CHIP 150OHM 5% 1/10W DA TP2012	
3	R121	2007-000023	R CHIP 120OHM 5% 1/10W DA TP2012	
3	R122	2007-000468	R CHIP 1KOHM 5% 1/10W DA TP2012	
3	R123	2007-000401	R CHIP 150OHM 5% 1/10W DA TP2012	
3	R124	2007-000468	R CHIP 1KOHM 5% 1/10W DA TP2012	
3	R125	2007-000401	R CHIP 150OHM 5% 1/10W DA TP2012	
3	R126	2007-000401	R CHIP 150OHM 5% 1/10W DA TP2012	
3	R127	2007-000401	R CHIP 150OHM 5% 1/10W DA TP2012	
3	R128	2007-000290	R CHIP 100OHM 5% 1/10W DA TP2012	
3	R129	2007-000465	R CHIP 1KOHM 1% 1/10W DA TP2012	
3	R130	2007-000868	R CHIP 4.7KOHM 1% 1/10W DA TP2012	
3	R131	2007-000981	R CHIP 5.6KOHM 5% 1/10W DA TP2012	
3	R132	2007-000465	R CHIP 1KOHM 1% 1/10W DA TP2012	
3	R133	2007-000868	R CHIP 4.7KOHM 1% 1/10W DA TP2012	
3	R134	2007-000981	R CHIP 5.6KOHM 5% 1/10W DA TP2012	
3	R135	2007-000290	R CHIP 100OHM 5% 1/10W DA TP2012	
3	R136	2007-000290	R CHIP 100OHM 5% 1/10W DA TP2012	
3	R137	2007-000465	R CHIP 1KOHM 1% 1/10W DA TP2012	
3	R138	2007-000868	R CHIP 4.7KOHM 1% 1/10W DA TP2012	
3	R139	2007-000981	R CHIP 5.6KOHM 5% 1/10W DA TP2012	
3	R140	2007-000465	R CHIP 1KOHM 1% 1/10W DA TP2012	
3	R141	2007-000868	R CHIP 4.7KOHM 1% 1/10W DA TP2012	
3	R142	2007-000981	R CHIP 5.6KOHM 5% 1/10W DA TP2012	
3	R143	2007-000290	R CHIP 100OHM 5% 1/10W DA TP2012	
3	R144	2007-000290	R CHIP 100OHM 5% 1/10W DA TP2012	
3	R145	2007-000465	R CHIP 1KOHM 1% 1/10W DA TP2012	
3	R146	2007-000868	R CHIP 4.7KOHM 1% 1/10W DA TP2012	
3	R147	2007-000981	R CHIP 5.6KOHM 5% 1/10W DA TP2012	
3	R148	2007-000465	R CHIP 1KOHM 1% 1/10W DA TP2012	
3	R149	2007-000868	R CHIP 4.7KOHM 1% 1/10W DA TP2012	
3	R150	2007-000981	R CHIP 5.6KOHM 5% 1/10W DA TP2012	
3	R151	2007-000290	R CHIP 100OHM 5% 1/10W DA TP2012	
3	R152	2007-000282	R CHIP 100KOHM 5% 1/10W DA TP2012	
3	R153	2007-000872	R CHIP 4.7KOHM 5% 1/10W DA TP2012	
3	R154	2007-000774	R CHIP 33KOHM 5% 1/10W DA TP2012	
3	R155	2007-000300	R CHIP 10KOHM 5% 1/10W DA TP2012	
3	R156	2007-001055	R CHIP 6.2KOHM 5% 1/10W DA TP2012	
3	R157	2007-000671	R CHIP 2KOHM 5% 1/10W DA TP2012	
3	R158	2007-000468	R CHIP 1KOHM 5% 1/10W DA TP2012	
3	R159	2007-001166	R CHIP 75OHM 5% 1/10W DA TP2012	
3	R160	2007-000766	R CHIP 330OHM 5% 1/10W DA TP2012	
3	R161	2007-000290	R CHIP 100OHM 5% 1/10W DA TP2012	
3	R162	2007-000290	R CHIP 100OHM 5% 1/10W DA TP2012	
3	R163	2007-000290	R CHIP 100OHM 5% 1/10W DA TP2012	
3	R164	2007-000468	R CHIP 1KOHM 5% 1/10W DA TP2012	
3	R165	2007-000468	R CHIP 1KOHM 5% 1/10W DA TP2012	
3	R166	2007-000468	R CHIP 1KOHM 5% 1/10W DA TP2012	
3	R167	2007-000468	R CHIP 1KOHM 5% 1/10W DA TP2012	
3	R168	2007-000468	R CHIP 1KOHM 5% 1/10W DA TP2012	
3	R169	2007-000703	R CHIP 3.6KOHM 5% 1/10W DA TP2012	
3	R170	2007-000468	R CHIP 1KOHM 5% 1/10W DA TP2012	
3	R171	2007-000221	R CHIP 1.2KOHM 5% 1/10W DA TP2012	
3	R172	2007-000642	R CHIP 270OHM 5% 1/10W DA TP2012	
3	R173	2007-000030	R CHIP 560OHM 5% 1/10W DA TP2012	
3	R174	2007-000030	R CHIP 560OHM 5% 1/10W DA TP2012	
3	R175	2007-000282	R CHIP 100KOHM 5% 1/10W DA TP2012	
3	R176	2007-000872	R CHIP 4.7KOHM 5% 1/10W DA TP2012	
3	R177	2007-000872	R CHIP 4.7KOHM 5% 1/10W DA TP2012	
3	R178	2007-000728	R CHIP 300OHM 5% 1/10W DA TP2012	
3	R179	2007-000728	R CHIP 300OHM 5% 1/10W DA TP2012	
3	R180	2007-000728	R CHIP 300OHM 5% 1/10W DA TP2012	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	R181	2007-000729	R CHIP 300OHM 5% 1/10W DA TP2012	
2	R182	2007-000729	R CHIP 300OHM 5% 1/10W DA TP2012	
2	R183	2007-000729	R CHIP 300OHM 5% 1/10W DA TP2012	
2	R184	2007-000830	R CHIP 39KOHM 5% 1/10W DA TP2012	
2	R201	2007-000029	R CHIP 0OHM 5% 1/10W DA TP2012	
2	R203	2007-000565	R CHIP 220KOHM 5% 1/10W DA TP2012	
2	R204	2007-000565	R CHIP 220KOHM 5% 1/10W DA TP2012	
2	R205	2007-000565	R CHIP 220KOHM 5% 1/10W DA TP2012	
2	R206	2007-000565	R CHIP 220KOHM 5% 1/10W DA TP2012	
2	R207	2007-000565	R CHIP 220KOHM 5% 1/10W DA TP2012	
2	R208	2007-000565	R CHIP 220KOHM 5% 1/10W DA TP2012	
3	X101	2801-003860	CRYSTAL SMD 24MHz 30ppm 28 ABV 20pF 50oh	

ASSY-FRONT,BOT

1	*	AA91-00477H	ASSY FRONT BOT ,VO G4305 PAL ~HPS,SPS4L,B	
2	PFDCFB	6002-000522	SCREW-TAPPING,TH - ,2,M4,L15,ZPC,BLK,SWR	
2		AA64-70124C	BADGE BRAND,AL,RZ500,SILVER,L=70,SAMSUNG	
2		AA64-013960	INLAY AY,43.54,62.J8,PS SHEET,T0.5 , BLK	S.N.A
2		AA64-013860	PANEL FRONT,DECORATION,43.54 62.J8,HIPS,V	
2		AA64-013820	CABINET FRONT,BOT,54.J8,HIPS,VO,G4309	
2		AA60-00080A	SPACER FELT,43,54,J8,FELT , , ,T0.35,	S.N.A
2		AA60-00077A	SPACER DUAL LOCK,54,J8,#250, , , , , , , ,4	S.N.A
2		AA60-00071B	SPACER JERSEY,54,J8,JERSEY,GRAY,SP 700G	S.N.A

ASSY-CONTROL

1	*	AA91-00476F	ASSY CONTROL,,HB BLK,ABS PNL ,51A,SPS4L,B	
2	BM-MS	6003-001023	SCREW-TAPTITE,RWH - ,B,M3,L10,ZPC,YEL,SW	
2	KNOPOW	AA61-60003J	SPRING CS, ,SUS304 0.5,OD6,H12 N7	
2	PC-BM	6003-000334	SCREW-TAPTITE,RH - ,2S,M3,L5,ZPC,YEL,SWR	
2	PCB-PC	6003-001026	SCREW-TAPTITE,RH - ,B,M4,L15,ZPC,BLK,SWR	
2		AA64-013918	INDICATOR LED,43,54,62,J8,ACRYL , SMOC	
2		AA64-014696	WINDOW CONTROL,43,54,62,J8,ACRYL SHEET,T3	
2		AA64-015603A	KNOB CONTACT,54,,B,C3603	
2		AA98-00094A	ASSY PCB,CONTROL ,SPK3,J8HF,,51A,	
2		AA98-00097A	ASSY PCB,POWER S/W, ,SPK3,J8HF,,51A,	
2		AA61-005618	BRACKET-MASTER,54,J8,SECC,T1.0 ,	S.N.A
2		AA64-013878	PANEL CONTROL,43,54,62,J8,ABS, ,HB,IVORY	
2		AA64-013888	KNOB CONTROL,43,54,62,J8,ABS, ,BLK, HB	
2		AA64-01389E	KNOB POWER,43,54,62,J8,ABS,GRAY,LG 807P M	
2		AA64-013908	WINDOW REMOCON,43,54,62,J8,PC, , , , , VIO	

ASSY CHASSIS PART

1	*	AA90-00383C	ASSY CHASSIS PART,,51A,54,J8	S.N.A
2	CDN-HC	6003-001023	SCREW-TAPTITE,RWH - ,B,M3,L10,ZPC,YEL,SW	
2	DF-FBT	6003-001023	SCREW-TAPTITE,RWH - ,B,M3,L10,ZPC,YEL,SW	
2	DF-HC	6003-001023	SCREW-TAPTITE,RWH - ,B,M3,L10,ZPC,YEL,SW	
2	PM-HC	6003-001023	SCREW-TAPTITE,RWH - ,B,M3,L10,ZPC,YEL,SW	
2		AA61-00504B	HOLDER CHASSIS,43,54,62,J8,ABS,GRAY,VO , ,	

ASSY CABINET

1	*	AA90-00382K	ASSY CABINET,54,J8,SPS4,J8HFX/SED	S.N.A
2	AC-BOM	AA60-10011A	SCREW-TAPTITE,HH - ,PC,M4,L12,ZPC,BLK,SW	
2	ACAFB	6002-000522	SCREW-TAPPING,TH - ,2,M4,L15,ZPC,BLK,SWR	
2	AV-CFD	6003-001023	SCREW-TAPTITE,RWH - ,B,M3,L10,ZPC,YEL,SW	
2	BM-CBT	6003-001026	SCREW-TAPTITE,RH - ,B,M4,L15,ZPC,BLK,SWR	
2	CB8APT	6003-001019	SCREW-TAPTITE,RH - ,B,M4,L12,ZPC,BLK,SWR	
2	CBT-CW	AA63-60002V	SPACER FELT,FELT,T0.3,BLK,60X40 , ,	S.N.A
2	CFB	AA65-00011C	CLAMP WIRE,ALL MODEL,NYLON 66,V2,NTR,25M	S.N.A
2	CW-CBT	6005-001003	SCREW-WOOD,HH - ,M4,L20,ZPC,BLK,SWRCH18A	S.N.A
2	CWB8CM	6005-001094	SCREW ASSY WOOD,WW,HH - ,M7,L32,ZPC,YEL	S.N.A
2	CWBCBB	6005-001003	SCREW-WOOD,HH - ,M4,L20,ZPC,BLK,SWRCH18A	S.N.A
2	CWBCBS	6005-001003	SCREW-WOOD,HH - ,M4,L20,ZPC,BLK,SWRCH18A	S.N.A
2	CWBCFB	6005-001003	SCREW-WOOD,HH - ,M4,L20,ZPC,BLK,SWRCH18A	S.N.A
2	CWBHC	6005-001003	SCREW-WOOD,HH - ,M4,L20,ZPC,BLK,SWRCH18A	S.N.A
2	FP-BCM	AA60-10011A	SCREW-TAPTITE,HH - ,PC,M4,L12,ZPC,BLK,SW	
2	HV-BCM	AA60-10011A	SCREW-TAPTITE,HH - ,PC,M4,L12,ZPC,BLK,SW	
2		AA67-00080A	MIRROR-BACK,54,J8,GLASS,940*686*673(132)*	
2		AA67-00027A	SCREEN-TINT, S3, ,PMMA,TINT=10%,T3.0,1	
2		AA64-01395H	INLAY TERMINAL,J7,J8HF,PS SHEET,T0.5,BLK	
2		AA67-00023A	SUN SCREEN,HC , ,53,H/C,AVS,PMMA,T=93%,T	
2		AA64-604498	INLAY COVER,SP 434,UM,PS,T0.5,149.3X69.5	
2		AA65-30008A	CLAMP CORD,PE,HB,BLK, , ,	S.N.A
2		AA64-01392C	DOOR AV,43,54,62,J8,ABS,HB,GRAY,LG 807P	S.N.A
2		AA91-004898	ASSY BRKT,MIRROR, , ,SECC 1 T1 0.54,J8	
3		AA60-00073A	SPACER FELT,54,J8,FELT, , , T1.0, 210	S.N.A
3		AA61-005128	BRACKET MIRROR,43,53,61,J8,SECC 1 T1.0,	S.N.A
2		AA64-013858	CABINET BACK,SIDE,43.54,62,J8, , ,HPS,HB,B	
2		AA61-00600A	SPRING EARTH,43,J8,STS, , , , , , , ,0	S.N.A
2		AA61-00475B	BRACKET CRT,MAIN,54,SECC, T1.6,	
2		AA60-00091N	SPACER FELT, FELT,70X10, , BLK,T1.0,	S.N.A
2		AA60-00072B	SPACER COVER,DUST,43,54,62,J9,SPONGE,94HF	S.N.A
2		AA60-00089C	SPACER SCREEN,43,54,62,J8,ABS, , BLK,	S.N.A
2		AA60-00069B	SPACER SCREEN,43,54,62,J8,ABS, , , BLK,	S.N.A
2		AA26-30006E	TRANS FLYBACK, ,FWZ 50A001BS,L50KV	
2		AA64-013848	CABINET BACK,BOT,43,54,62,J8, ,HIPS,VO,BL	
2		AA64-013798	CABINET-BACK,TOP,54,J8, ,HIPS,HB,BLK	
2		AA63-60131F	SPACER FELT,PC,612R,FELT, , , BLK,T0.5,	S.N.A
2		AA63-10007C	BAND-PP, , , ,W18, ,CLEAR,1G,	S.N.A
2		AA61-20285A	HOLDER BOX, ,3456,PPVO,WHT	
2		AA61-00642A	SPRING EARTH,MAIN,PRO,J17,J8,J9,STS,67,	S.N.A
2		AA61-006188	GUIDE FLOW,54,J8,J7,ABS,HB,BLK,	

ASSY CRT-(B)

1	*	AA94-02966A	ASSY CRT (B),P19LSC038MB, - ,80MC,7.BARE,	
2	BC-AL	AA60-10011A	SCREW-TAPTITE,HH - ,PC,M4,L12,ZPC,BLK,SW	
2		AA65-30114A	CLAMP LOCK,NYLON 66,V2,NTR, ,PROJECTION,	S.N.A
2		AA67-10005A	LENS ASSY, ,DELTA,CLEAR,54,J38B, ,77,	
2		AA91-00449A	ASSY BRACKET,CRT, , ,SECC T1 0,P,JT	
3		AA61-00473B	BRACKET CRT,53,SECC,T1.6,	S.N.A
3		AA61-00478A	SPRING WIRE,CRT,P,JT,STS, , , , , , , ,	S.N.A
3		AA61-00615B	BRACKET EARTH,54,J8,PBS,T0.5, ,	S.N.A
2		AA91-00491A	ASSY HOLDER,PACK, , ,FILM PP RUBBER,54,J8	
3		AA60-00062B	SPACER O,RING,53,SILICON, , , ,GRAY, ,	S.N.A
3		AA61-00477B	HOLDER-PACK,43,53,61,J8,PP, ,HB, ,	S.N.A
2		AA60-00074A	SPACER DYP,,T,SILICON RUBBER, , ,GRAY,	S.N.A
2		AA61-006028	BRACKET-LENS,RB,PROJECTION,SECC ,T1.6, ,	
2		AA67-10007A	LENS, ,DELTA,CLEAR,P,JT, ,77,79,	
2		AA26-30006F	TRANS FLYBACK, ,FWZ 50A001C,55,30KV	
2		AA64-013168	CASE-COUPLER,BLUE,53,T2.0,AL SHEET, ,	S.N.A
2		AA27-50005C	DEFLECTION YOKE, ,DPD 4092AL,ST-3,P,JTCRT	
2		AA03-00202A	CRT MONO,P19LSC038MB, ,7inch, , , ,FLAT	S.N.A
2		AA61-005558	HOLDER LANS,53,J8,PC ABS,BLK, , ,CF20%	S.N.A
2		AA60-00063B	SPACER CLENS,53,SILICON, , , ,GRAY, , ,	S.N.A
2		AA60-000618	SPACER CRT,53,SILICON, , , ,GRAY, , ,	S.N.A
2		AA39-00018A	LEAD CONNECTOR ASSY, ,1P,YFH800 01 YRH187	
2		AA33-00005A	MAGNET CONVERGENCE,1H 1P,2,TU 036, ,29.1m,	

ASSY CRT-(R)

1	*	AA94-02668A	ASSY CRT (R),P19LSC038U,A, - ,80MC,7.BARE,	
2	BC-AL	AA60-10011A	SCREW-TAPTITE,HH - ,PC,M4,L12,ZPC,BLK,SW	
2		AA65-30114A	CLAMP LOCK,NYLON 66,V2,NTR, ,PROJECTION,	S.N.A
2		AA64-013148	CASE COUPLER,RED,53,T2.0,AL SHEET, ,	S.N.A
2		AA67-10005A	LENS ASSY, ,DELTA,CLEAR,54,J38B, ,77,	
2		AA67-10008A	LENS, ,DELTA,RED,P,JT, ,77,79,	
2		AA91-00449A	ASSY BRACKET,CRT, , ,SECC T1 0,P,JT	
3		AA61-00473B	BRACKET CRT,53,SECC,T1.6, ,	S.N.A
3		AA61-00478A	SPRING WIRE,CRT,P,JT,STS, , , , , , , ,	S.N.A
3		AA61-00615B	BRACKET EARTH,54,J8,PBS,T0.5, ,	S.N.A
2		AA91-00491A	ASSY HOLDER,PACK, , ,FILM PP RUBBER,54,J8	
3		AA60-00062B	SPACER O,RING,53,SILICON, , , ,GRAY, ,	S.N.A
3		AA61-00477B	HOLDER PACK,43,53,61,J8,PP, ,HB, ,	S.N.A

Level	Loc. No.	Code No.	Description ; Specification	Remark
2		AA60-00074A	SPACER DYP,T;SILICON RUBBER,...,GRAY	S.N.A
2		AA26-30006F	TRANS-FLYBACK,PWZ-50A001C,55.20W	
2		AA61-00602B	BRACKET-LENS;REPROJECTION SECC,T1.6,	
2		AA27-50005C	DEFLECTION YOKE,DPD-4392AL,ST-3P,TORT	
2		AA03-00200A	CRT-MONO,P19LSG03RJA,7inch,...,FLAT	S.N.A
2		AA61-00555B	HOLDER-LENS;SILICON,PC-ABS,BLK,...,GF20%	S.N.A
2		AA60-00063B	SPACER-CLENS;SILICON,...,GRAY	S.N.A
2		AA60-00061B	SPACER-CRT;SILICON,...,GRAY	S.N.A
2		AA39-00018A	LEAD-CONNECTOR ASSY;,1P,YFH-800-01,YRH197	
2		AA33-00006A	MAGNET-CONVERGENCE,,,H-92LT,25A,29.1m	

ASSY-WOOD

1	*	AA91-00620A	ASSY-WOOD;,WOOD,KSM21-58,SVP-54,BSR,J7	
2	AWTAWB	6006-001094	SCREW-ASSY,WOOD,WW-HH,+,M7,L32,ZPC(YEL)	S.N.A
2		AA91-00474A	ASSY-WOOD,TOP,,,WOOD,SVP-54,,BSR,54J7	
3	CWTHCW	AA60-10051A	SCREW-WOOD;PH,+,M4,L16,ZPC(BLK),SWRCH18A	
3		AA64-01399A	CABINET-WOOD,TOP;54J8,,,WOOD,	S.N.A
3		AA61-00510C	HOLDER-SCREW;54J8,ABS,BLK,HB,,L835	
3		AA61-00610B	HOLDER-SCREW;54J8,ABS,BLK,HB,,L1132	
3		AA61-00507B	HOLDER-CABINET;WOOD,43,54,62,J8,ABS,BLK,H	
2		AA91-00475A	ASSY-WOOD,BOT,,,WOOD,SVP-54J8SR,54J7	
3	CASCWB	AA60-10051A	SCREW-WOOD;PH,+,M4,L16,ZPC(BLK),SWRCH18A	
3	HCMCWB	AA60-10051A	SCREW-WOOD;PH,+,M4,L16,ZPC(BLK),SWRCH18A	
3	HW-CWB	AA60-10051B	SCREW-WOOD;BH,+,M3.5,L11,ZPC(YEL),SWRCH1	
3	SPKCWB	AA60-10051A	SCREW-WOOD;PH,+,M4,L16,ZPC(BLK),SWRCH18A	
3		AA61-00506B	HOLDER-CRT,MAIN;43,54,62,J8,HIPS,BLK,HB,	
3		AA61-00508B	HOLDER-JERSEY;43,54,62,J8,ABS,BLK,HB,,,	
3		AA61-00533B	BRACKET-GRILLE;43,54,62,J8,SECC-1,T0.5,	
3		AA98-00049A	ASSY-LEAD,CON,,LEAD CON,CORE,AA39-20505	
4		3301-001201	CORE-FERRITE,AE,21x11x32mm,1500,290C	
3		AA60-00078A	SPACER-DUAL,LOCK;54J8,#250,40X25	
3		AA64-01402A	CABINET-WOOD,BOT;54J8,,WOOD,	S.N.A
3		AA63-00348B	COVER-DUCT;54,62,J8,HIPS,,HB,BLK	
3		3001-001107	SPEAKER;20W,8ohm,95dB,1300Hz	
3		3001-001134	SPEAKER;30W,8ohm,93dB,60Hz	
3		AA39-00042A	LEAD-CONNECTOR ASSY;,2.2UF,REC,REC,200MM	
3		AA61-00094C	HOLDER-RAIL,,PC_S33R,ABS,HB,BLK,480	
3		AA61-00097A	HOLDER-WIRE,,,NYLON,6/6,,NTR,	
3		AA61-00458A	CASTER,,,TP4C15-05,NYL,OH47,,,SR4	S.N.A

ASSY CABINET MASK

1	*	AA91-00478C	ASSY CABINET MASK;,HB,GRAY,C906~D902,PA	
2	C/FRON	AA63-00380A	COVER-CORNER;P,T/POLYESTER,,,CLR,#572	
2		AA64-01495B	CABINET-MASK,SIDE;54J8,GD906P~DD902,ABS,	
3		AA64-01495A	CABINET-MASK,SIDE;54J8,L827.4,APCHUL,ABS	S.N.A
2		AA64-01393J	CABINET-FRONT;MASK,SP54J8HF,C906~D902,J5	
3		AA64-01393A	CABINET-FRONT;MASK,54J8,L1099.4,APCHUL,A	S.N.A
2		AA64-01393C	CABINET-FRONT;MASK,54J8,GD906P~DD902P,DD	
3		AA64-01393A	CABINET-FRONT;MASK,54J8,L1099.4,APCHUL,A	S.N.A
2		AA61-00505B	HOLDER-CORNER;43,54,62,J8,ABS,GRAY,HB	

ASSY ACCESSORY

1	*	AA94-02817A	ASSY-ACCESSORY;SP53J5HFX/SED,J51A,SWISS	S.N.A
2		AA68-01331B	MANUAL-USER;SP43J5/43J8,FRE,W/P100(GL),1	S.N.A
2		AA68-01137B	MANUAL-USER;SP43J5/43J8,GER,W/P100(GL),1	S.N.A
2		AA68-00856B	MANUAL-USER;SP43J5HF/43J8HF,ENG,,W/P	S.N.A
2		AA69-30009C	BAG-SHEET;LDPE,T0.08,W150,L120,,,,	S.N.A
2		AA61-20126A	HOLDER-LEG,,,ABS,HB,BLK,	S.N.A
2		AA39-40001B	CABLE-RCA,1500MM	

REMOCON

1	*	AA59-00100A	REMOCON,,TM57/KS88P0416S,53J/GRAY,S/	
2		AA59-00100A	2,MICOM,Z98LR808SSC,R-50MO,,28PIN,2-3	
2		2902-000194	RESONATOR-CERAMIC,8MHz,1.0%,TP,9.5x4.5x5	

7-5 SP54J8HFX/XHK

ASSY PCB MAIN(OPT)

Level	Loc. No.	Code No.	Description ; Specification	Remark
1	*	AA94-03459P	ASSY-PCB MAIN(OPT);SP54J8HFX/XHK,,51A,HO	
2	C664	2401-001068	C-AL,3300uF,20%,50V,CP8K,22x40,10	
2	C665	2401-000737	C-AL,2200uF,20%,50V,CP,TP,18x35,5,7	
2	CNR01	3711-003974	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,STRAIG	
2	CNT01	3710-001208	CONNECTOR-SOCKET,32P,2R,2.54mm,STRAIGHT	
2	CNT02	3710-001208	CONNECTOR-SOCKET,32P,2R,2.54mm,STRAIGHT	
2	DS803	2401-000370	C-AL,47uF,20%,450V,CP,BK,16X35,5,7	
2	H001	AA40-70006S	TUNER-P/S,TEC2949PG30A(S),PAL-B/G,TR,18	
2	IC101	AA96-00110C	ASSY-H/S,,,,AA62-30013K,SI-3050C,	
3		1203-000577	IC-VOLTAGE REGULATOR;3090,ZIP5P,PLAST	
3		6003-000333	SCREW-TAPTITE,RH,+,ZS,M3.1L10,ZPC(YEL),SW	
3		AA62-30013K	HEATSINK-ES,,,,,,44/18,,WHT,A6063-EX	
2	IC102	AA96-00110A	ASSY-H/S,,,,AA62-30013K,SI-3050C,	
3		1203-000203	IC-POSI.ADJUST-REG,3050,TO-220,5P,-PLA	
3		6003-000333	SCREW-TAPTITE,RH,+,ZS,M3,L10,ZPC(YEL),SW	
3		AA62-30013K	HEATSINK-ES,,,,,,44/18,,WHT,A6063-EX	
2	IC103	1204-001276	IC-SOUND-PROCESSOR;TDA9810,DIP24P-400M	
2	IC502	AA96-00110A	ASSY-H/S,,,,AA62-30013K,SI-3050C,	
2	IC503	AA96-00110A	ASSY-H/S,,,,AA62-30013K,SI-3050C,	
2	IC504	AA96-00110A	ASSY-H/S,,,,AA62-30013K,SI-3050C,	
2	IC665	AA96-00038A	ASSY-H/S,,SOUND AMP,AA62-30173E,TDA726	
3		0205-000129	GREASE-SILICON;SC102,,JAPAN	S.N.A
3		1201-001026	IC-POWER-AMP;7265,ZIP,11P,19.6W/L,DUAL,1	
3		6003-000333	SCREW-TAPTITE,RH,+,ZS,M3,L10,ZPC(YEL),SW	
3		AA62-30173E	HEAT-SINK,ES,,,,T1.0,WHITE,SCREW-HOLE(1	S.N.A
2	F/CAB	AA39-30007B	F-CABLE,,T,150mm,1365#26	
2	L201	AA27-10001C	COIL-CHOKE,,100uH,UK,,5.0A,ST,700UH-K/R	
2	L503	AA29-00004A	FILTER-LINE NOISE,,20UH,3A,AC80-260V,TQ	
2	Q2107	AA96-50162F	ASSY-H/S,,POWER,AA62-30013E,2SA1011,30	
3		0502-000131	TR-POWER;2SA1011,D,PNP,1.2W,TO-220,,60	
3		6003-000333	SCREW-TAPTITE,RH,+,ZS,M3,L10,ZPC(YEL),SW	
3		AA62-30013E	HEAT-SINK,ES,,AL6063-EXTR,,,30(2),T02	
2	Q2108	AA96-50162G	ASSY-H/S,,AMP,AA62-30013E,2SC2344,30-MM	
3		0502-000153	TR-POWER;2SC2344,D,NPN,1.2W,TO-220,,60	
3		6003-000333	SCREW-TAPTITE,RH,+,ZS,M3,L10,ZPC(YEL),SW	
3		AA62-30013E	HEAT-SINK,ES,,AL6063-EXTR,,,30(2),T02	
2	R913	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8K3,2MM	
2	RLB01	3501-001053	RELAY-POWER;5Vdc,530mW,10A,1Form,A,15mS,5	
2	TS801	AA26-00019A	TRANS-SWITCHING;,AC80~260V,,US,,4M+LB	
2	X901	2801-000224	CRYSTAL-UNIT;32.768KHZ,20PPM,28-AAX12.5	
2		AA95-00007A	ASSY-F/CONVERTER;,SVP-43AUM,KPT51A,NTSC	
3	CON01	3711-002709	CONNECTOR-HEADER;NOWALL,12P,1R,2.5MM,ANG	
3	CON02	3711-002703	CONNECTOR-HEADER;NOWALL,5P,1R,2.5mm,ANGL	
3	IC03	AA13-30021E	IC-MCU,Z90234-R3911,52M-374FC,ST,24K,	
3	IC04	1103-001208	IC-EEPROM;AT24C02-PC27,C,256x8Bit,DIP8P	
3	S/CASE	AA63-40037A	SHIELD-CASE;,,SPTE,T0.5,SCT12A,	S.N.A
3	XTR01	2804-001213	OSCILLATOR-CLOCK;80MHz,100ppm,10TTL & CM	
3		AA99-20043V	ASSY-PCB SUB,AUTO;,AA95-00007A,,,V	S.N.A
4	CF10	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
4	CF11	2401-001840	C-AL,100uF,20%,16V,GP,TP5.3x11.5	
4	CF12	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CF13	2401-001513	C-AL,47uF,20%,16V,WT,TP5x11.5	
4	CF14	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CF15	2203-000429	C-CERAMIC,CHIP;0.018nF,5%,50V,NP0,TP,201	
4	CF16	2203-000634	C-CERAMIC,CHIP;0.022nF,5%,50V,NP0,TP,201	
4	CF17	2203-000429	C-CERAMIC,CHIP;0.018nF,5%,50V,NP0,TP,201	
4	CF18	2203-000583	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,201	
4	CF19	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CF21	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CF22	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CF23	2401-001513	C-AL,47uF,20%,16V,WT,TP5x11.5	
4	CF24	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CF25	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CF26	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CF27	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CF28	2401-001513	C-AL,47uF,20%,16V,WT,TP5x11.5	
4	CF29	2401-001513	C-AL,47uF,20%,16V,WT,TP5x11.5	
4	CF30	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CF31	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF32	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF33	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF34	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF35	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF36	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF37	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF38	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF39	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF40	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF41	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF42	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF44	2404-000151	C-TA,CHIP;1uF,20%,16V,,TP,3216,	
4	CF45	2203-001158	C-CERAMIC,CHIP;0.068nF,5%,50V,NP0,TP,201	
4	CF46	2404-000151	C-TA,CHIP;1uF,20%,16V,,TP,3216,	
4	CF47	2203-001158	C-CERAMIC,CHIP;0.068nF,5%,50V,NP0,TP,201	
4	CF48	2404-000151	C-TA,CHIP;1uF,20%,16V,,TP,3216,	
4	CF49	2203-001158	C-CERAMIC,CHIP;0.068nF,5%,50V,NP0,TP,201	
4	CF50	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF51	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF52	2203-000316	C-CERAMIC,CHIP;0.12nF,5%,50V,NP0,TP,2012	
4	CF53	2203-000316	C-CERAMIC,CHIP;0.12nF,5%,50V,NP0,TP,2012	
4	CF54	2402-000173	C-AL,SMD;4.7uF,20%,35V,GP,TP,4.3x4.3x5,	
4	CF55	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CF56	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
4	CF57	2402-000173	C-AL,SMD;4.7uF,20%,35V,GP,TP,4.3x4.3x5,	
4	CF58	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP	
4	CF60	2401-001840	C-AL,100uF,20%,16V,GP,TP6.3x11,5	
4	CF61	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CF62	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CF63	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CF64	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CF65	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CF66	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CF67	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CF68	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CF69	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CF70	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CF71	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CF72	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CF73	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CF74	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CF75	2401-001840	C-AL,100uF,20%,16V,GP,TP6.3x11,5	
4	CF76	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CF77	2203-000429	C-CERAMIC,CHIP;0.018nF,5%,50V,NP0,TP,201	
4	CF78	2203-000429	C-CERAMIC,CHIP;0.018nF,5%,50V,NP0,TP,201	
4	CF79	2401-000027	C-AL,4.7uF,20%,50V,GP,TP5x11.5	
4	CF80	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CF81	2203-000181	C-CERAMIC,CHIP;100nF,-80~20%,25V,Y5V,TP,	
4	CF84	2203-000858	C-CERAMIC,CHIP;0.039nF,5%,50V,NP0,TP,201	
4	CF85	2203-000839	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,2012	
4	CF86	2203-000858	C-CERAMIC,CHIP;0.039nF,5%,50V,NP0,TP,201	
4	CF87	2203-000839	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,2012	
4	CF88	2203-000858	C-CERAMIC,CHIP;0.039nF,5%,50V,NP0,TP,201	
4	CF89	2203-000839	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,2012	
4	DF01	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
4	DF02	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
4	DF03	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
4	FF03	2901-000226	FILTER-EMI;SMD,25V,0.3A,,100pF,3.2x1.25	
4	FF04	2901-000226	FILTER-EMI;SMD,25V,0.3A,,100pF,3.2x1.25	
4	FF05	2901-000233	FILTER-EMI;SMD,50V,0.3A,,330pF,4.5x3.2x	
4	FF06	2901-000233	FILTER-EMI;SMD,50V,0.3A,,330pF,4.5x3.2x	
4	FF17	2901-000233	FILTER-EMI;SMD,50V,0.3A,,330pF,4.5x3.2x	
4	IC01	1204-001405	IC-VIDEO PROCESS;FS3310KBC,DIP,128P,1100M	
4	IC02	1105-001270	IC-DRAM;72V161621,2x524Kx16BTB4,,TSOP	
4	IC05	1203-001419	IC-VOLTAGE REGULATOR;4931,TO-252,3P5.6x	
4	LF10	2901-000297	FILTER-EMI-ON BOARD,,3A,,,3.5x5,TP,	
4	LF11	2701-000116	INDUCTOR-AXIAL;10uH,10%,4.2x9.8mm	
4	LF12	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
4	LF13	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
4	LF14	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
4	LF15	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
4	LF16	2701-000149	INDUCTOR-AXIAL;2.7uH,10%,2.5x3.4mm	
4	LF17	2701-000149	INDUCTOR-AXIAL;2.7uH,10%,2.5x3.4mm	
4	LF18	2701-000149	INDUCTOR-AXIAL;2.7uH,10%,2.5x3.4mm	

Level	Loc. No.	Code No.	Description ; Specification	Remark
..4	PCB	AA41-10997B	PCB-FORMAT CONNERTER;KPM51A,4L,FR-4,245X	S.N.A
..4	RF11	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
..4	RF13	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
..4	RF15	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
..4	RF16	2007-000477	R-CHIP;1MOHM,5%,1/10W,DA,TP2012	
..4	RF17	2007-000477	R-CHIP;1MOHM,5%,1/10W,DA,TP2012	
..4	RF18	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
..4	RF19	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
..4	RF21	2007-000642	R-CHIP;270OHM,5%,1/10W,DA,TP2012	
..4	RF22	2007-001118	R-CHIP;680OHM,5%,1/10W,DA,TP2012	
..4	RF23	2007-000401	R-CHIP;150OHM,5%,1/10W,DA,TP2012	
..4	RF24	2007-000401	R-CHIP;150OHM,5%,1/10W,DA,TP2012	
..4	RF25	2007-000518	R-CHIP;2.7KOHM,5%,1/10W,DA,TP2012	
..4	RF26	2007-000518	R-CHIP;2.7KOHM,5%,1/10W,DA,TP2012	
..4	RF27	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
..4	RF29	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF30	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF31	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF32	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF33	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF34	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF35	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF36	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF37	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF38	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF39	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF40	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF41	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF42	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF43	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF44	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF45	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF46	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF47	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF48	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF49	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF51	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF52	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF53	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF54	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF55	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF56	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF57	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF58	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF59	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF60	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF61	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF62	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF64	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
..4	RF66	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF67	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP2012	
..4	RF68	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
..4	RF70	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
..4	RF71	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
..4	RF72	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
..4	RF73	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
..4	RF74	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
..4	RF75	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
..4	RF76	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
..4	RF78	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
..4	RF79	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
..4	RF80	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
..4	RF81	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
..4	RF82	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
..4	RF83	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
..4	RF84	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
..4	RF85	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
..4	RF86	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
..4	RF87	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
..4	RF88	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
..4	XTR02	2801-000152	CRYSTAL-UNIT;14.31818MHz,40ppm,28-AAM,16	
..4	XTR04	2801-000724	CRYSTAL-UNIT;6MHz,50ppm,28-AAM,20pF,40oh	
..2		AA95-004278	ASSY SOUND;-,SP43J5P3S/XTT,J51A,AA95-004	
..3	C614	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11.5	
..3	C615	2203-000595	C-CERAMIC,CHIP;0.22nF,5%,50V,NP0,TP2012	
..3	C616	2203-000938	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP2012	
..3	C617	2203-000142	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP2012	

Level	Loc. No.	Code No.	Description ; Specification	Remark
..3	C618	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP2012,	
..3	C619	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP2012,	
..3	C620	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11.5	
..3	C621	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11.5	
..3	C622	2203-000701	C-CERAMIC,CHIP;0.002nF,0.25pF,50V,NP0,TP	
..3	C623	2203-000701	C-CERAMIC,CHIP;0.002nF,0.25pF,50V,NP0,TP	
..3	C624	2203-001077	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP201	
..3	C625	2203-001077	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP201	
..3	C626	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11.5	
..3	C627	2203-000938	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP2012	
..3	C628	2203-000142	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP2012	
..3	C629	2203-001077	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP201	
..3	C630	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11.5	
..3	C631	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
..3	C632	2401-002229	C-AL;470nF,20%,50V,WT,TP,5x11.5	
..3	C633	2401-002229	C-AL;470nF,20%,50V,WT,TP,5x11.5	
..3	C634	2203-000784	C-CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP2012	
..3	C635	2203-000784	C-CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP2012	
..3	C636	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
..3	C637	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11.5	
..3	C638	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
..3	C639	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
..3	C640	2203-000938	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP2012	
..3	C641	2203-000142	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP2012	
..3	C642	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11.5	
..3	C643	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11.5	
..3	C644	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11.5	
..3	C645	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11.5	
..3	C646	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11.5	
..3	C649	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11.5	
..3	C650	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP2012	
..3	C651	2401-000365	C-AL;100uF,20%,50V,WT,TP,10x12.5mm,	
..3	C653	2203-000784	C-CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP2012	
..3	C654	2401-002229	C-AL;470nF,20%,50V,WT,TP,5x11.5	
..3	C655	2203-000784	C-CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP2012	
..3	C656	2401-002229	C-AL;470nF,20%,50V,WT,TP,5x11.5	
..3	C657	2401-002229	C-AL;470nF,20%,50V,WT,TP,5x11.5	
..3	C658	2203-000784	C-CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP2012	
..3	C661	2203-000784	C-CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP2012	
..3	C662	2401-002229	C-AL;470nF,20%,50V,WT,TP,5x11.5	
..3	C663	2401-002229	C-AL;470nF,20%,50V,WT,TP,5x11.5	
..3	C664	2203-000784	C-CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP2012	
..3	C667	2203-000784	C-CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP2012	
..3	C668	2401-002229	C-AL;470nF,20%,50V,WT,TP,5x11.5	
..3	C669	2401-002229	C-AL;470nF,20%,50V,WT,TP,5x11.5	
..3	C670	2203-000784	C-CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP2012	
..3	C684	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11.5	
..3	C688	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11.5	
..3	C691	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11.5	
..3	C692	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP2012	
..3	C695	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP2012	
..3	C696	2203-000170	C-CERAMIC,CHIP;1.8nF,10%,50V,X7R,TP2012	
..3	C697	2203-000170	C-CERAMIC,CHIP;1.8nF,10%,50V,X7R,TP2012	
..3	CB1	2401-000365	C-AL;100uF,20%,50V,WT,TP,10x12.5mm,	
..3	CD601	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP2012	
..3	CD602	2203-000142	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP2012	
..3	CD603	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11.5	
..3	CD604	2203-000695	C-CERAMIC,CHIP;0.22nF,5%,50V,NP0,TP2012	
..3	CD605	2203-000938	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP2012	
..3	CD606	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11.5	
..3	CD607	2203-000938	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP2012	
..3	CD608	2203-000142	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP2012	
..3	CD609	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
..3	CD610	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11.5	
..3	CD611	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
..3	CD612	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11.5	
..3	CD613	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11.5	
..3	CD615	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11.5	
..3	CD616	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP2012,	
..3	CD618	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP2012,	
..3	CD619	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
..3	CD620	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
..3	CD621	2203-000938	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP2012	
..3	CD622	2203-000142	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP2012	
..3	CD623	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11.5	
..3	CD624	2203-000495	C-CERAMIC,CHIP;2.2nF,10%,50V,X7R,TP2012	
..3	CD625	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11.5	

Level	Loc. No.	Code No.	Description ; Specification	Remark
..3	CD626	2203-000495	C-CERAMIC,CHIP;2.2nF,10%,50V,X7R,TP2012	
..3	CD627	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11.5	
..3	CD628	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP2012	
..3	CD629	2401-000365	C-AL;100uF,20%,50V,WT,TP,10x12.5mm,	
..3	CD630	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP2012	
..3	CDB1	2401-000365	C-AL;100uF,20%,50V,WT,TP,10x12.5mm,	
..3	CN601A	3711-003626	CONNECTOR-HEADER;NOWALL,20P,1R,2.5mm,ANG	
..3	CN602A	3711-003626	CONNECTOR-HEADER;NOWALL,20P,1R,2.5mm,ANG	
..3	IC601	1204-001689	IC-SOUND PROCESSOR;MSP3410D C5,PLCC,68P	
..3	IC604	1201-000541	IC-OP AMP;062,SOP,8P,153MIL,DUAL,6V/mV,P	
..3	ICD601	1204-001198	IC-DECODER;DPL3519A-A2,PLCC,68P,PLASTI	
..3	ICD602	1201-000541	IC-OP AMP;062,SOP,8P,153MIL,DUAL,6V/mV,P	
..3	L601	2701-000170	INDUCTOR-AXIAL;3.9uH,10%,3x7mm	
..3	L602	2701-000170	INDUCTOR-AXIAL;3.9uH,10%,3x7mm	
..3	L603	2701-000112	INDUCTOR-AXIAL;100uH,10%,3x7mm	
..3	LD601	2701-000170	INDUCTOR-AXIAL;3.9uH,10%,3x7mm	
..3	LD602	2701-000112	INDUCTOR-AXIAL;100uH,10%,3x7mm	
..3	LD603	2701-000170	INDUCTOR-AXIAL;3.9uH,10%,3x7mm	
..3	PCB	AA41-00087A	PCB-AUDIO;PLT51A,2L,FR-4,180X245X1.6T,3A	S.N.A
..3	Q606	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
..3	Q607	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
..3	R601	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
..3	R602	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
..3	R610	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
..3	R611	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
..3	R614	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
..3	R617	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP2012	
..3	R618	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP2012	
..3	R619	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
..3	R620	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
..3	R621	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
..3	R622	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
..3	R623	2007-000477	R-CHIP;1MOHM,5%,1/10W,DA,TP2012	
..3	R624	2007-000477	R-CHIP;1MOHM,5%,1/10W,DA,TP2012	
..3	R625	2007-000477	R-CHIP;1MOHM,5%,1/10W,DA,TP2012	
..3	R626	2007-000477	R-CHIP;1MOHM,5%,1/10W,DA,TP2012	
..3	R632	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP2012	
..3	R633	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP2012	
..3	R634	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP2012	
..3	R635	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP2012	
..3	R636	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP2012	
..3	R637	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP2012	
..3	R638	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP2012	
..3	R660	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
..3	R661	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
..3	R664	2007-001177	R-CHIP;8.2KOHM,5%,1/10W,DA,TP2012	
..3	R665	2007-000774	R-CHIP;33KOHM,5%,1/10W,DA,TP2012	
..3	R666	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
..3	R669	2007-001177	R-CHIP;8.2KOHM,5%,1/10W,DA,TP2012	
..3	R670	2007-000774	R-CHIP;33KOHM,5%,1/10W,DA,TP2012	
..3	R672	2007-000586	R-CHIP;22KOHM,5%,1/10W,DA,TP2012	
..3	R673	2007-000586	R-CHIP;22KOHM,5%,1/10W,DA,TP2012	
..3	R674	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP2012	
..3	R675	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP2012	
..3	RB1	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP2012	
..3	RB2	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP2012	
..3	RB3	2007-000328	R-CHIP;11KOHM,5%,1/10W,DA,TP2012	
..3	RB4	2007-000328	R-CHIP;11KOHM,5%,1/10W,DA,TP2012	
..3	RD601	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
..3	RD602	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
..3	RD604	2007-001177	R-CHIP;8.2KOHM,5%,1/10W,DA,TP2012	
..3	RD605	2007-000774	R-CHIP;33KOHM,5%,1/10W,DA,TP2012	
..3	RD610	2007-001177	R-CHIP;8.2KOHM,5%,1/10W,DA,TP2012	
..3	RD611	2007-000774	R-CHIP;33KOHM,5%,1/10W,DA,TP2012	
..3	RD627	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
..3	RDB1	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP2012	
..3	RDB2	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP2012	
..3	RDB3	2007-000328	R-CHIP;11KOHM,5%,1/10W,DA,TP2012	
..3	RDB4	2007-000328	R-CHIP;11KOHM,5%,1/10W,DA,TP2012	
..3	X601	2801-000186	CRYSTAL-UNIT;18.432MHz,25ppm,28-AAM,8pF,	
..3		AA63-40273A	SHIELD-CASE;-,SPTE,T0.5,-,CX724AHD	
..3		0202-000187	SOLDER-WIRE FLUX;-,RS605,D1.2,63Sn/37Pb	S.N.A
..2		AA95-00519E	ASSY PCB,PROSCAN;-,SP53J5HF,J51A,-,-	
..3	CNP901	3711-003543	CONNECTOR-HEADER;NOWALL,16P,1R,2.54MM,AN	
..3	CNP902	3711-001283	CONNECTOR-HEADER;NOWALL,14P,1R,2.5mm,ANG	
..3	CNP903	3711-001283	CONNECTOR-HEADER;NOWALL,14P,1R,2.5mm,ANG	

Level	Loc. No.	Code No.	Description ; Specification	Remark
..3	CNP904	3711-001283	CONNECTOR-HEADER;NOWALL,14P,1R,2.5mm,ANG	
..3	XP101	2801-004019	CRYSTAL-UNIT;20.25MHz,30ppm,28-AAM,13pF	
..3	XP601	2801-003811	CRYSTAL UNIT;24.576MHZ,20PPM,28-AAM,30PF	
..3		AA99-20079H	ASSY PCB SUB,AUTO;-,AA95-00519E,-,V	S.N.A
..4	CP101	2203-000938	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP2012	
..4	CP102	2203-000938	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP2012	
..4	CP103	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP2012	
..4	CP104	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP2012	
..4	CP106	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP2012,	
..4	CP109	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
..4	CP110	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7.5	
..4	CP111	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP2012	
..4	CP112	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
..4	CP113	2203-001172	C-CERAMIC,CHIP;0.006nF,0.25pF,50V,NP0,TP	
..4	CP114	2203-001172	C-CERAMIC,CHIP;0.006nF,0.25pF,50V,NP0,TP	
..4	CP115	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
..4	CP116	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7.5	
..4	CP117	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
..4	CP118	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7.5	
..4	CP119	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
..4	CP120	2203-001002	C-CERAMIC,CHIP;0.047nF,5%,50V,NP0,TP201	
..4	CP121	2203-001002	C-CERAMIC,CHIP;0.047nF,5%,50V,NP0,TP201	
..4	CP122	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP2012	
..4	CP126	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
..4	CP127	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7.5	
..4	CP128	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7.5	
..4	CP129	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
..4	CP130	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7.5	
..4	CP131	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
..4	CP132	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
..4	CP133	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
..4	CP135	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP2012	
..4	CP137	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
..4	CP139	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP2012	
..4	CP141	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
..4	CP142	2203-000938	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP2012	
..4	CP143	2203-000938	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP2012	
..4	CP144	2203-000938	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP2012	
..4	CP145	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP2012	
..4	CP301	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
..4	CP302	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
..4	CP303	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
..4	CP304	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
..4	CP305	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7.5	
..4	CP306	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
..4	CP307	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7.5	
..4	CP308	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
..4	CP309	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7.5	
..4	CP310	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
..4	CP311	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7.5	
..4	CP312	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
..4	CP313	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
..4	CP314	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
..4	CP315	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
..4	CP316	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
..4	CP317	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
..4	CP401	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
..4	CP402	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
..4	CP403	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7.5	
..4	CP404	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
..4	CP405	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
..4	CP406	2203-000142	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP2012	
..4	CP407	2203-000239	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP2012	
..4	CP408	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
..4	CP409	2203-000655	C-CERAMIC,CHIP;0.02nF,5%,50V,NP0,TP2012	
..4	CP410	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
..4	CP411	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
..4	CP412	2203-000655	C-CERAMIC,CHIP;0.02nF,5%,50V,NP0,TP2012	
..4	CP413	2203-000655	C-CERAMIC,CHIP;0.02nF,5%,50V,NP0,TP2012	
..4	CP414	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
..4	CP415	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
..4	CP416	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
..4	CP417	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
..4	CP418	2404-001020	C-TA,CHIP;10uF,20%,10V,GP,TP,3216,3.2	
..4	CP419	2404-001020	C-TA,CHIP;10uF,20%,10V,GP,TP,3216,3.2	
..4	CP420	2404-001020	C-TA,CHIP;10uF,20%,10V,GP,TP,3216,3.2	

Level	Loc. No.	Code No.	Description ; Specification	Remark
...4	CP501	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP2012	
...4	CP502	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP2012	
...4	CP503	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP2012	
...4	CP504	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP2012	
...4	CP505	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP2012	
...4	CP506	2401-001496	C-AL,47uF,20%,16V,GP,TP,5x7,5	
...4	CP507	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CP508	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP2012	
...4	CP509	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP2012	
...4	CP510	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP2012	
...4	CP511	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP2012	
...4	CP512	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP2012	
...4	CP513	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP2012	
...4	CP514	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP2012	
...4	CP515	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP2012	
...4	CP516	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP2012	
...4	CP517	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP2012	
...4	CP518	2401-000598	C-AL,1uF,20%,50V,GP,TP,4x7,5	
...4	CP519	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP2012	
...4	CP520	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP2012	
...4	CP521	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP2012	
...4	CP522	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP2012	
...4	CP523	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP2012	
...4	CP524	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP2012	
...4	CP525	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CP527	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CP528	2401-001496	C-AL,47uF,20%,16V,GP,TP,5x7,5	
...4	CP529	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP2012	
...4	CP530	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP2012	
...4	CP531	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP2012	
...4	CP532	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP2012	
...4	CP533	2401-000486	C-AL,10uF,20%,50V,GP,TP,6.3x7mm,5	
...4	CP534	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP2012	
...4	CP535	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP2012	
...4	CP536	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP2012	
...4	CP537	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP2012	
...4	CP538	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP2012	
...4	CP539	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP2012	
...4	CP540	2401-000486	C-AL,10uF,20%,50V,GP,TP,6.3x7mm,5	
...4	CP541	2203-001002	C-CERAMIC,CHIP;0.047nF,5%,50V,NP0,TP201	
...4	CP542	2203-001002	C-CERAMIC,CHIP;0.047nF,5%,50V,NP0,TP201	
...4	CP545	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP2012	
...4	CP546	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP2012	
...4	CP547	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP2012	
...4	CP548	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP2012	
...4	CP549	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CP550	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CP551	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CP552	2401-001496	C-AL,47uF,20%,16V,GP,TP,5x7,5	
...4	CP553	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CP554	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CP555	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CP556	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CP559	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CP601	2203-001088	C-CERAMIC,CHIP;0.005nF,0.25pF,50V,NP0,TP	
...4	CP602	2203-001088	C-CERAMIC,CHIP;0.005nF,0.25pF,50V,NP0,TP	
...4	CP603	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP2012	
...4	CP604	2203-000938	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP2012	
...4	CP605	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP2012,-	
...4	CP607	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CP609	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CP610	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CP611	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP2012,-	
...4	CP612	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP2012,	
...4	CP613	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP2012,-	
...4	CP614	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CP615	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CP616	2203-001002	C-CERAMIC,CHIP;0.047nF,5%,50V,NP0,TP201	
...4	CP617	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CP618	2203-000239	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP2012	
...4	CP619	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CP620	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CP621	2203-000239	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP2012	
...4	CP622	2203-000142	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP2012	
...4	CP623	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CP624	2401-001496	C-AL,47uF,20%,16V,GP,TP,5x7,5	
...4	CP625	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	

Level	Loc. No.	Code No.	Description ; Specification	Remark
...4	CP626	2401-002009	C-AL,100uF,20%,16V,GP,TP,6.3x7.5	
...4	CP627	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CP628	2401-002009	C-AL,100uF,20%,16V,GP,TP,6.3x7.5	
...4	CP629	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CP630	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CP631	2401-000598	C-AL,1uF,20%,50V,GP,TP,4x7,5	
...4	CP901	2404-001229	C-TA,CHIP;4.7uF,20%,25V,GP,TP,3528	
...4	CP902	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CP904	2203-001088	C-CERAMIC,CHIP;0.005nF,0.25pF,50V,NP0,TP	
...4	CP905	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP2012	
...4	CP906	2203-000495	C-CERAMIC,CHIP;2.2nF,10%,50V,X7R,TP2012	
...4	DP501	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
...4	DP502	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
...4	DP503	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
...4	DP504	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
...4	DP505	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
...4	DP601	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
...4	DP602	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
...4	DP603	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
...4	DP604	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
...4	DP605	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
...4	DP606	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
...4	DP607	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
...4	DP901	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
...4	DP902	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
...4	DP903	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
...4	DP904	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
...4	FP101	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
...4	FP102	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
...4	FP301	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
...4	FP901	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
...4	FP902	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
...4	FP903	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
...4	FP904	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
...4	FP905	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
...4	FP906	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
...4	FP907	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
...4	FP908	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
...4	ICP101	1204-001362	IC-VIDEO PROCESS;VPC3215C-B8,PLCC,43P,-	
...4	ICP103	1205-001172	IC-INTERFACE;CIP3250A-B1,PLCC,68P,-,PLAS	
...4	ICP301	1204-001623	IC-VERTICAL PROCESSO;SDA9400,QFP,64P,-,P	
...4	ICP302	1203-001419	IC-VOLTAGE REGULATOR;4931,TO-252,3P,6.6x	
...4	ICP401	1002-001045	IC-D/A CONVERTER;9280,8BIT,PLCC,68P,-,-	
...4	ICP501	1204-001550	IC-VIDEO PROCESS;CXA2101AQ,QFP,80P,-,PLA	
...4	ICP601	1204-001372	IC-HOR/VER.PROCESSO;SDA9361,QFP,44P,-,P	
...4	ICP901	1202-000001	IC-VOLTAGE COMP;7533,TO-92,3P,-,SINGLE,	
...4	LP101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	S.N.A
...4	LP102	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	S.N.A
...4	LP103	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	S.N.A
...4	LP105	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	S.N.A
...4	LP106	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	S.N.A
...4	LP107	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	S.N.A
...4	LP301	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	S.N.A
...4	LP302	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	S.N.A
...4	LP303	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	S.N.A
...4	LP401	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	S.N.A
...4	LP402	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	S.N.A
...4	LP403	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	S.N.A
...4	LP404	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	S.N.A
...4	LP601	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	S.N.A
...4	LP602	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	S.N.A
...4	LP603	2703-001717	INDUCTOR-SMD;1.2uH,5%,3.2x2.5x2.2mm	
...4	LP901	3301-001186	CORE-FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m	S.N.A
...4	LP902	3301-001186	CORE-FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m	S.N.A
...4	LP903	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	S.N.A
...4	LP904	3301-001184	CORE-FERRITE BEAD;AB,1.3kohm,4.5x3.2x1.3	S.N.A
...4	LP905	3301-001184	CORE-FERRITE BEAD;AB,1.3kohm,4.5x3.2x1.3	S.N.A
...4	LP906	3301-001184	CORE-FERRITE BEAD;AB,1.3kohm,4.5x3.2x1.3	S.N.A
...4	QP501	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
...4	QP502	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT	
...4	QP503	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT	
...4	QP504	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
...4	QP505	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
...4	QP506	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
...4	QP508	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT	
...4	QP602	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT	
...4	QP902	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	

Level	Loc. No.	Code No.	Description ; Specification	Remark
...4	RP101	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
...4	RP102	2007-000947	R-CHIP;47OHM,5%,1/10W,DA,TP2012	
...4	RP106	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP112	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP113	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP114	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP115	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP117	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
...4	RP134	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP135	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP136	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
...4	RP137	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
...4	RP138	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
...4	RP139	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
...4	RP140	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
...4	RP141	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
...4	RP142	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
...4	RP143	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
...4	RP153	2007-000401	R-CHIP;150OHM,5%,1/10W,DA,TP2012	
...4	RP154	2007-000308	R-CHIP;10OHM,5%,1/10W,DA,TP2012	
...4	RP155	2007-000947	R-CHIP;47OHM,5%,1/10W,DA,TP2012	
...4	RP156	2007-000947	R-CHIP;47OHM,5%,1/10W,DA,TP2012	
...4	RP157	2007-000947	R-CHIP;47OHM,5%,1/10W,DA,TP2012	
...4	RP159	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
...4	RP161	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP301	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP302	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP303	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP304	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP305	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP401	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
...4	RP402	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
...4	RP403	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
...4	RP404	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
...4	RP405	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP406	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP407	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP408	2007-001055	R-CHIP;6.2KOHM,5%,1/10W,DA,TP2012	
...4	RP409	2007-000401	R-CHIP;150OHM,5%,1/10W,DA,TP2012	
...4	RP411	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
...4	RP412	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
...4	RP413	2007-000401	R-CHIP;150OHM,5%,1/10W,DA,TP2012	
...4	RP415	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
...4	RP416	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
...4	RP417	2007-000380	R-CHIP;13KOHM,5%,1/10W,DA,TP2012	
...4	RP418	2007-000401	R-CHIP;150OHM,5%,1/10W,DA,TP2012	
...4	RP419	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
...4	RP421	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
...4	RP422	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP2012	
...4	RP423	2007-000401	R-CHIP;150OHM,5%,1/10W,DA,TP2012	
...4	RP501	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
...4	RP502	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
...4	RP503	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
...4	RP504	2007-000030	R-CHIP;560OHM,5%,1/10W,DA,TP2012	
...4	RP505	2007-000572	R-CHIP;220OHM,5%,1/10W,DA,TP2012	
...4	RP506	2007-000493	R-CHIP;2.2KOHM,5%,1/10W,DA,TP2012	
...4	RP507	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP2012	
...4	RP509	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP2012	
...4	RP510	2007-000938	R-CHIP;47KOHM,1%,1/10W,DA,TP2012	
...4	RP513	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP514	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP2012	
...4	RP515	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
...4	RP516	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
...4	RP517	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP518	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP2012	
...4	RP519	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP521	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP2012	
...4	RP522	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP523	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP2012	
...4	RP524	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP525	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP526	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP2012	
...4	RP527	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP528	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP529	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP2012	
...4	RP530	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	

Level	Loc. No.	Code No.	Description ; Specification	Remark
...4	RP537	2007-000689	R-CHIP;3.3MOHM,5%,1/10W,DA,TP2012	
...4	RP542	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP543	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP544	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
...4	RP546	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP547	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP549	2007-000671	R-CHIP;2KOHM,5%,1/10W,DA,TP2012	
...4	RP550	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP553	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP554	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP555	2007-000582	R-CHIP;22KOHM,1%,1/10W,DA,TP2012	
...4	RP556	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP560	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
...4	RP562	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
...4	RP565	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
...4	RP566	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
...4	RP567	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
...4	RP568	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
...4	RP569	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
...4	RP570	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP2012	
...4	RP571	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP601	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP602	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP603	2007-001208	R-CHIP;82KOHM,5%,1/10W,DA,TP2012	
...4	RP604	2007-000947	R-CHIP;47OHM,5%,1/10W,DA,TP2012	
...4	RP605	2007-000518	R-CHIP;2.7KOHM,5%,1/10W,DA,TP2012	
...4	RP606	2007-000518	R-CHIP;2.7KOHM,5%,1/10W,DA,TP2012	
...4	RP609	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
...4	RP611	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
...4	RP613	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP2012	
...4	RP614	2007-000001	R-CHIP;68KOHM,5%,1/10W,DA,TP2012	
...4	RP619	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
...4	RP620	2007-000947	R-CHIP;47OHM,5%,1/10W,DA,TP2012	
...4	RP621	2007-000947	R-CHIP;47OHM,5%,1/10W,DA,TP2012	
...4	RP622	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
...4	RP623	2007-000822	R-CHIP;390OHM,5%,1/10W,DA,TP2012	
...4	RP624	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP625	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
...4	RP626	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP2012	
...4	RP627	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
...4	RP628	2007-000267	R-CHIP;1.8KOHM,5%,1/10W,DA,TP2012	
...4	RP629	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
...4	RP630	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
...4	RP631	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
...4	RP709	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
...4	RP719	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
...4	RP727	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
...4	RP735	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
...4	RP736	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
...4	RP737	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
...4	RP738	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
...4	RP901	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP904	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
...4	RP907	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP908	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP912	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP913	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP914	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP915	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP916	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP917	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP918	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP920	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP921	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP924	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
...4	RP925	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP926	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP927	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
...4	RP929	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
...4	RP931	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
...4	RP933	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
...4	RP935	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
...4	RP936	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
...4	RP943	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
...4	RP944	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP2012	
...4	RP945	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	

Level	Loc. No.	Code No.	Description ; Specification	Remark
4	RP90	2007 000029	R CHIP 0.00HM 5% 1/10W DA TP 2012	
4		VA41 002338	PCB,PROSCAN SVP 53J5PFR 4 ㎜ 3.1 6T 245	S.N.A
3		AA63 40272A	SHIELD CASE ,SPTE T0.5, CXT243-D	S.N.A
3		AA95 00529A	ASSY PCB,PIP ,SP43J5HP,S1A,	
3	CNP01	3711 002709	CONNECTOR HEADER,NONWALL 10P1R,2.5MM,ANG	
3	CNP03	3711 002709	CONNECTOR HEADER,NONWALL 10P1R,2.5MM,ANG	
3	CP101	1204 000530	IC PAL/NTSC DECODER,TDA9151A,DIP32P,400	
3	CP102	1204 000560	IC DEMODULATOR,TDA9815,DIP22P,400MIL,PL	
3	RP126	2103 000665	VR SEMI,20Kohm,25%,1/5W,SIDE	
3	CP101	VA26 10004E	TRANS IF, 7MG,VIF, 7mm,8pF 1% 7MHzS	
2	ZP102	2904 000253	FILTER SAW AV,38.9MHz,DIP10A,ST 13dB B/G	
3		AA99 20066Z	ASSY PCB SUB,AUTO; AA95 00529A ,,,V	S.N.A
4	CP101	2203 000221	C CERAMIC,CHIP 100nF 20% 50V Y5V TP 3216	
4	CP102	2401 000922	C AL 22uF 20% 16V GP,TP 5x5.5	
4	CP103	2203 000429	C CERAMIC,CHIP 0.018nF 5% 50V NP0,TP 3216	
4	CP104	2203 000181	C CERAMIC,CHIP 100nF -80-20% 25V Y5V,TP	
4	CP105	2203-000717	C CERAMIC,CHIP 3.3nF 10% 50V,X7R,TP 3216	
4	CP106	2203 000221	C CERAMIC,CHIP 100nF 20% 50V Y5V TP 3216	
4	CP107	2203 000221	C CERAMIC,CHIP 100nF 20% 50V Y5V TP 3216	
4	CP108	2203 000221	C CERAMIC,CHIP 100nF 20% 50V Y5V TP 3216	
4	CP109	2401-001840	C AL 100uF 20% 16V,GP,TP6.3x11.5	
4	CP110	2203 000221	C CERAMIC,CHIP 100nF 20% 50V Y5V TP 3216	
4	CP111	2203-000716	C CERAMIC,CHIP 3.3nF 10% 50V,X7R,TP 2012	
4	CP112	2401 000660	C AL 2.2uF 20% 50V,GP,TP 5x11.5	
4	CP114	2203-000221	C CERAMIC,CHIP 100nF 20% 50V Y5V,TP 3216	
4	CP115	2203-000221	C CERAMIC,CHIP 100nF 20% 50V Y5V,TP 3216	
4	CP116	2203-000753	C CERAMIC,CHIP 330nF -80-20% 50V Y5V,TP,	
4	CP117	2401 002144	C AL 47uF 20% 16V,GP,TP 5x11.5	
4	CP118	2203-000221	C CERAMIC,CHIP 100nF 20% 50V Y5V,TP 3216	
4	CP119	2201-000692	C CERAMIC,DISC 0.008nF 0.5pF 50V,CH TP 4	
4	CP120	2203-000578	C CERAMIC,CHIP 220nF 20% 50V Y5V,TP 3216	
4	CP121	2401 000660	C AL 2.2uF 20% 50V,GP,TP 5x11.5	
4	CP123	2203-000260	C CERAMIC,CHIP 10nF 10% 50V,X7R,TP 2012	
4	CP124	2401 000660	C AL 2.2uF 20% 50V,GP,TP 5x11.5	
4	CP125	2203-000260	C CERAMIC,CHIP 10nF 10% 50V,X7R,TP 2012	
4	CP126	2401-001840	C AL 100uF 20% 16V,GP,TP6.3x11.5	
4	CP127	2203-000221	C CERAMIC,CHIP 100nF 20% 50V Y5V,TP 3216	
4	CP129	2203-000260	C CERAMIC,CHIP 10nF 10% 50V,X7R,TP 2012	
4	CP130	2203 000239	C CERAMIC,CHIP 0.1nF 5% 50V,NP0,TP 2012	
4	CP131	2201-000692	C CERAMIC,DISC 0.008nF 0.5pF 50V,CH TP 4	
4	CP132	2203-000239	C CERAMIC,CHIP 0.1nF 5% 50V,NP0,TP 2012	
4	CP133	2203 000221	C CERAMIC,CHIP 100nF 20% 50V Y5V,TP 3216	
4	CP134	2401 001840	C AL 100uF 20% 16V,GP,TP6.3x11.5	
4	CP135	2401-002144	C AL 47uF 20% 16V,GP,TP 5x11.5	
4	CP136	2203-000260	C CERAMIC,CHIP 10nF 10% 50V,X7R,TP 2012	
4	CP137	2203-000938	C CERAMIC,CHIP 0.47nF 5% 50V,NP0,TP 2012	
4	CP142	2401-000199	C AL 1000uF 20% 6.3V,GP,TP 10x12.5	
4	CP143	2401-002144	C AL 47uF 20% 16V,GP,TP 5x11.5	
4	CP144	2203-000221	C CERAMIC,CHIP 100nF 20% 50V Y5V,TP 3216	
4	CP145	2203-000221	C CERAMIC,CHIP 100nF 20% 50V Y5V,TP 3216	
4	CP201	2203-000325	C CERAMIC,CHIP 12nF 10% 50V,X7R,TP 3216,	
4	CP203	2401-002144	C AL 47uF 20% 16V,GP,TP 5x11.5	
4	CP204	2203-000221	C CERAMIC,CHIP 100nF 20% 50V Y5V,TP 3216	
4	CP205	2401-001840	C AL 100uF 20% 16V,GP,TP6.3x11.5	
4	CP206	2203 000221	C CERAMIC,CHIP 100nF 20% 50V Y5V,TP 3216	
4	CP207	2401 001840	C AL 100uF 20% 16V,GP,TP6.3x11.5	
4	CP208	2203-000221	C CERAMIC,CHIP 100nF 20% 50V Y5V,TP 3216	
4	CP209	2401 001914	C AL 1uF 20% 50V,BP,TP 5x11.5	
4	CP210	2401 001840	C AL 100uF 20% 16V,GP,TP6.3x11.5	
4	CP211	2401 000603	C AL 1uF 20% 50V,GP,TP 5x11.5	
4	CP213	2401-000603	C AL 1uF 20% 50V,GP,TP 5x11.5	
4	CP214	2203 000578	C CERAMIC,CHIP 220nF 20% 50V Y5V,TP 3216	
4	CP215	2401 000603	C AL 1uF 20% 50V,GP,TP 5x11.5	
4	CP216	2203-000221	C CERAMIC,CHIP 100nF 20% 50V Y5V,TP 3216	
4	CP217	2203 000578	C CERAMIC,CHIP 220nF 20% 50V Y5V,TP 3216	
4	CP218	2203 002085	C CERAMIC,CHIP 56nF 10% 50V,X7R,TP 2012,	
4	CP219	2203-000495	C CERAMIC,CHIP 2.2nF 10% 50V,X7R,TP 2012	
4	CP220	2203 000578	C CERAMIC,CHIP 220nF 20% 50V Y5V,TP 3216	
4	CP221	2203 000221	C CERAMIC,CHIP 100nF 20% 50V Y5V,TP 3216	
4	CP301	2401 001840	C AL 100uF 20% 16V,GP,TP6.3x11.5	
4	CP302	2203 000221	C CERAMIC,CHIP 100nF 20% 50V Y5V,TP 3216	
4	CP303	2401 001840	C AL 100uF 20% 16V,GP,TP6.3x11.5	
4	CP304	2203-000221	C CERAMIC,CHIP 100nF 20% 50V Y5V,TP 3216	
4	CP305	2203-001077	C CERAMIC,CHIP 0.056nF 5% 50V NP0,TP 201	
4	CP306	2203-001077	C CERAMIC,CHIP 0.056nF 5% 50V NP0,TP 201	
4	DP101	0401 000160	DIODE SWITCHING,ISS314,30V,100mA,USC,TP	
4	DP103	0403 000720	DIODE ZENER,MTZJ9.1B,9.1V,0.5W,9.01V,500	
4	DP105	0401 000160	DIODE SWITCHING,ISS314,30V,100mA,USC,TP	
4	DP201	0403 000334	DIODE ZENER,UZ2 7B5A,2.7V,2.54-2.75V,500	
4	ICP103	AA13 20004A	IC HYBRID; PAP102TS/PSPPME AMP,TP	
4	ICP105	1204 000635	IC PICTURE PROCESS SDA9189X,SOP32P,350M	
4	ICP201	1002 000206	IC A/D CONVERTER SDA9187 ZX,6BIT,SOP28P	
4	LP102	2701 000219	INDUCTOR AXIAL,820nH,10% 2.5x3.4mm	
4	LP103	2701 000114	INDUCTOR AXIAL,10uH,10% 2.5x3.4mm	
4	LP104	2701 000114	INDUCTOR AXIAL,10uH,10% 2.5x3.4mm	
4	LP105	2701 000114	INDUCTOR AXIAL,10uH,10% 2.5x3.4mm	
4	LP201	2701 000197	INDUCTOR AXIAL,5.6uH,10% 2.5x3.4mm	
4	LP301	2701 000114	INDUCTOR AXIAL,10uH,10% 2.5x3.4mm	
4	PCB	AA41-11003A	PCB PIP,SCT53A,2L,FR 4,330x245x1.6T,A6	S.N.A
4	QP104	0501 000342	TR SMALL SIGNAL,KSC1623-Y,NPN,200mW,SOT-	
4	QP105	0501 000342	TR SMALL SIGNAL,KSC1623-Y,NPN,200mW,SOT-	
4	QP106	0501 000342	TR SMALL SIGNAL,KSC1623-Y,NPN,200mW,SOT-	
4	QP201	0501 000342	TR SMALL SIGNAL,KSC1623-Y,NPN,200mW,SOT-	
4	QP202	0501 000342	TR SMALL SIGNAL,KSC1623-Y,NPN,200mW,SOT-	
4	QP203	0501 000280	TR SMALL SIGNAL,KSA1182,PNP,150mW,SOT-23	
4	QP204	0501 000342	TR SMALL SIGNAL,KSC1623-Y,NPN,200mW,SOT-	
4	QP205	0501 000342	TR SMALL SIGNAL,KSC1623-Y,NPN,200mW,SOT-	
4	QP206	0501 000342	TR SMALL SIGNAL,KSC1623-Y,NPN,200mW,SOT-	
4	QP302	0501 000342	TR SMALL SIGNAL,KSC1623-Y,NPN,200mW,SOT-	
4	QP303	0501 000280	TR SMALL SIGNAL,KSA1182,PNP,150mW,SOT-23	
4	QP304	0501 000280	TR SMALL SIGNAL,KSA1182,PNP,150mW,SOT-23	
4	QP305	0501 000280	TR SMALL SIGNAL,KSA1182,PNP,150mW,SOT-23	
4	RC129	2007-000586	R CHIP,22KOHM,5%,1/10W,DA,TP2012	
4	RP101	2007 001208	R CHIP,82KOHM,5%,1/10W,DA,TP2012	
4	RP104	2007 000468	R CHIP,1KOHM,5%,1/10W,DA,TP2012	
4	RP105	2007 000328	R CHIP,11KOHM,5%,1/10W,DA,TP2012	
4	RP106	2007 000774	R CHIP,33KOHM,5%,1/10W,DA,TP2012	
4	RP107	2007 000409	R CHIP,15KOHM,5%,1/10W,DA,TP2012	
4	RP108	2007 000493	R CHIP,2.2KOHM,5%,1/10W,DA,TP2012	
4	RP109	2007 000830	R CHIP,39KOHM,5%,1/10W,DA,TP2012	
4	RP110	2007 000300	R CHIP,10KOHM,5%,1/10W,DA,TP2012	
4	RP111	2007 000872	R CHIP,4.7KOHM,5%,1/10W,DA,TP2012	
4	RP112	2007 000931	R CHIP,470OHM,5%,1/10W,DA,TP2012	
4	RP113	2007 000774	R CHIP,33KOHM,5%,1/10W,DA,TP2012	
4	RP114	2007 000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP115	2007 000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP116	2007 000493	R CHIP,2.2KOHM,5%,1/10W,DA,TP2012	
4	RP118	2001 000117	R-CARBON(S),68OHM 5%,1/2W,AA,TP,2.4X6.4M	
4	RP119	2007 000282	R CHIP,100KOHM,5%,1/10W,DA,TP2012	
4	RP122	2007 000300	R CHIP,10KOHM,5%,1/10W,DA,TP2012	
4	RP123	2007 000941	R CHIP,47KOHM,5%,1/10W,DA,TP2012	
4	RP124	2007 000941	R CHIP,47KOHM,5%,1/10W,DA,TP2012	
4	RP125	2007 000401	R CHIP,150OHM,5%,1/10W,DA,TP2012	
4	RP127	2007 000030	R CHIP,560OHM,5%,1/10W,DA,TP2012	
4	RP128	2007 000941	R CHIP,47KOHM,5%,1/10W,DA,TP2012	
4	RP130	2007 000872	R CHIP,4.7KOHM,5%,1/10W,DA,TP2012	
4	RP131	2007 000586	R CHIP,22KOHM,5%,1/10W,DA,TP2012	
4	RP132	2007 000468	R CHIP,1KOHM,5%,1/10W,DA,TP2012	
4	RP135	2007 000468	R CHIP,1KOHM,5%,1/10W,DA,TP2012	
4	RP136	2007 000872	R CHIP,4.7KOHM,5%,1/10W,DA,TP2012	
4	RP137	2007 001039	R CHIP,56KOHM,5%,1/10W,DA,TP2012	
4	RP138	2007 000586	R CHIP,22KOHM,5%,1/10W,DA,TP2012	
4	RP140	2007 000029	R CHIP,0OHM,5%,1/10W,DA,TP2012	
4	RP201	2007 001039	R CHIP,56KOHM,5%,1/10W,DA,TP2012	
4	RP202	2007 000401	R CHIP,150OHM,5%,1/10W,DA,TP2012	
4	RP203	2007 000703	R CHIP,3.6KOHM,5%,1/10W,DA,TP2012	
4	RP204	2007 000693	R CHIP,220HM,5%,1/10W,DA,TP2012	
4	RP205	2007 000477	R CHIP,1MOHM,5%,1/10W,DA,TP2012	
4	RP206	2007 000931	R CHIP,470OHM,5%,1/10W,DA,TP2012	
4	RP207	2007 001009	R CHIP,51KOHM,5%,1/10W,DA,TP2012	
4	RP208	2007 000774	R CHIP,33KOHM,5%,1/10W,DA,TP2012	
4	RP209	2007 000401	R CHIP,150OHM,5%,1/10W,DA,TP2012	
4	RP210	2007 000221	R CHIP,1.2KOHM,5%,1/10W,DA,TP2012	
4	RP211	2007 001001	R CHIP,510OHM,5%,1/10W,DA,TP2012	
4	RP212	2007 000931	R CHIP,470OHM,5%,1/10W,DA,TP2012	
4	RP213	2007 000872	R CHIP,4.7KOHM,5%,1/10W,DA,TP2012	
4	RP215	2007 000872	R CHIP,4.7KOHM,5%,1/10W,DA,TP2012	
4	RP216	2007 000872	R CHIP,4.7KOHM,5%,1/10W,DA,TP2012	
4	RP217	2007 000409	R CHIP,15KOHM,5%,1/10W,DA,TP2012	
4	RP301	2007 000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP303	2007 000468	R CHIP,1KOHM,5%,1/10W,DA,TP2012	
4	RP304	2007 000290	R CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP307	2007 000518	R CHIP,2.7KOHM,5%,1/10W,DA,TP2012	
4	RP308	2007 000401	R CHIP,150OHM,5%,1/10W,DA,TP2012	

Level	Loc. No.	Code No.	Description ; Specification	Remark
4	RP309	2007 000931	R CHIP,470OHM,5%,1/10W,DA,TP2012	
4	RP310	2007 000931	R CHIP,470OHM,5%,1/10W,DA,TP2012	
4	RP311	2007 000931	R CHIP,470OHM,5%,1/10W,DA,TP2012	
4	RP312	2007 000300	R CHIP,10KOHM,5%,1/10W,DA,TP2012	
4	RP313	2007 000758	R CHIP,360OHM,5%,1/10W,DA,TP2012	
4	RP314	2007 000758	R CHIP,360OHM,5%,1/10W,DA,TP2012	
4	RP315	2007 000758	R CHIP,360OHM,5%,1/10W,DA,TP2012	
4	RP316	2001 001146	R CARBON(S),4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
4	RP317	2001 001146	R CARBON(S),4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
4	XP101	2801 000235	CRYSTAL UNIT,3.579545MHz,40ppm,28 AAM S,	
4	XP102	2801 000274	CRYSTAL UNIT,4.433619MHZ,30PPM,28 AAM,20	
4	XP301	2802 000121	RESONATOR,CERAMIC,20.48MHz,0.5%,TP,10 0x	
3		AA63 40013A	SHIELD CASE ,SPTE T0.5,SCT51A,WZ74,	S.N.A
3		0202 000187	SOLDER WIRE FLUX, RS60S,D1 2,63Sn/37Pb	S.N.A
2		AA99 30214P	ASSY PCB ROBOT, AA94 03459P ,ER	S.N.A
3	CN201	3711 003051	CONNECTOR HEADER,BOX,8P1R,2.5mm,STRAGHT	
3	CN202	3711 003052	CONNECTOR HEADER,BOX,10P1R,2.5mm,STRAGH	
3	CN501	3711 003051	CONNECTOR HEADER,BOX,8P1R,2.5mm,STRAGHT	
3	CNY01	3711 003973	CONNECTOR HEADER,BOX,11P1R,2.5mm,STRAIG	
3	CS810	2201 000446	C CERAMIC,DISC,3.3nF,20%,400V,Y5U,TP,15x	
3	CS811	2201 000446	C CERAMIC,DISC,3.3nF,20%,400V,Y5U,TP,15x	
3	DS801	0402 000102	DIODE BRIDGE,D2S60,600V,1.5A,	
3	FI101	2904-000253	FILTER SAW AV,38.9MHz,DIP10K,ST,18dB,B/G	
3	FI102	2904-001010	FILTER SAW AV,32.9~33.4MHz,SIP5P,ST,14.4	
3	HI002	AA40-10005T	TUNER,F/S,TECC2949PG29A(S),PAL B/G,TR,18	
3	IC501	AA96-00111L	ASSY,H/S, , ,AA62 30013L,KA78R12,	
4		1203-000165	IC POSI,ADJUST REG,;78R12,TO-220,3P ,,	
4		6003-000333	SCREW-TAPTITE,RH, ,2S,M3,L10,ZPC(YELL),SW	
4		AA62 30013L	HEATSINK-ES, , , , ,44/22, ,WHT, , , ,	
3	IC807	AA96-50147A	ASSY,H/S, ,TR,AA62 30012B,KA7805A,	S.N.A
4		1203-000274	IC POSI,FIXED REG ,7805,TO-220,3P ,PLAS	
4		6003-000333	SCREW-TAPTITE,RH, ,2S,M3,L10,ZPC(YELL),SW	
4		AA62 30012B	HEAT SINK-ES, ,A6063 EXTR, , ,45(H) 102	S.N.A
3	IC901	AA09-00092A	IC MICOM,Z9035612PSC R50P1,SP43J5HF 52P	
3	IC902	1103 001106	IC EEPROM,C81DC,1024x8Bit,DIP8P,300MIL,	
3	ICS801	AA13-00024A	IC HYBRID; ,TNY253P ,3PIN, ,	
3	ICSR02	0604 001032	PHOTO-COUPLER,TR,170-260%,300mW,DIP 4 ST	
3		AA99-10209A	ASSY,PCB MAIN,AL TO; AA99 30214P ,,V	S.N.A
4	C103	2201 000119	C CERAMIC,DISC,100nF -80-20%,50V,Y5V,TP	
4	C104	2401 001840	C AL 100uF 20% 16V,GP,TP6.3x11.5	
4	C105	2401 000302	C AL 100uF 20% 25V,GP,TP6.3x11.5	
4	C107	2305 000665	C FILM,MPEF,100nF 5% 63V,TP,7.5x4.0x5.0m	
4	C109	2201-000119	C CERAMIC,DISC,100nF,-80-20%,50V,Y5V,TP,	
4	C110	2401 001840	C AL 100uF 20% 16V,GP,TP6.3x11.5	
4	C119	2201-000119	C CERAMIC,DISC,100nF,-80-20%,50V,Y5V,TP,	
4	C121	2305 000665	C FILM,MPEF,100nF 5% 63V,TP,7.5x4.0x5.0m	
4	C125	2401 000603	C AL 1uF 20% 50V,GP,TP 5x11.5	
4	C126	2201-000119	C CERAMIC,DISC,100nF,-80-20%,50V,Y5V,TP,	
4	C130	2201-000119	C CERAMIC,DISC,100nF,-80-20%,50V,Y5V,TP,	
4	C131	2305-000665	C FILM,MPEF,100nF 5% 63V,TP,7.5x4.0x5.0m	
4	C132	2305-000665	C FILM,MPEF,100nF 5% 63V,TP,7.5x4.0x5.0m	
4	C133	2401-001363	C AL 470uF 20% 16V,GP,TP 10x12.5,5	
4	C134	2401 002273	C AL 220uF 20% 25V,HR,TP,10x20mm,5m	
4	C135	2401 000287	C AL 100uF 20% 16V,WT,TP5.3x11.5	
4	C136	2401-000027	C AL 4.7uF 20% 50V,GP,TP 5x11.5	
4	C137	2401 002212	C AL 10uF 20% 25V,WT,TP 5x11.5	
4	C138	2305-000665	C FILM,MPEF,100nF 5% 63V,TP,7.5x4.0x5.0m	
4	C139	2201 000180	C CERAMIC,DISC,10nF,10%,50V,Y5V,TP,7x3.5	
4	C140	2201 000292	C CERAMIC,DISC,1nF 10%,50V,Y5P,TP,5x3.5,	
4	C141	2201 000292	C CERAMIC,DISC,1nF,10%,50V,Y5P,TP,5x3.5,	
4	C142	2305 000289	C FILM,MPEF,220nF,5%,63V,TP, ,5mm	
4	C143	2401 000667	C AL 2.2uF 20% 50V,WT,TP,5x11.5	
4	C144	2201 000180	C CERAMIC,DISC,10nF,10%,50V,Y5V,TP,7x3.5	
4	C145	2305 000665	C FILM,MPEF,100nF 5% 63V,TP,7.5x4.0x5.0m	
4	C146	2305-000665	C FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x5.0m	
4	C147	2401 000680	C AL 2.2uF 20% 50V,GP,TP 5x11.5	
4	C148	2305 000665	C FILM,MPEF,100nF 5% 63V,TP,7.5x4.0x5.0m	
4	C149	2401 000947	C AL 22uF 20% 35V,GP,TP 5x11.5	
4	C180	2401 002300	C AL 47uF 20% 50V,GP,TP6.3x11.5	
4	C185	2401 001363	C AL 470uF 20% 16V,GP,TP 10x12.5,5	
4	C191	2401 002619	C AL 47uF 20% 25V,GP,TP 5x11.5	
4	C501	2305-000665	C FILM,MPEF,100nF 5% 63V,TP,7.5x4.0x5.0m	
4	C502	2401 001397	C AL 470uF 20% 25V,GP,TP,10x16.5	
4	C503	2305 000665	C FILM,MPEF,100nF 5% 63V,TP,7.5x4.0x5.0m	
4	C504	2401-000832	C AL 220uF 20% 25V,GP,TP8x11.5,5	
4	C505	2305 000665	C FILM,MPEF,100nF 5% 63V,TP,7.5x4.0x5.0m	
4	C506	2401 002594	C AL 220uF 20% 16V,GP,TP8x11.5,5	
4	C507	2305-000665	C FILM,MPEF,100nF 5% 63V,TP,7.5x4.0x5.0m	
4	C508	2401 002286	C AL 470uF 20% 16V,WT,TP,10x12.5,5	
4	C509	2305 000665	C FILM,MPEF,100nF 5% 63V,TP,7.5x4.0x5.0m	
4	C510	2401 000133	C AL 1000uF 20% 16V,GP,TP 10x20.5	
4	C511	2305 000665	C FILM,MPEF,100nF 5% 63V,TP,7.5x4.0x5.0m	
4	C512	2401 000689	C AL 2200uF 20% 16V,GP,TP 13x25.5	
4	C519	2305 000665	C FILM,MPEF,100nF 5% 63V,TP,7.5x4.0x5.0m	
4	C520	2401-001397	C AL 470uF 20% 25V,GP,TP,10x16.5	
4	C521	2305-000665	C FILM,MPEF,100nF 5% 63V,TP,7.5x4.0x5.0m	
4	C522	2401 002286	C AL 470uF 20% 16V,WT,TP,10x12.5,5	
4	C523	2201 000292	C CERAMIC,DISC,1nF,10%,50V,Y5P,TP,5x3.5,	
4	C537	2305 000665	C FILM,MPEF,100nF 5% 63V,TP,7.5x4.0x5.0m	
4	C538	2401 001840	C AL 100uF 20% 16V,GP,TP6.3x11.5	
4	C539	2401 001840	C AL 100uF 20% 16V,GP,TP6.3x11.5	
4	C540	2305 000665	C FILM,MPEF,100nF 5% 63V,TP,7.5x4.0x5.0m	
4	C543	2201 000144	C CERAMIC,DISC,0.1nF,5%,50V,NP0,TP,9.5x3	
4	C544	2401 002144	C AL 47uF 20% 16V,GP,TP 5x11.5	
4	C601	2401 002299	C AL 4.7uF 20% 50V,GP,TP 5x7.5	
4	C602	2401 002299	C AL 4.7uF 20% 50V,GP,TP 5x7.5	
4	C666	2305 000665	C FILM,MPEF,100nF 5% 63V,TP,7.5x4.0x5.0m	
4	C667	2401 000603	C AL 1uF 20% 50V,GP,TP 5x11.5	
4	C668	2401 000603	C AL 1uF 20% 50V,GP,TP 5x11.5	
4	C669	2401 000962	C AL 22uF 20% 50V,GP,TP 5x11.5	
4	C670	2401 000603	C AL 1uF 20% 50V,GP,TP 5x11.5	
4	C671	2401-001537	C AL 47uF 20% 25V,GP,TP8.3x7mm,5mm	
4	C676	2401 001192	C AL 33uF 20% 50V,GP,TP8.3x11.5	
4	C686	2201-000411	C CERAMIC,DISC,0.27nF,10%,50V,Y5P,TP 4x3	
4	C687	2201-000411	C CERAMIC,DISC,0.27nF,10%,50V,Y5P,TP 4x3	
4	C688	2401 000192	C AL 1000uF 20% 50V,GP,TP 16x25.7 5	
4	C689	2305 000665	C FILM,MPEF,100nF 5% 63V,TP,7.5x4.0x5.0m	
4	C690	2305 000665	C FILM,MPEF,100nF 5% 63V,TP,7.5x4.0x5.0m	
4	C691	2401 000192	C AL 1000uF 20% 50V,GP,TP 16x25.7 5	
4	C701	2401 000027	C AL 4.7uF 20% 50V,GP,TP 5x11.5	
4	C801	2401 002300	C AL 47uF 20% 50V,GP,TP6.3x11.5	
4	C901	2202 000796	C CERAMIC,MLC AXIAL,1NF,10%,50V,YSP,TP,3	
4	C905	2401 001496	C AL 47uF 20% 16V,GP,TP 5x7.5	
4	C906	2305 000149	C FILM,MPEF,100nF 5% 100V,TP,12x12.5x6.5	
4	C908	2201 000292	C CERAMIC,DISC,1nF 10%,50V,Y5P,TP,5x3.5,	
4	C909	2201 000292	C CERAMIC,DISC,1nF 10%,50V,Y5P,TP,5x3.5,	
4	C912	2201 000119	C CERAMIC,DISC,100nF -80-20%,50V,Y5V,TP	
4	C913	2201 000193	C CERAMIC,DISC,0.01nF 0.25pF,50V,NP0,TP	
4	C914	2201 000573	C CERAMIC,DISC,0.047nF,5%,50V,NP0,TP,5x3	
4	C915	2201-000119	C CERAMIC,DISC,100nF,-80-20%,50V,Y5V,TP,	
4	C916	2401 002042	C AL 220uF 20% 10V,GP,TP6.3x11.5	
4	C917	2401 002144	C AL 47uF 20% 16V,GP,TP 5x11.5	
4	C918	2201-000119	C CERAMIC,DISC,100nF,-80-20%,50V,Y5V,TP,	
4	C919	2401 000480	C AL 10uF 20% 50V,GP,TP 5x11.5	
4	C920	2201-000119	C CERAMIC,DISC,100nF,-80-20%,50V,Y5V,TP,	
4	C925	2201-000119	C CERAMIC,DISC,100nF,-80-20%,50V,Y5V,TP,	
4	C926	2401-000480	C AL 10uF 20% 50V,GP,TP 5x11.5	
4	C927	2202 000231	C CERAMIC,MLC AXIAL,330pF,10%,50V,YSP,TP	
4	C928	2202-000796	C CERAMIC,MLC AXIAL,1NF,10%,50V,YSP,TP,3	
4	CN003	3711 002642	CONNECTOR HEADER,BOX,3P,1R,2.5MM,STRAIGH	
4	CN402	3711 002642	CONNECTOR HEADER,BOX,3P,1R,2.5MM,STRAIGH	
4	CN403	3711-002642	CONNECTOR HEADER,BOX,3P,1R,2.5MM,STRAIGH	
4	CN404	3711-002642	CONNECTOR HEADER,BOX,3P,1R,2.5MM,STRAIGH	
4	CN601	3711 002643	CONNECTOR HEADER,BOX,4P,1R,2.5MM,STRAIGH	
4	CS801	2201 000332	C CERAMIC,DISC,2.2nF,20%,250V,Y5U,TP,9x4	
4	CS802	2201 000332	C CERAMIC,DISC,2.2nF,20%,250V,Y5U,TP,9x4	
4	CS804	2201 000119	C CERAMIC,DISC,100nF,-80-20%,50V,Y5V,TP,	
4	CS805	2401 002286	C AL 470uF 20% 16V,WT,TP,10x12.5,5	
4	CS807	2201 000119	C CERAMIC,DISC,100nF,-80-20%,50V,Y5V,TP,	
4	CS808	2401 002286	C AL 470uF 20% 16V,WT,TP,10x12.5,5	
4	CS809	2201 000566	C CERAMIC,DISC,0.47nF,10%,50V,Y5P,TP,5,	
4	CS812	2201 002076	C CERAMIC,DISC,0.068nF,5%,1kV,SL,TP,8x4m	
4	CZ144	2401 000480	C AL 10uF 20% 50V,GP,TP 5x11.5	
4	CZ146	2401-000832	C AL 220uF 20% 25V,GP,TP8x11.5,5	
4	CZ147	2201 000193	C CERAMIC,DISC,0.01nF,0.25pF,50V,NP0,TP,	
4	CZ148	2201 000193	C CERAMIC,DISC,0.01nF,0.25pF,50V,NP0,TP,	
4	CZ149	2201 000516	C CERAMIC,DISC,4.7nF,-100 0%,500V,YSU,TP	
4	CZ150	2201-000516	C CERAMIC,DISC,4.7nF,-100 0%,500V,YSU,TP	
4	CZ151	2401 001513	C AL 47uF 20% 16V,WT,TP,5x11.5	
4	CZ152	2401 001157	C AL 33uF 20% 16V,GP,TP,12.5x20.5	
4	CZ153	2401 001513	C AL 47uF 20% 16V,WT,TP,5x11.5	
4	CZ155	2201 000604	C CERAMIC,DISC,0.056nF,+100 0%,500V,SL,T	

Level	Loc. No.	Code No.	Description ; Specification	Remark
.4	CZ167	2401-001220	C-AL;4.7uF,20%,160V,GP,TP,8x11.5,5	
4	CZ167A	2401-001220	C-AL;4.7uF,20%,160V,GP,TP,8x11.5,5	
4	D101	0401-001088	DIODE-SWITCHING;BAW76,50V,300mA,DO-35,TP	
.4	D102	0401-001088	DIODE-SWITCHING;BAW76,50V,300mA,DO-35,TP	
..4	D103	0401-001088	DIODE-SWITCHING;BAW76,50V,300mA,DO-35,TP	
.4	D501	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35	
.4	D664	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
4	D665	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35	
..4	D666	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.4	D667	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
4	D668	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35	
.4	D669	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35.	
..4	D701	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.4	D702	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
...4	D703	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35.	
..4	D901	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.4	D902	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35.	
4	D903	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.4	D904	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35.	
.4	D905	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35.	
...4	D906	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.4	D907	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
...4	DS802	1405-000152	VARISTOR;560V,2500A,14x8.5mm,TP	
.4	DS803	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
...4	DS804	0403-001318	DIODE-ZENER;MTZJ4.3B,4.17-4.43V,500mW,DO	
...4	DS805	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
..4	DS806	1405-001030	VARISTOR;120V,2500A,14x8.5mm,TP	
..4	DS807	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
...4	DS808	1405-000152	VARISTOR;560V,2500A,14x8.5mm,TP	
...4	DS809	0404-001056	DIODE-SCHOTTKY;RK16,60V,1.5A,DO-204AC,TP	
...4	DS810	1405-000152	VARISTOR;560V,2500A,14x8.5mm,TP	
...4	DZ116	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
..4	DZ117	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35.	
..4	DZ118	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
..4	DZ119	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35.	
.4	DZ120	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
.4	DZ121	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
...4	DZ501	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
...4	DZ502	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
...4	DZ503	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
...4	DZ504	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
...4	DZ505	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
...4	DZ506	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
...4	DZ507	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
...4	DZ508	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
...4	DZ665	0403-001039	DIODE-ZENER;MA2560,56V,52-60V,1W,DO-41,T	
...4	DZ666	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
...4	DZ667	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
...4	DZ701	0403-001140	DIODE-ZENER;RD10ESAB-T4,10V,9.19-10.30V,	
...4	DZ801	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
...4	DZ901	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
...4	DZ902	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
...4	DZ903	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
...4	DZ904	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
...4	DZ905	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
...4	DZ906	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
...4	DZ907	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
...4	DZ911	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
...4	DZ912	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
...4	DZ914	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
..4	DZ915	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
...4	F901	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,	
...4	FI103	2903-000181	FILTER-CERAMIC;BR,5.5MHz,-,-,-,TP,TPS5.5	
...4	FI104	2903-000129	FILTER-CERAMIC;BR,4.5MHz,-,-,-,TP,	
..4	IC506	1203-000293	IC-POSI.FIXED REG.;7808,TO-220,3P,-,PLAS	
..4	IC904	1203-000615	IC-VOL. DETECTOR;7042,TO-92,3P,177MIL,PL	
...4	L101	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
...4	L103	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
...4	L106	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
...4	L107	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
...4	L108	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
...4	L109	2701-000101	INDUCTOR-AXIAL;1.2uH,10%,2.5x3.4mm	
...4	L110	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
...4	L111	2701-000120	INDUCTOR-AXIAL;12uH,10%,2.5x3.4mm	
...4	L112	2701-000299	INDUCTOR-AXIAL;13UH,10%,2.5X3.4MM	
...4	L113	AA26-10006G	TRANS-IF;-,7mG,VIF,-,7mm,8pF,77.8MHz,ST	
..4	L114	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	

Level	Loc. No.	Code No.	Description ; Specification	Remark
.4	L115	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
.4	L116	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
...4	L117	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
...4	L118	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
...4	L501	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
.4	L502	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
...4	L503	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
..4	L504	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
.4	L505	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
..4	L506	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500	
..4	L507	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500	
..4	L514	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
...4	L515	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
..4	L601	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
.4	L602	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
..4	L604	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
...4	L901	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
..4	L902	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
.4	L903	2701-001040	INDUCTOR-AXIAL;10uH,10%,4.5x14mm	
..4	L907	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500.	
...4	L909	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
...4	L910	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
...4	L911	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
...4	L912	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
...4	LD901	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
...4	LS801	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...4	LS802	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...4	LS803	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
...4	LZ112	2701-000002	INDUCTOR-AXIAL;100uH,10%,4.2x9.8mm	
...4	PCB	AA41-00075B	PCB-MAIN;SP43,J7PF,FR-1,1L,8,1.6T,330X24	S.N.A
...4	Q101	0504-000137	TR-DIGITAL;KSR1202,NPN,300mW,10K/10K,TO-	
...4	Q102	0504-000123	TR-DIGITAL;KSR1010,NPN,300mW,10K,TO-92,T	
..4	Q103	0501-000245	TR-SMALL SIGNAL;BC548C,NPN,500mW,TO-92,T	
...4	Q104	0504-000123	TR-DIGITAL;KSR1010,NPN,300mW,10K,TO-92,T	
..4	Q105	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...4	Q106	0504-000150	TR-DIGITAL;KSR2010,PNP,300mW,10K,TO-92,T	
...4	Q107	0504-000123	TR-DIGITAL;KSR1010,NPN,300mW,10K,TO-92,T	
...4	Q665	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...4	Q666	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.4	Q667	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
..4	Q701	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...4	Q702	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...4	Q901	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...4	Q902	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...4	Q903	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...4	Q909	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
...4	Q910	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...4	QS801	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1000mW,TO-	
...4	QZ103	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...4	QZ104	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...4	QZ105	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...4	QZ106	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
...4	R123	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R131	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
...4	R132	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
...4	R142	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R145	2001-000830	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...4	R146	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R148	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R149	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R150	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R151	2001-000313	R-CARBON;11KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R152	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...4	R153	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...4	R154	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...4	R155	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R156	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...4	R157	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...4	R158	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R159	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R160	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R161	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm	
...4	R162	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R163	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R164	2001-000490	R-CARBON;200OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R165	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R166	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	

Level	Loc. No.	Code No.	Description ; Specification	Remark
4	R167	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R168	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R169	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R501	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
4	R502	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R503	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R504	2001-000405	R-CARBON;180OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R509	2008-000266	R-FUSIBLE(S);1ohm,5%,2W,AF,TP,3.9x10mm	
4	R510	2008-000266	R-FUSIBLE(S);1ohm,5%,2W,AF,TP,3.9x10mm	
4	R511	2008-001116	R-FUSIBLE(S);0.68ohm,10%,2W,AG,TP,3.9x12	
..4	R512	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
.4	R524	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
.4	R525	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R526	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
.4	R531	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
.4	R532	2001-000037	R-CARBON(S);330OHM,5%,1/2W,AA,TP,2.4X6.4	
4	R533	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
..4	R601	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4	
..4	R602	2001-000605	R-CARBON;3.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..4	R603	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..4	R661	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
..4	R662	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
..4	R665	2001-001188	R-CARBON(S);8.2KOHM,5%,1/2W,AA,TP,2.4X6	
.4	R666	2001-001188	R-CARBON(S);8.2KOHM,5%,1/2W,AA,TP,2.4X6	
.4	R668	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
..4	R669	2001-001144	R-CARBON(S);4.7KOHM,5%,1/2W,AA,TP,2.4X6.	
..4	R670	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
..4	R671	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
..4	R672	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
...4	R673	2001-000411	R-CARBON;18KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R674	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R675	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
..4	R676	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..4	R677	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R678	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R679	2001-001071	R-CARBON(S);12KOHM,5%,1/2W,AA,TP,2.4X6.4	
.4	R680	2001-001000	R-CARBON;82KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R681	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
..4	R682	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP,2.5x6.	
..4	R683	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP,2.5x6.	
..4	R684	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
..4	R685	2004-001390	R-METAL(S);1Kohm,2%,1/2W,AA,TP,2.4x6.4mm	
.4	R686	2004-001390	R-METAL(S);1Kohm,2%,1/2W,AA,TP,2.4x6.4mm	
..4	R687	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
..4	R689	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
..4	R690	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...4	R701	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R702	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R703	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R704	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R801	2003-001098	R-METAL OXIDE(S);22Kohm,5%,3W,AA,TP,6x16	
...4	R901	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.4	R903	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R904	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R905	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..4	R906	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R907	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R908	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R909	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R910	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R912	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
..4	R914	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R915	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R916	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...4	R917	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...4	R918	2001-000832	R-CARBON;510OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R919	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...4	R921	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...4	R922	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...4	R923	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R924	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R925	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...4	R926	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...4	R930	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..4	R931	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..4	R932	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	

Level	Loc. No.	Code No.	Description ; Specification	Remark
4	R945	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R946	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R947	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R948	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R949	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..4	R950	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R951	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.4	R952	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R953	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R954	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R955	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R958	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R959	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R960	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R961	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R962	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R967	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R968	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R970	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.4	R971	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R974	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R977	2001-001062	R-CARBON(S);10MOHM,5%,1/2W,AA,TP,2.4X6.4	
..4	R979	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R980	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R981	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R982	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R983	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R984	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R985	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R986	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R987	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R988	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R989	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	R990	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R991	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R992	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	R993	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R994	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	RD901	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	RD903	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.4	RF802	2008-000294	R-FUSIBLE(S);33ohm,5%,2W,AF,TP,3.9x10mm	
..4	RS801	2003-002194	R-METAL OXIDE(S);1.8Kohm,5%,1W,AF,TP,2.5	
4	RS802	2001-001192	R-CARBON(S);820OHM,5%,1/2W,AA,TP,2.4X6.4	
..4	RS803	2001-001159	R-CARBON(S);510OHM,5%,1/2W,AA,TP,2.4X6.4	
..4	RS804	2001-001182	R-CARBON(S);7.5KOHM,5%,1/2W,AA,TP,2.4X6.	
...4	RS805	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
..4	RS806	2001-001159	R-CARBON(S);510OHM,5%,1/2W,AA,TP,2.4X6.4	
...4	RS807	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
..4	RZ153	2008-001086	R-FUSIBLE(S);3.3ohm,5%,2W,AG,TP,3.9x12mm	
..4	RZ154	2003-000632	R-METAL OXIDE(S);18ohm,5%,2W,AF,TP,4x12m	
..4	RZ156	2001-001159	R-CARBON(S);510OHM,5%,1/2W,AA,TP,2.4X6.4	
..4	RZ165	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	RZ166	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..4	RZ167	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..4	RZ167A	2001-000554	R-CARBON;270OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	RZ168	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
..4	RZ169	2001-000019	R-CARBON(S);10OHM,5%,1/2W,AA,TP,2.4X6.4M	
.4	RZ170	2001-000666	R-CARBON;33OHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	RZ171	2001-000666	R-CARBON;33OHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	RZ172	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..4	RZ173	2001-001139	R-CARBON(S);39KOHM,5%,1/2W,AA,TP,2.4X6.4	
..4	RZ174	2001-001139	R-CARBON(S);39KOHM,5%,1/2W,AA,TP,2.4X6.4	
.4	RZ175	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..4	RZ176	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.4	RZ177	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.4	RZ178	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...4	RZ179	2003-000713	R-METAL OXIDE(S);47ohm,5%,2W,AF,TP,4x12m	
..4	RZ180	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
..4	RZ181	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
.4	RZ182	2003-000713	R-METAL OXIDE(S);47ohm,5%,2W,AF,TP,4x12m	
..4	RZ183	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
..4	RZ184	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
.4	VR101	2103-000672	VR-SEMI;20Kohm,25%,1/5W,TOP	
.2		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
.2		AA39-20577A	LEAD CONNECTOR ASSY;,6(3)P,YFH806-06,800	
2		AA39-20010C	LEAD CONNECTOR ASSY;,1P,YFH800-01,S,600,	

Level	Loc. No.	Code No.	Description ; Specification	Remark
.2		3301-001201	CORE-FERRITE,AE,21x11x32mm,1500,2900	
.2		AA65-30109A	CLAMP-FBT,NYLON 66,V2,BLK	S.N.A
.2		AA65-30105A	CLAMP-WIRE,NYLON 66,V2,NTR,15MM,ALL MODE	S.N.A
.2		AA65-30104B	CLAMP-WIRE,NYLON 66,V2,BLK,W2.25,ALL MOD	S.N.A
.2		AA65-30013A	CLAMP-WIRE,NYLON 66,V0,NTR,DAWH,45N	S.N.A
.2		AA59-00171A	MODULE-FOCUS,PACK,SVP 5200,S300 P3	

ASSY POWER CORD

1	*	AA96-20126K	ASSY POWER CORD ; EP3VYESHKI nVC 60MM,M	
.2		3811-000401	WIRE-PVC CU,BCWA,300V,ROLL,17.0,16mm,#22	S.N.A
.2		AA39-10007X	POWER CORD ; EP3VYESHKI,~H3VV~,2 F,2.4m	
.2		AA61-20284A	HOLDER ; P CORD,PPV0,BLK,AE702	S.N.A

ASSY PCB CRT

1	*	AA96-00923A	ASSY PCB CRT,,J51A,43/54,PAL	
.2	BDW GN	AA39-20009G	LEAD CONNECTOR ASSY,,1P,YFH800-01,700,16	
.2	CS11	2201-002117	C CERAMIC,DISC,4.7nF,20%,,3kV,Y5U,TP,16x6	
.2	CS41	2201-002117	C CERAMIC,DISC,4.7nF,20%,,3kV,Y5U,TP,16x6	
.2	CS71	2201-002117	C CERAMIC,DISC,4.7nF,20%,,3kV,Y5U,TP,16x6	
.2	CN501	3711-003051	CONNECTOR-HEADER,BOX,8P,1R,2.5mm,STRAGHT	
.2	CN502	3711-003052	CONNECTOR-HEADER,BOX,10P,1R,2.5mm,STRAGH	
.2	CN5028	3711-003052	CONNECTOR-HEADER,BOX,10P,1R,2.5mm,STRAGH	
.2	CN503	3711-003052	CONNECTOR-HEADER,BOX,10P,1R,2.5mm,STRAGH	
.2	CN5038	3711-003052	CONNECTOR-HEADER,BOX,10P,1R,2.5mm,STRAGH	
.2	CNW401	AA39-20027B	LEAD CONNECTOR ASSY,,6P,S7006-006,S,400	
.2	CNW501	AA39-00127A	LEAD CONNECTOR ASSY,,8P,35155-0800,S,400	
.2	CNW502	AA39-00112A	LEAD CONNECTOR ASSY,,10P,35155-1000,S,30	
.2	CNW503	AA39-00112A	LEAD CONNECTOR ASSY,,10P,35155-1000,S,30	
.2	FOCUS	AA39-20115A	LEAD CONNECTOR ASSY,,1P,BUSHING,500,3239	
.2	FOCUS	AA39-20115A	LEAD CONNECTOR ASSY,,1P,BUSHING,500,3239	
.2	FOCUS	AA39-20115B	LEAD CONNECTOR ASSY,,1P,BUSHING,,700,M/M	
.2	GBW GN	3811-000446	WIRE-PVC CU,TCWA,600V,ROLL,17.0,16mm,#22	S.N.A
.2	GBW SC	3811-000480	WIRE-PVC CU,BCWA,1KV,ROLL,17.0,16mm,#22	S.N.A
.2	GDW GN	AA39-20009D	LEAD CONNECTOR ASSY,,1P,YFH800-01,500,16	
.2	GRW GN	3811-000446	WIRE-PVC CU,TCWA,600V,ROLL,17.0,16mm,#22	S.N.A
.2	GRW SC	3811-000480	WIRE-PVC CU,BCWA,1KV,ROLL,17.0,16mm,#22	S.N.A
.2	IC501	AA96-50151B	ASSY H/S ; AMP,AA61-10060A,TDA6111Q	
.3		1201-001131	IC VIDEO AMP,6111,SIP9P,-,SINGLE,,PLAS	
.3		6001-000057	SCREW-MACHINE;RH,-,M3.L6,ZPC(BLK),SWRCH1	
.3		6021-000222	NUT-HEXAGON,2C,M3,ZPC(YEL),SM20C	S.N.A
.3		AA61-10060A	BRACKET-TR ; ,-,CUS-1 1/2H,T0.5	S.N.A
.2	IC531	AA96-50151B	ASSY H/S ; AMP,AA61-10060A,TDA6111Q	
.2	IC561	AA96-50151B	ASSY H/S ; AMP,AA61-10060A,TDA6111Q	
.2	PCB	AA41-00357B	PCB-CRT,PC1533R,FR-1,1L,L,1.6T,245x245	S.N.A
.2	RDW GN	AA39-20009F	LEAD CONNECTOR ASSY,,1P,YFH800-01,200,16	
.2	SG502	AA27-00084A	COIL,S-23,,,,,,,,S-23,5000Mohm	
.2	SG532	AA27-00084A	COIL,S-23,,,,,,,,S-23,5000Mohm	
.2	SG562	AA27-00084A	COIL,S-23,,,,,,,,S-23,5000Mohm	
.2	V501	3704-001019	SOCKET-CRT,10P,29.1P,35.5P,AU,30U	
.2	V531	3704-001019	SOCKET-CRT,10P,29.1P,35.5P,AU,30U	
.2	V561	3704-001019	SOCKET-CRT,10P,29.1P,35.5P,AU,30U	
.2	VR501	2101-000321	VR-ROTARY,1Mohm,,0.6W,SIDE	
.2	VR531	2101-000321	VR-ROTARY,1Mohm,,0.6W,SIDE	
.2	VR561	2101-000321	VR-ROTARY,1Mohm,,0.6W,SIDE	
.2		AA99-20088J	ASSY-PCB SUB,AUTO; AA96-00923A ,,V	S.N.A
.3	C502	2401-000027	C-AL,4.7uF,20%,50V,GP,TP,5x11.5	
.3	C503	2201-000119	C CERAMIC,DISC,100nF,-80-20%,50V,Y5V,TP	
.3	C504	2401-001537	C-AL,47uF,20%,25V,GP,TP6.3x7mm,5mm	
.3	C505	2305-000149	C FILM,MPEF,100nF,5%,100V,TP,12x12.5x6.5	
.3	C506	2401-000430	C-AL,10uF,20%,250V,GP,TP,10x16mm,5m	
.3	C507	2305-000154	C FILM,MPEF,100nF,5%,400V,TP,21.5x6.5x11	
.3	C510	2401-000430	C-AL,10uF,20%,250V,GP,TP,10x16mm,5m	
.3	C512	2401-000133	C-AL,1000uF,20%,16V,GP,TP,10x20.5	
.3	C513	2201-000983	C CERAMIC,DISC,1nF,10%,2kV,Y5P,TP,9x5.7	
.3	C514	2201-000599	C CERAMIC,DISC,0.56nF,10%,500V,Y5P,TP,5	
.3	C532	2401-000027	C-AL,4.7uF,20%,50V,GP,TP,5x11.5	
.3	C533	2201-000119	C CERAMIC,DISC,100nF,-80-20%,50V,Y5V,TP	
.3	C534	2401-001537	C-AL,47uF,20%,25V,GP,TP6.3x7mm,5mm	
.3	C535	2305-000149	C FILM,MPEF,100nF,5%,100V,TP,12x12.5x6.5	

Level	Loc. No.	Code No.	Description ; Specification	Remark
.3	C536	2401-000430	C-AL,10uF,20%,250V,GP,TP,10x16mm,5m	
.3	C537	2305-000154	C FILM,MPEF,100nF,5%,400V,TP,21.5x6.5x11	
.3	C540	2401-000430	C-AL,10uF,20%,250V,GP,TP,10x16mm,5m	
.3	C542	2201-000983	C CERAMIC,DISC,1nF,10%,2kV,Y5P,TP,9x5.7	
.3	C543	2201-000599	C CERAMIC,DISC,0.56nF,10%,500V,Y5P,TP,5	
.3	C562	2401-000027	C-AL,4.7uF,20%,50V,GP,TP,5x11.5	
.3	C563	2201-000119	C CERAMIC,DISC,100nF,-80-20%,50V,Y5V,TP	
.3	C564	2401-001537	C-AL,47uF,20%,25V,GP,TP6.3x7mm,5mm	
.3	C565	2305-000149	C FILM,MPEF,100nF,5%,100V,TP,12x12.5x6.5	
.3	C566	2401-000430	C-AL,10uF,20%,250V,GP,TP,10x16mm,5m	
.3	C567	2305-000154	C FILM,MPEF,100nF,5%,400V,TP,21.5x6.5x11	
.3	C570	2401-000430	C-AL,10uF,20%,250V,GP,TP,10x16mm,5m	
.3	C572	2201-000983	C CERAMIC,DISC,1nF,10%,2kV,Y5P,TP,9x5.7	
.3	C573	2201-000599	C CERAMIC,DISC,0.56nF,10%,500V,Y5P,TP,5	
.3	CN401	3711-002645	CONNECTOR-HEADER,BOX,5P,1R,2.5MM,STRAGHT	
.3	D501	0402-000546	DIODE-RECTIFIER,TVR10G,400V,1.0A,DO-41,T	
.3	D502	0402-000546	DIODE-RECTIFIER,TVR10G,400V,1.0A,DO-41,T	
.3	D503	0402-000493	DIODE-RECTIFIER,1RSGU41,400V,1.5A,DO-15L	
.3	D504	0401-000005	DIODE-SWITCHING,1N4148,100V,200mA,DO-35	
.3	D509	0401-000005	DIODE-SWITCHING,1N4148,100V,200mA,DO-35	
.3	D510	0401-000005	DIODE-SWITCHING,1N4148,100V,200mA,DO-35	
.3	D531	0402-000546	DIODE-RECTIFIER,TVR10G,400V,1.0A,DO-41,T	
.3	D532	0402-000546	DIODE-RECTIFIER,TVR10G,400V,1.0A,DO-41,T	
.3	D533	0402-000493	DIODE-RECTIFIER,1RSGU41,400V,1.5A,DO-15L	
.3	D561	0402-000546	DIODE-RECTIFIER,TVR10G,400V,1.0A,DO-41,T	
.3	D562	0402-000546	DIODE-RECTIFIER,TVR10G,400V,1.0A,DO-41,T	
.3	D563	0402-000493	DIODE-RECTIFIER,1RSGU41,400V,1.5A,DO-15L	
.3	DZ501	0403-000334	DIODE-ZENER,UZ2.7BSA,2.7V,2.54,2.75V,500	
.3	DZ502	0403-000508	DIODE-ZENER,MTZJ5.6B,5.6V,5.45-5.73V,500	
.3	DZ503	0403-000708	DIODE-ZENER,MTZJ13B,13V,12.55-13.21V,500	
.3	DZ531	0403-000334	DIODE-ZENER,UZ2.7BSA,2.7V,2.54,2.75V,500	
.3	DZ532	0403-000508	DIODE-ZENER,MTZJ5.6B,5.6V,5.45-5.73V,500	
.3	DZ533	0403-000708	DIODE-ZENER,MTZJ13B,13V,12.55-13.21V,500	
.3	DZ561	0403-000334	DIODE-ZENER,UZ2.7BSA,2.7V,2.54,2.75V,500	
.3	DZ562	0403-000508	DIODE-ZENER,MTZJ5.6B,5.6V,5.45,5.73V,500	
.3	DZ563	0403-000708	DIODE-ZENER,MTZJ13B,13V,12.55,13.21V,500	
.3	L501	2701-000114	INDUCTOR-AXIAL,10uH,10%,2.5x3.4mm	
.3	L531	2701-000114	INDUCTOR-AXIAL,10uH,10%,2.5x3.4mm	
.3	L561	2701-000114	INDUCTOR-AXIAL,10uH,10%,2.5x3.4mm	
.3	Q501	0502-000006	TR-POWER,KSC1507,NPN,15W,TO-220,TP,120	
.3	Q502	0501-000389	TR-SMALL SIGNAL,KSC3115,NPN,400mW,TO-92,T	
.3	Q504	0501-000283	TR-SMALL SIGNAL,KSA539,PNP,400mW,TO-92,T	
.3	Q531	0502-000006	TR-POWER,KSC1507,NPN,15W,TO-220,TP,120	
.3	Q533	0501-000283	TR-SMALL SIGNAL,KSA539,PNP,400mW,TO-92,T	
.3	Q561	0502-000006	TR-POWER,KSC1507,NPN,15W,TO-220,TP,120	
.3	Q563	0501-000283	TR-SMALL SIGNAL,KSA539,PNP,400mW,TO-92,T	
.3	R500	2001-000449	R-CARBON,2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.3	R502	2001-000995	R-CARBON,820OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.3	R503	2001-000429	R-CARBON,1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.3	R504	2001-000006	R-CARBON,2.4KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.3	R505	2001-000362	R-CARBON,150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.3	R506	2001-001088	R-CARBON[S],1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
.3	R507	2001-000429	R-CARBON,1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.3	R508	2003-000738	R-METAL OXIDE[S],56Kohm,5%,2W,AA,TP,4x12	
.3	R509	2001-000734	R-CARBON,4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.3	R510	2001-000864	R-CARBON,560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.3	R511	2001-000009	R-CARBON,20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.3	R513	2008-000252	R-FUSIBLE[S],0.47ohm,10%,1/2W,AF,TP2.5x	
.3	R514	2001-001122	R-CARBON[S],3.9KOHM,5%,1/2W,AA,TP2.4X6	
.3	R515	2002-001017	R-COMPOSITION,1Kohm,10%,1/2W,AA,TP,3.7x9	
.3	R516	2001-000009	R-CARBON,20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.3	R517	2001-000085	R-CARBON[S],100KOHM,5%,1/2W,AA,TP2.4X6.	
.3	R518	2002-001021	R-COMPOSITION,560KOHM,10%,1/2W,AA,TP,3.7	
.3	R519	2002-001021	R-COMPOSITION,560KOHM,10%,1/2W,AA,TP,3.7	
.3	R520	2001-000066	R-CARBON[S],10KOHM,5%,1/2W,AA,TP2.4X6.4	
.3	R521	2001-001052	R-CARBON[S],1.5MOHM,5%,1/2W,AA,TP2.4X6.	
.3	R522	2002-001006	R-COMPOSITION,4.7Kohm,5%,1/2W,AA,TP,3.7x	
.3	R523	2002-001006	R-COMPOSITION,4.7Kohm,5%,1/2W,AA,TP,3.7x	
.3	R524	2001-000028	R-CARBON[S],100OHM,5%,1/2W,AA,TP2.4X6.4	
.3	R526	2001-000539	R-CARBON,240KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.3	R527	2001-000577	R-CARBON,2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.3	R528	2001-001015	R-CARBON,9.1KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.3	R529	2002-001021	R-COMPOSITION,560KOHM,10%,1/2W,AA,TP,3.7	
.3	R532	2001-000429	R-CARBON,1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.3	R533	2001-000429	R-CARBON,1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.3	R536	2001-001088	R-CARBON[S],1KOHM,5%,1/2W,AA,TP2.4X6.4M	
.3	R537	2001-000429	R-CARBON,1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	

Level	Loc. No.	Code No.	Description ; Specification	Remark
.3	R538	2003-000738	R-METAL OXIDE,S),56Kohm,5%,2W,AA,TP,4x12	
.3	R540	2001-000660	R-CARBON,33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.3	R541	2001-000009	R-CARBON,20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.3	R543	2008-000252	R-FUSIBLE[S],0.47ohm,10%,1/2W,AF,TP2.5x	
.3	R544	2001-001122	R-CARBON[S],3.9KOHM,5%,1/2W,AA,TP2.4X6.	
.3	R545	2002-001017	R-COMPOSITION,1Kohm,10%,1/2W,AA,TP,3.7x9	
.3	R546	2001-000009	R-CARBON,20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.3	R547	2001-000085	R-CARBON[S],100KOHM,5%,1/2W,AA,TP2.4X6.	
.3	R548	2002-001021	R-COMPOSITION,560KOHM,10%,1/2W,AA,TP,3.7	
.3	R549	2002-001021	R-COMPOSITION,560KOHM,10%,1/2W,AA,TP,3.7	
.3	R550	2001-000066	R-CARBON[S],10KOHM,5%,1/2W,AA,TP2.4X6.4	
.3	R551	2001-001052	R-CARBON[S],1.5MOHM,5%,1/2W,AA,TP2.4X6.	
.3	R552	2002-001006	R-COMPOSITION,4.7Kohm,5%,1/2W,AA,TP,3.7x	
.3	R553	2002-001006	R-COMPOSITION,4.7Kohm,5%,1/2W,AA,TP,3.7x	
.3	R554	2001-000028	R-CARBON[S],100OHM,5%,1/2W,AA,TP2.4X6.4	
.3	R555	2001-000734	R-CARBON,4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.3	R556	2001-000472	R-CARBON,2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.3	R557	2001-000362	R-CARBON,150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.3	R559	2002-001015	R-COMPOSITION,47Kohm,5%,1/2W,AA,TP,3.7x9	
.3	R562	2001-000232	R-CARBON,1.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.3	R563	2001-000429	R-CARBON,1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.3	R564	2001-001031	R-CARBON,910OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.3	R566	2001-001088	R-CARBON[S],1KOHM,5%,1/2W,AA,TP2.4X6.4M	
.3	R567	2001-000429	R-CARBON,1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.3	R568	2001-000734	R-CARBON,4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.3	R569	2001-000006	R-CARBON,2.4KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.3	R570	2001-000362	R-CARBON,150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.3	R571	2001-000281	R-CARBON,100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.3	R572	2003-000738	R-METAL OXIDE[S],56Kohm,5%,2W,AA,TP,4x12	
.3	R573	2008-000252	R-FUSIBLE[S],0.47ohm,10%,1/2W,AF,TP2.5x	
.3	R574	2001-001122	R-CARBON[S],3.9KOHM,5%,1/2W,AA,TP2.4X6.	
.3	R575	2002-001017	R-COMPOSITION,1Kohm,10%,1/2W,AA,TP,3.7x9	
.3	R576	2001-000009	R-CARBON,20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.3	R577	2001-000085	R-CARBON[S],100KOHM,5%,1/2W,AA,TP2.4X6.	
.3	R578	2002-001021	R-COMPOSITION,560KOHM,10%,1/2W,AA,TP,3.7	
.3	R579	2002-001021	R-COMPOSITION,560KOHM,10%,1/2W,AA,TP,3.7	
.3	R580	2001-000066	R-CARBON[S],10KOHM,5%,1/2W,AA,TP2.4X6.4	
.3	R581	2001-001052	R-CARBON[S],1.5MOHM,5%,1/2W,AA,TP2.4X6.	
.3	R582	2002-001006	R-COMPOSITION,4.7Kohm,5%,1/2W,AA,TP,3.7x	
.3	R583	2002-001006	R-COMPOSITION,4.7Kohm,5%,1/2W,AA,TP,3.7x	
.3	R584	2001-000028	R-CARBON[S],100OHM,5%,1/2W,AA,TP2.4X6.4	
.3	R589	2002-001015	R-COMPOSITION,47Kohm,5%,1/2W,AA,TP,3.7x9	
.3	SG351	4715-001036	SURGE ABSORBER;500V,20%,,,TP	
.3	SG501	4715-001036	SURGE ABSORBER;500V,20%,,,TP	
.3	SG503	4715-001036	SURGE ABSORBER;500V,20%,,,TP	
.3	SG533	4715-001036	SURGE ABSORBER;500V,20%,,,TP	
.3	SG561	4715-001036	SURGE ABSORBER;500V,20%,,,TP	
.3	SG563	4715-001036	SURGE ABSORBER;500V,20%,,,TP	
.2		AA63-10002A	BAND-TIE ; NYLON66 V2,,,L100,NTR,,,	S.N.A
.2		0202-000187	SOLDER-WIRE FLUX,,,RS60S,D1.2,63Sn/37Pb	S.N.A

ASSY-A/V FRONT

1	*	AA95-00918A	ASSY A/V FRONT ; SP43J,4PF,J51B,,,MVT	
.2	CNW02	AA39-20032J	LEAD CONNECTOR ASSY,,12P,S7006-012,S,130	
.2	CNY01	3711-003641	CONNECTOR-HEADER,BOX,12P,1R,2.5mm,STRAG	
.2	CP01	2202-000263	C CERAMIC,MLC AXIAL,470pF,10%,50V,Y5P,TP	
.2	CP02	2202-000263	C CERAMIC,MLC AXIAL,470pF,10%,50V,Y5P,TP	
.2	CP03	2202-000263	C CERAMIC,MLC AXIAL,470pF,10%,50V,Y5P,TP	
.2	CP04	2401-002009	C-AL,100uF,20%,16V,GP,TP5.3x7.5	
.2	CP05	2401-002009	C-AL,100uF,20%,16V,GP,TP5.3x7.5	
.2	CP06	2401-002009	C-AL,100uF,20%,16V,GP,TP5.3x7.5	
.2	CP07	2401-002009	C-AL,100uF,20%,16V,GP,TP5.3x7.5	
.2	CP08	2401-002009	C-AL,100uF,20%,16V,GP,TP5.3x7.5	
.2	CP09	2202-000121	C CERAMIC,MLC AXIAL,100pF,10%,50V,Y5P,TP	
.2	CP10	2202-000121	C CERAMIC,MLC AXIAL,100pF,10%,50V,Y5P,TP	
.2	DZ01	0403-000510	DIODE-ZENER,MTZJ6.2B,6.2V,5.96-6.27V,500	
.2	DZ02	0403-000510	DIODE-ZENER,MTZJ6.2B,6.2V,5.96-6.27V,500	
.2	JK02	3722-001164	JACK-RCA,3P,3.6mm,SN,WH-YE-RE,#16,Z2	
.2	JK101	3722-000544	JACK-VHS,4P,11.5mm,AG,BLK,N	
.2	PCB	AA41-00379A	PCB-A/V FRONT,ESP43J,94F,R0,1LA,1.6T,Z4	S.N.A
.2	RP01	2001-000273	R-CARBON,100KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.2	RP02	2001-000969	R-CARBON,75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.2	RP03	2001-000273	R-CARBON,100KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.2	RP04	2001-000969	R-CARBON,75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.2	RP05	2001-000969	R-CARBON,75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.2		3301-001201	CORE-FERRITE,AE,21x11x32mm,1500,2900	
.2		AA63-10002A	BAND-TIE, NYLON66 V2, L100,NTR,	S.N.A
.2		AA98-60004J	ASSY SUB,PART,APT51A,A/V,,,ALL	S.N.A
.3		0202-000187	SOLDER-WIRE FLUX,,RS60S,D1.2,63Sn/37Pb	S.N.A

ASSY-PCB,SUB

1	*	AA95-00425C	ASSY PCB,SUB,,SP53J,5HF,,J51A,PAL,FREE VO	
.2	C430	2301-001219	C FILM,MPE PPF,3.0nF,5%,1.6KV,TP,29x8.5x	
.2	C431	2305-000326	C FILM,MPPF,4.7nF,5%,1.6KV,TP,28.5x16x9m	
.2	C432	2305-000267	C FILM,MPPF,8.2nF,5%,1.6KV,TP,28.5x18.5x	
.2	C436	2305-000235	C FILM,MPPF,560nF,5%,400V,TP,26*22.5*14.	
.2	C438	2305-000267	C FILM,MPPF,8.2nF,5%,1.6KV,TP,28.5x18.5x	
.2	C471	2301-001091	C FILM,MPPF,470nF,5%,400V,TP,25x21.5x14.	
.2	C473	2305-000322	C FILM,MPPF,12nF,5%,1.6KV,TP,29x20.5x13.	
.2	C474	2305-000326	C FILM,MPPF,4.7nF,5%,1.6KV,TP,28.5x16x9m	
.2	C477	2301-000213	C FILM,PEF,Z20nF,5%,250V,TP,21.5x11.7.5	
.2	C801	2305-000321	C FILM,MPPF,470NF,5%,275VTP, ,22.5	
.2	C802	2305-000321	C FILM,MPPF,470NF,5%,275VTP, ,22.5	
.2	C812	2401-000701	C-AL,2200uF,20%,250V,GP, ,35x70mm,1	
.2	C813	2401-000701	C-AL,2200uF,20%,250V,GP, ,35x70mm,1	
.2	C831	2305-000323	C FILM,MPPF,2.2nF,5%,1.6KV,TP,28.5x15.5x	
.2	C842	2401-003370	C-AL,47uF,20%,450V,GP,BK,16X35.5,7	
.2	C862	2401-002225	C-AL,3300uF,20%,50V,WT,BK,,22x41.7.5	
.2	C866	2401-000737	C-AL,2200uF,20%,50V,GP,TP,18x35.5,7	
.2	C868	2401-000737	C-AL,2200uF,20%,50V,GP,TP,18x35.5,7	
.2	C875	2401-002251	C-AL,470uF,20%,200V,CP,BK,25x40mm,1	
.2	C876	2401-000787	C-AL,220uF,20%,160V,GP,TP,16x31.5mm	
.2	C891	2201-000987	C CERAMIC,DISC,2.2nF,20%,,400V,Y5U,TP,12	
.2	C892	2201-000987	C CERAMIC,DISC,2.2nF,20%,,400V,Y5U,TP,12	
.2	CN201	AA39-00128A	LEAD CONNECTOR ASSY,,8P,YBN-250-08,35155	
.2	CN202	AA39-00115A	LEAD CONNECTOR ASSY,,10P,YBN-250,10,3515	
.2	CN203	3711-003052	CONNECTOR-HEADER,BOX,10P,1R,2.5mm,STRAG	
.2	CN401	3711-003051	CONNECTOR-HEADER,BOX,8P,1R,2.5mm,STRAGHT	
.2	CN402	3711-003974	CONNECTOR-HEADER,BOX,12P,1R,2.5mm,STRAG	
.2	CN801	AA39-00116A	LEAD CONNECTOR ASSY,,12P,YBN-250,12,3515	
.2	CN802	3711-003051	CONNECTOR-HEADER,BOX,8P,1R,2.5mm,STRAGHT	
.2	CNW406	AA39-00009A	LEAD CONNECTOR ASSY,,3P,DFYH800-03,S,2	
.2	CNW909	AA39-20061G	LEAD CONNECTOR ASSY,,3P,YFH800-03,S,100M	
.2	D464	0402-000236	DIODE-RECTIFIER,GR24,400V,5A, ,TP	
.2	D804	AA96-50310A	ASSY H/S ; POWER,AA62,30150C,RBV606,	
.3		AA62-30150C	HEAT SINK-ES, ,A6063,EXTR, ,WHT,40/24,S)	
.3		AA60-30003A	WASHER, , ,T1.5, ,S8HG-1,	S.N.A
.3		6003-000333	SCREW-TAPTITE,RH,+,2S,M3,L10,ZPC(YEL),SW	
.2	D810	0402-000250	DIODE-RECTIFIER,RC4C,1000V,1A,	
.2	D854	AA96-00111C	ASSY H/S, , ,AA62-30013L,FML-G12S,	
.3		0402-000233	DIODE-RECTIFIER,FML G12S,,200V,5A, ,	
.3		6003-000333	SCREW-TAPTITE,RH,+,2S,M3,L10,ZPC(YEL),SW	
.3		AA62-30013L	HEATSINK-ES, , , , ,44/22, ,WHT, , ,	
.2	D871	AA96-00032A	ASSY H/S, , ,AA62-30173B,FML G12, FMGG26	
.3		0402-000233	DIODE-RECTIFIER,FML G12S,,200V,5A, ,	
.3		0402-000231	DIODE-RECTIFIER,FMG-G26S,600V,4A,TO-220F	
.3		AA62-30173B	HEAT SINK,ES, , ,T1.0,WHT, ,ALL, , ,88X2	
.3		6003-000333	SCREW-TAPTITE,RH,+,2S,M3,L10,ZPC(YEL),SW	
.3		0205-000129	GREASE-SILICON;SC102,,JAPAN	S.N.A
.2	DZ481	0403-001327	DIODE-ZENER,MTZJ18A,16.22-17.05V,500mW,D	
.2	DZ833	0406-001007	DIODE-TVS,P6KE180A,171/180/189V,600W,CAS	
.2	F801	3601-001007	FUSE-CARTRIDGE,250V,6.3A,TIME LAG,GLASS,	
.2	F802	3601-001137	FUSE-AXIAL,LEAD,250V,6A,SLOW BLOW,GLASS,	
.2	F804	3601-001007	FUSE-CARTRIDGE,250V,6.3A,TIME LAG,GLASS,	
.2	IC301	AA96-50381A	ASSY H/S, , ,AA62-30180B,LA7845,	
.3		0205-000129	GREASE-SILICON;SC102,,JAPAN	S.N.A
.3		1204-000517	IC-VERTIVAL DEF,LA7845,SIP,7P, ,PLASTIC	
.3		6003-000333	SCREW-TAPTITE,RH,+,2S,M3,L10,ZPC(YEL),SW	
.3		AA62-30180B	HEAT SINK-ES, ,A6063,EXTR,,2,WHT,70MM, ,	
.2	IC421	1203-000165	IC-POSI,ADJUST REG,,78R12,TO-220,3P, ,	
.2	IC430	1203-000162	IC-POSI,ADJUST REG,,317,TO-220,3P, ,PLAS	
.2	IC431	1201-000191	IC-OP AMP,4558,DIP8P,300MIL,DUAL,20V/mV	
.2	IC801	AA96-00035A	ASSY H/S, ,POWER,AA62,30181P,STR,F6656,	
.3		0205-000129	GREASE-SILICON;SC102,,JAPAN	S.N.A

Level	Loc. No.	Code No.	Description ; Specification	Remark
..3		6003-000333	SCREW TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
..3		AA13-00018A	IC HYBRID; ,STR F6656,LF1351,5PIN, ,	
..3		AA62-30181P	HEAT SINK,ES;-, ,T1.0,WHITE,SCREW HOLE(2	
.2	IC302	AA13-00033A	IC HYBRID; ,SVD001,-,7PIN, ,	
.2	IC804	1203-001400	IC POWER PRESCALER;SE110N,TO-220(SIP),3P	
.2	IC806	0604-001032	PHOTO COUPLER;TR,170-260%,300mW,DIP 4,ST	
.2	L431	AA27-30003M	COIL LINEARLITY; ,5uH,OWA14x15,USRC0.1x6	
.2	L432	AA27-40001U	COIL HORIZ WIDTH;-,220UH,DR1420,PI0.12X1	
.2	L482	3301-000374	CORE FERRITE BEAD;AA,3.5x1.0x9.0mm,-,	
.2	L800	AA29-30002L	FILTER-LINE NOISE;-,10mHMIN,5A,AC90~260V	
.2	L801	AA29-30002M	FILTER LINE NOISE; ,1mHMIN,5A,AC90~260V	
.2	L803	AA29-30002M	FILTER LINE NOISE; ,1mHMIN,5A,AC90~260V,	
.2	L854	AA27-10001C	COIL CHOKE; ,100uH,K, ,5.0A,ST,700UH-K(R	
.2	L860	AA27-10001C	COIL CHOKE; ,100uH,K,-,5.0A,ST,700UH K(R	
.2	L862	AA27-10001C	COIL CHOKE; ,100uH,K,-,5.0A,ST,700UH K(R	
.2	L872	AA27-10001C	COIL CHOKE; ,100uH,K, ,5.0A,ST,700UH K(R	
.2	L874	AA27-10002L	COIL-CHOKE; ,24UH,K,-,2A,-,24UH K,10X10M	
.2	PCB	AA41-00197C	PCB;PCJ533R,CEM 1,1L,C,1.6T,330X24	S.N.A
.2	Q431	AA96-00033E	ASSY H/S; ,H-OUT,AA62-30173C,2SC5446, F	
..3		AA02-00007A	MICA;DPM-04,MICA,22x29x0.15mm	
..3		AA62-30173C	HEAT SINK-ES; ,-,T1.0,WHITE,SCREW-HOLE(2	
..3		AA60-30001A	WASHER-PLATE;M3,ID3.5,15X8.5,T1.0,-,SBHG	S.N.A
..3		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
..3		0502-001175	TR-POWER;2SC5446,NPN,200000mW,TO-3PL,BK	
..3		0402-001296	DIODE-RECTIFIER;FMP-3FU,1.5KV,5A,TO-3PF,	
..3		0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
.2	Q433	AA96-50407A	ASSY-H/S;-,-,AA62-30154G,KSD73Y,-	
..3		0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
..3		0502-000298	TR-POWER;KSD73,NPN,30000mW,TO-220,TP,12	
..3		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
..3		AA62-30154G	HEAT SINK-ES; ,A6063 EXTR, ,WHT,50/16,-,	
.2	Q441	AA96-50383F	ASSY-H/S; ,-,AA62-30180D,2SD921,	
..3		0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
..3		0502-001104	TR POWER;2SD921,NPN,80W,TO-3P,BK,700-	
..3		6003-000333	SCREW TAPTITE,RH,+,2S,M3,L10,ZPC(YEL),SW	
..3		AA62-30180D	HEAT SINK ES; ,A6063 EXTR, 2,WHT,50mm, ,	
.2	Q472	0505-000156	FET SILICON;IRF620,N,200V,5A,0.8ohm,50W,	
.2	Q473	AA96-00037A	ASSY-H/S,-,-,AA62-30181N,2SC4125, IRFS6	
..3		0502-001100	TR POWER;2SC4125,NPN,70W,TO-3PML,BK 8-	
..3		AA62-30181N	HEAT-SINK,ES;-, ,T1.0,WHITE,SCREW HOLE(2	
..3		AA60-30001A	WASHER-PLATE;M3,ID3.5,15X8.5,T1.0,-,SBHG	S.N.A
..3		6003-000333	SCREW-TAPTITE,RH,+,2S,M3,L10,ZPC(YEL),SW	
..3		0505-001202	FET-SILICON;IRFS640A,N,200V,9.8A,0.18ohm	
..3		0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
.2	R440	2008-001091	R-FUSIBLE(S);0.47OHM,10%,1/2W,AC,BK,2.5X	
.2	R442	2008-000189	R-FUSIBLE;0.47ohm,10%,2W,AA,TP,6x15.5mm	
.2	R445	2008-001091	R-FUSIBLE(S);0.47OHM,10%,1/2W,AC,BK,2.5X	
.2	R803	1404-001195	THERMISTOR-NTC;5.1ohm,15%,2900,27mW/C,BK	
.2	R815	2003-002162	R-METAL OXIDE(S);15KOHM,5%,3W,AG,TP,6X16	
.2	R815A	2003-002162	R-METAL OXIDE(S);15KOHM,5%,3W,AG,TP,6X16	
.2	R817	2009-001096	R-METAL PLATE;0.07ohm,5%,5W,CL,BK,5x14x1	
.2	R841	2008-001096	R-FUSIBLE(S);3.3OHM,5%,1/2W,AC,BK,2.5X6.	
.2	RL802	3501-001040	RELAY-POWER;12VDC,500mW,10A,1FormA,15mS,	
.2	T431	AA26-50001U	TRANS-HORIZ DRIVE;-,28mH,105uH,4uH,ER28x	
.2	T432	AA26-00053A	TRANS;-,1.2mH,-,-,EER4445,BK,1.2mH,-	
.2	T444	AA26-30006A	TRANS-FLYBACK; ,FWZ-50A001,50,108V	
.2	T461	AA26-50001V	TRANS-HORIZ DRIVE;-,6.0mH,113uH,4uH,EI19	
.2	T481	AA26-50001W	TRANS-HORIZ DRIVE;-,830uH,23uH,4uH,EI-30	
.2	T802	AA26-00006A	TRANS-SWITCHING;-,90~260V,110V/34V/+-30V	
.2		AA65-30110A	CLAMP-WIRE;NYLON 66,V2,BLK,PAL TV,ALL M	S.N.A
.2		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
.2		AA99-20072K	ASSY PCB SUB,AUTO; AA95-00425C ,V	S.N.A
..3	C301	2305-000149	C FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
..3	C302	2201-000292	C CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
..3	C303	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
..3	C304	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
..3	C305	2201-002022	C CERAMIC,DISC;0.006nF,0.25pF,500V,NP0,T	
..3	C307	2401-000365	C-AL;100uF,20%,50V,WT,TP,10x12.5mm,	
..3	C308	2401-000365	C AL;100uF,20%,50V,WT,TP,10x12.5mm,	
..3	C309	2305-000285	C-FILM,MPEF;220NF,5%,100V,TP,10.5X5.5X15	
..3	C311	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
..3	C412	2301-000383	C FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
..3	C413	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
..3	C417	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16.5	
..3	C418	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
..3	C419	2201-000180	C CERAMIC,DISC;10nF,10%,50V,Y5V,TP,7x3.5	
..3	C426	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	

Level	Loc. No.	Code No.	Description ; Specification	Remark
..3	C427	2401-002300	C AL;47uF,20%,50V,GP,TP,6.3x11.5	
..3	C428	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0m	
..3	C437	2401-003114	C AL;4.7uF,20%,250V,WT,TP,10x16.5	
..3	C441	2401-000262	C-AL;100uF,20%,160V,HR,TP,16x25,7.5	
..3	C445	2401-001622	C-AL;6.8uF,20%,50V,BP,TP,16x25mm,7.	
..3	C450	2401-000262	C AL;100uF,20%,160V,HR,TP,16x25,7.5	
..3	C451	2401-001160	C AL;33uF,20%,160V,GP,-,16x35mm,7.5	
..3	C452	2201-000132	C CERAMIC,DISC;0.1nF,10%,500V,Y5P,TP,6.5	
..3	C453	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20.5	
..3	C454	2401-001429	C-AL;470uF,20%,50V,GP,TP,13x20.5	
..3	C455	2201-000132	C CERAMIC,DISC;0.1nF,10%,500V,Y5P,TP,6.5	
..3	C457	2201-000132	C CERAMIC,DISC;0.1nF,10%,500V,Y5P,TP,6.5	
..3	C458	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20.5	
..3	C467	2401-000360	C AL;100uF,20%,50V,GP,TP,8x11.5,5	
..3	C468	2201-000119	C CERAMIC,DISC;100nF,-80 20%,50V,Y5V,TP	
..3	C469	2201-000180	C-CERAMIC,DISC;10nF,10%,50V,Y5V,TP,7x3.5	
..3	C472	2401-000262	C-AL;100uF,20%,160V,HR,TP,16x25,7.5	
..3	C476	2401-000647	C-AL;2.2uF,20%,50V,BP,TP,5x11.5	
..3	C478	2301-000020	C FILM,PEF;27nF,5%,100V,TP,7.3x4x12.5mm,	
..3	C479	2301-000200	C-FILM,PEF;2.2nF,5%,200V,TP,11.0x6.0x9.0	
..3	C483	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11.5	
..3	C484	2201-000132	C-CERAMIC,DISC;0.1nF,10%,500V,Y5P,TP,6.5	
..3	C809	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
..3	C814	2201-002041	C-CERAMIC,DISC;0.82nF,10%,2kV,Y5P,TP,9x5	
..3	C815	2201-000406	C-CERAMIC,DISC;0.27nF,10%,2kV,Y5P,TP,6.3	
..3	C816	2201-000332	C-CERAMIC,DISC;2.2nF,20%,250V,Y5U,TP,9x4	
..3	C817	2201-000332	C-CERAMIC,DISC;2.2nF,20%,250V,Y5U,TP,9x4	
..3	C818	2301-001216	C-FILM,PPF;47nF,5%,630V,TP,20x14.5x22,7	
..3	C819	2201-000332	C-CERAMIC,DISC;2.2nF,20%,250V,Y5U,TP,9x4	
..3	C833	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
..3	C834	2401-003028	C AL;100uF,20%,25V,WT,TP,6.3x11.5	
..3	C835	2401-002395	C-AL;22UF,20%,25V,WT,TP,5X11.5	
..3	C851	2201-000551	C CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
..3	C852	2401-000133	C-AL;1000uF,20%,16V,GP,TP,10x20.5	
..3	C854	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
..3	C855	2401-003141	C AL;2200uF,20%,25V,WT,TP,13x25.5mm	
..3	C857	2401-000133	C AL;1000uF,20%,16V,GP,TP,10x20.5	
..3	C861	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
..3	C864	2201-000551	C CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
..3	C866	2401-000192	C AL;1000uF,20%,50V,GP,TP,16x25,7.5	
..3	C869	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	
..3	C871	2201-000651	C CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
..3	C872	2401-000703	C-AL;2200uF,20%,25V,GP,-,12.5x25mm,	
..3	C873	2401-001998	C-AL;1000uF,20%,25V,GP,TP,10x20.5mm	
..3	C874	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
..3	C877	2305-000427	C-FILM,MPEF;47nF,5%,100V,TP,7.5x12.5x3.5	
..3	D302	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
..3	D433	0402-000537	DIODE-RECTIFIER;RH1A,600V,0.6A,DO-204AC	
..3	D435	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
..3	D436	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
..3	D438	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
..3	D440	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
..3	D441	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
..3	D444	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
..3	D445	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
..3	D472	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
..3	D474	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
..3	D801	1405-000187	VARISTOR;750V,1250A,12.5x7mm,TP	
..3	D802	1405-000187	VARISTOR;750V,1250A,12.5x7mm,TP	
..3	D805	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
..3	D834	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
..3	D839	0402-000243	DIODE-RECTIFIER;RC2-V1,2000V,0.2A,DO-201	
..3	D842	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
..3	D843	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
..3	D851	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
..3	DZ301	0403-001328	DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D	
..3	DZ304	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
..3	DZ305	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
..3	DZ306	0403-001167	DIODE-ZENER;MTZJ30D,30V,29.02-30.51V,500	
..3	DZ307	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
..3	DZ413	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
..3	DZ473	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
..3	DZ837	0403-000170	DIODE-ZENER;1N4762,82V,10%,1W,DO-41,TP	
..3	DZ840	0403-001039	DIODE-ZENER;MA2560,56V,52-60V,1W,DO-41,T	
..3	DZ841	0403-000691	DIODE-ZENER;R2K,170V,170-200V,-,-,TP	
..3	DZ842	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
..3	DZ858	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	

Level	Loc. No.	Code No.	Description ; Specification	Remark
..3	F801A	3602-000114	FUSE HOLDER; ,30mohm	
..3	F801B	3602-000114	FUSE HOLDER; ,30mohm	
..3	F804A	3602-000114	FUSE HOLDER; ,30mohm	
..3	F804B	3602-000114	FUSE HOLDER; ,30mohm	
..3	F805	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
..3	F806	3601-001065	FUSE AXIAL LEAD;125V,3.5A,FAST ACTING,CE	
..3	F854	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
..3	F855	3601-001163	FUSE AXIAL LEAD;125V,7A,-,EPOXY,2.4X7.1M	
..3	F871	3601-001086	FUSE AXIAL LEAD;125V,5A,FAST ACTING,GLAS	
..3	L481	3301-000297	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
..3	L483	2901-000299	FILTER EMI ON BOARD;-,6A,UL/CSA,-,9x7.5,	
..3	L492	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
..3	L493	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,	
..3	L494	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
..3	L495	2901-000297	FILTER EMI ON BOARD; ,3A,-,-,3.5x5,TP,	
..3	L806	2901-000297	FILTER EMI ON BOARD; ,3A,-,-,3.5x5,TP,-	
..3	L807	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
..3	L808	3301-000287	CORE FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
..3	L810	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,	
..3	L811	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,	
..3	L812	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
..3	L813	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
..3	L814	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
..3	L815	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
..3	L816	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
..3	L831	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
..3	L832	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
..3	L851	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
..3	L857	3301-000287	CORE FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
..3	L859	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
..3	Q301	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
..3	Q432	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
..3	R301	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP,2.5x6.	
..3	R302	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP,2.5x6.	
..3	R303	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP,2.4x6.	
..3	R305	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP,2.4x6.	
..3	R306	2003-001036	R-METAL OXIDE(S);3.3ohm,5%,2W,AF,TP,3.9x	
..3	R307	2003-001036	R-METAL OXIDE(S);3.3ohm,5%,2W,AF,TP,3.9x	
..3	R308	2001-000016	R-CARBON(S);1OHM,5%,1/2W,AA,TP,2.4X6.4MM	
..3	R310	2003-002150	R-METAL OXIDE;270OHM,5%,2W,AG,TP,6X16MM	
..3	R312	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..3	R313	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
..3	R314	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
..3	R332	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
..3	R333	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
..3	R334	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
..3	R405	2009-001109	R-TEMPERATURE;240ohm,5%,1/4W,AA,TP,2.3x6	
..3	R406	2004-001983	R-METAL(S);2.49Kohm,1%,1/2W,AA,TP,2.4x6.	
..3	R407	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP,2.5x6.	
..3	R408	2004-001402	R-METAL(S);6.8Kohm,1%,1/2W,AA,TP,2.4x6.4	
..3	R409	2001-001178	R-CARBON(S);680OHM,5%,1/2W,AA,TP,2.4X6.4	
..3	R410	2001-000052	R-CARBON(S);3.3KOHM,5%,1/2W,AA,TP,2.4X6.	
..3	R412	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
..3	R419	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..3	R424	2008-000299	R-FUSIBLE(S);47ohm,5%,2W,AF,TP,3.9x10mm	
..3	R426	2003-002153	R-METAL OXIDE;4.7OHM,5%,2W,AG,TP,6X16MM	
..3	R427	2003-002152	R-METAL OXIDE;1OHM,5%,2W,AG,TP,6X16MM	
..3	R427A	2003-002152	R-METAL OXIDE;1OHM,5%,2W,AG,TP,6X16MM	
..3	R428	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
..3	R428A	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
..3	R429	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
..3	R430	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
..3	R433	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
..3	R434	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
..3	R441	2008-000189	R-FUSIBLE;0.47ohm,10%,2W,AA,TP,6x15.5mm	
..3	R444	2003-000995	R-METAL OXIDE(S);3.3Kohm,5%,2W,AF,TP,3.9	
..3	R462	2003-002026	R-METAL OXIDE(S);4.7ohm,5%,1W,AF,TP,2.5x	
..3	R463	2003-001024	R-METAL OXIDE(S);150ohm,5%,2W,AF,TP,3.9x	
..3	R464	2003-002158	R-METAL OXIDE;0.68OHM,5%,1W,AG,TP,4.3X12	
..3	R465	2001-001043	R-CARBON(S);0OHM,5%,1/2W,AA,TP,2.4X6.4MM	
..3	R466	2004-001386	R-METAL(S);16.9Kohm,1%,1/2W,AA,TP,2.4x6.	
..3	R467	2004-001986	R-METAL(S);35.7Kohm,1%,1/2W,AA,TP,2.4x6.	
..3	R468	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
..3	R469	2004-001390	R-METAL(S);1Kohm,2%,1/2W,AA,TP,2.4x6.4mm	
..3	R470	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
..3	R471	2004-002011	R-METAL(S);110Kohm,1%,1/2W,AA,TP,2.4x6.4	

Level	Loc. No.	Code No.	Description ; Specification	Remark
..3	R472	2008-000252	R-FUSIBLE(S);0.47ohm,10%,1/2W,AF,TP,2.5x	
..3	R473	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
..3	R486	2003-002014	R-METAL OXIDE(S);0.6OHM,5%,2W,AF,TP,3.9X	
..3	R488	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..3	R808	2001-000002	R-CARBON(S);200KOHM,5%,1/2W,AA,TP,6.4X2.	
..3	R809	2001-000002	R-CARBON(S);200KOHM,5%,1/2W,AA,TP,6.4X2	
..3	R810	2002-001010	R-COMPOSITION;1.8Mohm,5%,1/2W,AA,TP,3.7x	
..3	R812	2003-002151	R-METAL OXIDE;18KOHM,5%,2W,AG,TP,6X16MM	
..3	R814	2003-002151	R-METAL OXIDE;18KOHM,5%,2W,AG,TP,6X16MM	
..3	R825	2002-001010	R-COMPOSITION;1.8Mohm,5%,1/2W,AA,TP,3.7x	
..3	R832	2001-001178	R-CARBON(S);680OHM,5%,1/2W,AA,TP,2.4X6.4	
..3	R833	2003-001024	R-METAL OXIDE(S);150ohm,5%,2W,AF,TP,3.9x	
..3	R834	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP,2.4X6	
..3	R835	2001-001188	R-CARBON(S);8.2KOHM,5%,1/2W,AA,TP,2.4X6.	
..3	R837	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP,2.4X6	
..3	R838	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP,2.4X6	
..3	R842	2003-001040	R-METAL OXIDE(S);47Kohm,5%,2W,AF,TP,3.9x	
..3	R842A	2003-001040	R-METAL OXIDE(S);47Kohm,5%,2W,AF,TP,3.9x	
..3	R844	2003-002024	R-METAL OXIDE(S);91Kohm,5%,2W,AF,TP,3.9x	
..3	R845	2003-002024	R-METAL OXIDE(S);91Kohm,5%,2W,AF,TP,3.9x	
..3	R846	2003-002020	R-METAL OXIDE(S);56Kohm,5%,2W,AF,TP,3.9x	
..3	R847	2003-002020	R-METAL OXIDE(S);56Kohm,5%,2W,AF,TP,3.9x	
..3	R848	2001-001110	R-CARBON(S);240KOHM,5%,1/2W,AA,TP,2.4X6.	
..3	R850	2008-001079	R-FUSIBLE;4.7OHM,5%,2W,AF,TP,3.9X10MM	
..3	R855	2001-001196	R-CARBON(S);9.1KOHM,5%,1/2W,AA,TP,2.4X6.	
..3	R856	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
..3	R857	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
..3	R871	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
..3	R872	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
..3	R873	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP,2.4X6	
..3	R891	2002-001012	R-COMPOSITION;8.2Mohm,5%,1/2W,AA,TP,3.7x	
..3	VR471	2103-001024	VR-SEMI;50Kohm,25%,0.3W,TOP	
.2		AA65-30109A	CLAMP FBT,NYLON-66,V2,BLK,-,-	S.N.A
.2		AA65-30105B	CLAMP WIRE,NYLON 66,V2,NTR,25MM,ALL MODE	S.N.A
.2		AA62-00010A	HEAT SINK;-, ,T1.0,SILVER,H/SINK & SHIEL	S.N.A
.2		6003-001023	SCREW TAPTITE,RWH,+,B,M3,L10,ZPC(YEL),SW	
.2		0403-001325	DIODE ZENER;MTZJ15C,14.35-15.09V,500mW,D	

ASSY-PCB,CONV MDL

Level	Loc. No.	Code No.	Description ; Specification	Remark
1	*	AA95-00422B	ASSY PCB,CONV MDL; ,SP43J5HP,J51A,	
.2	C163	2306-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
.2	CN101	3711-002709	CONNECTOR-HEADER;NOWALL,12P,1R,2.5MM,ANG	
.2	CN102	3711-002709	CONNECTOR-HEADER;NOWALL,12P,1R,2.5MM,ANG	
.2	IC113	1203-000641	IC-RESET;7442,TO-92,3P,-,PLASTIC,-0.3/7	
.2		0202-001004	SOLDER-CREAM;SQ-2030M SZH-1,S63A,D0.04,6	S.N.A
.2		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
.2		AA63-00143A	SHIELD-CASE;-,SPTE T0.5,T0.5,ALL,MIGHT,CO	S.N.A
.2		AA99-20068A	ASSY-PCB SUB,AUTO; AA95-00422B ,V	S.N.A
..3	C101	2404-000275	C-TA,CHIP;100UF,10%,10V,GP,TP,7343	
..3	C102	2404-000275	C-TA,CHIP;100UF,10%,10V,GP,TP,7343	
..3	C103	2404-000256	C-TA,CHIP;47UF,20%,16V,GP,TP,7343	
..3	C104	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
..3	C105	2203-000858	C-CERAMIC,CHIP;0.039nF,5%,50V,NP0,TP,201	
..3	C106	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
..3	C107	2203-000716	C-CERAMIC,CHIP;3.3nF,10%,50V,X7R,TP,2012	
..3	C108	2203-005809	C-CERAMIC,CHIP;1000nF,10%,16V,X7R,TP,201	
..3	C109	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
..3	C110	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,	
..3	C111	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
..3	C112	2203-000683	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,201	
..3	C113	2203-000683	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,201	
..3	C114	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
..3	C115	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
..3	C116	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
..3	C117	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
..3	C118	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
..3	C119	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
..3	C120	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
..3	C121	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
..3	C122	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
..3	C123	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
..3	C124	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
..3	C125	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	

Level	Loc. No.	Code No.	Description ; Specification	Remark
.3	C126	2203-000181	C CERAMIC,CHIP:100nF,+80-20%,25V,Y5V,TP	
.3	C127	2203-000181	C CERAMIC,CHIP:100nF,+80-20%,25V,Y5V,TP	
.3	C128	2203-000181	C CERAMIC,CHIP:100nF,+80-20%,25V,Y5V,TP	
.3	C129	2203-000181	C CERAMIC,CHIP:100nF,+80-20%,25V,Y5V,TP	
.3	C130	2203-000181	C CERAMIC,CHIP:100nF,+80-20%,25V,Y5V,TP	
.3	C131	2203-000181	C CERAMIC,CHIP:100nF,+80-20%,25V,Y5V,TP	
.3	C132	2203-000408	C CERAMIC,CHIP:0.18nF,5%,50V,NP0,TP,2012	
.3	C133	2404-000294	C TA,CHIP:10uF,20%,16V,.TP,3528.	
.3	C134	2203-000181	C CERAMIC,CHIP:100nF,+80-20%,25V,Y5V,TP	
.3	C135	2203-000715	C CERAMIC,CHIP:3.3nF,10%,50V,X7R,TP,2012	
.3	C136	2203-000181	C CERAMIC,CHIP:100nF,+80-20%,25V,Y5V,TP	
.3	C137	2203-000715	C CERAMIC,CHIP:3.3nF,10%,50V,X7R,TP,2012	
.3	C138	2203-000408	C CERAMIC,CHIP:0.18nF,5%,50V,NP0,TP,2012	
.3	C139	2203-000181	C CERAMIC,CHIP:100nF,+80-20%,25V,Y5V,TP	
.3	C140	2404-000294	C TA,CHIP:10uF,20%,16V,.TP,3528.	
.3	C141	2203-000408	C CERAMIC,CHIP:0.18nF,5%,50V,NP0,TP,2012	
.3	C142	2404-000294	C TA,CHIP:10uF,20%,16V,.TP,3528.	
.3	C143	2203-000181	C CERAMIC,CHIP:100nF,+80-20%,25V,Y5V,TP	
.3	C144	2203-000716	C CERAMIC,CHIP:3.3nF,10%,50V,X7R,TP,2012	
.3	C145	2203-000181	C CERAMIC,CHIP:100nF,+80-20%,25V,Y5V,TP	
.3	C146	2203-000715	C CERAMIC,CHIP:3.3nF,10%,50V,X7R,TP,2012	
.3	C147	2203-000408	C CERAMIC,CHIP:0.18nF,5%,50V,NP0,TP,2012	
.3	C148	2404-000294	C TA,CHIP:10uF,20%,16V,.TP,3528.	
.3	C149	2203-000181	C CERAMIC,CHIP:100nF,+80-20%,25V,Y5V,TP	
.3	C150	2203-000181	C CERAMIC,CHIP:100nF,+80-20%,25V,Y5V,TP	
.3	C151	2203-000408	C CERAMIC,CHIP:0.18nF,5%,50V,NP0,TP,2012	
.3	C152	2404-000294	C TA,CHIP:10uF,20%,16V,.TP,3528.	
.3	C153	2203-000181	C CERAMIC,CHIP:100nF,+80-20%,25V,Y5V,TP	
.3	C154	2203-000716	C CERAMIC,CHIP:3.3nF,10%,50V,X7R,TP,2012	
.3	C155	2203-000181	C CERAMIC,CHIP:100nF,+80-20%,25V,Y5V,TP	
.3	C156	2203-000716	C CERAMIC,CHIP:3.3nF,10%,50V,X7R,TP,2012	
.3	C157	2203-000408	C CERAMIC,CHIP:0.18nF,5%,50V,NP0,TP,2012	
.3	C158	2404-000294	C TA,CHIP:10uF,20%,16V,.TP,3528.	
.3	C159	2203-000181	C CERAMIC,CHIP:100nF,+80-20%,25V,Y5V,TP	
.3	C160	2203-000181	C CERAMIC,CHIP:100nF,+80-20%,25V,Y5V,TP	
.3	C161	2404-000256	C TA,CHIP:47uF,20%,16V,CPTP,7343	
.3	C162	2404-000256	C TA,CHIP:47uF,20%,16V,CPTP,7343	
.3	C164	2402-000173	C AL,SMD:4.7uF,20%,35V,CPTP,4.3x4.3x5.	
.3	C165	2203-000181	C CERAMIC,CHIP:100nF,+80-20%,25V,Y5V,TP	
.3	C166	2203-000181	C CERAMIC,CHIP:100nF,+80-20%,25V,Y5V,TP	
.3	C167	2404-000123	C TA,CHIP,10uF,20%,16V,.TP:6032-2.9mm	
.3	C168	2203-000181	C CERAMIC,CHIP:100nF,+80-20%,25V,Y5V,TP	
.3	C169	2203-000181	C CERAMIC,CHIP:100nF,+80-20%,25V,Y5V,TP	
.3	C170	2203-000181	C CERAMIC,CHIP:100nF,+80-20%,25V,Y5V,TP	
.3	C171	2404-000284	C TA,CHIP,10uF,20%,16V,.TP,3528.	
.3	C172	2404-000256	C TA,CHIP:47UF,20%,16V,CPTP,7343	
.3	C173	2404-000256	C TA,CHIP:47UF,20%,16V,CPTP,7343	
.3	C174	2404-000256	C TA,CHIP:47UF,20%,16V,CPTP,7343	
.3	C201	2203-000408	C CERAMIC,CHIP:0.18nF,5%,50V,NP0,TP,2012	
.3	C202	2203-000408	C CERAMIC,CHIP:0.18nF,5%,50V,NP0,TP,2012	
.3	C203	2203-000408	C CERAMIC,CHIP:0.18nF,5%,50V,NP0,TP,2012	
.3	C204	2203-000408	C CERAMIC,CHIP:0.18nF,5%,50V,NP0,TP,2012	
.3	C205	2203-000408	C CERAMIC,CHIP:0.18nF,5%,50V,NP0,TP,2012	
.3	C206	2203-000408	C CERAMIC,CHIP:0.18nF,5%,50V,NP0,TP,2012	
.3	D101	0401-000160	DIODE SWITCHING,ISS314,30V,100mA,USC,TP	
.3	D102	0401-000160	DIODE SWITCHING,ISS314,30V,100mA,USC,TP	
.3	DZ101	0403-001016	DIODE ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m	
.3	DZ102	0403-001016	DIODE ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m	
.3	DZ104	0403-001016	DIODE ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m	
.3	DZ105	0403-001016	DIODE ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m	
.3	DZ106	0403-001016	DIODE ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m	
.3	DZ107	0403-001016	DIODE ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m	
.3	DZ108	0403-001016	DIODE ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m	
.3	DZ109	0403-001016	DIODE ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m	
.3	DZ110	0403-001016	DIODE ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m	
.3	DZ111	0403-001016	DIODE ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m	
.3	DZ112	0403-001016	DIODE ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m	
.3	DZ113	0403-001016	DIODE ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m	
.3	DZ114	0403-001016	DIODE ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m	
.3	DZ115	0403-001016	DIODE ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m	
.3	DZ116	0403-001016	DIODE ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m	
.3	DZ117	0403-001284	DIODE ZENER:RLZ3.3A,3.16-3.38V,500MW,LL	
.3	EF101	2901-000229	FILTER EMI SMD:50V,0.3A,.22000pF,4.5x3.	
.3	EF102	2901-000229	FILTER EMI SMD:50V,0.3A,.22000pF,4.5x3.	
.3	EF104	2901-000226	FILTER EMI SMD:25V,0.3A,.100pF,3.2x1.25	
.3	EF105	2901-000226	FILTER EMI SMD:25V,0.3A,.100pF,3.2x1.25	
.3	EF106	2901-000226	FILTER EMI SMD:25V,0.3A,.100pF,3.2x1.25	
.3	EF107	2901-000226	FILTER EMI SMD:25V,0.3A,.100pF,3.2x1.25	
.3	EF108	2901-000226	FILTER EMI SMD:25V,0.3A,.100pF,3.2x1.25	
.3	EF109	2901-000226	FILTER EMI SMD:25V,0.3A,.100pF,3.2x1.25	
.3	EF110	2901-000226	FILTER EMI SMD:25V,0.3A,.100pF,3.2x1.25	
.3	EF111	2901-000226	FILTER EMI SMD:25V,0.3A,.100pF,3.2x1.25	
.3	EF112	2901-000226	FILTER EMI SMD:25V,0.3A,.100pF,3.2x1.25	
.3	EF113	2901-000226	FILTER EMI SMD:25V,0.3A,.100pF,3.2x1.25	
.3	EF114	2901-000226	FILTER EMI SMD:25V,0.3A,.100pF,3.2x1.25	
.3	EF115	2901-000226	FILTER EMI SMD:25V,0.3A,.100pF,3.2x1.25	
.3	EF116	2901-000226	FILTER EMI SMD:25V,0.3A,.100pF,3.2x1.25	
.3	IC101	AA13-00071A	IC ASIC,.SOC31 QFP208P,CONV CONTROLL	
.3	IC102	0801-001043	IC CMOS LOGIC,74HC4046,PHASE LOCKED LOOP	
.3	IC103	AA09-00032A	IC MCU,TSC87251G2D-DTP,TSC87251G2D OT	
.3	IC104	1103-001167	IC EEPROM,256Kbit,24C08BIT,TSOP28P,.120NS	
.3	IC105	1201-001520	IC VIDEO AMP,2210,SOP8P150MIL,DUAL,7ch	
.3	IC106	1201-001504	IC OP AMP,072,SOP8P150MIL,DUAL,.PLAST	
.3	IC107	1201-001504	IC OP AMP,072,SOP8P150MIL,DUAL,.PLAST	
.3	IC108	1201-001504	IC OP AMP,072,SOP8P150MIL,DUAL,.PLAST	
.3	IC109	0801-001156	IC CMOS LOGIC,74HC4066,BILATERAL SWITCH	
.3	IC110	0801-001156	IC CMOS LOGIC,74HC4066,BILATERAL SWITCH,	
.3	IC111	1001-000105	IC ANALOG SWITCH,CD4066BM,BILATERAL CMOS	
.3	IC112	1001-000105	IC ANALOG SWITCH,CD4066BM,BILATERAL CMOS	
.3	PCB	AA41-00188D	PCB CONVERGENCE MODULE,SVP 43J4M,FR 4.4L	S.N.A
.3	Q101	0501-000280	TR:SMALL SIGNAL,KSA1182,PNP,150mW,SOT-23	
.3	Q102	0501-000342	TR:SMALL SIGNAL,KSC1623-Y,NPN,200mW,SOT-	
.3	Q103	0501-000342	TR:SMALL SIGNAL,KSC1623-Y,NPN,200mW,SOT-	
.3	Q104	0501-000280	TR:SMALL SIGNAL,KSA1182,PNP,150mW,SOT-23	
.3	Q105	0501-000342	TR:SMALL SIGNAL,KSC1623-Y,NPN,200mW,SOT-	
.3	Q105	0501-000342	TR:SMALL SIGNAL,KSC1623-Y,NPN,200mW,SOT-	
.3	Q107	0501-000342	TR:SMALL SIGNAL,KSC1623-Y,NPN,200mW,SOT-	
.3	Q108	0501-000280	TR:SMALL SIGNAL,KSA1182,PNP,150mW,SOT-23	
.3	Q109	0505-000257	FET:SILICON,2SK217-N,.20mA,-.150mW,SOT-	
.3	Q110	0505-000257	FET:SILICON,2SK217-N,.20mA,-.150mW,SOT	
.3	Q111	0505-000257	FET:SILICON,2SK217-N,.20mA,-.150mW,SOT	
.3	Q112	0505-000257	FET:SILICON,2SK217-N,.20mA,-.150mW,SOT	
.3	Q113	0505-000257	FET:SILICON,2SK217-N,.20mA,-.150mW,SOT	
.3	Q114	0505-000257	FET:SILICON,2SK217-N,.20mA,-.150mW,SOT	
.3	R101	3007-000881	R:CHIP,4.7OHM,5%,1/10W,DA,TP,2012	
.3	R102	3007-000881	R:CHIP,4.7OHM,5%,1/10W,DA,TP,2012	
.3	R103	3007-000881	R:CHIP,4.7OHM,5%,1/10W,DA,TP,2012	
.3	R104	3007-000881	R:CHIP,4.7OHM,5%,1/10W,DA,TP,2012	
.3	R105	3007-000415	R:CHIP,150HM,5%,1/10W,DA,TP,2012	
.3	R106	3007-000947	R:CHIP,470HM,5%,1/10W,DA,TP,2012	
.3	R107	3007-000282	R:CHIP,100KOHM,5%,1/10W,DA,TP,2012	
.3	R108	3007-000872	R:CHIP,4.7KOHM,5%,1/10W,DA,TP,2012	
.3	R109	3007-000493	R:CHIP,2.2KOHM,5%,1/10W,DA,TP,2012	
.3	R110	3007-000221	R:CHIP,1.2KOHM,5%,1/10W,DA,TP,2012	
.3	R111	3007-000380	R:CHIP,13KOHM,5%,1/10W,DA,TP,2012	
.3	R112	3007-000468	R:CHIP,1KOHM,5%,1/10W,DA,TP,2012	
.3	R113	3007-001097	R:CHIP,62KOHM,5%,1/10W,DA,TP,2012	
.3	R114	3007-000468	R:CHIP,1KOHM,5%,1/10W,DA,TP,2012	
.3	R116	3007-000468	R:CHIP,1KOHM,5%,1/10W,DA,TP,2012	
.3	R117	3007-000468	R:CHIP,1KOHM,5%,1/10W,DA,TP,2012	
.3	R118	3007-000468	R:CHIP,1KOHM,5%,1/10W,DA,TP,2012	
.3	R119	3007-000468	R:CHIP,1KOHM,5%,1/10W,DA,TP,2012	
.3	R120	3007-000401	R:CHIP,150OHM,5%,1/10W,DA,TP,2012	
.3	R121	3007-000023	R:CHIP,120OHM,5%,1/10W,DA,TP,2012	
.3	R122	3007-000468	R:CHIP,1KOHM,5%,1/10W,DA,TP,2012	
.3	R123	3007-000401	R:CHIP,150OHM,5%,1/10W,DA,TP,2012	
.3	R124	3007-000468	R:CHIP,1KOHM,5%,1/10W,DA,TP,2012	
.3	R125	3007-000401	R:CHIP,150OHM,5%,1/10W,DA,TP,2012	
.3	R126	3007-000401	R:CHIP,150OHM,5%,1/10W,DA,TP,2012	
.3	R127	3007-000401	R:CHIP,150OHM,5%,1/10W,DA,TP,2012	
.3	R128	3007-000290	R:CHIP,100OHM,5%,1/10W,DA,TP,2012	
.3	R129	3007-000465	R:CHIP,1KOHM,1%,1/10W,DA,TP,2012	
.3	R130	3007-000868	R:CHIP,4.7KOHM,1%,1/10W,DA,TP,2012	
.3	R131	3007-000981	R:CHIP,5.6KOHM,5%,1/10W,DA,TP,2012	
.3	R132	3007-000465	R:CHIP,1KOHM,1%,1/10W,DA,TP,2012	
.3	R133	3007-000868	R:CHIP,4.7KOHM,1%,1/10W,DA,TP,2012	
.3	R134	3007-000981	R:CHIP,5.6KOHM,5%,1/10W,DA,TP,2012	
.3	R135	3007-000290	R:CHIP,100OHM,5%,1/10W,DA,TP,2012	
.3	R136	3007-000290	R:CHIP,100OHM,5%,1/10W,DA,TP,2012	
.3	R137	3007-000465	R:CHIP,1KOHM,1%,1/10W,DA,TP,2012	
.3	R138	3007-000868	R:CHIP,4.7KOHM,1%,1/10W,DA,TP,2012	
.3	R139	3007-000981	R:CHIP,5.6KOHM,5%,1/10W,DA,TP,2012	
.3	R140	3007-000465	R:CHIP,1KOHM,1%,1/10W,DA,TP,2012	
.3	R141	3007-000868	R:CHIP,4.7KOHM,1%,1/10W,DA,TP,2012	
.3	R142	3007-000981	R:CHIP,5.6KOHM,5%,1/10W,DA,TP,2012	
.3	R143	3007-000290	R:CHIP,100OHM,5%,1/10W,DA,TP,2012	
.3	R144	3007-000290	R:CHIP,100OHM,5%,1/10W,DA,TP,2012	
.3	R145	3007-000465	R:CHIP,1KOHM,1%,1/10W,DA,TP,2012	
.3	R146	3007-000868	R:CHIP,4.7KOHM,1%,1/10W,DA,TP,2012	
.3	R147	3007-000981	R:CHIP,5.6KOHM,5%,1/10W,DA,TP,2012	
.3	R148	3007-000465	R:CHIP,1KOHM,1%,1/10W,DA,TP,2012	
.3	R149	3007-000868	R:CHIP,4.7KOHM,1%,1/10W,DA,TP,2012	
.3	R150	3007-000981	R:CHIP,5.6KOHM,5%,1/10W,DA,TP,2012	
.3	R151	3007-000290	R:CHIP,100OHM,5%,1/10W,DA,TP,2012	
.3	R152	3007-000282	R:CHIP,100KOHM,5%,1/10W,DA,TP,2012	
.3	R153	3007-000872	R:CHIP,4.7KOHM,5%,1/10W,DA,TP,2012	
.3	R154	3007-000774	R:CHIP,33KOHM,5%,1/10W,DA,TP,2012	
.3	R155	3007-000300	R:CHIP,10KOHM,5%,1/10W,DA,TP,2012	
.3	R156	3007-001055	R:CHIP,6.2KOHM,5%,1/10W,DA,TP,2012	
.3	R157	3007-000671	R:CHIP,2KOHM,5%,1/10W,DA,TP,2012	
.3	R158	3007-000468	R:CHIP,1KOHM,5%,1/10W,DA,TP,2012	
.3	R159	3007-001166	R:CHIP,75OHM,5%,1/10W,DA,TP,2012	
.3	R160	3007-000766	R:CHIP,220OHM,5%,1/10W,DA,TP,2012	
.3	R161	3007-000290	R:CHIP,100OHM,5%,1/10W,DA,TP,2012	
.3	R162	3007-000290	R:CHIP,100OHM,5%,1/10W,DA,TP,2012	
.3	R163	3007-000290	R:CHIP,100OHM,5%,1/10W,DA,TP,2012	
.3	R164	3007-000468	R:CHIP,1KOHM,5%,1/10W,DA,TP,2012	
.3	R165	3007-000468	R:CHIP,1KOHM,5%,1/10W,DA,TP,2012	
.3	R166	3007-000468	R:CHIP,1KOHM,5%,1/10W,DA,TP,2012	
.3	R167	3007-000468	R:CHIP,1KOHM,5%,1/10W,DA,TP,2012	
.3	R168	3007-000468	R:CHIP,1KOHM,5%,1/10W,DA,TP,2012	
.3	R169	2007-000703	R:CHIP,1.6KOHM,5%,1/10W,DA,TP,2012	
.3	R170	3007-000468	R:CHIP,1KOHM,5%,1/10W,DA,TP,2012	
.3	R171	2007-000221	R:CHIP,1.2KOHM,5%,1/10W,DA,TP,2012	
.3	R172	3007-000642	R:CHIP,270OHM,5%,1/10W,DA,TP,2012	
.3	R173	3007-000030	R:CHIP,560HM,5%,1/10W,DA,TP,2012	
.3	R174	3007-000030	R:CHIP,560HM,5%,1/10W,DA,TP,2012	
.3	R175	3007-000282	R:CHIP,100KOHM,5%,1/10W,DA,TP,2012	
.3	R176	3007-000872	R:CHIP,4.7KOHM,5%,1/10W,DA,TP,2012	
.3	R177	3007-000872	R:CHIP,4.7KOHM,5%,1/10W,DA,TP,2012	
.3	R178	3007-000728	R:CHIP,300HM,5%,1/10W,DA,TP,2012	
.3	R179	3007-000728	R:CHIP,300HM,5%,1/10W,DA,TP,2012	
.3	R180	3007-000728	R:CHIP,300HM,5%,1/10W,DA,TP,2012	
.3	R181	3007-000728	R:CHIP,300HM,5%,1/10W,DA,TP,2012	
.3	R182	3007-000728	R:CHIP,300HM,5%,1/10W,DA,TP,2012	
.3	R183	3007-000728	R:CHIP,300HM,5%,1/10W,DA,TP,2012	
.3	R184	2007-000830	R:CHIP,39KOHM,5%,1/10W,DA,TP,2012	
.3	R201	3007-000029	R:CHIP,00HM,5%,1/10W,DA,TP,2012	
.3	R203	2007-000565	R:CHIP,220KOHM,5%,1/10W,DA,TP,2012	
.3	R204	2007-000565	R:CHIP,220KOHM,5%,1/10W,DA,TP,2012	
.3	R205	2007-000565	R:CHIP,220KOHM,5%,1/10W,DA,TP,2012	
.3	R206	2007-000565	R:CHIP,220KOHM,5%,1/10W,DA,TP,2012	
.3	R207	2007-000565	R:CHIP,220KOHM,5%,1/10W,DA,TP,2012	
.3	R208	2007-000565	R:CHIP,220KOHM,5%,1/10W,DA,TP,2012	
.3	X101	2801-003860	CRYSTAL SMD:24MHz,30ppm,28-ABV,20pF,50on	

ASSY-FRONT,BOT

1	*	AA91-00477H	ASSY FRONT,BOT,;VO G4309 PAL,HIPS,SPS4U8	
* 2	PFOCFB	6002-000522	SCREW-TAPPING,TH,-,2.4/4.1,15,ZPC(BLK),SWR	
2		AA64-70124C	BADGE BRAND;AL,R2500,SILVER,L=70,SAMSUNG	
2		AA64-013960	INLAY AV,43,54,62,J8,PS SHEET,T0.5, ,BLK	S.N.A
2		AA64-013860	PANEL FRONT,DECORATION,43,54,62,J8,-HPS,V	
2		AA64-013820	CABINET FRONT,BOT,54,J8,HIPS,VO,G4309	
2		AA60-00080A	SPACER FELT,43,54,J8,FELT, , , , ,R0.35,	S.N.A
2		AA60-00077A	SPACER DUAL,LOCK,54,J8,F250, , , , , , 4	S.N.A
2		AA60-00071B	SPACER JERSEY,54,J8,JERSEY,GRAY,SP 100G	S.N.A

ASSY-CONTROL

1	*	AA91-00476F	ASSY CONTROL,;H8 BLK,ABS PAL,J51A,SPS4U8	
2	BM-MS	6003-001023	SCREW-TAPTITE;RWH,-,B,M3,L10,ZPC(YELL),SW	
2	KNOPOW	AA61-60003J	SPRING CS,.,SUS304,0.5,OD6,H12,N7,	
2	PC-BM	6003-000334	SCREW-TAPTITE;RH,-,2S,M3,L6,ZPC(YEL),SWR	
2	PCB-PC	6003-001026	SCREW-TAPTITE;RH,-,B,M4,L15,ZPC(BLK),SWR	
		AA64-013918	INDICATOR LED;43,54,62,J8,ACRYL, ,SMOG, ,	
		AA64-01460F	WINDOW CONTROL;43,54,62,J8,ACRYL,SHEET,T3	
		AA64-01503A	KNOB CONTACT,54,J8,C3603, , , , , ,	
		AA98-00094A	ASSY PCB,CONTROL, ,SP43,8HF,J51A, ,	
		AA98-00097A	ASSY PCB,POWER S/W, ,SP43,8HF,J51A, ,	
		AA61-00561B	BRACKET MASTER;54,J8,SECC,T1.0, ,	S.N.A
		AA64-013878	PANEL CONTROL;43,54,62,J8,ABS, ,H8,IVORY,	
		AA64-013888	KNOB CONTROL;43,54,62,J8,ABS, ,BLK, ,H8,	
		AA64-01389E	KNOB POWER;43,54,62,J8,ABS,GRAY,LG 807P M	
		AA64-01390B	WINDOW REMOCON;43,54,62,J8,PC, , , , , VIO	

ASSY CHASSIS PART

1	*	AA90-00383C	ASSY CHASSIS PART,;J51A 54,J8	S.N.A
2	ICON-HC	6003-001023	SCREW-TAPTITE;RWH,-,B,M3,L10,ZPC(YEL),SW	
2	OF-FBT	6003-001023	SCREW-TAPTITE;RWH,-,B,M3,L10,ZPC(YEL),SW	
2	OF-HC	6003-001023	SCREW-TAPTITE;RWH,-,B,M3,L10,ZPC(YEL),SW	
2	PM-HC	6003-001023	SCREW-TAPTITE;RWH,-,B,M3,L10,ZPC(YEL),SW	
2		AA61-005048	HOLDER CHASSIS,43,54,62,J8,ABS,GRAY,VO, ,	

ASSY CABINET

1	*	AA90-00382M	ASSY CABINET,54,U8,SPS4,J8HFX,2HK	S.N.A
2	AC-BCM	AA60-10011A	SCREW-TAPTITE;HH,-,PC,M4,L12,ZPC(BLK),SW	
2	AGAFB	6002-000522	SCREW-TAPPING,TH,-,2.4/4.1,15,ZPC(BLK),SWR	
2	AV-CFD	6003-001023	SCREW-TAPTITE;RWH,-,B,M3,L10,ZPC(YEL),SW	
2	BM-CBT	6003-001026	SCREW-TAPTITE;RH,-,B,M4,L15,ZPC(BLK),SWR	
2	CBBAPT	6003-001019	SCREW-TAPTITE;RH,-,B,M4,L12,-,ZPC(BLK),SWR	
2	CBT-CW	AA63-60002V	SPACER FELT,FELT,T0.3,BLK,60X40,	S.N.A
2	CFB	AA65-00011C	CLAMP WIRE,ALL MODEL,NYLON 66,V2 NTR,25M	S.N.A
2	CW-CBT	6005-001003	SCREW-WOOD;HH,-,M4 L20 ZPC(BLK),SWRCH18A	S.N.A
2	CWBBCM	6005-001094	SCREW-ASS Y WOOD;WW,HH,-,M7 L32 ZPC(YEL)	S.N.A
2	CWBCSB	6005-001003	SCREW-WOOD;HH,-,M4 L20 ZPC(BLK),SWRCH18A	S.N.A
2	CWBCSS	6005-001003	SCREW-WOOD;HH,-,M4 L20 ZPC(BLK),SWRCH18A	S.N.A
2	CWBCFB	6005-001003	SCREW-WOOD;HH,-,M4 L20 ZPC(BLK),SWRCH18A	S.N.A
2	CWBHC	6005-001003	SCREW-WOOD;HH,-,M4 L20 ZPC(BLK),SWRCH18A	S.N.A
2	FP-BCM	AA60-10011A	SCREW-TAPTITE;HH,-,PC,M4,L12,ZPC(BLK),SW	
2	HV-BCM	AA60-10011A	SCREW-TAPTITE;HH,-,PC,M4,L12,ZPC(BLK),SW	
2		AA67-00080A	MIRROR BACK,54,U8,GLASS,940*686*673(0.32)*	
2		AA67-00027A	SCREEN-TINT,-,53,-,PMMA,TINT=10%,T3.0,1	
2		AA67-00023A	SUN SCREEN,HC,-,53,H/C,A/S,PMMA,T=93%,T	
2		AA64-604998	INLAY COVERSP 43UM,PS,T0.5,149.3X69.5	
2		AA65-30008A	CLAMP CORD;PE,H8,BLK, , ,	S.N.A
2		AA64-01395F	INLAY TERMINAL,J7,J8,PS SHEET,T0.5, ,BLK	S.N.A
2		AA64-01392C	DOOR-AV,43,54,62,J8,ABS;H8,GRAY,LG 807P	S.N.A
2		AA91-00489B	ASSY-BRKT,MIRROR;-,,SECC,T1.0,54,U8	
3		AA60-00073A	SPACER FELT,54,U8,FELT, , , , ,T1.0, ,210	S.N.A
3		AA61-00512B	BRACKET-MIRROR;43,53,61,J8,SECC,T1.0, ,	S.N.A
2		AA64-013858	CABINET BACK,SIDE;43,54,62,J8, ,HIPS,H8,B	
2		AA61-00600A	SPRING-EARTH;43,J8,STS, , , , , , , , ,0	S.N.A
2		AA61-00475B	BRACKET-CRT,MAIN,54,SECC,T1.6, ,	
2		AA60-00091N	SPACER FELT, ,FELT,70X10, , ,BLK,T1.0, ,	S.N.A
2		AA60-000728	SPACER COVER,DUST,43,54,62,J9,SPONGE 94HF	S.N.A
2		AA60-00069C	SPACER SCREEN;43,54,62,J8,ABS, , , ,BLK,	S.N.A
2		AA60-00069B	SPACER SCREEN;43,54,62,J8,ABS, , , ,BLK,	S.N.A
2		AA26-30006E	TRANS FLYBACK, ;FWZ 50A0018(S),50KV,	
2		AA64-013848	CABINET BACK,BOT,43,54,62,J8, ,HIPS,VO,BL	
2		AA64-013798	CABINET BACK,TOP,54,J8, ,HIPS,H8,BLK	
2		AA63-60131F	SPACER FELT,PC,J612R,FELT, , , ,BLK,T0.5,	S.N.A
2		AA63-10007C	BAND PP, , ,W18, ,CLEAR,1G, ,	S.N.A
2		AA61-20285A	HOLDER BOX, ,3456,PP,VO,WHT,	
2		AA61-00642A	SPRING EARTH,MAIN;PRO,U7,J8,-(9),STS,67,	S.N.A
2		AA61-006188	GUIDE FLOW,54,J8,J7,ABS,H8,BLK, ,	

ASSY CRT-(G)

1	*	AA94-02870A	ASSY CRT (G);P16LSC03HKA,-,380MG,7,BARE,	
2	BC-AL	AA60-10011A	SCREW-TAPTITE;HH,-,PC,M4,L12,ZPC(BLK),SW	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2		AA81-00449A	ASSY BRACKET,CRT... ,SECC T1.0,P,T	
3		AA61-00473B	BRACKET-CRT;53 SECC,T1.6, .	S.N.A
3		AA61-00478A	SPRING-WIRE,CRT;P,T,STS, ...	S.N.A
3		AA61-00615B	BRACKET-EARTH;54,-B,PBS,T0.5 .	S.N.A
2		AA67-10066A	LENS-ASSY;DELTA 37. . . ,CLEAR A/B, .	
2		AA65-30114A	CLAMP-LOCK;NYLON 66,V2,NTR, ,PROJECTION,	S.N.A
2		AA61-00555B	HOLDER-LANS;53,J8,PC ABS,BLK, . ,GF20%	S.N.A
2		AA91-00491A	ASSY HOLDER,PACK, . ,FILM PP RUBBER,54,J8	
3		AA60-00062B	SPACER-O RING;53,SILICON, . . . ,GRAY, .	S.N.A
3		AA61-00477B	HOLDER-PACK;43,53,61,J8,PP, ,HB, .	S.N.A
2		AA60-00074A	SPACER-DY;PJT,SILICON RUBBER, . . ,GRAY,	S.N.A
2		AA67-10071A	LENS,DELTA 77 79. . ,GREEN,C ELEMENT,	
2		AA26-30006F	TRANS-FLYBACK; ,FWZ 50A001C,55,30KV	
2		AA64-01315B	CASE COUPLER,GREEN;43,53,61,T2.0,AL SHE	S.N.A
2		AA27-50005C	DEFLECTION-YOKE; ,DPD 43/92AL,ST-3P,ITCRT	
2		AA03-00201A	CRT MONO;P16LSC038HKA, ,7inch, . . ,FLAT	S.N.A
2		AA61-00478B	BRACKET-LENS;53,SECC,T1.6, .	S.N.A
2		AA60-00063B	SPACER-CLENS;53,SILICON, . . ,GRAY,	S.N.A
2		AA60-00061B	SPACER-CRT;53,SILICON, . . . ,GRAY, .	S.N.A
2		AA39-00018A	LEAD CONNECTOR ASSY;,1P,YFH800 01,YRH187	
2		AA33-00006A	MAGNET CONVERGENCE,,H 92,LT 29A ,,29.1m.0	

ASSY CRT-(B)

1	*	AA94-02869A	ASSY CRT-(B);P16LSC038MB,+380MG,7,BARE,	
2	BC-AL	AA60-10011A	SCREW-TAPTITE;HH,-PC,M4,L12,ZPC(BLK),SW	
2		AA65-30114A	CLAMP LOCK;NYLON 66,V2,NTR, ,PROJECTION,	S.N.A
2		AA67-10005A	LENS-ASSY; ,DELTA,CLEAR,54J8B, ,77,	
2		AA91-00449A	ASSY BRACKET,CRT, . . ,SECC T1.0,P,T	
3		AA61-00473B	BRACKET-CRT;53,SECC,T1.6, .	S.N.A
3		AA61-00478A	SPRING-WIRE,CRT;P,T,STS, ...	S.N.A
3		AA61-00615B	BRACKET-EARTH;54,-B,PBS,T0.5, .	S.N.A
2		AA91-00491A	ASSY HOLDER,PACK, . ,FILM PP RUBBER,54,J8	
3		AA60-00062B	SPACER-O,RING;53,SILICON, . . . GRAY,	S.N.A
3		AA61-00477B	HOLDER-PACK;43,53,61,J8,PP, ,HB, .	S.N.A
2		AA60-00074A	SPACER-DY;PJT,SILICON RUBBER, . . . ,GRAY,	S.N.A
2		AA26-30006F	TRANS-FLYBACK; ,FWZ 50A001C,55,30KV	
2		AA61-00602B	BRACKET-LENS,RB;PROJECTION,SECC ,T1.6, .	
2		AA67-10007A	LENS, ,DELTA,CLEAR,PJT, ,77,79,	
2		AA26-30006F	TRANS-FLYBACK; ,FWZ 50A001C,55,30KV	
2		AA64-01316B	CASE-COUPLER,BLUE;53,T2.0,AL SHEET, .	S.N.A
2		AA27-50005C	DEFLECTION-YOKE; ,DPD 43/92AL,ST-3P,ITCRT	
2		AA03-00202A	CRT MONO;P16LSC038MB, ,7inch, . . ,FLAT	S.N.A
2		AA61-00555B	HOLDER-LANS;53,J8,PC ABS,BLK, . ,GF20%	S.N.A
2		AA60-00063B	SPACER-CLENS;53,SILICON, . . ,GRAY, .	S.N.A
2		AA60-00061B	SPACER-CRT;53,SILICON, . . ,GRAY, .	S.N.A
2		AA39-00018A	LEAD CONNECTOR ASSY;,1P,YFH800 01,YRH187	
2		AA33-00005A	MAGNET CONVERGENCE,,H 92,LTU 036, ,29.1m.	

SSY CRT-(R)

1	*	AA94-02868A	ASSY CRT-(R);P16LSC003RJA,+380MG,7,BARE,	
2	BC-AL	AA60-10011A	SCREW-TAPTITE;HH,+PC,M4,L12,ZPC(BLK),SW	
2		AA65-30114A	CLAMP LOCK;NYLON 66,V2,NTR, ,PROJECTION,	S.N.A
2		AA64-01314B	CASE COUPLER,RED;53,T2.0,AL SHEET, .	S.N.A
2		AA67-10005A	LENS-ASSY; ,DELTA,CLEAR,54J8B, ,77,	
2		AA67-10008A	LENS; ,DELTA,RED,PJT, ,77,79,	
2		AA91-00449A	ASSY BRACKET,CRT, . ,SECC T1.0,P,T	
3		AA61-00473B	BRACKET-CRT;53,SECC,T1.6, .	S.N.A
3		AA61-00478A	SPRING-WIRE,CRT;P,T,STS, ...	S.N.A
3		AA61-00615B	BRACKET-EARTH;54J8,PBS,T0.5, .	S.N.A
2		AA91-00491A	ASSY HOLDER,PACK, . ,FILM PP RUBBER,54J8	
3		AA60-00062B	SPACER-O,RING;53,SILICON, . . ,GRAY, .	S.N.A
3		AA61-00477B	HOLDER-PACK;43,53,61J8,PP, ,HB, .	S.N.A
2		AA60-00074A	SPACER-DY;PJT,SILICON RUBBER, . . ,GRAY,	S.N.A
2		AA26-30006F	TRANS-FLYBACK; ,FWZ-50A001C,55,30KV	
2		AA61-00602B	BRACKET-LENS,RB;PROJECTION,SECC ,T1.6, .	
2		AA27-50005C	DEFLECTION-YOKE; ,DPD-43/92AL,ST-3P,ITCRT	
2		AA03-00200A	CRT MONO;P16LSC003RJA, ,7inch, . . ,FLAT	S.N.A
2		AA61-00555B	HOLDER-LANS;53,J8,PC ABS,BLK, . ,GF20%	S.N.A
2		AA60-00063B	SPACER-CLENS;53,SILICON, . . ,GRAY, .	S.N.A
2		AA60-00061B	SPACER-CRT;53,SILICON, . . ,GRAY, .	S.N.A
2		AA39-00018A	LEAD CONNECTOR ASSY;,1P,YFH800 01,YRH187	
2		AA33-00006A	MAGNET CONVERGENCE,,H 92,LTU 029A ,,29.1m.0	

ASSY-WOOD

1	*	AA81-00620A	ASSY-WOOD; WOOD KBM21 58,SVP 54J,BSR,,7	
2	AWTAWB	6006-001094	SCREW-ASSY;WOOD,WW,HH,+,M7,L32,ZPC(YEL)	S.N.A
2		AA61-00474A	ASSY-WOOD,TOP- . ,WOOD,SVP 54J,BSR,54J,7	
3	CWTHCW	AA60-10051A	SCREW-WOOD;PH-,+M4,L16,ZPC(BLK),SWRC+13A	
3		AA64-01399A	CABINET-WOOD,TOP;54J8,- ,WOOD,- .	S.N.A
3		AA61-00510C	HOLDER-SCREEN;54J8,ABS,BLK,HB, ,L83S	
3		AA61-00510B	HOLDER-SCREEN;54J8,ABS,BLK,HB, ,L1132	
3		AA61-00507B	HOLDER-CABINET-WOOD;43,54,62J8,ABS,BLK,+	
2		AA91-00475A	ASSY-WOOD,BOT- . ,WOOD,SVP 54J,BSR,54J,7	
3	CASCWB	AA60-10051A	SCREW-WOOD;PH-,+M4,L16,ZPC(BLK),SWRC+13A	
3	HCMCWB	AA60-10051A	SCREW-WOOD;PH-,+M4,L16,ZPC(BLK),SWRC+13A	
3	HW-CWB	AA60-10051B	SCREW-WOOD;RH-,+M3.5,L11,ZPC(YEL),SWRC+1	
3	SPKCWB	AA60-10051A	SCREW-WOOD;PH-,+M4,L16,ZPC(BLK),SWRC+13A	
3		AA61-00506B	HOLDER-CRT;MAIN;43,54,62J8,HIPS,BLK,+HB,	
3		AA61-00508B	HOLDER-JERSEY;43,54,62J8,ABS,BLK,HB, .	
3		AA61-00513B	BRACKET-GRILLE;43,54,62J8,SECC-1 ,T0.5,	
3		AA98-00049A	ASSY-LEAD,CON; ,LEAD-CON,CORE,AA39-20505	
4		3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
3		AA60-00078A	SPACER-DUAL,LOCK;54J8,ø250,40X25	
3		AA64-01402A	CABINET-WOOD,BOT;54J8, ,WOOD, .	S.N.A
3		AA63-00348B	COVER-DUCT;54,62J8,HIPS, ,HB,BLK, .	
3		3001-001107	SPEAKER;20W,8ohm,95dB,1300Hz	
3		3001-001134	SPEAKER;30W,8ohm,93dB,60Hz	
3		AA39-00042A	LEAD CONNECTOR ASSY;,2 ZUF,REC,REC,200MM	
3		AA61-00094C	HOLDER-RAIL ,PCJ533R,ABS,HB,BLK,480	
3		AA61-00097A	HOLDER-WIRE, . ,NYLON 6/6, ,NTR,	
3		AA61-00458A	CASTER, . . ,TP4015-05,NYL,OH47. . . ,SR4	S.N.A

ASSY CABINET MASK

1	*	AA81-00478C	CABINET-MASK,SIDE;54J8,GD906P-DG902,ABS,	
2	C/FRON	AA63-00380A	COVER-CORNER;PJT,POLYESTER, . . ,CLR,#572	
2		AA64-01495B	CABINET-MASK,SIDE;54J8,GD906P-DG902,ABS,	
3		AA64-01495A	CABINET-MASK,SIDE;54J8,L827.4 APCHUL,ABS	S.N.A
2		AA64-01393J	CABINET-FRONT;MASK,SP54J8HF,G806-D902 ,S	
3		AA64-01393A	CABINET-FRONT;MASK,54J8,L1099.4 APCHULA	S.N.A
2		AA64-01393C	CABINET-FRONT;MASK,54J8,GD906P-DG902P,DO	
3		AA64-01393A	CABINET-FRONT;MASK,54J8,L1099.4 APCHULA	S.N.A
2		AA61-00505B	HOLDER-CORNER;43,54,62J8,ABS,GRAY,HB	

ASSY-PCB,TERMINAL

1	*	AA95-00219D	ASSY-PCB,TERMINAL- ,SP43J5HF,J51A, . . ,1	
2	CNT01	3711-003630	CONNECTOR-HEADER;BOX,32P,2R,2.54mm,ANGLE	
2	CNT02	3711-003630	CONNECTOR-HEADER;BOX,32P,2R,2.54mm,ANGLE	
2	CNT03	3711-003601	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,ANGLE,	
2	IC703	0804-001121	IC-I/O SUPPORT CHIP;8574,88IT,DIP,16P,30	
2	IC704	1001-001022	IC-ANALOG SWITCH;TDA8601,BLANKING,DIP,16	
2	IC705	0801-000213	IC-CMOS LOGIC,4052,MULTIPLEXER,DIP,16P,3	
2	JKV01	3722-000498	JACK-SCART,21P, ,SN,BLK,NO	
2	JKV02	3722-001039	JACK-RCA;3P,3.6mm,SN,BLK,#16-22	
2	JKV03	3722-001382	JACK-RCA;5P6P,3.4MM,NI,R/W/G/B/BLUE,	
2	JKV04	3722-001350	JACK-RCA;7P9P3.4MM,NI,BLK,	
2	JKV05	3709-001013	CONNECTOR-DSUB;15P,3R,FEMALE,STRAIGHT,AU	
2	JKV06	3709-001013	CONNECTOR-DSUB;15P,3R,FEMALE,STRAGHT,AU	
2	JKV07	3722-000544	JACK-VHS,4P,11.5mm,AG,BLK,N	
2	RN701	2011-000160	R-NETWORK;10Kohm,5%,1/8W,A,SIP9P,TP	
2		AA65-30105A	CLAMP WIRE;NYLON 66,V2,NTR,15MM,ALL MODE	S.N.A
2		AA99-20079E	ASSY-PCB SUB,AUTO; AA95-00219D ,,V	S.N.A
3	C701	2401-002009	C-AL;100uF,20%,16V,GP,TP5.3x7.5	
3	C702	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
3	C703	2401-002009	C-AL;100uF,20%,16V,GP,TP5.3x7.5	
3	C704	2203-000818	C-CERAMIC,CHIP;0.033nF,5%,50V,NP0,TP,201	

Level	Loc. No.	Code No.	Description ; Specification	Remark
3	C705	2203-000818	C-CERAMIC,CHIP;0.033nF,5%,50V,NP0,TP,201	
3	C706	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C707	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C708	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C709	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C710	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C711	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C712	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
3	C713	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C714	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C715	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C716	2401-002009	C-AL;100uF,20%,16V,GP,TP5.3x7.5	
3	C717	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
3	C718	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C719	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C720	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C721	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C722	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C723	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
3	C724	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C725	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
3	C726	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
3	C727	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C730	2401-002299	C-AL;4.7uF,20%,50V,GP,TP5x7.5	
3	C731	2401-002299	C-AL;4.7uF,20%,50V,GP,TP5x7.5	
3	C732	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,	
3	C733	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,	
3	C734	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,	
3	C735	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,	
3	C736	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,	
3	C737	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,	
3	C740	2401-001840	C-AL;100uF,20%,16V,GP,TP5.3x11.5	
3	C741	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
3	C742	2401-001840	C-AL;100uF,20%,16V,GP,TP5.3x11.5	
3	C743	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
3	C744	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
3	C745	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
3	C746	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
3	C747	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
3	C748	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
3	C749	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
3	C760	2401-000667	C-AL;2.2uF,20%,50V,WT,TP5x11.5	
3	C761	2401-000667	C-AL;2.2uF,20%,50V,WT,TP5x11.5	
3	C762	2401-000667	C-AL;2.2uF,20%,50V,WT,TP5x11.5	
3	C763	2401-000667	C-AL;2.2uF,20%,50V,WT,TP5x11.5	
3	C764	2401-000667	C-AL;2.2uF,20%,50V,WT,TP5x11.5	
3	C765	2401-000667	C-AL;2.2uF,20%,50V,WT,TP5x11.5	
3	C766	2401-000667	C-AL;2.2uF,20%,50V,WT,TP5x11.5	
3	C767	2401-000667	C-AL;2.2uF,20%,50V,WT,TP5x11.5	
3	C768	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C769	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
3	C770	2203-000683	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,201	
3	C771	2203-000683	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,201	
3	C772	2203-000683	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,201	
3	C773	2203-000239	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,2012	
3	C774	2203-000239	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,2012	
3	C775	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,	
3	C776	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,	
3	C777	2401-001496	C-AL;47uF,20%,16V,GP,TP5x7.5	
3	C780	2401-000360	C-AL;100uF,20%,50V,GP,TP8x11.5,5	
3	C782	2401-000471	C-AL;10uF,20%,50V,BP,TP5x11.5mm	
3	C783	2401-000471	C-AL;10uF,20%,50V,BP,TP5x11.5mm	
3	DZ701	0403-000314	DIODE-ZENER;RLZ,9.1B,9.1V,8.80-9.30V,400	
3	DZ702	0403-000314	DIODE-ZENER;RLZ,9.1B,9.1V,8.80-9.30V,400	
3	DZ703	0403-000314	DIODE-ZENER;RLZ,9.1B,9.1V,8.80-9.30V,400	
3	DZ704	0403-001117	DIODE-ZENER;RLZ,12B,5%,500mW,LL-34,TP	
3	DZ705	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
3	IC701	1001-001030	IC-VIDEO SWITCH;TDA6820X, ,SOP,28P,300MI	
3	IC702	1001-001030	IC-VIDEO SWITCH;TDA6820X, ,SOP,28P,300MI	
3	J701	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
3	J702	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
3	L701	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	L702	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	L703	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	L704	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	L705	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	

Level	Loc. No.	Code No.	Description ; Specification	Remark
3	L706	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	L707	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	L708	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	L709	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	L710	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	L719	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	L720	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	L721	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	L722	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	L723	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	L724	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	L725	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	L726	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
3	PCB	AA41-00075B	PCB AV TERMINAL;SP43J5HF,ER 4.2L,B 1.6T,	S.N.A
3	Q701	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT 23,	
3	Q702	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT 23,	
3	Q703	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT 23,	
3	Q704	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT 23,	
3	Q705	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT 23,	
3	Q706	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT 23,	
3	Q707	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT 23,	
3	Q708	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT 23,	
3	Q709	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT 23,	
3	Q710	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT 23,	
3	Q711	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT 23,	
3	Q712	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT 23,	
3	Q713	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT 23,	
3	R701	2007-000293	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R702	2007-000300	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
3	R703	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
3	R704	2007-000511	R-CHIP;2.4KOHM,5%,1/10W,DA,TP,2012	
3	R705	2007-001165	R-CHIP;750HM,5%,1/10W,DA,TP,2012	
3	R706	2007-001165	R-CHIP;750HM,5%,1/10W,DA,TP,2012	
3	R708	2007-000293	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R709	2007-000293	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R710	2007-000293	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R711	2007-001165	R-CHIP;750HM,5%,1/10W,DA,TP,2012	
3	R712	2007-000293	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R713	2007-000293	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R714	2007-000293	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R715	2007-000293	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R716	2007-000300	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
3	R717	2007-000401	R-CHIP;5.6KOHM,5%,1/10W,DA,TP,2012	
3	R718	2007-000300	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
3	R719	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
3	R720	2007-000511	R-CHIP;2.4KOHM,5%,1/10W,DA,TP,2012	
3	R721	2007-000293	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R722	2007-001165	R-CHIP;750HM,5%,1/10W,DA,TP,2012	
3	R723	2007-000293	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R724	2007-000293	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R725	2007-001165	R-CHIP;750HM,5%,1/10W,DA,TP,2012	
3	R726	2007-001165	R-CHIP;750HM,5%,1/10W,DA,TP,2012	
3	R727	2007-001165	R-CHIP;750HM,5%,1/10W,DA,TP,2012	
3	R728	2007-001165	R-CHIP;750HM,5%,1/10W,DA,TP,2012	
3	R729	2007-001165	R-CHIP;750HM,5%,1/10W,DA,TP,2012	
3	R730	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
3	R731	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
3	R732	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
3	R733	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
3	R734	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP,2012	
3	R735	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP,2012	
3	R736	2007-001165	R-CHIP;750HM,5%,1/10W,DA,TP,2012	
3	R737	2007-000765	R-CHIP;330OHM,5%,1/10W,DA,TP,2012	
3	R740	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
3	R741	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
3	R742	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
3	R743	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
3	R744	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
3	R745	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
3	R746	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
3	R747	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
3	R748	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
3	R749	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
3	R750	2007-000572	R-CHIP;220OHM,5%,1/10W,DA,TP,2012	
3	R751	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
3	R752	2007-000572	R-CHIP;220OHM,5%,1/10W,DA,TP,2012	
3	R753	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	

Level	Loc. No.	Code No.	Description ; Specification	Remark
3	R754	2007-000572	R-CHIP:2200HM 5%,1/10W,DA,TP,2012	
3	R755	2007-000029	R-CHIP:0OHM,5%,1/10W,DA,TP,2012	
3	R756	2007-000964	R-CHIP:5.1KOHM,5%,1/10W,DA,TP,2012	
3	R757	2007-000468	R-CHIP:1KOHM,5%,1/10W,DA,TP,2012	
3	R758	2007-000872	R-CHIP:4.7KOHM 5%,1/10W,DA,TP,2012	
3	R759	2007-000872	R-CHIP:4.7KOHM 5%,1/10W,DA,TP,2012	
3	R760	2007-000290	R-CHIP:1000HM,5%,1/10W,DA,TP,2012	
3	R761	2007-000221	R-CHIP:1.2KOHM,5%,1/10W,DA,TP,2012	
3	R762	2007-000290	R-CHIP:1000HM 5%,1/10W,DA,TP,2012	
3	R763	2007-000290	R-CHIP:1000HM,5%,1/10W,DA,TP,2012	
3	R764	2007-000221	R-CHIP:1.2KOHM,5%,1/10W,DA,TP,2012	
3	R765	2007-000290	R-CHIP:1000HM 5%,1/10W,DA,TP,2012	
3	R766	2007-000290	R-CHIP:1000HM,5%,1/10W,DA,TP,2012	
3	R767	2007-000290	R-CHIP:1000HM,5%,1/10W,DA,TP,2012	
3	R768	2007-000290	R-CHIP:1000HM,5%,1/10W,DA,TP,2012	
3	R769	2007-000290	R-CHIP:1000HM,5%,1/10W,DA,TP,2012	
3	R770	2007-000766	R-CHIP:330OHM,5%,1/10W,DA,TP,2012	
3	R771	2007-001166	R-CHIP:750HM,5%,1/10W,DA,TP,2012	
3	R772	2007-001166	R-CHIP:750HM,5%,1/10W,DA,TP,2012	
3	R773	2007-001166	R-CHIP:750HM,5%,1/10W,DA,TP,2012	
3	R774	2007-001166	R-CHIP:750HM,5%,1/10W,DA,TP,2012	
3	R775	2007-001166	R-CHIP:750HM,5%,1/10W,DA,TP,2012	
3	R776	2007-001166	R-CHIP:750HM,5%,1/10W,DA,TP,2012	
3	R777	2007-000781	R-CHIP:330HM,5%,1/10W,DA,TP,2012	
3	R778	2007-000781	R-CHIP:330HM,5%,1/10W,DA,TP,2012	
3	R779	2007-001100	R-CHIP:620HM,5%,1/10W,DA,TP,2012	
3	R780	2007-001100	R-CHIP:620HM,5%,1/10W,DA,TP,2012	
3	R781	2007-001100	R-CHIP:620HM,5%,1/10W,DA,TP,2012	
3	R782	2007-000300	R-CHIP:10KOHM,5%,1/10W,DA,TP,2012	
3	R783	2007-000300	R-CHIP:10KOHM,5%,1/10W,DA,TP,2012	
3	R784	2007-000300	R-CHIP:10KOHM,5%,1/10W,DA,TP,2012	
3	R785	2007-000872	R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012	
3	R786	2007-000290	R-CHIP:1000HM,5%,1/10W,DA,TP,2012	
3	R787	2007-000290	R-CHIP:1000HM,5%,1/10W,DA,TP,2012	
3	R788	2007-000468	R-CHIP:1KOHM,5%,1/10W,DA,TP,2012	
3	R791	2007-000290	R-CHIP:1000HM,5%,1/10W,DA,TP,2012	
3	R792	2007-000290	R-CHIP:1000HM,5%,1/10W,DA,TP,2012	
3	R793	2007-000290	R-CHIP:1000HM,5%,1/10W,DA,TP,2012	
3	R794	2007-000290	R-CHIP:1000HM,5%,1/10W,DA,TP,2012	
3	R795	2007-001155	R-CHIP:750OHM,5%,1/10W,DA,TP,2012	
3	R796	2007-000282	R-CHIP:100KOHM,5%,1/10W,DA,TP,2012	
3	R797	2007-001155	R-CHIP:750OHM,5%,1/10W,DA,TP,2012	
3	R798	2007-000282	R-CHIP:100KOHM,5%,1/10W,DA,TP,2012	
3	R799	2007-000468	R-CHIP,1KOHM,5%,1/10W,DA,TP,2012	
3	R800	2007-001166	R-CHIP:750HM,5%,1/10W,DA,TP,2012	
3	R801	2007-001166	R-CHIP:750HM,5%,1/10W,DA,TP,2012	
3	R802	2007-001166	R-CHIP:750HM,5%,1/10W,DA,TP,2012	
3	R803	2007-000328	R-CHIP,11KOHM,5%,1/10W,DA,TP,2012	
3	R804	2007-000328	R-CHIP:11KOHM,5%,1/10W,DA,TP,2012	
3	R805	2007-000001	R-CHIP:68KOHM,5%,1/10W,DA,TP,2012	
3	R806	2007-000001	R-CHIP:68KOHM,5%,1/10W,DA,TP,2012	
3	R807	2007-000001	R-CHIP:68KOHM,5%,1/10W,DA,TP,2012	
3	R808	2007-000001	R-CHIP:68KOHM,5%,1/10W,DA,TP,2012	
3	R809	2007-000001	R-CHIP:68KOHM,5%,1/10W,DA,TP,2012	
3	R810	2007-000001	R-CHIP:68KOHM,5%,1/10W,DA,TP,2012	
3	R811	2007-000001	R-CHIP:68KOHM,5%,1/10W,DA,TP,2012	
3	R812	2007-000001	R-CHIP:68KOHM,5%,1/10W,DA,TP,2012	
3	R813	2007-000300	R-CHIP:10KOHM,5%,1/10W,DA,TP,2012	
3	R814	2007-000300	R-CHIP:10KOHM,5%,1/10W,DA,TP,2012	
3	R815	2007-000300	R-CHIP:10KOHM,5%,1/10W,DA,TP,2012	
3	R816	2007-000774	R-CHIP:33KOHM,5%,1/10W,DA,TP,2012	
3	R817	2007-000615	R-CHIP:24KOHM,5%,1/10W,DA,TP,2012	
3	R818	2007-000774	R-CHIP:33KOHM,5%,1/10W,DA,TP,2012	
3	R819	2007-000615	R-CHIP:24KOHM,5%,1/10W,DA,TP,2012	
2		0202-000187	SOLDER WIRE FLUX ,:RS60S,D1.2,63Sn/37Pb	S.N.A
2		0202-001004	SOLDER-CREAM;SQ-2030M SZH-1,SB3A,D0.04,6	S.N.A

ASSY-PCB,H/V

1	*	AA96-00056C	ASSY PCB,H/V, ,SPM3,/SHP3S/XTT,,I51A, , , ,	
2	BK01	AA61-10068A	BRACKET,PCB; ,M2160,SPTE,T0.3, , ,	S.N.A
2	BK02	AA61-10068A	BRACKET,PCB; ,M2160,SPTE,T0.3, , ,	S.N.A
2	BK03	AA61-10068A	BRACKET,PCB; ,M2160,SPTE,T0.3, , ,	S.N.A
2	CN401	3711-001049	CONNECTOR-HEADER;BOX,6P,1R,2.5mm,ANGLE,	
2	CN402	3711-002709	CONNECTOR-HEADER;NOWALL,12P,1R,2.5MM,ANG	
2	CN403	AA39-20052A	LEAD CONNECTOR ASSY;,4P,YBNH025,04,YSH02	
2	CN404	3711-001283	CONNECTOR-HEADER;NOWALL,14P,1R,2.5mm,ANG	
2	IC471	1203-000610	IC PWM CONTROLLER;494,DIP,16P,300MIL,PLA	
2	L351	AA27-10003M	COIL-CHOKE, ,8100uH,J,40.34mA,TP,ELO607R	
2	PCB	AA41-00199C	PCB-H/V MODULE,P53A,CEM-1,1L,C,1.6T,330x	S.N.A
2	Q371	AA96-50291A	ASSY H/S; , ,AA62-30154B,2SC4636,	
3		0205-000129	GREASE SILICON;SC102,,JAPAN	S.N.A
3		0502-000442	TR POWER,2SC4636RB,NPN,2W,TO-220,ST,10	
3		6003-000333	SCREW-TAPTITE,BH-,2S,M3,L10,ZPC(YEL),SW	
3		AA62-30154B	HEAT SINK-ES, ,A6063,EXTR, , , ,SILVER ANO	
2	Q422	0505-000156	FET-SILICON;IRF620,N,200V,5A,0.8ohm,50W,	
2	R425	2003-000736	R-METAL OXIDE(ES);560ohm,5%,3W,AA,TP6x16	
2	R486	2008-001096	R-FUSIBLE(S);3.3OHM,5%,1/2W,AC,BK,2.5X6,	
3		2001-000262	R-CARBON;1.8MOHM,5%,1/8W,AA,TP,1.8X3.2M	
2		AA99-20071J	ASSY-PCB SUB,AUTO; ,AA95-00056C ,,V	S.N.A
3	C341	2401-001914	C-AL;1uF,20%,50V,BP,TP,5x11,5	
3	C342	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
3	C351	2301-000175	C-FILM,PEF,15nF,5%,50V,TP,7.1x3.5x13mm,5	
3	C352	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
3	C353	2301-000204	C-FILM,PEF,2.7nF,5%,50V,TP,7 4x3.9x13mm,	
3	C354	2301-000261	C-FILM,PEF,4.7nF,5%,100V,TP,10.5x12.5x6	
3	C355	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
3	C356	2201-000180	C-CERAMIC,DISC,10nF,10%,50V,Y5V,TP,7x3,5	
3	C357	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
3	C358	2401-000471	C-AL;10uF,20%,50V,BP,TP,5x11,5mm	
3	C360	2305-000289	C-FILM,MPEF,220nF,5%,63V,TP, ,5mm	
3	C361	2305-000122	C-FILM,MPPF,100nF,5%,50V,TP,7.3x4.0x5.0m	
3	C362	2305-000149	C-FILM,MPEF,100nF,5%,100V,TP,12x12.5x6.5	
3	C371	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
3	C372	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
3	C373	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
3	C374	2401-001621	C-AL;6.8uF,20%,450V,GP,TP,13x20,5	
3	C405	2209-000558	C-CERAMIC,DISC,0.47nF,10%,50V,Y5P,TP,5x3	
3	C406	2201-000370	C-CERAMIC,DISC,0.22nF,10%,50V,Y5P,TP,4x3	
3	C421	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
3	C429	2305-000704	C-FILM,MPEF;100nF,5%,,250V,TP,16.5x10.3x5	
3	C454	2303-000331	C-FILM,PPF 4.7nF,5%,630V,TP,19.5x12x7.7,	
3	C455	2401-001527	C-AL;47uF,20%,250V,HR,TP,13x25mm,5m	
3	C456	2201-000132	C-CERAMIC,DISC,0.1nF,10%,500V,Y5P,TP,6.5	
3	C461	2201-000600	C-CERAMIC,DISC,0.56nF,10%,50V,Y5P,TP,5x3	
2	C462	2301-000246	C-FILM,PEF,33nF,5%,100V,TP,7x5.0x9.5mm,5	
3	C480	2305-000122	C-FILM,MPPF,100nF,5%,50V,TP,7.3x4.0x5.0m	
3	C481	2401-000914	C-AL,22uF,20%,16V,GP,TP,5x11,5	
3	C482	2305-000178	C-FILM,MPEF,10nF,5%,100V,TP, ,5mm	
3	C484	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
3	C485	2201-000146	C-CERAMIC,DISC,0.1nF,5%,50V,SL,TP,5x3.5,	
3	C486	2201-000146	C-CERAMIC,DISC,0.1nF,5%,50V,SL,TP,5x3.5,	
3	C487	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
3	C488	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
3	C489	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
3	C490	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
3	C492	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
3	C493	2201-000119	C-CERAMIC,DISC,100nF,+80-20%,50V,Y5V,TP,	
3	C494	2201-000471	C-CERAMIC,DISC,0.33nF,10%,50V,Y5P,TP,4x3	
3	C495	2301-000192	C-FILM,PEF,1nF,5%,50V,TP,5.3x10mm,5mm	
3	C496	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11,5,5	
3	D342	0401-000005	DIODE-SWITCHING,1N4148,100V,200mA,DO-35,	
3	D343	0401-000005	DIODE-SWITCHING,1N4148,100V,200mA,DO-35,	
3	D344	0401-000005	DIODE-SWITCHING,1N4148,100V,200mA,DO-35,	
3	D345	0403-001325	DIODE-ZENER;MTZJ,15C,14.35-15.09V,500mW,D	
3	D352	0401-000005	DIODE-SWITCHING,1N4148,100V,200mA,DO-35,	
3	D353	0401-000005	DIODE-SWITCHING,1N4148,100V,200mA,DO-35,	
3	D355	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
3	D363	0401-000005	DIODE-SWITCHING,1N4148,100V,200mA,DO-35,	
3	D364	0401-000005	DIODE-SWITCHING,1N4148,100V,200mA,DO-35,	
3	D371	0401-000005	DIODE-SWITCHING,1N4148,100V,200mA,DO-35,	
3	D372	0401-000005	DIODE-SWITCHING,1N4148,100V,200mA,DO-35,	
3	D373	0402-000243	DIODE-RECTIFIER;RC2-V1,2000V,0.2A,DO-201	
3	D384	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
3	D385	0401-000005	DIODE-SWITCHING,1N4148,100V,200mA,DO-35,	
3	D388	0403-001316	DIODE-ZENER;MTZJ,3.0A,2.85-3.07V,500mW,DO	
3	D395	0403-001319	DIODE-ZENER;MTZJ,4.7C,4.68-4.93V,500mW,DO	
3	D442	0401-000005	DIODE-SWITCHING,1N4148,100V,200mA,DO-35,	
3	D443	0401-000005	DIODE-SWITCHING,1N4148,100V,200mA,DO-35,	
3	D451	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
3	D456	0401-000005	DIODE-SWITCHING,1N4148,100V,200mA,DO-35,	

Level	Loc. No.	Code No.	Description ; Specification	Remark
3	D457	0403-000714	DIODE-ZENER;MTZJ,3.3B,3.3V,3.32-3.53V,500	
3	D474	0403-000734	DIODE-ZENER;TZP15B,15V,14.7-15.5V,1W,DO	
3	D475	0401-000005	DIODE-SWITCHING,1N4148,100V,200mA,DO-35,	
3	D476	0401-000005	DIODE-SWITCHING,1N4148,100V,200mA,DO-35,	
3	D477	0401-000005	DIODE-SWITCHING,1N4148,100V,200mA,DO-35,	
3	D478	0401-000005	DIODE-SWITCHING,1N4148,100V,200mA,DO-35,	
3	D479	0401-000005	DIODE-SWITCHING,1N4148,100V,200mA,DO-35,	
3	D480	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
3	D483	0403-000720	DIODE-ZENER;MTZJ,9.1B,9.1V,8.57-9.01V,500	
3	D484	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
3	D491	0401-000005	DIODE-SWITCHING,1N4148,100V,200mA,DO-35,	
3	D492	0403-000716	DIODE-ZENER;MTZJ,4.7B,4.7V,4.55-4.8V,500m	
3	D493	0403-001325	DIODE-ZENER;MTZJ,15C,14.35-15.09V,500mW,D	
3	IC481	1203-001217	IC-POSI ADJUST REG.,431,TO-92,3P,4.58MIL	
3	L341	2701-000115	INDUCTOR-AXIAL,10uH,10%,4.2x9.9mm	
3	Q342	0501-000389	TR-SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q343	0501-000389	TR-SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q344	0501-000283	TR-SMALL SIGNAL,KSA539,PNP,400mW,TO-92,T	
3	Q350	0501-000389	TR-SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q351	0501-000283	TR-SMALL SIGNAL,KSA539,PNP,400mW,TO-92,T	
3	Q352	0501-000389	TR-SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q353	0501-000389	TR-SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q354	0501-000283	TR-SMALL SIGNAL,KSA539,PNP,400mW,TO-92,T	
3	Q355	0501-000366	TR-SMALL SIGNAL,KSC2330,Y,NPN,1W,TO-92L,	
3	Q381	0501-000389	TR-SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q382	0501-000389	TR-SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q401	0501-000389	TR-SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q402	0501-000389	TR-SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q421	0501-000389	TR-SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q451	0501-000389	TR-SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q452	0501-000389	TR-SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q453	0501-000389	TR-SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q454	0501-000283	TR-SMALL SIGNAL,KSA539,PNP,400mW,TO-92,T	
3	Q461	0501-000389	TR-SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q471	0501-000389	TR-SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q473	0501-000389	TR-SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q481	0501-000389	TR-SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q482	0501-000283	TR-SMALL SIGNAL,KSA539,PNP,400mW,TO-92,T	
3	Q483	0501-000283	TR-SMALL SIGNAL,KSA539,PNP,400mW,TO-92,T	
3	Q491	0501-000389	TR-SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	R339	2001-000613	R-CARBON;3.9KOHM 5%,1/8W,AA,TP,1.8X3.2M	
3	R340	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R341	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R342	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R343	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R344	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R345	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP2.4X6.4M	
3	R345A	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R346	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R347	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP2.4X6.4M	
3	R348	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R349	2001-000252	R-CARBON;1.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R351	2001-001178	R-CARBON(S);680OHM,5%,1/2W,AA,TP2.4X6.4	
3	R352	2001-000033	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
3	R353	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R354	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R355	2001-000006	R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R357	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R358	2001-000008	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R359	2001-000766	R-CARBON;43KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R360	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R361	2001-001191	R-CARBON(S);820KOHM,5%,1/2W,AA,TP2.4X6.	
3	R362	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R363	2001-000723	R-CARBON;4.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R364	2001-000938	R-CARBON;68OHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R365	2001-001120	R-CARBON(S);3.3OHM,5%,1/2W,AA,TP2.4X6.4	
3	R366	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP2.4X6.4	
3	R367	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP2.4X6.	
3	R368	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP2.4X6.	
3	R369	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP2.4X6.	
3	R369A	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP2.4X6.	
3	R370	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP2.4X6.	
3	R371	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP2.4X6.	
3	R372	2001-001110	R-CARBON(S);240KOHM,5%,1/2W,AA,TP2.4X6.	
3	R373	2001-001110	R-CARBON(S);240KOHM,5%,1/2W,AA,TP2.4X6.	
3	R374	2001-001110	R-CARBON(S);240KOHM,5%,1/2W,AA,TP2.4X6.	
3	R375	2001-001113	R-CARBON(S);270KOHM,5%,1/2W,AA,TP2.4X6.	
3	R376	2001-000613	R-CARBON,3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R377	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP2.5x6.5	
3	R378	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP2.5x6.5	
3	R379	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP2.5x6.5	
3	R380	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP2.5x6.5	
3	R381	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP2.4X6.4M	
3	R384	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA,TP2.4X6.	
3	R385	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R386	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R387	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R388	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R389	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R395	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	R397	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	R398	2001-001070	R-CARBON(S);120OHM,5%,1/2W,AA,TP2.4X6.4	
2		0202-000187	SOLDER WIRE FLUX ,:RS60S,D1.2,63Sn/37Pb	S.N.A
2		AA65-30105C	CLAMP WIRE,ALL MODEL,NYLON 66,V2,NTR,5MM	S.N.A

ASSY-PCB,CONV AMP

Level	Loc. No.	Code No.	Description ; Specification	Remark
1	*	AA95-00055L	ASSY PCB,CONV AMP ;SP53J5HF_51A, ,	
2	C491	2306-000322	C FILM,MPPF 12nF,5%,1.6KV,TP,29x20.5x13,	
2	CN203	AA39-00115A	LEAD CONNECTOR ASSY,,10P,YBN+250-10.3515	
2	CN401	AA39-00128A	LEAD CONNECTOR ASSY,,8P,YBN+250-08.3515S	
2	CN402	AA39-00116A	LEAD CONNECTOR ASSY,,12P,YBN+250 12.3515	
2	CN802	AA39-00128A	LEAD CONNECTOR ASSY,,8P,YBN+250-08.3515S	
2	CZ101	AA96-50152C	ASSY-H/S, ,TR,AA62 30012A,KA7806A,30MM	
3		1203-000284	IC POSI,FIXED REG,,7806,TO-220,3P PLAS	
3		6003-000333	SCREW-TAPTITE,RH - ,2S,M3,L10,ZPC(YEL),SW	
3		AA62-30012A	HEAT SINK ES, ,A6063 EXTR, , T0220 , ,	
2	CZ102	1203-000121	IC NEGA,FIXED REG, 7908,TO-220,3P PLAS	
2	CZ103	AA96-00034A	ASSY H/S, ,CONVERGENCE,AA62 30173D,STK3	
3		0205-000129	GREASE SILICON,SC102,,JAPAN	S.N.A
3		1201-001225	IC VIDEO AMP,392,SIP22P, ,TRIPLE PLAS	
3		6003-001021	SCREW-TAPTITE,RH - ,B,M3,L15,ZPC(YEL),SWR	
3		AA62-30173D	HEAT SINK ES, , ,T1.0,WHITE,SCREW HOLE(2	
2	CZ104	AA96-00034A	ASSY H/S, CONVERGENCE,AA62 30173D,STK3	
2	PCB	AA41-00135D	PCB CONVERGENCE AMP,P51A,1L,CEM-1,330x24	S.N.A
2	SG303	4715-001050	SURGE ABSORBER,2.4kV,20%,1500A, ,DISC RA	
2		0202-000187	SOLDER-WIRE FLUX, ,RS605,D1.2,63Sn/37Pb	S.N.A
2		AA99-20071E	ASSY PCB SUB,AUTO; AA96-00055L V	S.N.A
3	CN403	3711-002643	CONNECTOR-HEADER;BOX,4P,1R,2.5MM,STRAIGH	
3	CZ101	2401-001429	C-AL;470uF,20%,50V,DIP,TP,13x20,5	
3	CZ102	2401-001429	C-AL;470uF,20%,50V,DIP,TP,13x20,5	
3	CZ103	2401-000689	C-AL;2200uF,20%,16V,DIP,TP,13x25,5	
3	CZ105	2401-000689	C AL;2200uF,20%,16V,DIP,TP,13x25,5	
3	CZ106	2201-000180	C-CERAMIC,DISC,10nF,10%,50V,Y5V,TP,7x3,5	
3	CZ107	2201-000180	C CERAMIC,DISC,10nF,10%,50V,Y5V,TP,7x3,5	
3	CZ108	2201-000499	C CERAMIC,DISC,0.39nF,5%,50V,SL, TP,8.5x3	
3	CZ109	2201-000499	C CERAMIC,DISC,0.39nF,5%,50V,SL, TP,8.5x3	
3	CZ110	2201-000499	C CERAMIC,DISC,0.39nF,5%,50V,SL, TP,8.5x3	
3	CZ111	2201-000976	C CERAMIC,DISC,0.022nF,5%,50V,NP0,TP,5x3	
3	CZ112	2201-000863	C CERAMIC,DISC,0.68nF,10%,50V,Y5P,TP,5x3	
3	CZ113	2201-000976	C CERAMIC,DISC,0.022nF,5%,50V,NP0,TP,5x3	
3	CZ114	2201-000863	C CERAMIC,DISC,0.68nF,10%,50V,Y5P,TP,5x3	
3	CZ115	2201-000976	C CERAMIC,DISC,0.022nF,5%,50V,NP0,TP,5x3	
3	CZ116	2201-000863	C CERAMIC,DISC,0.68nF,10%,50V,Y5P,TP,5x3	
3	CZ117	2201-000327	C CERAMIC,DISC,2.2nF,10%,50V,Y5V,TP,6.5x	
3	CZ118	2201-000327	C CERAMIC,DISC,2.2nF,10%,50V,Y5V,TP,6.5x	
3	CZ119	2201-000119	C CERAMIC,DISC,100nF,+80-20%,50V,Y5V,TP,	
3	CZ120	2201-000119	C CERAMIC,DISC,100nF,+80-20%,50V,Y5V,TP,	
3	CZ121	2201-000764	C CERAMIC,DISC,0.082nF,5%,50V,NP0,TP,8x3	
3	CZ126	2201-000499	C CERAMIC,DISC,0.39nF,5%,50V,SL, TP,8.5x3	
3	CZ127	2201-000499	C CERAMIC,DISC,0.39nF,5%,50V,SL, TP,8.5x3	
3	CZ128	2201-000499	C CERAMIC,DISC,0.39nF,5%,50V,SL, TP,8.5x3	
3	CZ132	2201-000976	C CERAMIC,DISC,0.022nF,5%,50V,NP0,TP,5x3	
3	CZ133	2201-000863	C CERAMIC,DISC,0.68nF,10%,50V,Y5P,TP,5x3	
3	CZ134	2201-000976	C CERAMIC,DISC,0.022nF,5%,50V,NP0,TP,5x3	
3	CZ135	2201-000863	C CERAMIC,DISC,0.68nF,10%,50V,Y5P,TP,5x3	
3	CZ136	2201-000976	C-CERAMIC,DISC,0.022nF,5%,50V,NP0,TP,5x3	
3	CZ137	2201-000863	C CERAMIC,DISC,0.68nF,10%,50V,Y5P,TP,5x3	
3	CZ138	2201-000327	C CERAMIC,DISC,2.2nF,10%,50V,Y5V,TP,6.5x	
3	CZ139	2201-000327	C CERAMIC,DISC,2.2nF,10%,50V,Y5V,TP,6.5x	
3	CZ144	2401-001840	C AL;100uF,20%,16V,DIP,TP,6.3x11.5	
3	CZ145	2201-000119	C CERAMIC,DISC,100nF,+80-20%,50V,Y5V,TP,	
3	CZ146	2401-001840	C AL,100uF,20%,16V,DIP,TP,6.3x11,5	
3	CZ147	2201-000119	C CERAMIC,DISC,100nF,+80-20%,50V,Y5V,TP,	
3	CZ151	2202-000796	C CERAMIC,MLC,AXIAL,1NF,10%,50V,Y5P,TP,3	
3	CZ152	2202-000796	C CERAMIC,MLC,AXIAL,1NF,10%,50V,Y5P,TP,3	
3	CZ153	2202-000796	C CERAMIC,MLC,AXIAL,1NF,10%,50V,Y5P,TP,3	
3	CZ154	2202-000796	C CERAMIC,MLC,AXIAL,1NF,10%,50V,Y5P,TP,3	
3	CZ155	2202-000796	C-CERAMIC,MLC,AXIAL,1NF,10%,50V,Y5P,TP,3	
3	CZ156	2202-000796	C-CERAMIC,MLC,AXIAL,1NF,10%,50V,Y5P,TP,3	
3	D453	0402-001286	DIODE-RECTIFIER;RPTH,2000V,1A, ,TP	
3	D501	0401-000005	DIODE-SWITCHING,1N4148,100V,200mA,DO-35,	
3	DZ120	0403-000510	DIODE ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
3	DZ121	0403-000510	DIODE ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
3	DZ122	0403-000510	DIODE ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
3	DZ126	0402-000546	DIODE RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
3	DZ127	0402-000546	DIODE RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
3	DZ128	0403-000510	DIODE ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
3	DZ129	0403-000510	DIODE ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
3	DZ130	0403-000510	DIODE ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
3	DZ131	0403-000510	DIODE ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
3	LZ101	2701-001030	INDUCTOR-AXIAL,43uH,10%,5x14mm	
3	LZ102	2701-001030	INDUCTOR-AXIAL,43uH,10%,5x14mm	
3	LZ103	2701-000142	INDUCTOR-AXIAL,1uH,10%,2.5x3.4mm	
3	LZ104	2701-000142	INDUCTOR-AXIAL,1uH,10%,2.5x3.4mm	
3	LZ107	2701-000142	INDUCTOR-AXIAL,1uH,10%,2.5x3.4mm	
3	LZ108	2701-000142	INDUCTOR-AXIAL,1uH,10%,2.5x3.4mm	
3	LZ109	2701-000142	INDUCTOR-AXIAL,1uH,10%,2.5x3.4mm	
3	LZ110	2701-000142	INDUCTOR-AXIAL,1uH,10%,2.5x3.4mm	
3	LZ111	2701-000142	INDUCTOR-AXIAL,1uH,10%,2.5x3.4mm	
3	LZ112	2701-000142	INDUCTOR-AXIAL,1uH,10%,2.5x3.4mm	
3	R382	2002-001006	R COMPOSITION,4.7Kohm,5%,1/2W,AA,TP,3.7x	
3	R476	2004-004046	R METAL(S);430Kohm,1%,1/2W,AA,TP,2.5x6.5	
3	R476A	2004-004001	R METAL(S);180Kohm,1%,1/2W,AA,TP,2.5x6.5	
3	R476B	2004-001892	R METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
3	R476C	2004-004046	R METAL(S);430Kohm,1%,1/2W,AA,TP,2.5x6.5	
3	R478	2004-001892	R METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
3	R501	2004-001376	R METAL(S);11Kohm,1%,1/2W,AA,TP,2.4x6.4m	
3	R502	2004-004066	R METAL(S);1.3Kohm,1%,1/2W,AA,TP,2.5x6.5	
3	RF219	2008-000261	R FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
3	RF220	2008-000261	R FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
3	RF221	2008-000261	R FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
3	RF222	2008-000261	R FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
3	RF250	2008-000261	R FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
3	RF251	2008-000261	R FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
3	RF252	2008-000261	R FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
3	RF253	2008-000261	R FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
3	RZ101	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RZ102	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RZ103	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RZ104	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP2.4X6.4	
3	RZ105	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP2.4X6.4	
3	RZ106	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP2.4X6.4	
3	RZ107	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP2.4X6.4	
3	RZ108	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP2.4X6.4	
3	RZ109	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP2.4X6.4	
3	RZ110	2001-000563	R-CARBON,27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RZ111	2001-000563	R CARBON,27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RZ112	2001-000563	R-CARBON,27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RZ113	2001-000591	R-CARBON,3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	RZ114	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RZ115	2001-000591	R CARBON,3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	RZ116	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RZ117	2001-000591	R CARBON,3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	RZ118	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RZ120	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RZ121	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RZ122	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
3	RZ123	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
3	RZ124	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
3	RZ125	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
3	RZ126	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
3	RZ127	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
3	RZ128	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
3	RZ129	2003-001024	R-METAL OXIDE(S);150ohm,5%,2W,AF,TP,3.9x	
3	RZ129A	2003-001024	R-METAL OXIDE(S);150ohm,5%,2W,AF,TP,3.9x	
3	RZ130	2003-001024	R-METAL OXIDE(S);150ohm,5%,2W,AF,TP,3.9x	
3	RZ130A	2003-001024	R-METAL OXIDE(S);150ohm,5%,2W,AF,TP,3.9x	
3	RZ131	2003-002157	R-METAL OXIDE,220OHM,5%,2W,AG,TP5X16MM	
3	RZ131A	2003-002157	R-METAL OXIDE,220OHM,5%,2W,AG,TP5X16MM	
3	RZ132	2003-002157	R-METAL OXIDE,220OHM,5%,2W,AG,TP5X16MM	
3	RZ132A	2003-002157	R-METAL OXIDE,220OHM,5%,2W,AG,TP5X16MM	
3	RZ133	2001-000563	R-CARBON,27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RZ134	2001-000563	R-CARBON,27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RZ135	2001-000563	R-CARBON,27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RZ136	2001-000591	R-CARBON,3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	RZ137	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RZ138	2001-000591	R-CARBON,3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	RZ139	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RZ140	2001-000591	R-CARBON,3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	RZ141	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RZ142	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
3	RZ143	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
3	RZ144	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
3	RZ145	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
3	RZ146	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
3	RZ147	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	

Level	Loc. No.	Code No.	Description ; Specification	Remark
3	RZ148	2003-002157	R METAL OXIDE,220OHM,5%,2W,AG,TP5X16MM	
3	RZ148A	2003-002157	R METAL OXIDE,220OHM,5%,2W,AG,TP5X16MM	
2	RZ149	2003-001024	R METAL OXIDE(S);150ohm,5%,2W,AF,TP,3.9x	
3	RZ149A	2003-001024	R METAL OXIDE(S);150ohm,5%,2W,AF,TP,3.9x	
3	VR472	2103-001086	VR SEMI;100KOHM,25%,0.3W,TOP	

ASSY ACCESSORY

Level	Loc. No.	Code No.	Description ; Specification	Remark
1	*	AA94-03537A	ASSY ACCESSORY;SP43J8HFX/XHK,,51A,HONGKU	S.N.A
2		AA69-30009C	BAG;SHEET,LDPE,10.0R,W150,L120, , ,	S.N.A
2		AA68-00856B	MANUAL USER;SP43J5HF/43J8HF,ENG, ,W/P	S.N.A
2		AA61-20126A	HOLDER LEG, , ,ABS,HB,BLK	S.N.A
2		AA39-40001B	CABLE RCA, ,1500MM	

REMOCON

Level	Loc. No.	Code No.	Description ; Specification	Remark
1	*	AA59-00100A	REMOCON; ,TM57 KS8P9418S,33,L/CRA,FSV	
2		AA09-00100A	IC MICOM,Z86L8808SSC R 50MQ, ,28PIN,2.4~3	
2		3902-000194	RESONATOR CERAMIC,3MHz,1.0%,TP,8.5x4.5x5	

7-6 SP54J8HFX/BWT

ASSY PCB MAIN(OPT)

Level	Loc. No.	Code No.	Description ; Specification	Remark
1	*	AA94-03459T	ASSY PCB MAIN(OPT);SP54J8HFX/BWT,,51A,CI	
2	C664	2401-001058	C AL,3300uF,20%,50V,DIP,BK,22x40,10	
2	C665	2401-000737	C AL,2200uF,20%,50V,DIP,TP,18x35.5,7	
2	CN801	3711-000974	CONNECTOR HEADER;BOX,12P,1R,2.5mm,STRAIG	
2	CNT01	3710-001208	CONNECTOR SOCKET,32P,2R,2.54mm,STRAIGHT,	
2	CNT02	3710-001208	CONNECTOR SOCKET,32P,2R,2.54mm,STRAIGHT,	
2	CS803	2401-000370	C AL;47uF,20%,450V,DIP,BK,16X35.5,7,	
2	+001	AA40-10006S	TUNER F/S,TECC2949PG30A(S),PAL B/G,TR,18	
2	C101	AA96-00110C	ASSY H/S, , ,AA62 30013K,SI-3050C,	
3		1203-000577	IC VOLTAGE REGULATOR;3090,ZIP5P, ,PLASTI	
3		6003-000333	SCREW-TAPTITE,RH - ,2S,M3,L10,ZPC(YEL),SW	
3		AA62-30013K	HEATSINK ES, , , , , ,44/18, ,WHT,A6063 EX	
2	IC102	AA96-00110A	ASSY H/S, , ,AA62 30013K,SI-3050C,	
3		1203-000203	IC POSI,ADJUST REG,,3050,TO-220,5P ,PLA	
3		6003-000333	SCREW-TAPTITE,RH - ,2S,M3,L10,ZPC(YEL),SW	
3		AA62-30013K	HEATSINK ES, , , , , ,44/18, ,WHT,A6063 EX	
2	IC103	1204-001276	IC SOUND PROCESSOR;TDA9810,DIP24P,400MI	
2	IC502	AA96-00110A	ASSY H/S, , ,AA62 30013K,SI-3050C,	
2	IC503	AA96-00110A	ASSY H/S, , ,AA62 30013K,SI-3050C,	
2	IC504	AA96-00110A	ASSY H/S, , ,AA62 30013K,SI-3050C,	
2	IC665	AA96-00038A	ASSY H/S, ,SOUND AMP,AA62 30173E,TDA726	
3		0205-000129	GREASE SILICON,SC102,,JAPAN	S.N.A
3		1201-001026	IC POWER AMP,7265,ZIP,11P,19.6MIL,DUAL,1	
3		6003-000333	SCREW-TAPTITE,RH - ,2S,M3,L10,ZPC(YEL),SW	
3		AA62-30173E	HEAT SINK,ES, , ,T1.0,WHITE,SCREW HOLE(T	S.N.A
2	IF/CAB	AA39-30007B	IF CABLE, ,T,150mm,1365#26	
2	L201	AA27-K0001C	COIL-CHOKE, ,100uH,K, ,5.0A,ST,700UH-K/R	
2	L603	AA29-00004A	FILTER-LINE NOISE, ,20UH,3A,AC80-260V,TO	
2	QZ107	AA96-50162F	ASSY-H/S, ,POWER,AA62 30013E,2SA1011,30	
3	*	0502-000131	TR POWER,2SA1011 D,PNP,1.2W,TO-220, ,60	
3		6003-000333	SCREW-TAPTITE,RH - ,2S,M3,L10,ZPC(YEL),SW	
3		AA62-30013E	HEAT SINK,ES, ,A6063 EXTR, , ,30(2I) T02	
2	QZ108	AA96-50162G	ASSY-H/S, ,AMP,AA62 30013E,2SC2344,30MM	
3		0502-000153	TR POWER,2SC2344 D,NPN,1.2W,TO-220, ,60	
3		6003-000333	SCREW-TAPTITE,RH - ,2S,M3,L10,ZPC(YEL),SW	
3		AA62-30013E	HEAT SINK,ES, ,A6063 EXTR, , ,30(2I) T02	
2	R913	2001-000786	R-CARBON,47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	RL801	3501-001053	RELAY POWER;5Vdc,530mW,10A,1Form A,15mS,5	
2	TS801	AA26-00019A	TRANS-SWITCHING, ,AC80~260V, ,US, ,4MHUB	
2	X501	2801-000224	CRYSTAL UNIT;32.768KHZ,20PPM,2B-AAY,12.5	
2		AA99-30216H	ASSY-PCB ROBOT, , AA94-03459T ,ER	S.N.A
3	CN201	3711-000051	CONNECTOR-HEADER;BOX,8P,1R,2.5mm,STRAGHT	
3	CN202	3711-000052	CONNECTOR-HEADER;BOX,10P,1R,2.5mm,STRAGHT	
3	CN501	3711-000051	CONNECTOR-HEADER;BOX,8P,1R,2.5mm,STRAGHT	
3	CNY01	3711-000973	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,STRAG	
3	CS810	2201-000446	C CERAMIC,DISC,3.3nF,20%,400V,Y5U,TP,15x	
3	CS811	2201-000446	C CERAMIC,DISC,3.3nF,20%,400V,Y5U,TP,15x	
3	DS801	0402-000102	DIODE BRIDGE,D2SB60,600V,1.5A,	
3	FI101	2904-000253	FILTER SAW AV;38.9MHz,DIP10K,ST,1RdB,3-G	
3	FI102	2904-001010	FILTER SAW AV;32.9~33.4MHz,SIP5PST,14 4	
3	H002	AA40-10006T	TUNER F/S,TECC2845PG2SA(S),PAL B/G,TR,18	
3	IC501	AA96-00111L	ASSY H/S, , ,AA62 30013L,KA78R12, ,	
4		1203-000165	IC POSI,ADJUST REG,,78R12,TO-220,3P	
4		6003-000333	SCREW-TAPTITE,RH - ,2S,M3,L10,ZPC(YEL),SW	
4		AA62-30013L	HEATSINK ES, , , , ,44/22, ,WHT, , ,	
3	G307	AA96-50147A	ASSY H/S, ,TR,AA62 30012B,KA7805A	S.N.A
4		1203-000274	IC POSI,FIXED REG,,7805,TO-220,3P PLAS	
4		6003-000333	SCREW-TAPTITE,RH - ,2S,M3,L10,ZPC(YEL),SW	
4		AA62-30012B	HEAT SINK ES, ,A6063 EXTR, , ,45(1S),T02	S.N.A
3	C001	AA09-00093A	IC MICOM,Z9035612PSC,P50P3,SP43J,5mF,52P	
3	G902	1103-001105	IC EEPROM;C81DC,1024x8bit,DIP8P,300MIL	
3	ICS801	AA13-00024A	IC HYBRID; ,TNY253P, ,8PIN,	
3	ICS802	0604-001032	PHOTO-COUPLER;TR,170-260%,300mW,DIP 4,ST	
3		AA99-10210T	ASSY-PCB MAIN,AUTO; AA99-30216H V	S.N.A
4	C103	2201-000119	C CERAMIC,DISC,100nF,+80-20%,50V,Y5V,TP	
4	C104	2401-001840	C AL;100uF,20%,16V,DIP,TP,6.3x11.5	
4	C105	2401-000302	C AL;100uF,20%,25V,DIP,TP,6.3x11.5	
4	C107	2305-000665	C FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x6.0m	
4	C109	2201-000119	C CERAMIC,DISC,100nF,+80-20%,50V,Y5V,TP,	
4	C110	2401-001840	C AL;100uF,20%,16V,DIP,TP,6.3x11.5	
4	C119	2201-000119	C CERAMIC,DISC,100nF,+80-20%,50V,Y5V,TP,	
4	C121	2305-000665	C FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x6.0m	
4	C125	2401-000503	C-AL;1uF,20%,50V,DIP,TP,5x11,5	
4	C126	2201-000119	C-CERAMIC,DISC,100nF,+80-20%,50V,Y5V,TP,	
4	C130	2201-000119	C CERAMIC,DISC,100nF,+80-20%,50V,Y5V,TP,	
4	C131	2305-000665	C FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x6.0m	
4	C132	2305-000665	C FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x6.0m	
4	C133	2401-001363	C AL,470uF,20%,16V,DIP,TP,10x12.5,5	
4	C134	2401-002273	C AL,220uF,20%,25V,HR,TP,10x20mm,5m	
4	C135	2401-000287	C AL;100uF,20%,16V,WT,TP,6.3x11,5	
4	C136	2401-000027	C AL,4.7uF,20%,50V,DIP,TP,5x11,5	
4	C137	2401-002712	C AL,10uF,20%,25V,WT,TP,5x11,5	
4	C138	2305-000665	C FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x6.0m	
4	C139	2201-000180	C CERAMIC,DISC,10nF,10%,50V,Y5V,TP,7x3,5	
4	C140	2201-000292	C CERAMIC,DISC,1nF,10%,50V,Y5P,TP,5x3,5,	
4	C141	2201-000292	C CERAMIC,DISC,1nF,10%,50V,Y5P,TP,5x3,5,	
4	C142	2305-000289	C FILM,MPEF,220nF,5%,63V,TP, ,5mm	
4	C143	2401-000667	C-AL,2.2uF,20%,50V,WT,TP,5x11,5	
4	C144	2201-000180	C CERAMIC,DISC,10nF,10%,50V,Y5V,TP,7x3,5	
4	C145	2305-000665	C FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x6.0m	
4	C146	2305-000665	C FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x6.0m	
4	C147	2401-000660	C-AL,2.2uF,20%,50V,DIP,TP,5x11,5	
4	C148	2305-000665	C FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x6.0m	
4	C149	2401-000947	C AL,22uF,20%,35V,DIP,TP,5x11,5	
4	C180	2401-002300	C AL,47uF,20%,50V,DIP,TP,6.3x11,5	
4	C185	2401-001363	C AL,470uF,20%,16V,DIP,TP,10x12.5,5	
4	C191	2401-002619	C AL,47uF,20%,25V,DIP,TP,5x11,5	
4	C501	2305-000665	C FILM,MPEF,100nF,5%,63V,TP,7.5x4.0x6.0m	
4	C502	2401-001397	C AL,470uF,20%,25V,DIP,TP,10x16,5	

Level	Loc. No.	Code No.	Description ; Specification	Remark
..4	C503	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
..4	C504	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
..4	C505	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
..4	C506	2401-002594	C-AL;220uF,20%,16V,GP,TP,8x11.5,5	
..4	C507	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
..4	C508	2401-002286	C-AL;470uF,20%,16V,WT,TP,10x12.5,5	
..4	C509	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
..4	C510	2401-000133	C-AL;1000uF,20%,16V,GP,TP,10x20,5	
..4	C511	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
..4	C512	2401-000689	C-AL;2200uF,20%,16V,GP,TP,13x25,5	
..4	C519	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
..4	C520	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
..4	C521	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
..4	C522	2401-002286	C-AL;470uF,20%,16V,WT,TP,10x12.5,5	
..4	C523	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
..4	C537	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
..4	C538	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11.5	
..4	C539	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11.5	
..4	C540	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
..4	C543	2201-000144	C-CERAMIC,DISC;0.1nF,5%,50V,NP0,TP,8.5x3	
..4	C544	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11.5	
..4	C601	2401-002299	C-AL;4.7uF,20%,50V,GP,TP,5x7.5	
..4	C602	2401-002299	C-AL;4.7uF,20%,50V,GP,TP,5x7.5	
..4	C666	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
..4	C667	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11.5	
..4	C668	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11.5	
..4	C669	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11.5	
..4	C670	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11.5	
..4	C671	2401-001537	C-AL;47uF,20%,25V,GP,TP,6.3x7mm,5mm	
..4	C676	2401-001192	C-AL;33uF,20%,50V,GP,TP,6.3x11.5	
..4	C686	2201-000411	C-CERAMIC,DISC;0.27nF,10%,50V,Y5P,TP,4x3	
..4	C687	2201-000411	C-CERAMIC,DISC;0.27nF,10%,50V,Y5P,TP,4x3	
..4	C688	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	
..4	C689	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
..4	C690	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
..4	C691	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	
..4	C701	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11.5	
..4	C801	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11.5	
..4	C901	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
..4	C905	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7.5	
..4	C906	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
..4	C908	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
..4	C909	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
..4	C912	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
..4	C913	2201-000193	C-CERAMIC,DISC;0.01nF,0.25pF,50V,NP0,TP,	
..4	C914	2201-000573	C-CERAMIC,DISC;0.047nF,5%,50V,NP0,TP,5x3	
..4	C915	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
..4	C916	2401-002042	C-AL;220uF,20%,10V,GP,TP,6.3x11.5	
..4	C917	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11.5	
..4	C918	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
..4	C919	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11.5	
..4	C920	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
..4	C925	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
..4	C926	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11.5	
..4	C927	2202-000231	C-CERAMIC,MLC-AXIAL;330pF,10%,50V,Y5P,TP	
..4	C928	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
..4	CN003	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5MM,STRAIGH	
..4	CN402	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5MM,STRAIGH	
..4	CN403	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5MM,STRAIGH	
..4	CN404	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5MM,STRAIGH	
..4	CN601	3711-002643	CONNECTOR-HEADER;BOX,4P,1R,2.5MM,STRAIGH	
..4	CS801	2201-000332	C-CERAMIC,DISC;2.2nF,20%,250V,Y5U,TP,9x4	
..4	CS802	2201-000332	C-CERAMIC,DISC;2.2nF,20%,250V,Y5U,TP,9x4	
..4	CS804	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
..4	CS805	2401-002286	C-AL;470uF,20%,16V,WT,TP,10x12.5,5	
..4	CS807	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
..4	CS808	2401-002286	C-AL;470uF,20%,16V,WT,TP,10x12.5,5	
..4	CS809	2201-000558	C-CERAMIC,DISC;0.47nF,10%,500V,Y5P,TP,5.	
..4	CS812	2201-002076	C-CERAMIC,DISC;0.068nF,5%,1kV,SL,TP,8x4m	
..4	CZ144	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11.5	
..4	CZ146	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
..4	CZ147	2201-000193	C-CERAMIC,DISC;0.01nF,0.25pF,50V,NP0,TP,	
..4	CZ148	2201-000193	C-CERAMIC,DISC;0.01nF,0.25pF,50V,NP0,TP,	
..4	CZ149	2201-000516	C-CERAMIC,DISC;4.7nF,+100-0%,500V,Y5U,TP	
..4	CZ150	2201-000516	C-CERAMIC,DISC;4.7nF,+100-0%,500V,Y5U,TP	
..4	CZ151	2401-001513	C-AL;47uF,20%,16V,WT,TP,5x11.5	
..4	CZ152	2401-001157	C-AL;33uF,20%,160V,GP,TP,12.5x20.5	

Level	Loc. No.	Code No.	Description ; Specification	Remark
..4	CZ153	2401-001513	C-AL;47uF,20%,16V,WT,TP,5x11.5	
..4	CZ155	2201-000604	C-CERAMIC,DISC;0.056nF,+100-0%,500V,SL,T	
..4	CZ167	2401-001220	C-AL;4.7uF,20%,160V,GP,TP,8x11.5,5	
..4	CZ167A	2401-001220	C-AL;4.7uF,20%,160V,GP,TP,8x11.5,5	
..4	D101	0401-001088	DIODE-SWITCHING;BAW76,50V,300mA,DO-35,TP	
..4	D102	0401-001088	DIODE-SWITCHING;BAW76,50V,300mA,DO-35,TP	
..4	D103	0401-001088	DIODE-SWITCHING;BAW76,50V,300mA,DO-35,TP	
..4	D501	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
..4	D664	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
..4	D665	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
..4	D666	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
..4	D667	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
..4	D668	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
..4	D669	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
..4	D701	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
..4	D702	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
..4	D703	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
..4	D901	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
..4	D902	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
..4	D903	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
..4	D904	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
..4	D905	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
..4	D906	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
..4	D907	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
..4	DS802	1405-000152	VARISTOR;560V,2500A,14x8.5mm,TP	
..4	DS803	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
..4	DS804	0403-001318	DIODE-ZENER;MTZJ4.3B,4.17-4.43V,500mW,DO	
..4	DS805	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
..4	DS806	1405-001030	VARISTOR;120V,2500A,14x8.5mm,TP	
..4	DS807	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
..4	DS808	1405-000152	VARISTOR;560V,2500A,14x8.5mm,TP	
..4	DS809	0404-001056	DIODE-SCHOTTKY;RK16,60V,1.5A,DO-204AC,TP	
..4	DS810	1405-000152	VARISTOR;560V,2500A,14x8.5mm,TP	
..4	DZ116	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
..4	DZ117	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
..4	DZ118	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
..4	DZ119	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
..4	DZ120	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
..4	DZ121	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
..4	DZ501	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
..4	DZ502	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
..4	DZ503	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
..4	DZ504	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
..4	DZ505	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
..4	DZ506	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
..4	DZ507	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
..4	DZ508	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
..4	DZ665	0403-001039	DIODE-ZENER;MA2560,56V,52-60V,1W,DO-41,T	
..4	DZ666	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
..4	DZ667	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
..4	DZ701	0403-001140	DIODE-ZENER;RD10ESAB-T4,10V,9.19-10.30V,	
..4	DZ801	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
..4	DZ901	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
..4	DZ902	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
..4	DZ903	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
..4	DZ904	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
..4	DZ905	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
..4	DZ906	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
..4	DZ907	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
..4	DZ911	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
..4	DZ912	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
..4	DZ914	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
..4	DZ915	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
..4	F901	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,	
..4	FI103	2903-000181	FILTER-CERAMIC;BR,5.5MHz,-,-,-,TP,TPS5.5	
..4	FI104	2903-000129	FILTER-CERAMIC;BR,4.5MHz,-,-,-,TP,-	
..4	IC506	1203-000293	IC-POSI.FIXED REG.;7808,TO-220,3P,-,PLAS	
..4	IC904	1203-000515	IC-VOL. DETECTOR;7042,TO-92,3P,177MIL,PL	
..4	L101	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
..4	L103	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
..4	L106	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
..4	L107	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
..4	L108	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
..4	L109	2701-000101	INDUCTOR-AXIAL;1.2uH,10%,2.5x3.4mm	
..4	L110	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
..4	L111	2701-000120	INDUCTOR-AXIAL;12uH,10%,2.5x3.4mm	
..4	L112	2701-000299	INDUCTOR-AXIAL;13UH,10%,2.5X3.4MM	

Level	Loc. No.	Code No.	Description ; Specification	Remark
..4	L113	AA26-10006G	TRANS-IF;-,7mG,VIF,-,7mm,8pF,77.8MHz,ST	
..4	L114	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
..4	L115	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
..4	L116	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
..4	L117	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
..4	L118	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
..4	L501	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
..4	L502	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
..4	L503	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
..4	L504	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
..4	L505	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,	
..4	L506	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
..4	L507	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
..4	L514	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
..4	L515	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
..4	L601	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
..4	L602	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
..4	L604	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
..4	L901	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,	
..4	L902	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
..4	L903	2701-001040	INDUCTOR-AXIAL;10uH,10%,4.5x14mm	
..4	L907	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
..4	L909	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
..4	L910	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
..4	L911	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
..4	L912	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
..4	LD901	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
..4	LS801	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,	
..4	LS802	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
..4	LS803	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
..4	LZ112	2701-000002	INDUCTOR-AXIAL;100uH,10%,4.2x9.8mm	
..4	PCB	AA41-00075B	PCB-MAIN;SP43J7PF,FR-1,1L,B,1.6T,330X24	S.N.A
..4	Q101	0504-000137	TR-DIGITAL;KSR1202,NPN,300mW,10K/10K,TO-	
..4	Q102	0504-000123	TR-DIGITAL;KSR1010,NPN,300mW,10K,TO-92,T	
..4	Q103	0501-000245	TR-SMALL SIGNAL;BC548C,NPN,500mW,TO-92,T	
..4	Q104	0504-000123	TR-DIGITAL;KSR1010,NPN,300mW,10K,TO-92,T	
..4	Q105	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
..4	Q106	0504-000150	TR-DIGITAL;KSR2010,PNP,300mW,10K,TO-92,T	
..4	Q107	0504-000123	TR-DIGITAL;KSR1010,NPN,300mW,10K,TO-92,T	
..4	Q665	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
..4	Q666	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
..4	Q667	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
..4	Q701	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
..4	Q702	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
..4	Q901	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
..4	Q902	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
..4	Q903	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
..4	Q909	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
..4	Q910	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
..4	QS801	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1000mW,TO-	
..4	QZ103	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
..4	QZ104	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
..4	QZ105	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
..4	QZ106	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
..4	R123	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R131	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
..4	R132	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
..4	R142	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R145	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..4	R146	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R148	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R149	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R150	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R151	2001-000313	R-CARBON;11KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R152	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..4	R153	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..4	R154	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..4	R155	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R156	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..4	R157	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..4	R158	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R159	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R160	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R161	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm	
..4	R162	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R163	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	

Level	Loc. No.	Code No.	Description ; Specification	Remark
..4	R164	2001-000490	R-CARBON;200OHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R165	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R166	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R167	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R168	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R169	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..4	R501	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
..4	R502	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R503	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R504	2001-000405	R-CARBON;180OHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R509	2008-000266	R-FUSIBLE(S);1ohm,5%,2W,AF,TP,3.9x10mm	
..4	R510	2008-000266	R-FUSIBLE(S);1ohm,5%,2W,AF,TP,3.9x10mm	
..4	R511	2008-001116	R-FUSIBLE(S);0.68ohm,10%,2W,AG,TP,3.9x12	
..4	R512	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
..4	R524	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
..4	R525	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
..4	R526	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
..4	R531	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
..4	R532	2001-000037	R-CARBON(S);330OHM,5%,1/2W,AA,TP,2.4X6.4	
..4	R533	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
..4	R601	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4	
..4	R602	2001-000605	R-CARBON;3.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..4	R603	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..4	R661	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
..4	R662	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
..4	R665	2001-001188	R-CARBON(S);8.2KOHM,5%,1/2W,AA,TP,2.4X6.	
..4	R666	2001-001188	R-CARBON(S);8.2KOHM,5%,1/2W,AA,TP,2.4X6.	
..4	R668	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
..4	R669	2001-001144	R-CARBON(S);4.7KOHM,5%,1/2W,AA,TP,2.4X6.	
..4	R670	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
..4	R671	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
..4	R672	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
..4	R673	2001-000411	R-CARBON;18KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R674	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R675	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
..4	R676	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..4	R677	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R678	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R679	2001-001071	R-CARBON(S);12KOHM,5%,1/2W,AA,TP,2.4X6.4	
..4	R680	2001-001000	R-CARBON;82KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R681	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
..4	R682	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP,2.5x6.	
..4	R683	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP,2.5x6.	
..4	R684	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
..4	R685	2004-001390	R-METAL(S);1Kohm,2%,1/2W,AA,TP,2.4x6.4mm	
..4	R686	2004-001390	R-METAL(S);1Kohm,2%,1/2W,AA,TP,2.4x6.4mm	
..4	R687	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
..4	R689	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
..4	R690	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..4	R701	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R702	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R703	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R704	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R801	2003-001098	R-METAL OXIDE(S);22Kohm,5%,3W,AA,TP,6x16	
..4	R901	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..4	R903	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R904	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R905	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..4	R906	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R907	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R908	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R909	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R910	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R912	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
..4	R914	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R915	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R916	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..4	R917	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..4	R918	2001-000832	R-CARBON;510OHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R919	2001-000691	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..4	R921	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..4	R922	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..4	R923	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R924	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..4	R925	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..4	R926	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	

Level	Loc. No.	Code No.	Description ; Specification	Remark
...4	R930	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...4	R931	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...4	R932	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...4	R945	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R946	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R947	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R948	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R949	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...4	R950	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R951	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...4	R952	2001-000291	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R953	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...4	R954	2001-000291	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R955	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...4	R958	2001-000291	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R959	2001-000291	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R960	2001-000291	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R961	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...4	R962	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R967	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R968	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R970	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...4	R971	2001-000790	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R974	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...4	R977	2001-001062	R-CARBON(S);10MOHM,5%,1/2W,AA,TP,2.4X6.4	
...4	R979	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R980	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R981	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R982	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R983	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R984	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R985	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R986	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R987	2001-000790	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R988	2001-000291	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R989	2001-000291	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R990	2001-000291	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R991	2001-000291	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R992	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...4	R993	2001-000291	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	R994	2001-000291	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	RD901	2001-000291	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	RD903	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...4	RF802	2008-000294	R-FUSIBLE(S);33ohm,5%,2W,AF,TP,3.9x10mm	
...4	RS801	2003-002194	R-METAL OXIDE(S);1.8Kohm,5%,1W,AF,TP,2.5	
...4	RS802	2001-001152	R-CARBON(S);820OHM,5%,1/2W,AA,TP,2.4X6.4	
...4	RS803	2001-001159	R-CARBON(S);510OHM,5%,1/2W,AA,TP,2.4X6.4	
...4	RS804	2001-001182	R-CARBON(S);7.5KOHM,5%,1/2W,AA,TP,2.4X6.	
...4	RS805	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
...4	RS806	2001-001159	R-CARBON(S);510OHM,5%,1/2W,AA,TP,2.4X6.4	
...4	RS807	2001-000738	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
...4	RZ153	2008-001086	R-FUSIBLE(S);3.3ohm,5%,2W,AG,TP,3.9x12mm	
...4	RZ154	2003-000532	R-METAL OXIDE(S);18ohm,5%,2W,AF,TP,4x12m	
...4	RZ156	2001-001159	R-CARBON(S);510OHM,5%,1/2W,AA,TP,2.4X6.4	
...4	RZ165	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	RZ166	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...4	RZ167	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
► ...4	RZ167A	2001-000554	R-CARBON;270OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	RZ168	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
...4	RZ169	2001-000019	R-CARBON(S);10OHM,5%,1/2W,AA,TP,2.4X6.4M	
...4	RZ170	2001-000666	R-CARBON;33OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	RZ171	2001-000666	R-CARBON;33OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	RZ172	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...4	RZ173	2001-001139	R-CARBON(S);39KOHM,5%,1/2W,AA,TP,2.4X6.4	
...4	RZ174	2001-001139	R-CARBON(S);39KOHM,5%,1/2W,AA,TP,2.4X6.4	
...4	RZ175	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...4	RZ176	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...4	RZ177	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...4	RZ178	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...4	RZ179	2003-000713	R-METAL OXIDE(S);47ohm,5%,2W,AF,TP,4x12m	
...4	RZ180	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
...4	RZ181	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
...4	RZ182	2003-000713	R-METAL OXIDE(S);47ohm,5%,2W,AF,TP,4x12m	
...4	RZ183	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
...4	RZ184	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
...4	VR101	2103-000672	VR-SEMI;20Kohm,25%,1/5W,TOP	
.2		AA95-00007A	ASSY-F/CONVERTER;-,SVP 434JM,KPT51A,NTSC	

Level	Loc. No.	Code No.	Description ; Specification	Remark
..3	CON01	3711-002709	CONNECTOR-HEADER;NOWALL,12P,1R,2.5MM,ANG	
..3	CON02	3711-002703	CONNECTOR-HEADER;NOWALL,5P,1R,2.5mm,ANGL	
..3	IC03	AA13-30021E	IC-MCU;Z90234-R3911 SZM-374FC,ST,24K,	
..3	IC04	1103-001208	IC-EEPROM;AT24C02 PC27 C,256x8Bit,DIP,8P	
..3	S/CASE	AA63-40037A	SHIELD CASE;-,SPTE,T0.5,SCT12A,-	S.N.A
..3	XTR01	2804-001213	OSCILLATOR-CLOCK;80MHz,100ppm,10TTL & CM	
..3		AA99-20043V	ASSY-PCB SUB;AUTO;-,AA95-00007A,-,V	S.N.A
...4	CF10	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
...4	CF11	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11.5	
...4	CF12	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF13	2401-001513	C-AL;47uF,20%,16V,WT,TP,5x11.5	
...4	CF14	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF15	2203-000429	C-CERAMIC,CHIP;0.018nF,5%,50V,NP0,TP,201	
...4	CF16	2203-000634	C-CERAMIC,CHIP;0.022nF,5%,50V,NP0,TP,201	
...4	CF17	2203-000429	C-CERAMIC,CHIP;0.018nF,5%,50V,NP0,TP,201	
...4	CF18	2203-000683	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,201	
...4	CF19	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF21	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF22	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF23	2401-001513	C-AL;47uF,20%,16V,WT,TP,5x11.5	
...4	CF24	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF25	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF26	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF27	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF28	2401-001513	C-AL;47uF,20%,16V,WT,TP,5x11.5	
...4	CF29	2401-001513	C-AL;47uF,20%,16V,WT,TP,5x11.5	
...4	CF30	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF31	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF32	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF33	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF34	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF35	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF37	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF38	2401-001513	C-AL;47uF,20%,16V,WT,TP,5x11.5	
...4	CF39	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF40	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF41	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF42	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF44	2404-000151	C-TA,CHIP;1uF,20%,16V,-,TP,3216,-	
...4	CF45	2203-001158	C-CERAMIC,CHIP;0.068nF,5%,50V,NP0,TP,201	
...4	CF46	2404-000151	C-TA,CHIP;1uF,20%,16V,-,TP,3216,	
...4	CF47	2203-001158	C-CERAMIC,CHIP;0.068nF,5%,50V,NP0,TP,201	
...4	CF48	2404-000151	C-TA,CHIP;1uF,20%,16V,-,TP,3216,-	
...4	CF49	2203-001158	C-CERAMIC,CHIP;0.068nF,5%,50V,NP0,TP,201	
...4	CF50	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF51	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF52	2203-000316	C-CERAMIC,CHIP;0.12nF,5%,50V,NP0,TP,2012	
...4	CF53	2203-000316	C-CERAMIC,CHIP;0.12nF,5%,50V,NP0,TP,2012	
...4	CF54	2402-000173	C-AL,SMD;4.7uF,20%,35V,GP,TP,4.3x4.3x5.	
...4	CF55	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF56	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
...4	CF57	2402-000173	C-AL,SMD;4.7uF,20%,35V,GP,TP,4.3x4.3x5.	
...4	CF58	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF60	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11.5	
...4	CF61	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF62	2401-001513	C-AL;47uF,20%,16V,WT,TP,5x11.5	
...4	CF63	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF64	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF65	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF66	2401-001513	C-AL;47uF,20%,16V,WT,TP,5x11.5	
...4	CF67	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF68	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF69	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF70	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF71	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF72	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF75	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11.5	
...4	CF76	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF77	2203-000429	C-CERAMIC,CHIP;0.018nF,5%,50V,NP0,TP,201	
...4	CF78	2203-000429	C-CERAMIC,CHIP;0.018nF,5%,50V,NP0,TP,201	
...4	CF79	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11.5	
...4	CF80	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF81	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
...4	CF84	2203-000858	C-CERAMIC,CHIP;0.039nF,5%,50V,NP0,TP,201	
...4	CF85	2203-000839	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,2012	
...4	CF86	2203-000858	C-CERAMIC,CHIP;0.039nF,5%,50V,NP0,TP,201	
...4	CF87	2203-000839	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,2012	

Level	Loc. No.	Code No.	Description ; Specification	Remark
...4	CF88	2203-000858	C-CERAMIC,CHIP;0.039nF,5%,50V,NP0,TP,201	
...4	CF89	2203-000839	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,2012	
...4	DF01	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
...4	DF02	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
...4	DF03	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
...4	FF13	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
...4	FF14	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
...4	FF15	2901-000233	FILTER-EMI SMD;50V,0.3A,-,330pF,4.5x3.2x	
...4	FF16	2901-000233	FILTER-EMI SMD;50V,0.3A,-,330pF,4.5x3.2x	
...4	FF17	2901-000233	FILTER-EMI SMD;50V,0.3A,-,330pF,4.5x3.2x	
...4	IC01	1204-001406	IC-VIDEO PROCESS;FS310KBC,QFP,128P,1100M	
...4	IC02	1105-001270	IC-DRAM;72V161621,2x524Kx16BITBit,TSOP	
...4	IC05	1203-001419	IC-VOLTAGE REGULATOR;4931,TO-252,3P,6.6x	
...4	LF10	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x6,TP	
...4	LF11	2701-000116	INDUCTOR-AXIAL;10uH,10%,4.2x9.8mm	
...4	LF12	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
...4	LF13	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
...4	LF14	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
...4	LF15	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
...4	LF16	2701-000149	INDUCTOR-AXIAL;2.7uH,10%,2.5x3.4mm	
...4	LF17	2701-000149	INDUCTOR-AXIAL;2.7uH,10%,2.5x3.4mm	
...4	LF18	2701-000149	INDUCTOR-AXIAL;2.7uH,10%,2.5x3.4mm	
...4	PCB	AA41-109978	PCB-FORMAT CONNERTER;KPM51A,4L,FR-4,245X	S.N.A
...4	RF11	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
...4	RF13	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
...4	RF15	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
...4	RF16	2007-000477	R-CHIP;1MOHM,5%,1/10W,DA,TP,2012	
...4	RF17	2007-000477	R-CHIP;1MOHM,5%,1/10W,DA,TP,2012	
...4	RF18	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
...4	RF19	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
...4	RF21	2007-000642	R-CHIP;270OHM,5%,1/10W,DA,TP,2012	
...4	RF22	2007-001118	R-CHIP;680OHM,5%,1/10W,DA,TP,2012	
...4	RF23	2007-000401	R-CHIP;150OHM,5%,1/10W,DA,TP,2012	
...4	RF24	2007-000401	R-CHIP;150OHM,5%,1/10W,DA,TP,2012	
...4	RF25	2007-000518	R-CHIP;2.7KOHM,5%,1/10W,DA,TP,2012	
...4	RF26	2007-000518	R-CHIP;2.7KOHM,5%,1/10W,DA,TP,2012	
...4	RF27	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
...4	RF29	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
...4	RF30	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
...4	RF31	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
...4	RF32	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
...4	RF33	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
...4	RF34	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
...4	RF35	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
...4	RF36	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
...4	RF37	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
...4	RF38	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
...4	RF39	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
...4	RF40	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
...4	RF41	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
...4	RF42	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
...4	RF43	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
...4	RF44	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
...4	RF45	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
...4	RF46	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
...4	RF47	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
...4	RF48	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
...4	RF49	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
...4	RF51	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
...4	RF52	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
...4	RF53	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
...4	RF54	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
...4	RF55	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
...4	RF56	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
...4	RF57	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
...4	RF58	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
...4	RF59	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
...4	RF60	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
...4	RF61	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
...4	RF62	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
...4	RF64	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
...4	RF66	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
...4	RF67	2007-000781	R-CHIP;33OHM,5%,1/10W,DA,TP,2012	
...4	RF68	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
...4	RF70	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
...4	RF71	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	

Level	Loc. No.	Code No.	Description ; Specification	Remark
...4	RF72	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
...4	RF73	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
...4	RF74	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
...4	RF75	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
...4	RF76	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
...4	RF78	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
...4	RF79	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
...4	RF80	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
...4	RF81	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
...4	RF82	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
...4	RF83	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
...4	RF84	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
...4	RF85	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
...4	RF86	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
...4	RF87	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
...4	RF88	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
...4	XTR02	2801-000152	CRYSTAL-UNIT;14.31818MHz,40ppm,28-AAM,16	
...4	XTR04	2801-000724	CRYSTAL-UNIT;6MHz,50ppm,28-AAM,20pF,40oh	
.2		AA95-004278	ASSY SOUND;-,SP43,J5P3S/XTT,J51A,AA95-004	
..3	C614	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11.5	
..3	C615	2203-000595	C-CERAMIC,CHIP;0.22nF,5%,50V,NP0,TP,2012	
..3	C616	2203-000938	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,2012	
..3	C617	2203-000142	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,2012	
..3	C618	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,	
..3	C619	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,	
..3	C620	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11.5	
..3	C621	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11.5	
..3	C622	2203-000701	C-CERAMIC,CHIP;0.002nF,0.25pF,50V,NP0,TP	
..3	C623	2203-000701	C-CERAMIC,CHIP;0.002nF,0.25pF,50V,NP0,TP	
..3	C624	2203-001077	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,201	
..3	C625	2203-001077	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,201	
..3	C626	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11.5	
..3	C627	2203-000938	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,2012	
..3	C628	2203-000142	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,2012	
..3	C629	2203-001077	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,201	
..3	C630	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11.5	
..3	C631	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
..3	C632	2401-002229	C-AL;470nF,20%,50V,WT,TP,5x11.5	
..3	C633	2401-002229	C-AL;470nF,20%,50V,WT,TP,5x11.5	
..3	C634	2203-000784	C-CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP,2012	
..3	C635	2203-000784	C-CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP,2012	
..3	C636	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
..3	C637	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11.5	
..3	C638	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
..3	C639	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
..3	C640	2203-000938	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,2012	
..3	C641	2203-000142	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,2012	
..3	C642	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11.5	
..3	C643	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11.5	
..3	C644	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11.5	
..3	C645	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11.5	
..3	C646	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11.5	
..3	C649	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11.5	
..3	C650	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
..3	C651	2401-000365	C-AL;100uF,20%,50V,WT,TP,10x12.5mm,	
..3	C653	2203-000784	C-CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP,2012	
..3	C654	2401-002229	C-AL;470nF,20%,50V,WT,TP,5x11.5	
..3	C655	2203-000784	C-CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP,2012	
..3	C656	2401-002229	C-AL;470nF,20%,50V,WT,TP,5x11.5	
..3	C657	2401-002229	C-AL;470nF,20%,50V,WT,TP,5x11.5	
..3	C658	2203-000784	C-CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP,2012	
..3	C661	2203-000784	C-CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP,2012	
..3	C662	2401-002229	C-AL;470nF,20%,50V,WT,TP,5x11.5	
..3	C663	2401-002229	C-AL;470nF,20%,50V,WT,TP,5x11.5	
..3	C664	2203-000784	C-CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP,2012	
..3	C667	2203-000784	C-CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP,2012	
..3	C668	2401-002229	C-AL;470nF,20%,50V,WT,TP,5x11.5	
..3	C669	2401-002229	C-AL;470nF,20%,50V,WT,TP,5x11.5	
..3	C670	2203-000784	C-CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP,2012	
..3	C684	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11.5	
..3	C688	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11.5	
..3	C691	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11.5	
..3	C692	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
..3	C695	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP,2012	
..3	C696	2203-000170	C-CERAMIC,CHIP;1.8nF,10%,50V,X7R,TP,2012	
..3	C697	2203-000170	C-CERAMIC,CHIP;1.8nF,10%,50V,X7R,TP,2012	

Level	Loc. No.	Code No.	Description ; Specification	Remark
..3	C631	2401-000365	C AL;100uF,20%,50V,WT,TP,10x12.5mm	
..3	CD601	2203-000260	C CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
..3	CD602	2203-000142	C CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,2012	
..3	CD603	2401-000962	C AL;22uF,20%,50V,GP,TP,5x11.5	
..3	CD604	2203-000595	C CERAMIC,CHIP;0.22nF,5%,50V,NP0,TP,2012	
..3	CD605	2203-000938	C CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,2012	
..3	CD606	2401-000962	C AL;22uF,20%,50V,GP,TP,5x11.5	
..3	CD607	2203-000938	C CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,2012	
..3	CD608	2203-000142	C CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,2012	
..3	CD609	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
..3	CD610	2401-000480	C AL;10uF,20%,50V,GP,TP,5x11.5	
..3	CD611	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
..3	CD612	2401-000027	C AL;4.7uF,20%,50V,GP,TP,5x11,5	
..3	CD613	2401-000660	C AL;2.2uF,20%,50V,GP,TP,5x11.5	
..3	CD615	2401-000660	C AL;2.2uF,20%,50V,GP,TP,5x11.5	
..3	CD616	2203-000444	C CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,	
..3	CD618	2203-000444	C CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,	
..3	CD619	2401-002235	C AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
..3	CD620	2401-002235	C AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
..3	CD621	2203-000938	C CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,2012	
..3	CD622	2203-000142	C CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,2012	
..3	CD623	2401-000480	C AL;10uF,20%,50V,GP,TP,5x11,5	
..3	CD624	2203-000495	C CERAMIC,CHIP;2.2nF,10%,50V,X7R,TP,2012	
..3	CD625	2401-000962	C AL;22uF,20%,50V,GP,TP,5x11.5	
..3	CD626	2203-000495	C CERAMIC,CHIP;2.2nF,10%,50V,X7R,TP,2012	
..3	CD627	2401-000962	C AL;22uF,20%,50V,GP,TP,5x11,5	
..3	CD628	2203-000260	C CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
..3	CD629	2401-000365	C AL;100uF,20%,50V,WT,TP,10x12.5mm,	
..3	CD630	2203-000761	C CERAMIC,CHIP;330nF,10%,16V,X7R,TP,2012	
..3	CD81	2401-000365	C AL;100uF,20%,50V,WT,TP,10x12.5mm,	
..3	CN601A	3711-003626	CONNECTOR-HEADER;NOWALL,20P,1R,2.5mm,ANG	
..3	CN602A	3711-003626	CONNECTOR-HEADER;NOWALL,20P,1R,2.5mm,ANG	
..3	IC601	1204-001699	IC SOUND PROCESSOR;MSP3410D-C5,PLCC,68P,	
..3	IC604	1201-000541	IC OP AMP;062,SOP,8P,153MIL,DUAL,6V/mV,P	
..3	IC6601	1204-001198	IC DECODER;DPL3519A A2,PLCC,68P,,PLASTI	
..3	IC602	1201-000541	C OP AMP;062,SOP,8P,153MIL,DUAL,6V/mV,P	
..3	L601	2701-000170	INDUCTOR-AXIAL;3.9uH,10%,3x7mm	
..3	L602	2701-000170	INDUCTOR-AXIAL;3.9uH,10%,3x7mm	
..3	L603	2701-000112	INDUCTOR-AXIAL;100uH,10%,3x7mm	
..3	LD601	2701-000170	INDUCTOR-AXIAL;3.9uH,10%,3x7mm	
..3	LD602	2701-000112	INDUCTOR-AXIAL;100uH,10%,3x7mm	
..3	LD603	2701-000170	INDUCTOR-AXIAL;3.9uH,10%,3x7mm	
..3	PCB	AA41-00087A	PCB-AUDIO;PLT51A,2L,FR-4,1800245X1.6T,3A	S.N.A
..3	Q606	0501-000727	TR SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
..3	Q607	0501-000727	TR SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
..3	R601	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
..3	R602	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
..3	R610	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
..3	R611	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
..3	R614	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
..3	R617	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP,2012	
..3	R618	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP,2012	
..3	R619	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
..3	R620	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
..3	R621	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
..3	R622	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
..3	R623	2007-000477	R-CHIP;1MOHM,5%,1/10W,DA,TP,2012	
..3	R624	2007-000477	R-CHIP;1MOHM,5%,1/10W,DA,TP,2012	
..3	R625	2007-000477	R-CHIP;1MOHM,5%,1/10W,DA,TP,2012	
..3	R626	2007-000477	R-CHIP;1MOHM,5%,1/10W,DA,TP,2012	
..3	R632	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP,2012	
..3	R633	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP,2012	
..3	R634	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP,2012	
..3	R635	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP,2012	
..3	R636	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP,2012	
..3	R637	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP,2012	
..3	R638	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP,2012	
..3	R660	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
..3	R661	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
..3	R664	2007-001177	R-CHIP;8.2KOHM,5%,1/10W,DA,TP,2012	
..3	R665	2007-000774	R-CHIP;33KOHM,5%,1/10W,DA,TP,2012	
..3	R666	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
..3	R669	2007-001177	R-CHIP;8.2KOHM,5%,1/10W,DA,TP,2012	
..3	R670	2007-000774	R-CHIP;33KOHM,5%,1/10W,DA,TP,2012	
..3	R672	2007-000586	R-CHIP;22KOHM,5%,1/10W,DA,TP,2012	
..3	R673	2007-000586	R-CHIP;22KOHM,5%,1/10W,DA,TP,2012	
..3	R674	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
..3	R675	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
..3	RB1	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP,2012	
..3	RB2	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP,2012	
..3	RB3	2007-000328	R-CHIP;11KOHM,5%,1/10W,DA,TP,2012	
..3	RB4	2007-000328	R-CHIP;11KOHM,5%,1/10W,DA,TP,2012	
..3	RD601	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
..3	RD602	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
..3	RD604	2007-001177	R-CHIP;8.2KOHM,5%,1/10W,DA,TP,2012	
..3	RD605	2007-000774	R-CHIP;33KOHM,5%,1/10W,DA,TP,2012	
..3	RD610	2007-001177	R-CHIP;8.2KOHM,5%,1/10W,DA,TP,2012	
..3	RD611	2007-000774	R-CHIP;33KOHM,5%,1/10W,DA,TP,2012	
..3	RD627	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
..3	RDB1	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP,2012	
..3	RDB2	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP,2012	
..3	RDB3	2007-000328	R-CHIP;11KOHM,5%,1/10W,DA,TP,2012	
..3	RDB4	2007-000328	R-CHIP;11KOHM,5%,1/10W,DA,TP,2012	
..3	X601	2801-000186	CRYSTAL UNIT;18.432MHz,25ppm,28-AAM,8pF,	
..3		AA63-40273A	SHIELD CASE;,SPTE,T0.5,,,CX724AHD	
..3		0202-000187	SOLDER-WIRE,FLUX,,RS60S,D1.2,63Sn/37Pb	S.N.A
.2		AA99-00519E	ASSY-PCB,PROSCAN;,,,SP53,USHE,151A,,,,,	
..3	CNP901	3711-003543	CONNECTOR-HEADER;NOWALL,16P,1R,2.54MM,AN	
..3	CNP902	3711-001283	CONNECTOR-HEADER;NOWALL,14P,1R,2.5mm,ANG	
..3	CNP903	3711-001283	CONNECTOR-HEADER;NOWALL,14P,1R,2.5mm,ANG	
..3	CNP904	3711-001283	CONNECTOR-HEADER;NOWALL,14P,1R,2.5mm,ANG	
..3	XP101	2801-004019	CRYSTAL UNIT;20.25MHz,30ppm,28-AAM,13pF,	
..3	XP601	2801-003811	CRYSTAL UNIT;24.576MHZ,20PPM,28-AAM,,30PF	
..3		AA99-20079H	ASSY-PCB SUB,AUTO;,AA65-00519E ,,V	S.N.A
...4	CP101	2203-000938	C CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,2012	
...4	CP102	2203-000938	C CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,2012	
...4	CP103	2203-000781	C CERAMIC,CHIP;330nF,10%,16V,X7R,TP,2012	
...4	CP104	2203-000761	C CERAMIC,CHIP;330nF,10%,16V,X7R,TP,2012	
...4	CP106	2203-000444	C CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,	
...4	CP109	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP	
...4	CP110	2401-001496	C AL;47uF,20%,16V,GP,TP,5x7,5	
...4	CP111	2203-000979	C CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
...4	CP112	2401-000486	C AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
...4	CP113	2203-001172	C CERAMIC,CHIP;0.006nF,0.25pF,50V,NP0,TP	
...4	CP114	2203-001172	C CERAMIC,CHIP;0.006nF,0.25pF,50V,NP0,TP	
...4	CP115	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP116	2401-002009	C AL;100uF,20%,16V,GP,TP6.3x7,5	
...4	CP117	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP118	2401-002009	C AL;100uF,20%,16V,GP,TP6.3x7,5	
...4	CP119	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP120	2203-001002	C CERAMIC,CHIP;0.047nF,5%,50V,NP0,TP,201	
...4	CP121	2203-001002	C CERAMIC,CHIP;0.047nF,5%,50V,NP0,TP,201	
...4	CP122	2203-000761	C CERAMIC,CHIP;330nF,10%,16V,X7R,TP,2012	
...4	CP126	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP127	2401-002009	C AL;100uF,20%,16V,GP,TP6.3x7,5	
...4	CP128	2401-002009	C AL;100uF,20%,16V,GP,TP6.3x7,5	
...4	CP129	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP130	2401-002009	C AL;100uF,20%,16V,GP,TP6.3x7,5	
...4	CP131	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP132	2401-000486	C AL;10uF,20%,50V,GP,TP6.3x7mm,5	
...4	CP133	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP135	2203-000575	C CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
...4	CP137	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP139	2203-000575	C CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
...4	CP141	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP142	2203-000938	C CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,2012	
...4	CP143	2203-000938	C CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,2012	
...4	CP144	2203-000938	C CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,2012	
...4	CP145	2203-000761	C CERAMIC,CHIP;330nF,10%,16V,X7R,TP,2012	
...4	CP301	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP302	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP303	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP304	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP305	2401-001496	C AL;47uF,20%,16V,GP,TP,5x7,5	
...4	CP306	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP307	2401-001496	C AL;47uF,20%,16V,GP,TP,5x7,5	
...4	CP308	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP309	2401-001496	C AL;47uF,20%,16V,GP,TP,5x7,5	
...4	CP310	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP311	2401-001496	C AL;47uF,20%,16V,GP,TP,5x7,5	
...4	CP312	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP313	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP314	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP315	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP316	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP317	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP401	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP402	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP403	2401-002009	C AL;100uF,20%,16V,GP,TP6.3x7,5	
...4	CP404	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP405	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP406	2203-000142	C CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,2012	
...4	CP407	2203-000239	C CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,2012	
...4	CP408	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP409	2203-000555	C CERAMIC,CHIP;0.02nF,5%,50V,NP0,TP,2012	
...4	CP410	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP411	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP412	2203-000555	C CERAMIC,CHIP;0.02nF,5%,50V,NP0,TP,2012	
...4	CP413	2203-000555	C CERAMIC,CHIP;0.02nF,5%,50V,NP0,TP,2012	
...4	CP414	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP415	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP416	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP417	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP418	2404-001020	C TA;CHIP;10uF,20%,10V,GP,TP,3216,3.2	
...4	CP419	2404-001020	C TA;CHIP;10uF,20%,10V,GP,TP,3216,3.2	
...4	CP420	2404-001020	C TA;CHIP;10uF,20%,10V,GP,TP,3216,3.2	
...4	CP501	2203-002494	C CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
...4	CP502	2203-002494	C CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
...4	CP503	2203-002494	C CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
...4	CP504	2203-002494	C CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
...4	CP505	2203-002494	C CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
...4	CP506	2401-001496	C AL;47uF,20%,16V,GP,TP,5x7,5	
...4	CP507	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP508	2203-002494	C CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
...4	CP509	2203-002494	C CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
...4	CP510	2203-002494	C CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
...4	CP511	2203-002494	C CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
...4	CP512	2203-002494	C CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
...4	CP513	2203-002494	C CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
...4	CP514	2203-002494	C CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
...4	CP515	2203-002494	C CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
...4	CP516	2203-002494	C CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
...4	CP517	2203-002494	C CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
...4	CP518	2401-000598	C AL;1uF,20%,50V,GP,TP,4x7,5	
...4	CP519	2203-002494	C CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
...4	CP520	2203-002494	C CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
...4	CP521	2203-002494	C CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
...4	CP522	2203-002494	C CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
...4	CP523	2203-002494	C CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
...4	CP524	2203-000260	C CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
...4	CP525	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP527	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP528	2401-001496	C AL;47uF,20%,16V,GP,TP,5x7,5	
...4	CP529	2203-000575	C CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
...4	CP530	2203-000575	C CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
...4	CP531	2203-000575	C CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
...4	CP532	2203-002494	C CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
...4	CP533	2401-000486	C AL;10uF,20%,50V,GP,TP6.3x7mm,5	
...4	CP534	2203-000260	C CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
...4	CP535	2203-000260	C CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
...4	CP536	2203-000260	C CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
...4	CP537	2203-000260	C CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
...4	CP538	2203-000260	C CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
...4	CP539	2203-000260	C CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
...4	CP540	2401-000486	C AL;10uF,20%,50V,GP,TP6.3x7mm,5	
...4	CP541	2203-001002	C CERAMIC,CHIP;0.047nF,5%,50V,NP0,TP,201	
...4	CP542	2203-001002	C CERAMIC,CHIP;0.047nF,5%,50V,NP0,TP,201	
...4	CP545	2203-002494	C CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
...4	CP546	2203-000260	C CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
...4	CP547	2203-000260	C CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
...4	CP548	2203-000260	C CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
...4	CP549	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP550	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP551	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP552	2401-001496	C AL;47uF,20%,16V,GP,TP,5x7,5	
...4	CP553	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP554	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP555	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP556	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP559	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP501	2203-001088	C CERAMIC,CHIP;0.005nF,0.25pF,50V,NP0,TP	
...4	CP502	2203-001088	C CERAMIC,CHIP;0.005nF,0.25pF,50V,NP0,TP	
...4	CP503	2203-002494	C CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
...4	CP504	2203-000938	C CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,2012	
...4	CP505	2203-000444	C CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,	
...4	CP507	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP509	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP510	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP511	2203-000444	C CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,	
...4	CP512	2203-000444	C CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,	
...4	CP513	2203-000444	C CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,	
...4	CP514	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP515	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP516	2203-001002	C CERAMIC,CHIP;0.047nF,5%,50V,NP0,TP,201	
...4	CP517	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP518	2203-000239	C CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,2012	
...4	CP519	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP520	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP521	2203-000239	C CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,2012	
...4	CP522	2203-000142	C CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,2012	
...4	CP523	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP524	2401-001496	C AL;47uF,20%,16V,GP,TP,5x7,5	
...4	CP525	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP526	2401-002009	C AL;100uF,20%,16V,GP,TP6.3x7,5	
...4	CP527	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP529	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	CP559	2203-000181	C CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
...4	FP101	2501-001120	FILTER-EMI;SMD;25V,100mA,,,,3.2x1.6x1.1	
...4	FP102	2501-001120	FILTER-EMI;SMD;25V,100mA,,,,3.2x1.6x1.1	
...4	FP301	2501-001120	FILTER-EMI;SMD;25V,100mA,,,,3.2x1.6x1.1	
...4	FP501	2501-000226	FILTER-EMI;SMD;25V,0.3A,,100pF,3.2x1.25	
...4	FP502	2501-000226	FILTER-EMI;SMD;25V,0.3A,,100pF,3.2x1.25	
...4	FP503	2501-000226	FILTER-EMI;SMD;25V,0.3A,,100pF,3.2x1.25	
...4	FP504	2501-000226	FILTER-EMI;SMD;25V,0.3A,,100pF,3.2x1.25	
...4	FP505	2501-000226	FILTER-EMI;SMD;25V,0.3A,,100pF,3.2x1.25	
...4	FP506	2501-000226	FILTER-EMI;SMD;25V,0.3A,,100pF,3.2x1.25	
...4	FP507	2501-000226	FILTER-EMI;SMD;25V,0.3A,,100pF,3.2x1.25	
...4	FP508	2501-000226	FILTER-EMI;SMD;25V,0.3A,,100pF,3.2x1.25	
...4	IC101	1204-001362	IC-VIDEO PROCESS;VPC3215C 88,PLCC,43P,,	
...4	IC103	1205-001172	IC INTERFACE;CP3250A 81,PLCC,68P,,PLAS	
...4	IC301	1204-001623	IC-VERTICAL PROCESSO;SDA9400,QFP64P,,P	
...4	IC302	1203-001419	IC VOLTAGE REGULATOR;4931,TO 252,3P,6.6x	
...4	IC401	1602-001045	IC D/A CONVERTER;9280,8BIT,PLCC,68P,,,,	
...4	IC501	1204-001550	IC VIDEO PROCESS,CXA2101AQ,QFP80P,,PLA	
...4	IC601	1204-001372	IC HOR./VER.PROCESSO;SDA9361,QFP44P,,P	
...4	IC901	1202-000001	IC-VOLTAGE COMP;7533,TO 92,3P,,SINGLE,	
...4	LP101	3301-001324	CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM,	S.N.A
...4	LP102	3301-001324	CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM,	S.N.A
...4	LP103	3301-001324	CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM,	S.N.A
...4	LP105	3301-001324	CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM,	S.N.A
...4	LP106	3301-001324	CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM,	S.N.A
...4	LP107	3301-001324	CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM,	S.N.A
...4	LP301	3301-001324	CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM,	S.N.A

Level	Loc. No.	Code No.	Description ; Specification	Remark
4	LP302	3301-001324	CORE FERRITE BEAD;AB,150HM,2X1.25X0.9MM	S-N-A
4	LP303	3301-001324	CORE FERRITE BEAD;AB,150HM,2X1.25X0.9MM	S-N-A
4	LP401	3301-001324	CORE FERRITE BEAD;AB,150HM,2X1.25X0.9MM	S-N-A
4	LP402	3301-001324	CORE FERRITE BEAD;AB,150HM,2X1.25X0.9MM	S-N-A
4	LP403	3301-001324	CORE FERRITE BEAD;AB,150HM,2X1.25X0.9MM	S-N-A
4	LP404	3301-001324	CORE FERRITE BEAD;AB,150HM,2X1.25X0.9MM	S-N-A
4	LP601	3301-001324	CORE FERRITE BEAD;AB,150HM,2X1.25X0.9MM	S-N-A
4	LP502	3301-001324	CORE FERRITE BEAD;AB,150HM,2X1.25X0.9MM	S-N-A
4	LP503	2703-001717	INDUCTOR,SMD,1.2uH,5%,3.2x2.5x2.2mm	
4	JP001	3301-001186	CORE FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m	S-N-A
4	JP002	3301-001186	CORE FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m	S-N-A
4	JP003	3301-001324	CORE FERRITE BEAD;AB,150HM,2X1.25X0.9MM	S-N-A
4	JP004	3301-001184	CORE FERRITE BEAD;AB,1.3ohm,4.5x3.2x1.3	S-N-A
4	JP005	3301-001184	CORE FERRITE BEAD;AB,1.3ohm,4.5x3.2x1.3	S-N-A
4	JP006	3301-001184	CORE FERRITE BEAD;AB,1.3ohm,4.5x3.2x1.3	S-N-A
4	JP501	0501-000280	TR,SMALL SIGNAL,KSA1182,PNP,150mW,SOT-23	
4	QP502	0501-000344	TR,SMALL SIGNAL,KSC1623-G,NPN,200mW,SOT-	
4	QP503	0501-000344	TR,SMALL SIGNAL,KSC1623-G,NPN,200mW,SOT-	
4	QP504	0501-000280	TR,SMALL SIGNAL,KSA1182,PNP,150mW,SOT-23	
4	QP505	0501-000280	TR,SMALL SIGNAL,KSA1182,PNP,150mW,SOT-23	
4	QP506	0501-000280	TR,SMALL SIGNAL,KSA1182,PNP,150mW,SOT-23	
4	QP508	0501-000344	TR,SMALL SIGNAL,KSC1623-G,NPN,200mW,SOT-	
4	QP602	0501-000344	TR,SMALL SIGNAL,KSC1623-G,NPN,200mW,SOT-	
4	QP902	0501-000280	TR,SMALL SIGNAL,KSA1182,PNP,150mW,SOT-23	
4	RP101	2007-000029	R-CHIP,0OHM,5%,1/10W,DA,TP2012	
4	RP102	2007-000947	R-CHIP,47OHM,5%,1/10W,DA,TP2012	
4	RP106	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP112	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP113	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP114	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP115	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP117	2007-000029	R-CHIP,0OHM,5%,1/10W,DA,TP2012	
4	RP134	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP135	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP136	2011-000585	R-NETWORK,47ohm,5%,63mW,LCHIP8PTP	
4	RP137	2011-000585	R-NETWORK,47ohm,5%,63mW,LCHIP8PTP	
4	RP138	2011-000585	R-NETWORK,47ohm,5%,63mW,LCHIP8PTP	
4	RP139	2011-000585	R-NETWORK,47ohm,5%,63mW,LCHIP8PTP	
4	RP140	2011-000585	R-NETWORK,47ohm,5%,63mW,LCHIP8PTP	
4	RP141	2011-000585	R-NETWORK,47ohm,5%,63mW,LCHIP8PTP	
4	RP142	2011-000585	R-NETWORK,47ohm,5%,63mW,LCHIP8PTP	
4	RP143	2011-000585	R-NETWORK,47ohm,5%,63mW,LCHIP8PTP	
4	RP153	2007-000401	R-CHIP,150OHM,5%,1/10W,DA,TP2012	
4	RP154	2007-000308	R-CHIP,10OHM,5%,1/10W,DA,TP2012	
4	RP155	2007-000947	R-CHIP,47OHM,5%,1/10W,DA,TP2012	
4	RP156	2007-000947	R-CHIP,47OHM,5%,1/10W,DA,TP2012	
4	RP157	2007-000947	R-CHIP,47OHM,5%,1/10W,DA,TP2012	
4	RP159	2007-001186	R-CHIP,750HM,5%,1/10W,DA,TP2012	
4	RP161	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP301	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP302	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP303	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP304	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP305	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP401	2011-000585	R-NETWORK,47ohm,5%,63mW,LCHIP8PTP	
4	RP402	2011-000585	R-NETWORK,47ohm,5%,63mW,LCHIP8PTP	
4	RP403	2011-000585	R-NETWORK,47ohm,5%,63mW,LCHIP8PTP	
4	RP404	2011-000585	R-NETWORK,47ohm,5%,63mW,LCHIP8PTP	
4	RP405	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP406	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP407	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP408	2007-001055	R-CHIP,5.2KOHM,5%,1/10W,DA,TP2012	
4	RP409	2007-000401	R-CHIP,150OHM,5%,1/10W,DA,TP2012	
4	RP411	2007-001186	R-CHIP,750HM,5%,1/10W,DA,TP2012	
4	RP412	2007-001186	R-CHIP,750HM,5%,1/10W,DA,TP2012	
4	RP413	2007-000401	R-CHIP,150OHM,5%,1/10W,DA,TP2012	
4	RP415	2007-001186	R-CHIP,750HM,5%,1/10W,DA,TP2012	
4	RP416	2007-001186	R-CHIP,750HM,5%,1/10W,DA,TP2012	
4	RP417	2007-000380	R-CHIP,13KOHM,5%,1/10W,DA,TP2012	
4	RP418	2007-000401	R-CHIP,150OHM,5%,1/10W,DA,TP2012	
4	RP419	2007-001186	R-CHIP,750HM,5%,1/10W,DA,TP2012	
4	RP421	2007-001186	R-CHIP,750HM,5%,1/10W,DA,TP2012	
4	RP422	2007-000300	R-CHIP,10KOHM,5%,1/10W,DA,TP2012	
4	RP423	2007-000401	R-CHIP,150OHM,5%,1/10W,DA,TP2012	
4	RP501	2007-000029	R-CHIP,0OHM,5%,1/10W,DA,TP2012	
4	RP502	2007-000029	R-CHIP,0OHM,5%,1/10W,DA,TP2012	
4	RP503	2007-000029	R-CHIP,0OHM,5%,1/10W,DA,TP2012	
4	RP504	2007-000030	R-CHIP,560OHM,5%,1/10W,DA,TP2012	
4	RP505	2007-000572	R-CHIP,220OHM,5%,1/10W,DA,TP2012	
4	RP506	2007-000493	R-CHIP,2.2KOHM,5%,1/10W,DA,TP2012	
4	RP507	2007-001166	R-CHIP,75OHM,5%,1/10W,DA,TP2012	
4	RP509	2007-000931	R-CHIP,470OHM,5%,1/10W,DA,TP2012	
4	RP510	2007-000538	R-CHIP,47KOHM,1%,1/10W,DA,TP2012	
4	RP513	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP514	2007-000210	R-CHIP,1.1KOHM,5%,1/10W,DA,TP2012	
4	RP515	2007-000468	R-CHIP,1KOHM,5%,1/10W,DA,TP2012	
4	RP516	2007-000468	R-CHIP,1KOHM,5%,1/10W,DA,TP2012	
4	RP517	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP518	2007-000210	R-CHIP,1.1KOHM,5%,1/10W,DA,TP2012	
4	RP519	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP521	2007-000210	R-CHIP,1.1KOHM,5%,1/10W,DA,TP2012	
4	RP522	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP523	2007-000210	R-CHIP,1.1KOHM,5%,1/10W,DA,TP2012	
4	RP524	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP525	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP526	2007-000210	R-CHIP,1.1KOHM,5%,1/10W,DA,TP2012	
4	RP527	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP528	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP529	2007-000210	R-CHIP,1.1KOHM,5%,1/10W,DA,TP2012	
4	RP530	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP537	2007-000689	R-CHIP,3.3MOHM,5%,1/10W,DA,TP2012	
4	RP542	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP543	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP544	2007-000029	R-CHIP,0OHM,5%,1/10W,DA,TP2012	
4	RP546	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP547	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP549	2007-000671	R-CHIP,2KOHM,5%,1/10W,DA,TP2012	
4	RP550	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP553	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP554	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP555	2007-000582	R-CHIP,22KOHM,1%,1/10W,DA,TP2012	
4	RP556	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP560	2007-000468	R-CHIP,1KOHM,5%,1/10W,DA,TP2012	
4	RP562	2007-000468	R-CHIP,1KOHM,5%,1/10W,DA,TP2012	
4	RP565	2007-000029	R-CHIP,0OHM,5%,1/10W,DA,TP2012	
4	RP566	2007-000029	R-CHIP,0OHM,5%,1/10W,DA,TP2012	
4	RP567	2007-000029	R-CHIP,0OHM,5%,1/10W,DA,TP2012	
4	RP568	2007-000029	R-CHIP,0OHM,5%,1/10W,DA,TP2012	
4	RP569	2007-000029	R-CHIP,0OHM,5%,1/10W,DA,TP2012	
4	RP570	2007-000300	R-CHIP,10KOHM,5%,1/10W,DA,TP2012	
4	RP571	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP601	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP602	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP603	2007-001208	R-CHIP,820OHM,5%,1/10W,DA,TP2012	
4	RP604	2007-000947	R-CHIP,47OHM,5%,1/10W,DA,TP2012	
4	RP605	2007-000518	R-CHIP,2.7KOHM,5%,1/10W,DA,TP2012	
4	RP606	2007-000518	R-CHIP,2.7KOHM,5%,1/10W,DA,TP2012	
4	RP609	2007-000872	R-CHIP,4.7KOHM,5%,1/10W,DA,TP2012	
4	RP611	2007-000468	R-CHIP,1KOHM,5%,1/10W,DA,TP2012	
4	RP613	2007-000941	R-CHIP,47KOHM,5%,1/10W,DA,TP2012	
4	RP614	2007-000001	R-CHIP,68KOHM,5%,1/10W,DA,TP2012	
4	RP619	2007-000468	R-CHIP,1KOHM,5%,1/10W,DA,TP2012	
4	RP620	2007-000947	R-CHIP,47OHM,5%,1/10W,DA,TP2012	
4	RP621	2007-000947	R-CHIP,47OHM,5%,1/10W,DA,TP2012	
4	RP622	2007-000468	R-CHIP,1KOHM,5%,1/10W,DA,TP2012	
4	RP623	2007-000822	R-CHIP,390OHM,5%,1/10W,DA,TP2012	
4	RP624	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP625	2007-000872	R-CHIP,4.7KOHM,5%,1/10W,DA,TP2012	
4	RP626	2007-000931	R-CHIP,470OHM,5%,1/10W,DA,TP2012	
4	RP627	2007-000872	R-CHIP,4.7KOHM,5%,1/10W,DA,TP2012	
4	RP628	2007-000267	R-CHIP,1.8KOHM,5%,1/10W,DA,TP2012	
4	RP629	2007-000872	R-CHIP,4.7KOHM,5%,1/10W,DA,TP2012	
4	RP630	2007-000468	R-CHIP,1KOHM,5%,1/10W,DA,TP2012	
4	RP631	2007-000872	R-CHIP,4.7KOHM,5%,1/10W,DA,TP2012	
4	RP709	2007-000029	R-CHIP,0OHM,5%,1/10W,DA,TP2012	
4	RP719	2007-000029	R-CHIP,0OHM,5%,1/10W,DA,TP2012	
4	RP727	2007-000029	R-CHIP,0OHM,5%,1/10W,DA,TP2012	
4	RP735	2007-000029	R-CHIP,0OHM,5%,1/10W,DA,TP2012	
4	RP736	2007-000029	R-CHIP,0OHM,5%,1/10W,DA,TP2012	
4	RP737	2007-000029	R-CHIP,0OHM,5%,1/10W,DA,TP2012	
4	RP738	2007-000029	R-CHIP,0OHM,5%,1/10W,DA,TP2012	
4	RP901	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP904	2007-000029	R-CHIP,0OHM,5%,1/10W,DA,TP2012	
4	RP907	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	

Level	Loc. No.	Code No.	Description ; Specification	Remark
4	RP908	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP912	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP913	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP914	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP915	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP916	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP917	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP918	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP920	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP921	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP924	2007-000029	R-CHIP,0OHM,5%,1/10W,DA,TP2012	
4	RP925	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP926	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP927	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP929	2007-000029	R-CHIP,0OHM,5%,1/10W,DA,TP2012	
4	RP931	2007-000029	R-CHIP,0OHM,5%,1/10W,DA,TP2012	
4	RP933	2007-000029	R-CHIP,0OHM,5%,1/10W,DA,TP2012	
4	RP935	2007-000029	R-CHIP,0OHM,5%,1/10W,DA,TP2012	
4	RP936	2007-000468	R-CHIP,1KOHM,5%,1/10W,DA,TP2012	
4	RP943	2007-000468	R-CHIP,1KOHM,5%,1/10W,DA,TP2012	
4	RP944	2007-000941	R-CHIP,47KOHM,5%,1/10W,DA,TP2012	
4	RP945	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP980	2007-000029	R-CHIP,0OHM,5%,1/10W,DA,TP2012	
4		AA41-00233B	PCB-PROSCAN;SVP 53J59FR-4,4L,B,1.6T,245	S-N-A
3		AA63-40272A	SHIELD-CASE; ,SPTE,T0.5, ,,CX724AHD	S-N-A
2		AA95-00529A	ASSY-PCB,PP; ,,SPK0,USHP,J51A, ,,,	
3	CNP01	3711-002709	CONNECTOR HEADER;NOWALL,12P,1R,2.5MM,ANG	
3	CNP03	3711-002709	CONNECTOR HEADER;NOWALL,12P,1R,2.5MM,ANG	
3	ICP101	1204-000530	IC PAL/NTSC DECODER;TDA9160A,DIP,32P,400	
3	ICP102	1204-000560	IC DEMODULATOR;TDA9815,DIP,32P,400MIL,PL	
3	RP126	2103-000665	VR SEMI,20Kohm,25%,1/5W,SIDE	
3	TP101	AA26-10004E	TRANS-IF; ,7MG,VIF ,7mm,8pF,116.7MHz,S	
3	ZP102	2904-000253	FILTER SAW AV;38.9MHz,DIP10K,ST,18dB,B/G	
3		AA99-20066Z	ASSY PCB SUB;AL;TO; AA95-00529A V	S-N-A
4	CP101	2203-000221	C CERAMIC,CHIP,100nF,20%,50V,Y5V,TP,3216	
4	CP102	2401-000922	C AL,22uF,20%,16V,CP,TP,5x5.5	
4	CP103	2203-000429	C CERAMIC,CHIP,0.018nF,5%,50V,NP0,TP,201	
4	CP104	2203-000181	C CERAMIC,CHIP,100nF,-80-20%,25V,Y5V,TP	
4	CP105	2203-000717	C CERAMIC,CHIP,3.3nF,10%,50V,X7R,TP,3216	
4	CP106	2203-000221	C CERAMIC,CHIP,100nF,20%,50V,Y5V,TP,3216	
4	CP107	2203-000221	C CERAMIC,CHIP,100nF,20%,50V,Y5V,TP,3216	
4	CP108	2203-000221	C CERAMIC,CHIP,100nF,20%,50V,Y5V,TP,3216	
4	CP109	2401-001840	C AL,100uF,20%,16V,CP,TP,5.3x11.5	
4	CP110	2203-000221	C CERAMIC,CHIP,100nF,20%,50V,Y5V,TP,3216	
4	CP111	2203-000716	C CERAMIC,CHIP,3.3nF,10%,50V,X7R,TP,2012	
4	CP112	2401-000660	C AL,2.2uF,20%,50V,CP,TP,5x11.5	
4	CP114	2203-000221	C CERAMIC,CHIP,100nF,20%,50V,Y5V,TP,3216	
4	CP115	2203-000221	C CERAMIC,CHIP,100nF,20%,50V,Y5V,TP,3216	
4	CP116	2203-000753	C CERAMIC,CHIP,330nF,-80-20%,50V,Y5V,TP	
4	CP117	2401-002144	C AL,47uF,20%,16V,CP,TP,5x11.5	
4	CP118	2203-000221	C CERAMIC,CHIP,100nF,20%,50V,Y5V,TP,3216	
4	CP119	2201-000692	C CERAMIC,DISC,0.008nF,0.5pF,50V,LU,TP,4	
4	CP120	2203-000578	C CERAMIC,CHIP,220nF,20%,50V,Y5V,TP,3216	
4	CP121	2401-000660	C AL,2.2uF,20%,50V,CP,TP,5x11.5	
4	CP123	2203-000260	C CERAMIC,CHIP,10nF,10%,50V,X7R,TP,2012	
4	CP124	2401-000660	C AL,2.2uF,20%,50V,CP,TP,5x11.5	
4	CP125	2203-000260	C CERAMIC,CHIP,10nF,10%,50V,X7R,TP,2012	
4	CP126	2401-001840	C AL,100uF,20%,16V,CP,TP,5.3x11.5	
4	CP127	2203-000221	C CERAMIC,CHIP,100nF,20%,50V,Y5V,TP,3216	
4	CP129	2203-000260	C CERAMIC,CHIP,10nF,10%,50V,X7R,TP,2012	
4	CP130	2203-000239	C CERAMIC,CHIP,0.1nF,5%,50V,NP0,TP,2012	
4	CP131	2201-000692	C CERAMIC,DISC,0.008nF,0.5pF,50V,LU,TP,4	
4	CP132	2203-000239	C CERAMIC,CHIP,0.1nF,5%,50V,NP0,TP,2012	
4	CP133	2203-000221	C CERAMIC,CHIP,100nF,20%,50V,Y5V,TP,3216	
4	CP134	2401-001840	C AL,100uF,20%,16V,CP,TP,5.3x11.5	
4	CP135	2401-002144	C AL,47uF,20%,16V,CP,TP,5x11.5	
4	CP136	2203-000260	C CERAMIC,CHIP,10nF,10%,50V,X7R,TP,2012	
4	CP137	2203-000808	C CERAMIC,CHIP,0.47nF,5%,50V,NP0,TP,2012	
4	CP142	2401-000199	C AL,1000uF,20%,6.3V,CP,TP,10x12.5,	
4	CP143	2401-002144	C AL,47uF,20%,16V,CP,TP,5x11.5	
4	CP144	2203-000221	C CERAMIC,CHIP,100nF,20%,50V,Y5V,TP,3216	
4	CP145	2203-000221	C CERAMIC,CHIP,100nF,20%,50V,Y5V,TP,3216	
4	CP201	2203-000325	C CERAMIC,CHIP,12nF,10%,50V,X7R,TP,3216,	
4	CP203	2401-002144	C AL,47uF,20%,16V,CP,TP,5x11.5	
4	CP204	2203-000221	C CERAMIC,CHIP,100nF,20%,50V,Y5V,TP,3216	
4	CP205	2401-001840	C AL,100uF,20%,16V,CP,TP,5.3x11.5	
4	CP206	2203-000221	C CERAMIC,CHIP,100nF,20%,50V,Y5V,TP,3216	
4	CP207	2401-001840	C AL,100uF,20%,16V,CP,TP,5.3x11.5	
4	CP208	2203-000221	C CERAMIC,CHIP,100nF,20%,50V,Y5V,TP,3216	
4	CP209	2401-001914	C AL,1uF,20%,50V,BP,TP,5x11.5	
4	CP210	2401-001840	C AL,100uF,20%,16V,CP,TP,5.3x11.5	
4	CP211	2401-000603	C AL,1uF,20%,50V,CP,TP,5x11.5	
4	CP213	2401-000603	C AL,1uF,20%,50V,CP,TP,5x11.5	
4	CP214	2203-000578	C CERAMIC,CHIP,220nF,20%,50V,Y5V,TP,3216	
4	CP215	2401-000603	C AL,1uF,20%,50V,CP,TP,5x11.5	
4	CP216	2203-000221	C CERAMIC,CHIP,100nF,20%,50V,Y5V,TP,3216	
4	CP217	2203-000578	C CERAMIC,CHIP,220nF,20%,50V,Y5V,TP,3216	
4	CP218	2203-002085	C CERAMIC,CHIP,56nF,10%,50V,X7R,TP,2012,	
4	CP219	2203-000495	C CERAMIC,CHIP,2.2nF,10%,50V,X7R,TP,2012	
4	CP220	2203-000578	C CERAMIC,CHIP,220nF,20%,50V,Y5V,TP,3216	
4	CP221	2203-000221	C CERAMIC,CHIP,100nF,20%,50V,Y5V,TP,3216	
4	CP301	2401-001840	C AL,100uF,20%,16V,CP,TP,5.3x11.5	
4	CP302	2203-000221	C CERAMIC,CHIP,100nF,20%,50V,Y5V,TP,3216	
4	CP303	2401-001840	C AL,100uF,20%,16V,CP,TP,5.3x11.5	
4	CP304	2203-000221	C CERAMIC,CHIP,100nF,20%,50V,Y5V,TP,3216	
4	CP305	2203-001077	C CERAMIC,CHIP,0.056nF,5%,50V,NP0,TP,201	
4	CP306	2203-001077	C CERAMIC,CHIP,0.056nF,5%,50V,NP0,TP,201	
4	DP101	0401-000160	DIODE;SWITCHING,ISS314,30V,100mA,,USC,TP	
4	DP103	0403-000720	DIODE;ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DP105	0401-000160	DIODE;SWITCHING,ISS314,30V,100mA,,USC,TP	
4	DP201	0403-000334	DIODE;ZENER;UZ2.7BSA,2.7V,2.5M-2.75V,500	
4	ICP103	AA13-20004A	IC HYBRID; ,PAP102T,SIP9PPRE-AMP,TP	
4	ICP105	1204-000535	IC PICTURE PROCESS,SDA9188X,SOP,32P,150M	
4	ICP201	1002-002026	IC A/D CONVERTER;SDA9187-2X,6BIT,SOP,28P	
4	LP102	2701-000219	INDUCTOR-AXIAL,820nH,10%,2.5x3.4mm	
4	LP103	2701-000114	INDUCTOR-AXIAL,10uH,10%,2.5x3.4mm	
4	LP104	2701-000114	INDUCTOR AXIAL,10uH,10%,2.5x3.4mm	
4	LP105	2701-000114	INDUCTOR AXIAL;10uH,10%,2.5x3.4mm	
4	LP201	2701-000197	INDUCTOR AXIAL;5.6uH,10%,2.5x3.4mm	
4	LP301	2701-000114	INDUCTOR AXIAL,10uH,10%,2.5x3.4mm	
4	PCB	AA41-11003A	PCB PP;SCT53A,2L,FR 4,330x245x1.6T,A6	S-N-A
4	QP104	0501-000342	TR SMALL SIGNAL,KSC1623,Y,NPN,200mW,SOT	
4	QP105	0501-000342	TR SMALL SIGNAL,KSC1623,Y,NPN,200mW,SOT	
4	QP106	0501-000342	TR SMALL SIGNAL,KSC1623,Y,NPN,200mW,SOT	
4	QP201	0501-000342	TR SMALL SIGNAL,KSC1623,Y,NPN,200mW,SOT	
4	QP202	0501-000342	TR SMALL SIGNAL,KSC1623,Y,NPN,200mW,SOT	
4	QP203	0501-000280	TR SMALL SIGNAL,KSA1182,PNP,150mW,SOT-23	
4	QP204	0501-000342	TR SMALL SIGNAL,KSC1623,Y,NPN,200mW,SOT-	
4	QP205	0501-000342	TR SMALL SIGNAL,KSC1623,Y,NPN,200mW,SOT-	
4	QP206	0501-000342	TR SMALL SIGNAL,KSC1623,Y,NPN,200mW,SOT-	
4	QP302	0501-000342	TR SMALL SIGNAL,KSC1623,Y,NPN,200mW,SOT-	
4	QP303	0501-000280	TR SMALL SIGNAL,KSA1182,PNP,150mW,SOT-23	
4	QP304	0501-000280	TR SMALL SIGNAL,KSA1182,PNP,150mW,SOT-23	
4	QP305	0501-000280	TR SMALL SIGNAL,KSA1182,PNP,150mW,SOT-23	
4	RC129	2007-000686	R-CHIP,220OHM,5%,1/10W,DA,TP2012	
4	RP101	2007-001208	R-CHIP,820OHM,5%,1/10W,DA,TP2012	
4	RP104	2007-000468	R-CHIP,1KOHM,5%,1/10W,DA,TP2012	
4	RP105	2007-000328	R-CHIP,11KOHM,5%,1/10W,DA,TP2012	
4	RP106	2007-000774	R-CHIP,33KOHM,5%,1/10W,DA,TP2012	
4	RP107	2007-000409	R-CHIP,150HM,5%,1/10W,DA,TP2012	
4	RP108	2007-000493	R-CHIP,2.2KOHM,5%,1/10W,DA,TP2012	
4	RP109	2007-000830	R-CHIP,39KOHM,5%,1/10W,DA,TP2012	
4	RP110	2007-000300	R-CHIP,10KOHM,5%,1/10W,DA,TP2012	
4	RP111	2007-000872	R-CHIP,4.7KOHM,5%,1/10W,DA,TP2012	
4	RP112	2007-000831	R-CHIP,470OHM,5%,1/10W,DA,TP2012	
4	RP113	2007-000774	R-CHIP,33KOHM,5%,1/10W,DA,TP2012	
4	RP114	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP115	2007-000290	R-CHIP,100OHM,5%,1/10W,DA,TP2012	
4	RP116	2007-000493	R-CHIP,2.2KOHM,5%,1/10W,DA,TP2012	
4	RP118	2001-000117	R-CARBON[5];68OHM,5%,1/2W,AA,TP2.4X6.4M	
4	RP119	2007-000282	R-CHIP,100KOHM,5%,1/10W,DA,TP2012	
4	RP122	2007-000300	R-CHIP,10KOHM,5%,1/10W,DA,TP2012	
4	RP123	2007-000941	R-CHIP,47KOHM,5%,1/10W,DA,TP2012	
4	RP124	2007-000941	R-CHIP,47KOHM,5%,1/10W,DA,TP2012	
4	RP125	2007-000401	R-CHIP,150OHM,5%,1/10W,DA,TP2012	
4	RP127	2007-000030	R-CHIP,560OHM,5%,1/10W,DA,TP2012	
4	RP128	2007-000941	R-CHIP,47KOHM,5%,1/10W,DA,TP2012	
4	RP130	2007-000872	R-CHIP,4.7KOHM,5%,1/10W,DA,TP2012	
4	RP131	2007-000686	R-CHIP,220OHM,5%,1/10W,DA,TP2012	
4	RP132	2007-000468	R-CHIP,1KOHM,5%,1/10W,DA,TP2012	
4	RP135	2007-000468	R-CHIP,1KOHM,5%,1/10W,DA,TP2012	
4	RP136	2007-000872	R-CHIP,4.7KOHM,5%,1/10W,DA,TP2012	

Level	Loc. No.	Code No.	Description ; Specification	Remark
4	RP137	2007-001039	R-CHIP;56KOHM,5%,1/10W,DA,TP2012	
4	RP138	2007-000586	R-CHIP;22KOHM,5%,1/10W,DA,TP2012	
4	RP140	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP2012	
4	RP201	2007-001039	R-CHIP;56KOHM,5%,1/10W,DA,TP2012	
4	RP202	2007-000401	R-CHIP;150OHM,5%,1/10W,DA,TP2012	
4	RP203	2007-000703	R-CHIP;3.6KOHM,5%,1/10W,DA,TP2012	
4	RP204	2007-000593	R-CHIP;22OHM,5%,1/10W,DA,TP2012	
4	RP205	2007-000477	R-CHIP;1MOHM,5%,1/10W,DA,TP2012	
4	RP206	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP2012	
4	RP207	2007-001009	R-CHIP;51KOHM,5%,1/10W,DA,TP2012	
4	RP208	2007-000774	R-CHIP;33KOHM,5%,1/10W,DA,TP2012	
4	RP209	2007-000401	R-CHIP;150OHM,5%,1/10W,DA,TP2012	
4	RP210	2007-000221	R-CHIP;1.2KOHM,5%,1/10W,DA,TP2012	
4	RP211	2007-001001	R-CHIP;510OHM,5%,1/10W,DA,TP2012	
4	RP212	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP2012	
4	RP213	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
4	RP215	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
4	RP216	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP2012	
4	RP217	2007-000409	R-CHIP;15KOHM,5%,1/10W,DA,TP2012	
4	RP301	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP303	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP2012	
4	RP304	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP2012	
4	RP307	2007-000518	R-CHIP;2.7KOHM,5%,1/10W,DA,TP2012	
4	RP308	2007-000401	R-CHIP;150OHM,5%,1/10W,DA,TP2012	
4	RP309	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP2012	
4	RP310	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP2012	
4	RP311	2007-000931	R-CHIP;470OHM,5%,1/10W,DA,TP2012	
4	RP312	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP2012	
4	RP313	2007-000798	R-CHIP;360OHM,5%,1/10W,DA,TP2012	
4	RP314	2007-000798	R-CHIP;360OHM,5%,1/10W,DA,TP2012	
4	RP315	2007-000798	R-CHIP;360OHM,5%,1/10W,DA,TP2012	
4	RP316	2001-001146	R-CARBON(S);4.70HM,5%,1/2W,AA,TP2.4X6.4	
4	RP317	2001-001146	R-CARBON(S);4.70HM,5%,1/2W,AA,TP2.4X6.4	
4	XP101	2801-000235	CRYSTAL UNIT;3.579545MHz,40ppm,28-AAM,S,	
4	XP102	2801-000274	CRYSTAL UNIT,4.433619MHZ,30PPM,28-AAM,20	
4	XP301	2802-000121	RESONATOR CERAMIC,20.48MHz±0.5%,TP,10.0x	
3		AA63-40013A	SHIELD CASE,..SPTE,T0.5,SCT51A,W774,	S.N.A
3		3202-000187	SOLDER WIRE FLUX,..RS60S,D1.2,63Sn/37Pb	S.N.A
2		AA95-00644C	ASSY PCB,TTX,..SP4U,SHF,,J51A,..,RUSSIA	
3	CNT01	3711-002709	CONNECTOR;HEADER,NOWALL,12P1R,2.5MM,ANG	
3	CN102	3711-002707	CONNECTOR;HEADER,NOWALL,9P1R,2.5mm,ANGL	
3	ICT01	AA13-00046A	IC MCU,SDA545x OTP 13B,0TP,S,T64K ,D	
3	ICT02	1103-001209	IC EEPROM;AT24C04 PC27 C,512Kx8Bit,DIP8	
3	ICT04	1001-000223	IC VIDEO SWITCH;TEA5114A,..DIP16P,334Mil	
3	XT01	2801-000724	CRYSTAL UNIT;6MHz,50ppm,28 AAM,20pF,40oh	
3		AA63-40014A	SHIELD CASE,E..SPTE,T0.5,SCT51A,	S.N.A
3		AA98-20083R	ASSY PCB SUB,AUTO; AA95 00644C ,,V	S.N.A
4	CT01	2401-002009	C-AL;100uF,20%,16V,GP,TP5.3x7.5	
4	CT02	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
4	CT03	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
4	CT04	2203-000818	C-CERAMIC,CHIP;0.033nF,5%,50V,NP0,TP,201	
4	CT05	2203-000818	C-CERAMIC,CHIP;0.033nF,5%,50V,NP0,TP,201	
4	CT06	2401-000486	C-AL;10uF,20%,50V,GP,TP5.3x7mm,5	
4	CT07	2203-000802	C-CERAMIC,CHIP;33nF,10%,50V,X7R,TP,2012	
4	CT08	2401-002009	C-AL;100uF,20%,16V,GP,TP5.3x7.5	
4	CT09	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
4	CT10	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
4	CT12	2203-000802	C-CERAMIC,CHIP;33nF,10%,50V,X7R,TP,2012	
4	CT13	2401-002009	C-AL;100uF,20%,16V,GP,TP5.3x7.5	
4	CT14	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
4	CT15	2203-000575	C-CERAMIC,CHIP;220nF,10%,25V,X7R,TP,2012	
4	CT16	2203-000575	C-CERAMIC,CHIP;220nF,10%,25V,X7R,TP,2012	
4	CT17	2203-000575	C-CERAMIC,CHIP;220nF,10%,25V,X7R,TP,2012	
4	CT18	2203-000575	C-CERAMIC,CHIP;220nF,10%,25V,X7R,TP,2012	
4	CT19	2203-000575	C-CERAMIC,CHIP;220nF,10%,25V,X7R,TP,2012	
4	CT20	2203-000575	C-CERAMIC,CHIP;220nF,10%,25V,X7R,TP,2012	
4	CT21	2401-000302	C-AL;100uF,20%,25V,GP,TP5.3x11.5	
4	CT22	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
4	CT23	2401-002009	C-AL;100uF,20%,16V,GP,TP5.3x7.5	
4	CT24	2203-000181	C-CERAMIC,CHIP;100nF,-80-20%,25V,Y5V,TP,	
4	DZT01	0403-001018	DIODE ZENER;RLZ6.2B,6.2V,5.95-6.27V,400m	
4	DZT02	0403-001117	DIODE ZENER;RLZ12B,5%,500mW,LL 34,TP	
4	ICT03	1203-000515	IC VOL DETECTOR;7042,TO-92,3P,1.17V,MIL,PL	
4	ICT05	0801-000410	IC CMOS LOGIC,74HC32,OR GATE,SOP14P,150	
4	JT03	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
4	LT01	2702-001094	INDUCTOR RADIAL,10uH,10%,6x4mm	
4	LT02	2702-001094	INDUCTOR RADIAL,10uH,10%,6x4mm	
4	LT03	2702-001094	INDUCTOR RADIAL,10uH,10%,6x4mm	
4	LT04	2702-001094	INDUCTOR RADIAL,10uH,10%,6x4mm	
4	LT05	2702-001094	INDUCTOR RADIAL,10uH,10%,6x4mm	
4	PCB	AA41-00276A	PCB;TTX,SP4U,SMFFR 4.2LA,1.6T,180x24	S.N.A
4	RT01	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RT02	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RT03	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RT04	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
4	RT05	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
4	RT06	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
4	RT07	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
4	RT08	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
4	RT09	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
4	RT10	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
4	RT11	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
4	RT12	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP,2012	
4	RT13	2007-000518	R-CHIP;2.7KOHM,5%,1/10W,DA,TP,2012	
4	RT14	2007-000653	R-CHIP;27KOHM,5%,1/10W,DA,TP,2012	
4	RT15	2007-000477	R-CHIP;1MOHM,5%,1/10W,DA,TP,2012	
4	RT16	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RT18	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
4	RT22	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
4	RT26	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RT27	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RT28	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RT29	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RT30	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
4	RT31	2007-000572	R-CHIP;220OHM,5%,1/10W,DA,TP,2012	
4	RT32	2007-000728	R-CHIP;300OHM,5%,1/10W,DA,TP,2012	
4	RT33	2007-000572	R-CHIP;220OHM,5%,1/10W,DA,TP,2012	
4	RT34	2007-000728	R-CHIP;300OHM,5%,1/10W,DA,TP,2012	
4	RT35	2007-000572	R-CHIP;220OHM,5%,1/10W,DA,TP,2012	
4	RT36	2007-000728	R-CHIP;300OHM,5%,1/10W,DA,TP,2012	
3		0202-000187	SOLDER-WIRE FLUX,..RS60S,D1.2,63Sn/37Pb	S.N.A
3		0202-001004	SOLDER CREAM;SQ-2030M SZH 1.563A,D0.04 6	S.N.A
2		AA39-20577A	LEAD CONNECTOR ASSY;,6(3P,YFH-800 05,800	
2		AA39-20010C	LEAD CONNECTOR ASSY;,1P,YFH-800-01,S,500,	
2		3301-001201	CORE FERRITE,AE,21x11x32mm,1500,2500	
2		0202-000187	SOLDER-WIRE FLUX,..RS60S,D1.2,63Sn/37Pb	S.N.A
2		AA59-00171A	MODULE FOCUS,PACK,SVP S200,S300 P3,...	
2		AA65-30109A	CLAMP;FBT,NYLON 66,V2 BLK,,,,,	S.N.A
2		AA65-30105A	CLAMP;WIRE,NYLON 66,V2,NTR,15MM,ALL MODE	S.N.A
2		AA65-30104B	CLAMP;WIRE,NYLON 66,V2 BLK,W2.25,ALL MOD	S.N.A
2		AA65-30013A	CLAMP;WIRE,NYLON 66,V0,NTR,DAWH-45N,,,,	S.N.A

ASSY POWER CORD

Level	Loc. No.	Code No.	Description ; Specification	Remark
△1	*	AA96-00305A	ASSY POWER CORD;..CP2/NO(4.8),H/C 50mm,V	
2		3811-000401	WIRE;PVC CU,BCWA,300V,ROLL,17/0.16mm,#22	S.N.A
2		AA61-20284A	HOLDER;,P CORD,PP/VO,BLK,SE-002	S.N.A
2		AA39-10007B	POWER CORD;..VM-0377,2x42/0.15,2.4M,T,3P	

ASSY PCB CRT

Level	Loc. No.	Code No.	Description ; Specification	Remark
1	*	AA95-00923A	ASSY PCB CRT,,,J51A,43/54,PAL	
2	BDW-GN	AA39-20009G	LEAD CONNECTOR ASSY,,1P,YFH-800-01,700,16	
2	CS11	2201-002117	C-CERAMIC,DISC,4.7nF,20%,3kV,Y5U,TP,16x6	
2	CS41	2201-002117	C-CERAMIC,DISC,4.7nF,20%,3kV,Y5U,TP,16x6	
2	CS71	2201-002117	C-CERAMIC,DISC,4.7nF,20%,3kV,Y5U,TP,16x6	
2	CN501	3711-003051	CONNECTOR;HEADER,BOX,8P,1R,2.5mm,STRAGHT	
2	CN502	3711-003052	CONNECTOR;HEADER,BOX,10P,1R,2.5mm,STRAGH	
2	CN502B	3711-003052	CONNECTOR;HEADER,BOX,10P,1R,2.5mm,STRAGH	
2	CN503	3711-003052	CONNECTOR;HEADER,BOX,10P,1R,2.5mm,STRAGH	
2	CN503B	3711-003052	CONNECTOR;HEADER,BOX,10P,1R,2.5mm,STRAGH	
2	CNW401	AA39-20027B	LEAD CONNECTOR ASSY,,6P,67096-006,S,400,	
2	CNW501	AA39-00127A	LEAD CONNECTOR ASSY,,8P,35155-0800,S,400	
2	CNW502	AA39-00112A	LEAD CONNECTOR ASSY,,10P,35155-1000,S,30	
2	CNW503	AA39-00112A	LEAD CONNECTOR ASSY,,10P,35155-1000,S,30	
2	FOCUS	AA39-20115A	LEAD CONNECTOR ASSY,,1P,BUSHING,500,3239	
2	FOCUS	AA39-20115A	LEAD CONNECTOR ASSY,,1P,BUSHING,500,3239	
2	FOCUS	AA39-20115B	LEAD CONNECTOR ASSY,,1P,BUSHING,,700MM,	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	GBW-GN	3811-000446	WIRE;PVC CU,TCWA,600V,ROLL,17/0.16mm,#22	S.N.A
2	GBW-SC	3811-000480	WIRE;PVC CU,BCWA,1KV,ROLL,17/0.16mm,#22,	S.N.A
2	GDW-GN	AA39-20009D	LEAD CONNECTOR ASSY,,1P,YFH-800-01,500,16	
2	GRW-GN	3811-000446	WIRE;PVC CU,TCWA,600V,ROLL,17/0.16mm,#22	S.N.A
2	GRW-SC	3811-000480	WIRE;PVC CU,BCWA,1KV,ROLL,17/0.16mm,#22,	S.N.A
2	ICS01	AA96-50151B	ASSY;H/S,..AMPAA61 10060A,TDA6111Q,	
3		1201-001131	IC VIDEO AMP;S111,SIP9P,,SINGLE, PLAS	
3		6001-000057	SCREW MACHINE;RH,+,M3L6,ZPC(BLK),SWRCH1	
3		6021-000222	NUT;HEXAGON,2C,M3,ZPC(YEL),SW20C ,1	S.N.A
3		AA61-10060A	BRACKET-TR;..,QUS,T1/2H,T0.5,...	S.N.A
2	ICS31	AA96-50151B	ASSY;H/S,..AMPAA61 10060A,TDA6111Q,	
2	ICS61	AA96-50151B	ASSY;H/S,..AMPAA61 10060A,TDA6111Q,	
2	PCB	AA41-00357B	PCB-CRT;PC1533R,FR 1,1L,B,1.6T,245x245	S.N.A
2	RDW-GN	AA39-20009F	LEAD CONNECTOR ASSY,,1P,YFH-800-01,200,16	
2	SCS02	AA27-00084A	COILS,23,.....,S,23,5000Mmm	
2	SCS32	AA27-00084A	COILS,23,.....,S,23,5000Mmm	
2	SCS62	AA27-00084A	COILS,23,.....,S,23,5000Mmm	
2	VS01	3704-001019	SOCKET-CRT;10P,29.1PI,35.5PI,AU30U	
2	VS31	3704-001019	SOCKET-CRT;10P,29.1PI,35.5PI,AU30U	
2	VS61	3704-001019	SOCKET-CRT;10P,29.1PI,35.5PI,AU30U	
2	VR501	2101-000321	VR-ROTARY;1Mohm,,,0.5W,SIDE	
2	VR531	2101-000321	VR-ROTARY;1Mohm,,,0.5W,SIDE	
2	VR561	2101-000321	VR-ROTARY;1Mohm,,,0.5W,SIDE	
2		AA99-20089J	ASSY PCB SUB,AUTO; AA95-00823A ,,V	S.N.A
3	CS02	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11.5	
3	CS03	2201-000119	C-CERAMIC,DISC;100nF,-80-20%,50V,Y5V,TP,	
3	CS04	2401-001537	C-AL;47uF,20%,25V,GP,TP6.3x7mm,5mm	
3	CS05	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
3	CS06	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
3	CS07	2305-000154	C-FILM,MPEF;100nF,5%,400V,TP,21.5x6.5x11	
3	CS10	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
3	CS12	2401-000133	C-AL;1000uF,20%,16V,GP,TP,10x20,5	
3	CS13	2201-000983	C-CERAMIC,DISC;1nF,10%,2kV,Y5P,TP5x5.7	
3	CS14	2201-000599	C-CERAMIC,DISC,0.56nF,10%,500V,Y5P,TP,5	
3	CS32	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11.5	
3	CS33	2201-000119	C-CERAMIC,DISC,100nF,-80-20%,50V,Y5V,TP,	
3	CS34	2401-001537	C-AL;47uF,20%,25V,GP,TP6.3x7mm,5mm	
3	CS35	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
3	CS36	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
3	CS37	2305-000154	C-FILM,MPEF;100nF,5%,400V,TP,21.5x6.5x11	
3	CS40	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
3	CS42	2201-000983	C-CERAMIC,DISC,1nF,10%,2kV,Y5P,TP5x5.7	
3	CS43	2201-000599	C-CERAMIC,DISC,0.56nF,10%,500V,Y5P,TP,5	
3	CS62	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11.5	
3	CS63	2201-000119	C-CERAMIC,DISC;100nF,-80-20%,50V,Y5V,TP,	
3	CS64	2401-001537	C-AL;47uF,20%,25V,GP,TP6.3x7mm,5mm	
3	CS65	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
3	CS66	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
3	CS67	2305-000154	C-FILM,MPEF;100nF,5%,400V,TP,21.5x6.5x11	
3	CS70	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
3	CS72	2201-000983	C-CERAMIC,DISC;1nF,10%,2kV,Y5P,TP5x5.7,	
3	CS73	2201-000599	C-CERAMIC,DISC,0.56nF,10%,500V,Y5P,TP,5,	
3	CN401	3711-002645	CONNECTOR;HEADER,BOX,6P,1R,2.5MM,STRAIGH	
3	DS01	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
3	DS02	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
3	DS03	0402-000493	DIODE-RECTIFIER;1RSGU41,400V,1.5A,DO-15L	
3	DS04	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
3	DS09	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
3	DS10	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
3	DS31	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
3	DS32	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
3	DS33	0402-000493	DIODE-RECTIFIER;1RSGU41,400V,1.5A,DO-15L	
3	DS61	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
3	DS62	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
3	DS63	0402-000493	DIODE-RECTIFIER;1RSGU41,400V,1.5A,DO-15L	
3	DZ501	0403-000334	DIODE-ZENER;UZ2.7BSA,2.7V,2.54,2.75V,500	
3	DZ502	0403-000508	DIODE-ZENER;MTZJ,5.6B,5.6V,5.45-5.73V,500	
3	DZ503	0403-000708	DIODE-ZENER;MTZJ,13B,13V,12.55-13.21V,500	
3	DZ531	0403-000334	DIODE-ZENER;UZ2.7BSA,2.7V,2.54,2.75V,500	
3	DZ532	0403-000508	DIODE-ZENER;MTZJ,5.6B,5.6V,5.45-5.73V,500	
3	DZ533	0403-000708	DIODE-ZENER;MTZJ,13B,13V,12.55-13.21V,500	
3	DZ561	0403-000334	DIODE-ZENER;UZ2.7BSA,2.7V,2.54,2.75V,500	
3	DZ562	0403-000508	DIODE-ZENER;MTZJ,5.6B,5.6V,5.45-5.73V,500	
3	DZ563	0403-000708	DIODE-ZENER;MTZJ,13B,13V,12.55-13.21V,500	
3	LS01	2701-000114	INDUCTOR AXIAL,10uH,10%,2.5x3.4mm	
3	LS31	2701-000114	INDUCTOR AXIAL,10uH,10%,2.5x3.4mm	
3	LS61	2701-000114	INDUCTOR AXIAL,10uH,10%,2.5x3.4mm	
3	QS01	0502-000006	TR POWER;KSC1507,NPN,15W,TO-220,TP,120-	
3	QS02	0501-000389	TR SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
3	QS04	0501-000283	TR SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
3	QS31	0502-000006	TR POWER;KSC1507,NPN,15W,TO-220,TP,120-	
3	QS33	0501-000283	TR SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
3	QS61	0502-000006	TR POWER;KSC1507,NPN,15W,TO-220,TP,120-	
3	QS63	0501-000283	TR SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
3	RS00	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.9X3.2M	
3	RS02	2001-000995	R-CARBON;8200HM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RS03	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RS04	2001-000006	R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	RS05	2001-000362	R-CARBON,150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RS06	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP2.4X6.4M	
3	RS07	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RS08	2003-000738	R-METAL OXIDE(S);56Kohm,5%,2W,AA,TP4x12	
3	RS09	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	RS10	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RS11	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RS13	2008-000252	R-FUSIBLE(S);0.47ohm,10%,1/2W,AF,TP2.5x	
3	RS14	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP2.4X6.	
3	RS15	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP3.7x9	
3	RS16	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RS17	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP2.4X6.	
3	RS18	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP3.7	
3	RS19	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP3.7	
3	RS20	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP2.4X6.4	
3	RS21	2001-001052	R-CARBON(S);1.5MOHM,5%,1/2W,AA,TP2.4X6.	
3	RS22	2002-001006	R-COMPOSITION;4.7Kohm,5%,1/2W,AA,TP3.7x	
3	RS23	2002-001006	R-COMPOSITION;4.7Kohm,5%,1/2W,AA,TP3.7x	
3	RS24	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP2.4X6.4	
3	RS26	2001-000539	R-CARBON;2.4KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	RS27	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	RS28	2001-001015	R-CARBON;9.1KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	RS29	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP3.7	
3	RS32	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	RS33	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	RS36	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP2.4X6.4M	
3	RS37	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	RS38	2003-000738	R-METAL OXIDE(S);56Kohm,5%,2W,AA,TP4x12	
3	RS40	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	RS41	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	RS43	2008-000252	R-FUSIBLE(S);0.47ohm,10%,1/2W,AF,TP2.5x	
3	RS44	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP2.4X6.	
3	RS45	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP3.7x9	
3	RS46	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	RS47	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP2.4X6.	
3	RS48	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP3.7	
3	RS49	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP3.7	
3	RS50	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP2.4X6.4	
3	RS51	2001-001052	R-CARBON(S);1.5MOHM,5%,1/2W,AA,TP2.4X6.	
3	RS52	2002-001006	R-COMPOSITION;4.7Kohm,5%,1/2W,AA,TP3.7x	
3	RS53	2002-001006	R-COMPOSITION;4.7Kohm,5%,1/2W,AA,TP3.7x	
3	RS54	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP2.4X6.4	
3	RS55	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	RS56	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	RS57	2001-000362	R-CARBON,150OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	RS59	2002-001015	R-COMPOSITION;47Kohm,5%,1/2W,AA,TP3.7x9	
3	RS62	2001-000232	R-CARBON;1.3KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	RS63	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	RS64	2001-001031	R-CARBON;91KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	RS66	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP2.4X6.4M	
3	RS67	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	RS68	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	RS69	2001-000005	R-CARBON;2.4KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	RS70	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	RS71	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	RS72	2003-000738	R-METAL OXIDE(S);56Kohm,5%,2W,AA,TP4x12	
3	RS73	2008-000252	R-FUSIBLE(S);0.47ohm,10%,1/2W,AF,TP2.5x	
3	RS74	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP2.4X6.	
3	RS75	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP3.7x9	
3	RS76	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	RS77	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP2.4X6.	
3	RS78	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP3.7	
3	RS79	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP3.7	
3	RS80	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP2.4X6.4	

Level	Loc. No.	Code No.	Description ; Specification	Remark
3	R581	2001-001052	R CARBON(S);1.5MOHM,5%,1/2W,AA,TP2.4X6	
3	R582	2002-001006	R COMPOSITION;4.7Kohm,5%,1/2W,AA,TP3.7x	
3	R583	2002-001006	R COMPOSITION;4.7Kohm,5%,1/2W,AA,TP3.7x	
3	R584	2001-000028	R CARBON(S);100OHM,5%,1/2W,AA,TP2.4X6.4	
3	R589	2002-001015	R COMPOSITION;47Kohm,5%,1/2W,AA,TP3.7x9	
3	SG351	4715-001036	SURGE ABSORBER;500V,20%,...TP	
3	SG501	4715-001036	SURGE ABSORBER;500V,20%,...TP	
3	SG503	4715-001036	SURGE ABSORBER;500V,20%,...TP	
3	SG533	4715-001036	SURGE ABSORBER;500V,20%,...TP	
3	SG561	4715-001036	SURGE ABSORBER;500V,20%,...TP	
3	SG563	4715-001036	SURGE ABSORBER;500V,20%,...TP	
2		AA63-10002A	BAND-TIE;..NYLON66,V2,...L100,NTR,...	S.N.A
2		0202-000187	SOLDER WIRE FLUX,..RS60S,D1.2,63Sn/37Pb	S.N.A

ASSY-A/V FRONT

1	*	AA95-00918A	ASSY A/V FRONT,..SP43J,4PF,..51B,..,MVT	
2	CNW02	AA39-20032J	LEAD CONNECTOR ASSY;,12P,57096,012,S,130	
2	CNY01	3711-003641	CONNECTOR HEADER;BOX,12P,1R,2.5mm,STRAIG	
2	CP01	2202-000263	C CERAMIC,MLC,AXIAL,470pF,10%,50V,SP,TP	
2	CP02	2202-000263	C CERAMIC,MLC,AXIAL,470pF,10%,50V,SP,TP	
2	CP03	2202-000263	C CERAMIC,MLC,AXIAL,470pF,10%,50V,SP,TP	
2	CP04	2401-002009	C AL,100uF,20%,16V,GP,TP,6.3x7.5	
2	CP05	2401-002009	C AL,100uF,20%,16V,GP,TP,6.3x7.5	
2	CP06	2401-002009	C AL,100uF,20%,16V,GP,TP,6.3x7.5	
2	CP07	2401-002009	C AL,100uF,20%,16V,GP,TP,6.3x7.5	
2	CP08	2401-002009	C AL,100uF,20%,16V,GP,TP,6.3x7.5	
2	CP09	2202-000121	C CERAMIC,MLC,AXIAL,100pF,10%,50V,SP,TP	
2	CP10	2202-000121	C CERAMIC,MLC,AXIAL,100pF,10%,50V,SP,TP	
2	DZ01	0403-000510	DIODE ZENER;MTZJ,6.2B,6.2V,5.96 6.27V,500	
2	DZ02	0403-000510	DIODE ZENER;MTZJ,6.2B,6.2V,5.96 6.27V,500	
2	JK02	3722-001164	,JACK,RCA;3P,3.4mm,SN,WH,YE,RE,#16-22	
2	JK101	3722-000544	,JACK,VHS;4P,11.5mmAC,BLK,N	
2	PCB	AA41-00379A	PCB,A/V FRONT,SP43J,SHEF#0..1LA,1.6T,24	S.N.A
2	RP01	2001-000273	R CARBON;100KOHM,5%,1/8W,AA,TP1.8X3.2M	
2	RP02	2001-000969	R CARBON;750HM,5%,1/8W,AA,TP1.8X3.2MM	
2	RP03	2001-000273	R CARBON;100KOHM,5%,1/8W,AA,TP1.8X3.2M	
2	RP04	2001-000969	R CARBON;750HM,5%,1/8W,AA,TP1.8X3.2MM	
2	RP05	2001-000969	R CARBON;750HM,5%,1/8W,AA,TP1.8X3.2MM	
2		3301-001201	CORE;FERRITE,AE,21x11x32mm,1500,2800	
2		AA63-10002A	BAND-TIE,..NYLON66,V2,...L100,NTR,...	S.N.A
2		AA98-60004J	ASSY SUB;PART;APTS1A,A/V,..ALL	S.N.A
3		0202-000187	SOLDER WIRE FLUX,..RS60S,D1.2,63Sn/37Pb	S.N.A

ASSY-PCB,SUB

1	*	AA95-00425B	ASSY-PCB,SUB;..SP53J,SHF,J51A,PAL,..;	
2	C430	2301-001219	C-FILM,MPE,-PPF,3.9nF,5%,1.6KV,TP,29x8.5x	
2	C431	2305-000326	C-FILM,MPPF,4.7nF,5%,1.6KV,TP,28.5x16x9m	
2	C432	2305-000267	C-FILM,MPPF,8.2nF,5%,1.6KV,TP,28.5x18.5x	
2	C436	2305-000235	C-FILM,MPPF,560nF,5%,400V,TP,25°22.5°14,	
2	C438	2305-000267	C-FILM,MPPF,8.2nF,5%,1.6KV,TP,28.5x18.5x	
2	C471	2301-001091	C-FILM,MPPF,470nF,5%,400V,TP,26x21.5x14	
2	C473	2305-000322	C-FILM,MPPF,12nF,5%,1.6KV,TP,29x20.5x13,	
2	C474	2305-000326	C-FILM,MPPF,4.7nF,5%,1.6KV,TP,28.5x16x9m	
2	C477	2301-000213	C-FILM,PEF,220nF,5%,250V,TP,21.5x11.7.5	
2	C801	2305-000321	C-FILM,MPPF,470NF,5%,275V,TP, ,22.5	
2	C802	2305-000321	C-FILM,MPPF,470NF,5%,275V,TP, ,22.5	
2	C812	2401-003465	C-AL,680UF,20%,450V,GP,BK,35X80MM,2	
2	C831	2305-000323	C-FILM,MPPF,2.2nF,5%,1.6KV,TP,28.5x15.5x	
2	C862	2401-002225	C-AL,3300uF,20%,50V,WT,BK,22x41,7.5	
2	C865	2401-000737	C-AL,2200uF,20%,50V,GP,TP,18x35.5,7	
2	C868	2401-000737	C-AL,2200uF,20%,50V,GP,TP,18x35.5,7	
2	C875	2401-002251	C-AL,470uF,20%,200V,GP,BK,25x40mm,1	
2	C876	2401-000787	C-AL,220uF,20%,160V,GP,TP,16x31.5mm	
2	C891	2201-000987	C CERAMIC,DISC,2.2nF,20%,400V,Y5U,TP,12.	
2	C892	2201-000987	C CERAMIC,DISC,2.2nF,20%,400V,Y5U,TP,12.	
2	CN201	AA39-00128A	LEAD CONNECTOR ASSY;,8P,YBNH250-08,35155	
2	CN202	AA39-00115A	LEAD CONNECTOR ASSY,,10P,YBNH250-10,3515	
2	CN203	3711-003052	CONNECTOR HEADER;BOX,10P,1R,2.5mm,STRACH	
2	CN401	3711-003051	CONNECTOR HEADER;BOX,8P,1R,2.5mm,STRACHT	
2	CN402	3711-003974	CONNECTOR HEADER;BOX,12P,1R,2.5mm,STRA,G	
2	CN801	AA39-00116A	LEAD CONNECTOR ASSY,,12P,YBNH250-12,3515	
2	CN802	3711-003051	CONNECTOR HEADER;BOX,8P,1R,2.5mm,STRAGHT	
2	CNW406	AA39-00009A	LEAD CONNECTOR ASSY,,3P,2P,YFH800-03,5,2	
2	CNW809	AA39-20061G	LEAD CONNECTOR ASSY,,3P,YFH800-03,5,100M	
2	D464	0402-000236	DIODE RECTIFIER;GB24,400V,5A,..TP	
2	D804	AA96-50310A	ASSY H/S,..;POWER,AA62-30150C,RBV606,	
3		AA62-30150C	HEAT SINK ES;-,A6063 EXTR.,;WHT,40(24.5)	
3		AA60-30003A	WASHER;....,T1.5, SBHG 1,	S.N.A
3		6003-000333	SCREW-TAPTITE,RH,- 2S,M3,L10,ZPC(YEL),SW	
3		0402-000549	DIODE-BRIDGE;RBV606,600V,6A,..BK	
3		0205-000129	GREASE SILICON;SC102,,JAPAN	S.N.A
2	D810	0402-000250	DIODE-RECTIFIER;RG4C,1000V,1A,	
2	D854	AA96-00111C	ASSY H/S,..,AA62-30013L,FML G12S,	
3		0402-000233	DIODE RECTIFIER;FML G12S,200V,5A,..	
3		6003-000333	SCREW-TAPTITE,RH,- 2S,M3,L10,ZPC(YEL),SW	
3		AA62-30013L	HEATSINK ES,....,44/22,,WHT,....	
2	D871	AA96-00032A	ASSY H/S,..,AA62-30173B,FML G12,,FMGG26	
3		0402-000233	DIODE RECTIFIER;FML G12S,200V,5A,..	
3		0402-000231	DIODE RECTIFIER;FMG G26S,600V,4A,TO-220F	
3		AA62-30173B	HEAT SINK,ES,-,,T1.0,WHT,,-ALL,,,88X2	
3		6003-000333	SCREW-TAPTITE,RH,- 2S,M3,L10,ZPC(YEL),SW	
3		0205-000129	GREASE SILICON;SC102,,JAPAN	S.N.A
2	DZ481	0403-001327	DIODE ZENER;MTZJ,18A,16.22-17.05V,500mW,D	
2	FB01	3601-001007	FUSE-CARTRIDGE;250V,5.3A,TIME LAG,GLASS,	
2	FB02	3601-001137	FUSE-AXIAL LEAD;250V,6A,SLOW-BLOW,GLASS,	
2	FB04	3601-001007	FUSE-CARTRIDGE;250V,6.3A,TIME LAG,GLASS,	
2	IC301	AA96-50381A	ASSY H/S;-,,AA62-30180B,LA7845,	
3		0205-000129	GREASE SILICON;SC102,,JAPAN	S.N.A
3		1204-000517	IC VERTIVAL DEF,LA7845,SIP,7P,,PLASTIC	
3		6003-000333	SCREW-TAPTITE,RH,- 2S,M3,L10,ZPC(YEL),SW	
3		AA62-30180B	HEAT SINK,ES;-,A6063 EXTR.,2,WHT,70MM,..	
2	IC421	1203-000165	IC-POSI,ADJUST REG.,78R12,TO-220,3P,..,	
2	IC430	1203-000162	IC POSI,ADJUST REG.,317,TO-220,3P,,PLAS	
2	IC431	1201-000191	IC OP AMP;4558,DIP8P,300MIL,DUAL,20V/mV	
2	IC801	AA96-00035A	ASSY H/S,,;POWER,AA62-30181P,STR F6656,	
3		0205-000129	GREASE SILICON;SC102,,JAPAN	S.N.A
3		6003-000333	SCREW-TAPTITE,RH,- 2S,M3,L10,ZPC(YEL),SW	
3		AA13-00018A	IC-HYBRID;,,STR-F6656,LF1351,SPIN,,,	
3		AA62-30181P	HEAT SINK,ES;-,,T1.0,WHITE,SCREW-HOLE(2	
2	IC804	1203-001400	IC POWER PRESCALER;SE110N,TO-220(SIP),3P	
2	IC806	0604-001032	PHOTO-COUPLER;TR,170-260%,300mW,DIP 4,ST	
2	L431	AA27-30003M	COIL-LINEARITY;-,5uH,OWA14x15,USRC0.1x6	
2	L432	AA27-40001U	COIL-HORIZ,WIDTH;-,220UH,DR1420,PI0.12X1	
2	L482	3301-000374	CORE-FERRITE BEAD;AA,3.5x1.0x9.0mm,..,	
2	L800	AA29-30002L	FILTER-LINE NOISE;,,10mH/4mH,5A,AC90~260V	
2	L801	AA29-30002F	FILTER-LINE NOISE;,6mH,2.45A,-,	
2	L803	AA29-00008A	FILTER-LINE NOISE;35-6MH,3A,-,6MH/4MH,3A,	
2	L854	AA27-10001C	COIL-CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
2	L860	AA27-10001C	COIL-CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
2	L862	AA27-10001C	COIL-CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
2	L872	AA27-10001C	COIL-CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
2	L874	AA27-10002L	COIL-CHOKE;-,24uH,K,-,2A,-,24UH-K,10X10M	
2	PCB	AA41-00197C	PCB;PCJ,S33R,CEM-1,1L,C,1.6T,330*24	S.N.A
2	Q431	AA96-00033E	ASSY H/S,-,H-OUT,AA62-30173C,2SC5446,F	
3		AA62-00007A	MICA,DPM-04,MICA,22x29x0.15mm	
3		AA62-30173C	HEAT SINK-ES;-,,T1.0,WHITE,SCREW-HOLE(2	
3		AA60-30001A	WASHER-PLATE,M3,ID3.5,15X8.5,T1.0,,SBHG	S.N.A
3		6003-000333	SCREW-TAPTITE,RH,- 2S,M3,L10,ZPC(YEL),SW	
3		0502-001175	TR-POWER;2SC5446,NPN,200000mW,TO-3PL,BK	
3		0402-001296	DIODE RECTIFIER;FMP 3FU,1.5KV,5A,TO-3PF,	
3		0205-000129	GREASE SILICON;SC102,,JAPAN	S.N.A
2	Q433	AA96-50407A	ASSY H/S,-,,AA62-30154G,KSD73Y,	
3		0205-000129	GREASE SILICON;SC102,,JAPAN	S.N.A
3		0502-000298	TR-POWER;KSD73,NPN,30000mW,TO-220,TP,12	
3		6003-000333	SCREW-TAPTITE,RH,- 2S,M3,L10,ZPC(YEL),SW	
3		AA62-30154G	HEAT SINK ES;-,A6063 EXTR.,-,WHT,50/16,-,	
2	Q441	AA96-50083F	ASSY H/S;-,,AA62-30180D,2SD921,-	
3		0205-000129	GREASE SILICON;SC102,,JAPAN	S.N.A
3		0502-001104	TR-POWER;2SD921,NPN,80W,TO-3P,BK,700-	
3		6003-000333	SCREW-TAPTITE,RH,- 2S,M3,L10,ZPC(YEL),SW	
3		AA62-30180D	HEAT SINK-ES,-,A6063 EXTR.,2,WHT,50mm,,,	
2	Q472	0505-000156	FET-SILICON;IRF620,N,200V,5A,0.8ohm,50W,	
2	Q473	AA96-00037A	ASSY H/S,-,,AA62-30181N,2SC4125,,RF56	
3		0502-001100	TR-POWER;2SC4125,NPN,70W,TO-3PML,BK,8-	
3		AA62-30181N	HEAT SINK,ES,-,,T1.0,WHITE,SCREW-HOLE(2	
3		AA60-30001A	WASHER-PLATE,M3,ID3.5,15X8.5,T1.0,,SBHG	S.N.A

Level	Loc. No.	Code No.	Description ; Specification	Remark
3		6003-000333	SCREW-TAPTITE,RH,- 2S,M3,L10,ZPC(YEL),SW	
3		0505-001202	FET-SILICON;IRF5640A,N,200V,0.8A,0.18ohm	
3		0205-000129	GREASE SILICON;SC102,,JAPAN	S.N.A
2	R440	2008-001091	R FUSIBLE(S),0.47OHM,10%,1/2W,AC,BK,2.5X	
2	R442	2008-000189	R FUSIBLE,0.47ohm,10%,2W,AA,TP6x15.5mm	
2	R445	2008-001091	R FUSIBLE(S),0.47OHM,10%,1/2W,AC,BK,2.5X	
2	R803	1404-001195	THERMISTOR;NTC,5 1ohm,15%,2000,27mW/C,BK	
2	R815	2003-002162	R-METAL OXIDE(S);15KOHM,5%,3W,AG,TP6X16	
2	R815A	2003-002162	R-METAL OXIDE(S);15KOHM,5%,3W,AG,TP6X16	
2	R817	2009-001096	R-METAL PLATE;0.07ohm,5%,5W,CL,BK,5x14x1	
2	R841	2008-001096	R FUSIBLE(S),3.3OHM,5%,1/2W,AC,BK,2.5X6.	
2	T431	AA25-30001U	TRANS,HORIZ,DRIVE;..28mH,105uH,4uH,ER28x	
2	T432	AA25-30053A	TRANS,..1.2mH,..EER4445,BK,1.2mH,	
2	T444	AA25-30005A	TRANS,FLYBACK,..FWZ-50A001,50,108V	
2	T461	AA25-30001V	TRANS,HORIZ,DRIVE,..6.0mH,113uH,4uH,EI19	
2	T481	AA25-30001W	TRANS,HORIZ,DRIVE,..830uH,23uH,4uH,EI-30	
2	T802	AA26-30006A	TRANS,SWITCHING;..90~260V,110V/24V/+-30V	
2		AA65-30110A	CLAMP,WIRE;NYLON 66,V2,BLK,PAL TWLALL M	S.N.A
2		0202-000187	SOLDER WIRE FLUX,..RS60S,D1.2,63Sn/37Pb	S.N.A
2		AA62-30010A	HEAT SINK-,,,T1.0,SILVER,H/SINK & SHIEL	S.N.A
2		AA65-30109A	CLAMP FBT;NYLON 66,V2,BLK,-,,	S.N.A
2		AA65-30105B	CLAMP-WIRE;NYLON 66,V2,NTR,25MM,ALL MODE	S.N.A
2		AA99-20059B	ASSY-PCB SUB,AUTO;..AA95-00425B ,,V	S.N.A
3	C301	2305-000149	C FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
3	C302	2201-000232	C CERAMIC,DISC,1nF,10%,50V,YSP,TP,5x3.5,	
3	C303	2305-000149	C FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
3	C304	2201-000232	C CERAMIC,DISC,1nF,10%,50V,YSP,TP,5x3.5,	
3	C305	2201-000222	C CERAMIC,DISC,0.005nF,0.25pF,50V,NP0,T	
3	C307	2401-000365	C AL,100uF,20%,50V,WT,TP,10x12.5mm,	
3	C308	2401-000365	C AL,100uF,20%,50V,WT,TP,10x12.5mm,	
3	C309	2305-000285	C FILM,MPEF,220nF,5%,100V,TP,10.5X5.5X15	
3	C311	2305-000149	C FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
3	C412	2201-000383	C FILM,PEF,10nF,5%,50V,TP6x7x3.2mm,5mm	
3	C413	2401-000360	C AL,100uF,20%,50V,GP,TP8x11.5,5	
3	C417	2401-001297	C AL,470uF,20%,25V,GP,TP,10x16,5	
3	C418	2401-000360	C AL,100uF,20%,50V,GP,TP8x11.5,5	
3	C419	2201-000180	C CERAMIC,DISC,10nF,10%,50V,Y5V,TP7x3,5	
3	C426	2401-000360	C AL,100uF,20%,50V,GP,TP8x11.5,5	
3	C427	2401-002300	C AL,47uF,20%,50V,GP,TP6.3x11.5	
3	C428	2306-000122	C FILM,MPPF,100nF,5%,50V,TP,7.3x4.0x5.0m	
3	C437	2401-003114	C AL,4.7uF,20%,250V,WT,TP,10x16,5	
3	C441	2401-000252	C AL,100uF,20%,160V,HR,TP,16x25,7.5	
3	C445	2401-001622	C AL,6.8uF,20%,50V,SP,TP,16x25mm,7.	
3	C450	2401-000252	C AL,100uF,20%,160V,HR,TP,16x25,7.5	
3	C451	2401-001150	C AL,33uF,20%,160V,GP,,16x35mm,7.5	
3	C452	2201-000132	C CERAMIC,DISC,0.1nF,10%,500V,YSP,TP6.5	
3	C453	2401-002298	C AL,470uF,20%,25V,WT,TP,10x20,5	
3	C454	2401-001429	C AL,470uF,20%,50V,GP,TP,13x20,5	
3	C455	2201-000132	C CERAMIC,DISC,0.1nF,10%,500V,YSP,TP6.5	
3	C457	2201-000132	C CERAMIC,DISC,0.1nF,10%,500V,YSP,TP6.5	
3	C458	2401-002298	C AL,470uF,20%,25V,WT,TP,10x20,5	
3	C467	2401-000360	C AL,100uF,20%,50V,GP,TP8x11.5,5	
3	C468	2201-000119	C CERAMIC,DISC,100nF,-80~20%,50V,Y5V,TP,	
3	C469	2201-000180	C CERAMIC,DISC,10nF,10%,50V,Y5V,TP,7x3,5	
3	C472	2401-000252	C AL,100uF,20%,160V,HR,TP,16x25,7.5	
3	C476	2401-000647	C AL,2.2uF,20%,50V,BP,TP5x11,5	
3	C478	2301-000020	C FILM,PEF,27nF,5%,100V,TP,7.3x4x12.5mm,	
3	C479	2301-000200	C FILM,PEF,2.2nF,5%,200V,TP,11.0x6.0x9.0	
3	C483	2401-000650	C AL,2.2uF,20%,50V,GP,TP,5x11,5	
3	C484	2201-000132	C CERAMIC,DISC,0.1nF,10%,500V,YSP,TP6.5	
3	C809	2201-000551	C CERAMIC,DISC,0.47nF,10%,1kV,YSP,TP6.3	
3	C814	2201-002041	C CERAMIC,DISC,0.82nF,10%,2kV,YSP,TP5x5	
3	C815	2201-000406	C CERAMIC,DISC,0.27nF,10%,2kV,YSP,TP5.3	
3	C816	2201-000332	C CERAMIC,DISC,2.2nF,20%,250V,Y5U,TP,9x4	
3	C817	2201-000332	C CERAMIC,DISC,2.2nF,20%,250V,Y5U,TP,9x4	
3	C818	2301-001216	C FILM,PPF,47nF,5%,630V,TP,20x14.5x22.7	
3	C819	2201-000332	C CERAMIC,DISC,2.2nF,20%,250V,Y5U,TP,9x4	
3	C833	2201-000292	C CERAMIC,DISC,1nF,10%,50V,YSP,TP5x3.5,	
3	C834	2401-000828	C AL,100uF,20%,25V,WT,TP5,3x11,5	
3	C851	2201-000551	C CERAMIC,DISC,0.47nF,10%,1kV,YSP,TP6.3	
3	C852	2401-000133	C AL,1000uF,20%,16V,GP,TP,10x20,5	
3	C854	2201-000551	C CERAMIC,DISC,0.47nF,10%,1kV,YSP,TP6.3	
3	C855	2401-000141	C AL,2200uF,20%,25V,WT,TP,13x25,5mm	
3	C857	2401-000133	C AL,1000uF,20%,16V,GP,TP,10x20,5	
3	C861	2201-000551	C CERAMIC,DISC,0.47nF,10%,1kV,YSP,TP6.3	
3	C864	2201-000551	C CERAMIC,DISC,0.47nF,10%,1kV,YSP,TP6.3	
3	C866	2401-000192	C AL,1000uF,20%,50V,GP,TP,16x25,7.5	
3	C869	2401-000192	C AL,1000uF,20%,50V,GP,TP,16x25,7.5	
3	C871	2201-000551	C CERAMIC,DISC,0.47nF,10%,1kV,YSP,TP6.3	
3	C872	2401-000703	C AL,2200uF,20%,25V,GP,,12.5x25mm,	
3	C873	2401-001998	C AL,1000uF,20%,25V,GP,TP,10x20,5mm	
3	C874	2201-000551	C CERAMIC,DISC,0.47nF,10%,1kV,YSP,TP6.3	
3	C877	2305-000427	C FILM,MPEF,4.7nF,5%,100V,TP7.5x12.5x3.5	
3	D302	0402-000546	DIODE RECTIFIER;TVR10C,400V,1.0A,DO-41,T	
3	D433	0402-000537	DIODE RECTIFIER;RH1A,600V,0.6A,DO-204AC	
3	D435	0402-000132	DIODE RECTIFIER;1N4004,400V,1A,DO-41,TP	
3	D436	0401-000005	DIODE SWITCHING;1N4148,100V,200mA,DO-35	
3	D438	0402-000546	DIODE RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
3	D440	0402-000534	DIODE RECTIFIER;RG10V,400V,1.2A,DO-201,T	
3	D441	0402-000534	DIODE RECTIFIER;RG10V,400V,1.2A,DO-201,T	
3	D444	0402-000546	DIODE RECTIFIER;TVR10C,400V,1.0A,DO-41,T	
3	D445	0402-000534	DIODE RECTIFIER;RG10V,400V,1.2A,DO-201,T	
3	D472	0402-000546	DIODE RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
3	D474	0402-000546	DIODE RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
3	D801	1405-000187	VARISTOR;750V,1250A,12.5x7mm,TP	
3	D802	1405-000187	VARISTOR;750V,1250A,12.5x7mm,TP	
3	D834	0402-000546	DIODE RECTIFIER;TVR10C,400V,1.0A,DO-41,T	
3	D843	0402-000546	DIODE RECTIFIER;TVR10C,400V,1.0A,DO-41,T	
3	D851	0402-000493	DIODE RECTIFIER;1RSCU41,400V,1.5A,DO-15L	
3	DZ301	0403-001328	DIODE ZENER;MTZJ,22A,20.15-21.20V,500mW,D	
3	DZ304	0403-001327	DIODE ZENER;MTZJ,18A,16.22-17.05V,500mW,D	
3	DZ305	0403-001329	DIODE ZENER;MTZJ,24B,22.61-23.77V,500mW,D	
3	DZ306	0403-001167	DIODE ZENER;MTZJ,30D,30V,29.02-30.51V,500	
3	DZ307	0403-001329	DIODE ZENER;MTZJ,24B,22.61-23.77V,500mW,D	
3	DZ413	0403-001319	DIODE ZENER;MTZJ,4.7C,4.68-4.93V,500mW,DO	
3	DZ473	0403-000720	DIODE ZENER;MTZJ,9.1B,9.1V,8.57-9.01V,500	
3	DZ842	0403-000700	DIODE ZENER;TZPJ3A,33V,31-35V,1W,DO-41,T	
3	DZ858	0403-001325	DIODE ZENER;MTZJ,15C,14.35-15.09V,500mW,D	
3	FB01A	3602-000114	FUSE HOLDER;...30mohm	
3	FB01B	3602-000114	FUSE HOLDER;...30mohm	
3	FB04A	3602-000114	FUSE HOLDER;...30mohm	
3	FB04B	3602-000114	FUSE HOLDER;...30mohm	
3	FB05	3601-001086	FUSE AXIAL LEAD;125V,SA,FAST ACTING,GLAS	
3	FB06	3601-001065	FUSE AXIAL LEAD;125V,3.5A,FAST ACTING,CE	
3	FB54	3601-001086	FUSE AXIAL LEAD;125V,SA,FAST ACTING,GLAS	
3	FB55	3601-001163	FUSE AXIAL LEAD;125V,7A,,EPOXY,2.4X7.1M	
3	FB71	3601-001086	FUSE AXIAL LEAD;125V,SA,FAST ACTING,GLAS	
3	L481	3301-000287	CORE FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
3	L483	2901-000299	FILTER EMI ON BOARD;-,6A,UL/CSA,-,9x7.5,	
3	L492	2701-000115	INDUCTOR-AXIAL,10uH,10%,,3x7mm	
3	L493	2901-000297	FILTER-EMI ON BOARD;-,3A,,-,3.5x5,TP,	
3	L494	3301-000287	CORE FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
3	L495	2901-000297	FILTER-EMI ON BOARD;-,3A,-,3.5x5,TP,	
3	L806	2901-000297	FILTER-EMI ON BOARD;-,3A,-,3.5x5,TP,	
3	L807	2901-000297	FILTER-EMI ON BOARD;-,3A,,-,3.5x5,TP,	
3	L808	3301-000287	CORE FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
3	L810	2901-000297	FILTER-EMI ON BOARD;-,3A,-,3.5x5,TP,	
3	L811	2901-000297	FILTER-EMI ON BOARD;-,3A,-,3.5x5,TP,	
3	L812	2901-000297	FILTER-EMI ON BOARD;-,3A,-,3.5x5,TP,	
3	L813	2901-000297	FILTER-EMI ON BOARD;-,3A,-,3.5x5,TP,	
3	L814	3301-000287	CORE FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
3	L815	2901-000297	FILTER-EMI ON BOARD;-,3A,-,3.5x5,TP,	
3	L816	2901-000297	FILTER-EMI ON BOARD;-,3A,-,3.5x5,TP,	
3	L831	3301-000287	CORE FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
3	L832	3301-000287	CORE FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
3	L851	2901-000297	FILTER-EMI ON BOARD;-,3A,-,3.5x5,TP,	
3	L857	3301-000287	CORE FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
3	L859	3301-000287	CORE FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
3	Q301	0501-000389	TR SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
3	Q432	0501-000283	TR SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
3	R301	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP2.5x6.	
3	R302	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP2.5x6.	
3	R303	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP2.4x6.	
3	R305	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP2.4x6.	
3	R306	2003-001036	R-METAL OXIDE(S);3.3ohm,5%,2W,AF,TP3.9x	
3	R307	2003-001036	R-METAL OXIDE(S);3.3ohm,5%,2W,AF,TP3.9x	
3	R308	2001-000016	R CARBON(S);10HM,5%,1/2W,AA,TP2.4X6.4MM	
3	R310	2003-002150	R METAL OXIDE;270OHM,5%,2W,AC,TP5X16MM	
3	R312	2001-000290	R CARBON;10KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R313	2001-000761	R CARBON;430OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R314	2001-000761	R CARBON;430OHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R332	2001-001107	R CARBON(S);220ohm,5%,1/2W,AA,TP2.4x6.4	

Level	Loc. No.	Code No.	Description ; Specification	Remark
.3	R333	2001 001107	R CARBON(S);220ohm,5%,1/2W,AA,TP2.4x6.4	
.3	R334	2001 001107	R CARBON(S);220ohm,5%,1/2W,AA,TP2.4x6.4	
.3	R405	2009-001109	R TEMPERATURE 240ohm,5%,1/4W,AA,TP2.3x6	
.3	R406	2004-001983	R METAL(S);2.49Kohm,1%,1/2W,AA,TP2.4x6.	
.3	R407	2004-001897	R METAL(S);43.2Kohm,1%,1/2W,AA,TP2.5x6.	
.3	R408	2004-001402	R METAL(S);6.8Kohm,1%,1/2W,AA,TP2.4x6.4	
.3	R409	2001 001178	R CARBON(S);680OHM,5%,1/2W,AA,TP2.4X6.4	
.3	R410	2001-000052	R CARBON(S);3.3KOHM,5%,1/2W,AA,TP2.4X6.	
.3	R412	2001 000362	R CARBON;150OHM,5%,1/8W,AA,TP1.8X3.2MM	
.3	R419	2001 000290	R CARBON;10KOHM,5%,1/8W,AA,TP1.8X3.2MM	
.3	R424	2008 000299	R FUSIBLE(S);4.7ohm,5%,2W,AE,TP3.5x10mm	
.3	R426	2003 002153	R METAL OXIDE;4.7OHM,5%,2W,AG,TP6X16MM	
.3	R427	2003-002152	R METAL OXIDE 10HM,5%,2W,AG,TP5X15MM	
.3	R427A	2003 002152	R METAL OXIDE 10HM,5%,2W,AG,TP5X16MM	
.3	R428	2002 001017	R COMPOSITION;1Kohm,10%,1/2W,AA,TP3.7x9	
.3	R428A	2002 001017	R COMPOSITION;1Kohm,10%,1/2W,AA,TP3.7x9	
.3	R429	2003-000586	R METAL OXIDE(S);.22Kohm,5%,2W,AF,TP4x12	
.3	R430	2003-000586	R METAL OXIDE(S);.22Kohm,5%,2W,AF,TP4x12	
.3	R433	2001 001155	R CARBON(S);5.6KOHM,5%,1/2W,AA,TP2.4X6.	
.3	R434	2001 001093	R CARBON(S);2.2KOHM,5%,1/2W,AA,TP2.4X6.	
.3	R441	2008-000189	R FUSIBLE;0.47ohm,10%,2W,AA,TP6x15.5mm	
.3	R444	2003 000995	R METAL OXIDE(S);3.3Kohm,5%,2W,AF,TP3.9	
.3	R462	2003-002025	R METAL OXIDE(S);4.7ohm,5%,1W,AF,TP2.5x	
.3	R463	2003-001024	R METAL OXIDE(S);150ohm,5%,2W,AF,TP3.9x	
.3	R464	2003-002158	R METAL OXIDE,0.68OHM,5%,1W,AG,TP4.3X12	
.3	R465	2001-001043	R CARBON(S);00OHM,5%,1/2W,AA,TP2.4X6.4MM	
.3	R466	2004-001386	R METAL(S);16.9Kohm,1%,1/2W,AA,TP2.4x6.	
.3	R467	2004-001985	R METAL(S);35.7Kohm,1%,1/2W,AA,TP2.4x6.	
.3	R468	2001-001122	R CARBON(S);3.9KOHM,5%,1/2W,AA,TP2.4X6.	
.3	R469	2004-001390	R METAL(S);1Kohm,2%,1/2W,AA,TP2.4x6.4mm	
.3	R470	2001-000028	R CARBON(S);100OHM,5%,1/2W,AA,TP2.4X6.4	
.3	R471	2004-002011	R METAL(S);110Kohm,1%,1/2W,AA,TP2.4x6.4	
.3	R472	2008-000252	R FUSIBLE(S);0.47ohm,10%,1/2W,AF,TP2.5x	
.3	R473	2004 001395	R METAL(S);330Kohm,2%,1/2W,AA,TP2.4x6.4	
.3	R486	2003-002014	R METAL OXIDE(S);0.60HM,5%,2W,AF,TP3.9X	
.3	R488	2001 000273	R CARBON;100KOHM,5%,1/8W,AA,TP1.8X3.2M	
.3	R808	2001-000002	R CARBON(S);200KOHM,5%,1/2W,AA,TP6.4X2.	
.3	R808A	2001-000002	R CARBON(S);200KOHM,5%,1/2W,AA,TP6.4X2.	
.3	R810	2002-001010	R COMPOSITION;1.8Mohm,5%,1/2W,AA,TP3.7x	
.3	R812	2003-002151	R METAL OXIDE;18KOHM,5%,2W,AG,TP5X16MM	
.3	R814	2003 002151	R METAL OXIDE,18KOHM,5%,2W,AG,TP6X16MM	
.3	R816	2004-00429	R METAL(S);10Kohm,1%,1/2W,AA,TP2.5x6.5m	
.3	R825	2002-001010	R COMPOSITION;1.8Mohm,5%,1/2W,AA,TP3.7x	
.3	R832	2001-001178	R CARBON(S);680OHM,5%,1/2W,AA,TP2.4X6.4	
.3	R834	2001 001097	R CARBON(S);2.4KOHM,5%,1/2W,AA,TP2.4X6.	
.3	R837	2001-001097	R CARBON(S);2.4KOHM,5%,1/2W,AA,TP2.4X6.	
.3	R838	2001 001097	R CARBON(S);2.4KOHM,5%,1/2W,AA,TP2.4X6.	
.3	R855	2001-001196	R CARBON(S);9.1KOHM,5%,1/2W,AA,TP2.4X6.	
.3	R856	2001 001155	R CARBON(S);5.6KOHM,5%,1/2W,AA,TP2.4X6.	
.3	R857	2001-001155	R CARBON(S);5.6KOHM,5%,1/2W,AA,TP2.4X6.	
.3	R871	2001-001088	R CARBON(S);1KOHM,5%,1/2W,AA,TP2.4X6.4M	
.3	R872	2001-001088	R CARBON(S);1KOHM,5%,1/2W,AA,TP2.4X6.4M	
.3	R873	2001-001097	R CARBON(S);2.4KOHM,5%,1/2W,AA,TP2.4X6.	
.3	R891	2002 001012	R COMPOSITION;8.2Mohm,5%,1/2W,AA,TP3.7x	
.3	VR471	2103-001024	VR SEMI;50Kohm,25%,0.3W,TOP	
.2		0403-001325	DIODE ZENER;MTZJ15C,14.35-15.09V,500mW,D	
.2		6003-001023	SCREW TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	

ASSY-PCB,CONV MDL

1	*	AA95-004228	ASSY PCB,CONV MDL;..SP43,JSHP,,S1A,..	
.2	C163	2305-000289	C FILM,MPEF,220nF,5%,63V,TP,,5mm	
.2	CN101	3711-002709	CONNECTOR-HEADER;NOWALL,12P,1R,2.5MM,ANG	
.2	CN102	3711-002709	CONNECTOR-HEADER;NOWALL,12P,1R,2.5MM,ANG	
.2	IC113	1203-000641	IC RESET;7442,TO-92,3P,;PLASTIC,-0.3/7	
.2		0202-001004	SOLDER-CREAM;SQ-2030M SZH-1,563A,D0.04,6	S.N.A
.2		0202 000187	SOLDER-WIRE FLUX ;RS60S,D1.2,63Sn/37Pb	S.N.A
.2		AA63-00143A	SHIELD-CASE; ;SPTE T0.5,T0.5,ALLMIGHT,CO	S.N.A
2		AA99-20068A	ASSY-PCB SUB,AUTO; AA95-004228 ,,V	S.N.A
.3	C101	2404-000275	C TA,CHIP,100UF,10%,10V,GP,TP,7343	
.3	C102	2404-000275	C TA,CHIP,100UF,10%,10V,GP,TP,7343	
.3	C103	2404-000256	C TA,CHIP,47UF,20%,16V,GP,TP,7343	
.3	C104	2203 000181	C CERAMIC,CHIP,100nF,-80 ,20%,25V,Y5V,TP,	
.3	C105	2203 000858	C CERAMIC,CHIP-0.039nF,5%,50V,NP0,TP,201	
.3	C106	2203 000181	C CERAMIC,CHIP,100nF,-80 ,20%,25V,Y5V,TP,	
.3	C107	2203 000716	C CERAMIC,CHIP,3.3nF,10%,50V,X7R,TP,2012	
.3	C108	2203 005809	C CERAMIC,CHIP,1000nF,10%,16V,X7R,TP,201	
.3	C109	2203 000181	C CERAMIC,CHIP,100nF,-80 ,20%,25V,Y5V,TP,	
.3	C110	2203 000444	C CERAMIC,CHIP,1nF,10%,50V,X7R,TP,2012,	
.3	C111	2203 000181	C CERAMIC,CHIP,100nF,-80 ,20%,25V,Y5V,TP,	
.3	C112	2203 000683	C CERAMIC,CHIP-0.027nF,5%,50V,NP0,TP,201	
.3	C113	2203 000683	C CERAMIC,CHIP-0.027nF,5%,50V,NP0,TP,201	
.3	C114	2203 000181	C CERAMIC,CHIP,100nF,-80 ,20%,25V,Y5V,TP,	
.3	C115	2203 000181	C CERAMIC,CHIP,100nF,-80 ,20%,25V,Y5V,TP,	
.3	C116	2203 000181	C CERAMIC,CHIP,100nF,-80 ,20%,25V,Y5V,TP,	
.3	C117	2203 000181	C CERAMIC,CHIP,100nF,-80 ,20%,25V,Y5V,TP,	
.3	C118	2203 000181	C CERAMIC,CHIP,100nF,-80 ,20%,25V,Y5V,TP,	
.3	C119	2203 000181	C CERAMIC,CHIP,100nF,-80 ,20%,25V,Y5V,TP,	
.3	C120	2203 000181	C CERAMIC,CHIP,100nF,-80 ,20%,25V,Y5V,TP,	
.3	C121	2203 000181	C CERAMIC,CHIP,100nF,-80 ,20%,25V,Y5V,TP,	
.3	C122	2203 000181	C CERAMIC,CHIP,100nF,-80 ,20%,25V,Y5V,TP,	
.3	C123	2203 000181	C CERAMIC,CHIP,100nF,-80 ,20%,25V,Y5V,TP,	
.3	C124	2203 000181	C CERAMIC,CHIP,100nF,-80 ,20%,25V,Y5V,TP,	
.3	C125	2203 000181	C CERAMIC,CHIP,100nF,-80 ,20%,25V,Y5V,TP,	
.3	C126	2203 000181	C CERAMIC,CHIP,100nF,-80 ,20%,25V,Y5V,TP,	
.3	C127	2203 000181	C CERAMIC,CHIP,100nF,-80 ,20%,25V,Y5V,TP,	
.3	C128	2203 000181	C CERAMIC,CHIP,100nF,-80 ,20%,25V,Y5V,TP,	
.3	C129	2203 000181	C CERAMIC,CHIP,100nF,-80 ,20%,25V,Y5V,TP,	
.3	C130	2203 000181	C CERAMIC,CHIP,100nF,-80 ,20%,25V,Y5V,TP,	
.3	C131	2203 000181	C CERAMIC,CHIP,100nF,-80 ,20%,25V,Y5V,TP,	
.3	C132	2203 000408	C CERAMIC,CHIP,0.18nF,5%,50V,NP0,TP,2012	
.3	C133	2404 000284	C TA,CHIP,10uF,20%,16V,,TP,3528,	
.3	C134	2203 000181	C CERAMIC,CHIP,100nF,-80 ,20%,25V,Y5V,TP,	
.3	C135	2203 000716	C CERAMIC,CHIP,3.3nF,10%,50V,X7R,TP,2012	
.3	C136	2203 000181	C CERAMIC,CHIP,100nF,-80 ,20%,25V,Y5V,TP,	
.3	C137	2203 000716	C CERAMIC,CHIP,3.3nF,10%,50V,X7R,TP,2012	
.3	C138	2203 000408	C CERAMIC,CHIP,0.18nF,5%,50V,NP0,TP,2012	
.3	C139	2203 000181	C CERAMIC,CHIP,100nF,-80 ,20%,25V,Y5V,TP,	
.3	C140	2404 000284	C TA,CHIP,10uF,20%,16V,,TP,3528,	
.3	C141	2203 000408	C CERAMIC,CHIP,0.18nF,5%,50V,NP0,TP,2012	
.3	C142	2404 000294	C TA,CHIP,100uF,20%,16V,,TP,3528,	
.3	C143	2203 000181	C CERAMIC,CHIP,100nF,-80 ,20%,25V,Y5V,TP,	
.3	C144	2203 000716	C CERAMIC,CHIP,3.3nF,10%,50V,X7R,TP,2012	
.3	C145	2203 000181	C CERAMIC,CHIP,100nF,-80 ,20%,25V,Y5V,TP,	
.3	C146	2203 000716	C CERAMIC,CHIP,3.3nF,10%,50V,X7R,TP,2012	
.3	C147	2203 000408	C CERAMIC,CHIP,0.18nF,5%,50V,NP0,TP,2012	
.3	C148	2404 000284	C TA,CHIP,10uF,20%,16V,,TP,3528,	
.3	C149	2203 000181	C CERAMIC,CHIP,100nF,-80 ,20%,25V,Y5V,TP,	
.3	C150	2203 000181	C CERAMIC,CHIP,100nF,-80 ,20%,25V,Y5V,TP,	
.3	C151	2203 000408	C CERAMIC,CHIP,0.18nF,5%,50V,NP0,TP,2012	
.3	C152	2404 000284	C TA,CHIP,10uF,20%,16V,,TP,3528,	
.3	C153	2203 000181	C CERAMIC,CHIP,100nF,-80 ,20%,25V,Y5V,TP,	
.3	C154	2203 000716	C CERAMIC,CHIP,3.3nF,10%,50V,X7R,TP,2012	
.3	C155	2203 000181	C CERAMIC,CHIP,100nF,-80 ,20%,25V,Y5V,TP,	
.3	C156	2203 000716	C CERAMIC,CHIP,3.3nF,10%,50V,X7R,TP,2012	
.3	C157	2203 000408	C CERAMIC,CHIP,0.18nF,5%,50V,NP0,TP,2012	
.3	C158	2404 000284	C TA,CHIP,10uF,20%,16V,,TP,3528,	
.3	C159	2203 000181	C CERAMIC,CHIP,100nF,-80 ,20%,25V,Y5V,TP,	
.3	C160	2203 000181	C CERAMIC,CHIP,100nF,-80 ,20%,25V,Y5V,TP,	
.3	C161	2404 000256	C TA,CHIP,47UF,20%,16V,GP,TP,7343	
.3	C162	2404 000256	C TA,CHIP,47UF,20%,16V,GP,TP,7343	
.3	C164	2402-000173	C AL,SMD,4.7uF,20%,35V,GP,TP,4.3x4.3x5.	
.3	C165	2203 000181	C CERAMIC,CHIP,100nF,-80 ,20%,25V,Y5V,TP,	
.3	C166	2203 000181	C CERAMIC,CHIP,100nF,-80 ,20%,25V,Y5V,TP,	
.3	C167	2404 000123	C TA,CHIP,10uF,20%,16V,,TP,6032,2.9mm	
.3	C168	2203 000181	C CERAMIC,CHIP,100nF,-80 ,20%,25V,Y5V,TP,	
.3	C169	2203 000181	C CERAMIC,CHIP,100nF,-80 ,20%,25V,Y5V,TP,	
.3	C170	2203 000181	C CERAMIC,CHIP,100nF,-80 ,20%,25V,Y5V,TP,	
.3	C171	2404-000284	C TA,CHIP,10uF,20%,16V,,TP,3528,	
.3	C172	2404-000256	C TA,CHIP,47UF,20%,16V,GP,TP,7343	
.3	C173	2404-000256	C TA,CHIP,47UF,20%,16V,GP,TP,7343	
.3	C174	2404-000256	C TA,CHIP,47UF,20%,16V,GP,TP,7343	
.3	C201	2203-000408	C CERAMIC,CHIP,0.18nF,5%,50V,NP0,TP,2012	
.3	C202	2203 000408	C CERAMIC,CHIP,0.18nF,5%,50V,NP0,TP,2012	
.3	C203	2203-000408	C CERAMIC,CHIP,0.18nF,5%,50V,NP0,TP,2012	
.3	C204	2203-000408	C CERAMIC,CHIP,0.18nF,5%,50V,NP0,TP,2012	
.3	C205	2203-000408	C CERAMIC,CHIP,0.18nF,5%,50V,NP0,TP,2012	
.3	C206	2203-000408	C CERAMIC,CHIP,0.18nF,5%,50V,NP0,TP,2012	
.3	D101	0401 000160	DIODE SWITCHING,ISS314,30V,100mA,USC,TP	
.3	D102	0401 000160	DIODE SWITCHING,ISS314,30V,100mA,USC,TP	
.3	DZ101	0403-001016	DIODE ZENER;RLZ6.2B,6.2V,5.96 6.27V,400m	

Level	Loc. No.	Code No.	Description ; Specification	Remark
.3	DZ102	0403-001016	DIODE ZENER;RLZ6.2B,6.2V,5.96 6.27V,400m	
.3	DZ104	0403-001016	DIODE ZENER;RLZ6.2B,6.2V,5.96 6.27V,400m	
.3	DZ105	0403-001016	DIODE ZENER;RLZ6.2B,6.2V,5.96 6.27V,400m	
.3	DZ106	0403-001016	DIODE ZENER;RLZ6.2B,6.2V,5.96 6.27V,400m	
.3	DZ107	0403-001016	DIODE ZENER;RLZ6.2B,6.2V,5.96 6.27V,400m	
.3	DZ108	0403-001016	DIODE ZENER;RLZ6.2B,6.2V,5.96 6.27V,400m	
.3	DZ109	0403-001016	DIODE ZENER;RLZ6.2B,6.2V,5.96 6.27V,400m	
.3	DZ110	0403-001016	DIODE ZENER;RLZ6.2B,6.2V,5.96 6.27V,400m	
.3	DZ111	0403-001016	DIODE ZENER;RLZ6.2B,6.2V,5.96 6.27V,400m	
.3	DZ112	0403-001016	DIODE ZENER;RLZ6.2B,6.2V,5.96 6.27V,400m	
.3	DZ113	0403-001016	DIODE ZENER;RLZ6.2B,6.2V,5.96 6.27V,400m	
.3	DZ114	0403-001016	DIODE ZENER;RLZ6.2B,6.2V,5.96 6.27V,400m	
.3	DZ115	0403-001016	DIODE ZENER;RLZ6.2B,6.2V,5.96 6.27V,400m	
.3	DZ116	0403-001016	DIODE ZENER;RLZ6.2B,6.2V,5.96 6.27V,400m	
.3	DZ117	0403 001284	DIODE ZENER;RLZ3.3A,3.16 3.38V,500MW,LL	
.3	EF101	2901 000229	FILTER EMI SMD;50V,0.3A, ,22000pF,4.5x3.	
.3	EF102	2901 000229	FILTER EMI SMD;50V,0.3A, ,22000pF,4.5x3.	
.3	EF104	2901 000226	FILTER EMI SMD;,25V,0.3A, ,100pF,3.2x1.25	
.3	EF105	2901 000226	FILTER EMI SMD;,25V,0.3A, ,100pF,3.2x1.25	
.3	EF106	2901 000226	FILTER EMI SMD;,25V,0.3A, ,100pF,3.2x1.25	
.3	EF107	2901 000226	FILTER EMI SMD;,25V,0.3A, ,100pF,3.2x1.25	
.3	EF108	2901 000226	FILTER EMI SMD;,25V,0.3A, ,100pF,3.2x1.25	
.3	EF109	2901 000226	FILTER EMI SMD;,25V,0.3A, ,100pF,3.2x1.25	
.3	EF110	2901 000226	FILTER EMI SMD;,25V,0.3A, ,100pF,3.2x1.25	
.3	EF111	2901 000226	FILTER EMI SMD;,25V,0.3A, ,100pF,3.2x1.25	
.3	EF112	2901 000226	FILTER EMI SMD;,25V,0.3A, ,100pF,3.2x1.25	
.3	EF113	2901 000226	FILTER EMI SMD;,25V,0.3A, ,100pF,3.2x1.25	
.3	EF114	2901 000226	FILTER EMI SMD;,25V,0.3A, ,100pF,3.2x1.25	
.3	EF115	2901 000226	FILTER EMI SMD;,25V,0.3A, ,100pF,3.2x1.25	
.3	EF116	2901 000226	FILTER EMI SMD;,25V,0.3A, ,100pF,3.2x1.25	
.3	IC101	AA13-00071A	IC ASIC,,;SDC91,QFP208P,CONV CONTROLL	
.3	IC102	0801 001043	IC CMOS LOGIC;74HC4046,PHASE LOCKED LOOP	
.3	IC103	AA09-00032A	IC MCU;TSC87251G2D-07P,TSC87251G2D-07	
.3	IC104	1103-001167	IC EEPROM,28C64,8KX8BIT,TSOP,28P, ,120NS	
.3	IC105	1201-001520	IC VIDEO AMP;2210,SOP8P,150MIL,DUAL,7dB	
.3	IC106	1201-001504	IC OP AMP;072,SOP8P,150MIL,DUAL, ,PLAST	
.3	IC107	1201 001504	IC OP AMP;072,SOP8P,150MIL,DUAL, ,PLAST	
.3	IC108	1201 001504	IC OP AMP;072,SOP8P,150MIL,DUAL, ,PLAST	
.3	IC109	0801 001156	IC CMOS LOGIC,74HC4066,BILATERAL SWITCH,	
.3	IC110	0801 001156	IC CMOS LOGIC,74HC4066,BILATERAL SWITCH,	
.3	IC111	1001 000106	IC ANALOG SWITCH;CD4066BM,BILATERAL CMOS	
.3	IC112	1001-000106	IC ANALOG SWITCH;CD4066BM,BILATERAL CMOS	
.2	PCB	AA41-00188D	PCB-CONVERGENCE MODULE;SVP 43,14M,FR-4,4L	S.N.A
.3	Q101	0501-000290	TR SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.3	Q102	0501 000342	TR SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT-	
.3	Q103	0501 000342	TR SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT-	
.3	Q104	0501 000290	TR SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.3	Q105	0501-000342	TR SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT-	
.3	Q106	0501-000342	TR SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT-	
.3	Q107	0501-000342	TR SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT-	
.3	Q108	0501-000290	TR SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.3	Q109	0505-000257	FET-SILICON;2SK217,N, ,20mA, ,150mW,SOT-	
.3	Q110	0505-000257	FET SILICON;2SK217,N, ,20mA, ,150mW,SOT-	
.3	Q111	0505-000257	FET SILICON;2SK217,N, ,20mA, ,150mW,SOT-	
.3	Q112	0505-000257	FET-SILICON;2SK217,N, ,20mA, ,150mW,SOT-	
.3	Q113	0505-000257	FET SILICON;2SK217,N, ,20mA, ,150mW,SOT-	
.3	Q114	0505-000257	FET SILICON;2SK217,N, ,20mA, ,150mW,SOT-	
.3	R101	2007 000881	R CHIP;4.7OHM,5%,1/10W,DA,TP,2012	
.3	R102	2007-000881	R CHIP;4.7OHM,5%,1/10W,DA,TP,2012	
.3	R103	2007-000881	R CHIP;4.7OHM,5%,1/10W,DA,TP,2012	
.3	R104	2007-000881	R CHIP;4.7OHM,5%,1/10W,DA,TP,2012	
.3	R105	2007 000415	R CHIP;150HM,5%,1/10W,DA,TP,2012	
.3	R106	2007 000947	R CHIP;47OHM,5%,1/10W,DA,TP,2012	
.3	R107	2007 000282	R CHIP;100KOHM,5%,1/10W,DA,TP,2012	
.3	R108	2007 000872	R CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
.3	R109	2007 000493	R CHIP;2.2KOHM,5%,1/10W,DA,TP,2012	
.3	R110	2007 000221	R CHIP;1.2KOHM,5%,1/10W,DA,TP,2012	
.3	R111	2007-000380	R CHIP;10KOHM,5%,1/10W,DA,TP,2012	
.3	R112	2007-000468	R CHIP;1KOHM,5%,1/10W,DA,TP,2012	
.3	R113	2007 001097	R CHIP;82KOHM,5%,1/10W,DA,TP,2012	
.3	R114	2007 000468	R CHIP;1KOHM,5%,1/10W,DA,TP,2012	
.3	R116	2007 000468	R CHIP;1KOHM,5%,1/10W,DA,TP,2012	
.3	R117	2007 000468	R CHIP;1KOHM,5%,1/10W,DA,TP,2012	
.3	R118	2007 000468	R CHIP;1KOHM,5%,1/10W,DA,TP,2012	
.3	R119	2007 000468	R CHIP;1KOHM,5%,1/10W,DA,TP,2012	
.3	R120	2007 000401	R CHIP;150OHM,5%,1/10W,DA,TP,2012	
.3	R121	2007-000023	R CHIP;120OHM,5%,1/10W,DA,TP,2012	
.3	R122	2007 000468	R CHIP;1KOHM,5%,1/10W,DA,TP,2012	
.3	R123	2007 000401	R CHIP;150OHM,5%,1/10W,DA,TP,2012	
.3	R124	2007-000468	R CHIP;1KOHM,5%,1/10W,DA,TP,2012	
.3	R125	2007-000401	R CHIP;150OHM,5%,1/10W,DA,TP,2012	
.3	R126	2007-000401	R CHIP;150OHM,5%,1/10W,DA,TP,2012	
.3	R127	2007-000401	R CHIP;150OHM,5%,1/10W,DA,TP,2012	
.3	R128	2007-000290	R CHIP;100OHM,5%,1/10W,DA,TP,2012	
.3	R129	2007-000465	R CHIP;1KOHM,1%,1/10W,DA,TP,2012	
.3	R130	2007 000868	R CHIP;4.7KOHM,1%,1/10W,DA,TP,2012	
.3	R131	2007-000981	R CHIP;5.6KOHM,5%,1/10W,DA,TP,2012	
.3	R132	2007 000465	R CHIP;1KOHM,1%,1/10W,DA,TP,2012	
.3	R133	2007-000868	R CHIP;4.7KOHM,1%,1/10W,DA,TP,2012	
.3	R134	2007 000981	R CHIP;5.6KOHM,5%,1/10W,DA,TP,2012	
.3	R135	2007-000290	R CHIP;100OHM,5%,1/10W,DA,TP,2012	
.3	R136	2007-000290	R CHIP;100OHM,5%,1/10W,DA,TP,2012	
.3	R137	2007 000465	R CHIP;1KOHM,1%,1/10W,DA,TP,2012	
.3	R138	2007 000868	R CHIP;4.7KOHM,1%,1/10W,DA,TP,2012	
.3	R139	2007 000981	R CHIP;5.6KOHM,5%,1/10W,DA,TP,2012	
.3	R140	2007 000465	R CHIP;1KOHM,1%,1/10W,DA,TP,2012	
.3	R141	2007 000868	R CHIP;4.7KOHM,1%,1/10W,DA,TP,2012	
.3	R142	2007 000981	R CHIP;5.6KOHM,5%,1/10W,DA,TP,2012	
.3	R143	2007 000290	R CHIP;100OHM,5%,1/10W,DA,TP,2012	
.3	R144	2007-000290	R CHIP;100OHM,5%,1/10W,DA,TP,2012	
.3	R145	2007 000465	R CHIP;1KOHM,1%,1/10W,DA,TP,2012	
.3	R146	2007-000868	R CHIP;4.7KOHM,1%,1/10W,DA,TP,2012	
.3	R147	2007 000981	R CHIP;5.6KOHM,5%,1/10W,DA,TP,2012	
.3	R148	2007-000465	R CHIP;1KOHM,1%,1/10W,DA,TP,2012	
.3	R149	2007 000868	R CHIP;4.7KOHM,1%,1/10W,DA,TP,2012	
.3	R150	2007 000981	R CHIP;5.6KOHM,5%,1/10W,DA,TP,2012	
.3	R151	2007 000290	R CHIP;100OHM,5%,1/10W,DA,TP,2012	
.3	R152	2007 000282	R CHIP;100KOHM,5%,1/10W,DA,TP,2012	
.3	R153	2007-000872	R CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
.3	R154	2007 000774	R CHIP;33KOHM,5%,1/10W,DA,TP,2012	
.3	R155	2007 000300	R CHIP;10KOHM,5%,1/10W,DA,TP,2012	
.3	R156	2007 001055	R CHIP;6.2KOHM,5%,1/10W,DA,TP,2012	
.3	R157	2007 000671	R CHIP;2KOHM,5%,1/10W,DA,TP,2012	
.3	R158	2007 000468	R CHIP;1KOHM,5%,1/10W,DA,TP,2012	
.3	R159	2007 001166	R CHIP;750HM,5%,1/10W,DA,TP,2012	
.3	R160	2007 000766	R CHIP;330OHM,5%,1/10W,DA,TP,2012	
.3	R161	2007 000290	R CHIP;100OHM,5%,1/10W,DA,TP,2012	
.3	R162	2007 000290	R CHIP;100OHM,5%,1/10W,DA,TP,2012	
.3	R163	2007 000290	R CHIP;100OHM,5%,1/10W,DA,TP,2012	
.3	R164	2007 000468	R CHIP;1KOHM,5%,1/10W,DA,TP,2012	
.3	R165	2007-000468	R CHIP;1KOHM,5%,1/10W,DA,TP,2012	
.3	R166	2007-000468	R CHIP;1KOHM,5%,1/10W,DA,TP,2012	
.3	R167	2007-000468	R CHIP;1KOHM,5%,1/10W,DA,TP,2012	
.3	R168	2007-000468	R CHIP;1KOHM,5%,1/10W,DA,TP,2012	
.3	R169	2007-000703	R CHIP;3.6KOHM,5%,1/10W,DA,TP,2012	
.3	R170	2007 000468	R CHIP;1KOHM,5%,1/10W,DA,TP,2012	
.3	R171	2007-000221	R CHIP;1.2KOHM,5%,1/10W,DA,TP,2012	
.3	R172	2007-000542	R CHIP;270OHM,5%,1/10W,DA,TP,2012	
.3	R173	2007-000030	R CHIP;560OHM,5%,1/10W,DA,TP,2012	
.3	R174	2007-000030	R CHIP;560OHM,5%,1/10W,DA,TP,2012	
.3	R175	2007-000282	R CHIP;100KOHM,5%,1/10W,DA,TP,2012	
.3	R176	2007 000872	R CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
.3	R177	2007 000872	R CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
.3	R178	2007-000728	R CHIP;300OHM,5%,1/10W,DA,TP,2012	
.3	R179	2007 000728	R CHIP;300OHM,5%,1/10W,DA,TP,2012	
.3	R180	2007 000728	R CHIP;300OHM,5%,1/10W,DA,TP,2012	
.3	R181	2007-000728	R CHIP;300OHM,5%,1/10W,DA,TP,2012	
.3	R182	2007 000728	R CHIP;300OHM,5%,1/10W,DA,TP,2012	
.3	R183	2007 000728	R CHIP;300OHM,5%,1/10W,DA,TP,2012	
.3	R184	2007 000830	R CHIP;39KOHM,5%,1/10W,DA,TP,2012	
.3	R201	2007 000029	R CHIP;00HM,5%,1/10W,DA,TP,2012	
.3	R203	2007-000565	R CHIP;220KOHM,5%,1/10W,DA,TP,2012	
.3	R204	2007-000565	R CHIP;220KOHM,5%,1/10W,DA,TP,2012	
.3	R205	2007 000565	R CHIP;220KOHM,5%,1/10W,DA,TP,2012	
.3	R206	2007-000565	R CHIP;220KOHM,5%,1/10W,DA,TP,2012	
.3	R207	2007-000565	R CHIP;220KOHM,5%,1/10W,DA,TP,2012	
.3	R208	2007-000565	R CHIP;220KOHM,5%,1/10W,DA,TP,2012	
.3	X101	2801 003860	CRYSTAL SMD;24MHz,30ppm,28 ABV,20pF,50on	

ASSY-FRONT,BOT

Level	Loc. No.	Code No.	Description ; Specification	Remark
1	*	AA91-00477H	ASSY FRONT,BOT,VO G4309 PAL,-HPS,SPS4J8	
2	HFCCFB	6002-000522	SCREW-TAPPING,-TH,-+,2.M4L115,ZPC(BLK),SWR	
2		AA64-70124C	BADGE-BRAND,AL,R2500,SILVER,L=70,SAMSUNG	
2		AA64-013960	INLAY-AV,43.54,62J8,PS SHEET,T0.5,-BLK	S,N,A
2		AA64-013866	PANEL-FRONT,DECORATION,43,54,62J8-HPS,V	
2		AA64-013820	CABINET-FRONT,BOT,54J8-HPS,VO,G4309	
2		AA60-00080A	SPACER-FELT,43.54J8,FELT,-,-,-,-,T0.35,	S,N,A
2		AA60-00077A	SPACER-DUAL,LOCK,54J8,#250,-,-,-,-,4	S,N,A
2		AA60-00071B	SPACER-JERSEY,54J8,-JERSEY,GRAY,SP-700G	S,N,A

ASSY-CONTROL

Level	Loc. No.	Code No.	Description ; Specification	Remark
1	*	AA91-00476F	ASSY CONTROL,-HB BLK,ABS PAL,-51A,SPS4J8	
2	BM-MS	6003-001023	SCREW-TAPTITE,RWH,-,B,M3,L10,ZPC(YEL),SW	
2	KNOPOW	AA61-60003J	SPRING-CS,-,SUS304,0.5,OD6,H12,N7	
2	PC-BM	6003-000334	SCREW-TAPTITE,RH,-,2S,M3,L6,ZPC(YEL),SWR	
2	PCB-PC	6003-001026	SCREW-TAPTITE,RH,-,B,M4,L15,ZPC(BLK),SWR	
2		AA64-013918	INDICATOR-LED,43,54,62J8,ACRYL,-,SMOC,-	
2		AA64-01469F	WINDOW-CONTROL,43,54,62J8,ACRYL,SHEET,T3	
2		AA64-01503A	KNOB-CONTACT,54J8,C3603,-,-,-,-,-,-,-	
2		AA98-00094A	ASSY-PCB,CONTROL,-,SP43,8HF,J51A,-,-	
2		AA98-00097A	ASSY-PCB,POWER S/W,-,SP43,8HF,J51A,-,-	
2		AA61-00561B	BRACKET-MASTER,54J8,SECC,T1.0,-,-	S,N,A
2		AA64-01387B	PANEL-CONTROL,43,54,62J8,ABS,-,HB,IVORY,	
2		AA64-013898	KNOB-CONTROL,43,54,62J8,ABS,-,BLK,-HB,	
2		AA64-01389E	KNOB-POWER,43,54,62J8,ABS,GRAY,LG-807P,M	
2		AA64-013908	WINDOW-REMOCON,43,54,62J8,PC,-,-,-,-VIO	

ASSY CHASSIS PART

Level	Loc. No.	Code No.	Description ; Specification	Remark
1	*	AA90-00383C	ASSY CHASSIS PART,J51A,54J8	S,N,A
2	CON-HC	6003-001023	SCREW-TAPTITE,RWH,-,B,M3,L10,ZPC(YEL),SW	
2	DF-FBT	6003-001023	SCREW-TAPTITE,RWH,-,B,M3,L10,ZPC(YEL),SW	
2	DF-HC	6003-001023	SCREW-TAPTITE,RWH,-,B,M3,L10,ZPC(YEL),SW	
2	PM-HC	6003-001023	SCREW-TAPTITE,RWH,-,B,M3,L10,ZPC(YEL),SW	
2		AA61-00504B	HOLDER-CHASSIS,43,54,62J8,ABS,GRAY,VO,-,-	

ASSY CABINET

Level	Loc. No.	Code No.	Description ; Specification	Remark
1	*	AA90-00382L	ASSY CABINET,54J8,SPS4J8HFX/BWT	S,N,A
2	AC-BCM	AA60-10011A	SCREW-TAPTITE,HH,-,PC,M4,L12,ZPC(BLK),SW	
2	ACAFB	6002-000522	SCREW-TAPPING,TH,-,2,M4,L15,ZPC(BLK),SWR	
2	AV-CFD	6003-001023	SCREW-TAPTITE,RWH,-,B,M3,L10,ZPC(YEL),SW	
2	BM-CBT	6003-001026	SCREW-TAPTITE,RH,-,B,M4,L15,ZPC(BLK),SWR	
2	CBBAPT	6003-001019	SCREW-TAPTITE,RH,-,B,M4,L12,ZPC(BLK),SWR	
2	CBT-CW	AA63-60002V	SPACER-FELT,FELT,T0.3,BLK,60X40,-,-	S,N,A
2	CFB	AA65-00011C	CLAMP-WIRE,ALL MODEL,NYLON 66,V2,NTR,25M	S,N,A
2	CW-CBT	6005-001003	SCREW-WOOD,HH,-,M4,L20,ZPC(BLK),SWRCH18A	S,N,A
2	CWB6CM	6005-001094	SCREW-ASS'Y WOOD,WW,HH,-,M7,L32,ZPC(YEL)	S,N,A
2	CWBCB8	6005-001003	SCREW-WOOD,HH,-,M4,L20,ZPC(BLK),SWRCH18A	S,N,A
2	CWBCBS	6005-001003	SCREW-WOOD,HH,-,M4,L20,ZPC(BLK),SWRCH18A	S,N,A
2	CWBCFB	6005-001003	SCREW-WOOD,HH,-,M4,L20,ZPC(BLK),SWRCH18A	S,N,A
2	CWBHC	6005-001003	SCREW-WOOD,HH,-,M4,L20,ZPC(BLK),SWRCH18A	S,N,A
2	FP-BCM	AA60-10011A	SCREW-TAPTITE,HH,-,PC,M4,L12,ZPC(BLK),SW	
2	HV-BCM	AA60-10011A	SCREW-TAPTITE,HH,-,PC,M4,L12,ZPC(BLK),SW	
2		AA67-00027A	SCREW-TINT,-,S3,-,PMMA,TINT-10%,T3.0,1	
2		AA67-00023A	SUN SCREEN,HC,-,S3,HC,A/S,PMMA,T=93%,T	
2		AA64-01392C	DOOR-AV,43,54,62J8,ABS,HB,GRAY,LG-807P	S,N,A
2		AA65-30008A	CLAMP-CORD,PE,HB,BLK,-,-,-	S,N,A
2		AA64-01395H	INLAY-TERMINAL,-J7,-J8HF,PS SHEET,T0.5,BLK	
2		AA64-60449B	INLAY-COVER,SP-43#JMF,PS,T0.5,149.3X89.5	
2		AA67-00080A	MIRROR-BACK,54J8,GLASS,940*686*673(132"	
2		AA91-00489B	ASSY-BRK,MIRROR,-,-,SECC-1,T1.0,54J8	
3		AA60-00073A	SPACER-FELT,54J8,FELT,-,-,-,-,T1.0,-,210	S,N,A
3		AA61-00512B	BRACKET-MIRROR,43,53,61J8,SECC-1,T1.0,-	S,N,A
2		AA64-013858	CABINET-BACK,SIDE,43,54,62J8,-HIPS,HB,B	
2		AA61-00600A	SPRING-EARTH,43,J8,STS,-,-,-,-,-,-,-,-,0	S,N,A
2		AA61-00475B	BRACKET-CRT,MAIN,54,SECC,T1.6,-	
2		AA60-00091N	SPACER-FELT,-,FELT,70X10,-,-BLK,T1.0,-	S,N,A
2		AA60-00072B	SPACER-COVER,DUST,43,54,62J9,SPONGE,94HF	S,N,A
2		AA60-00069C	SPACER-SCREEN,43,54,62J8,ABS,-,-BLK	S,N,A
2		AA60-00069B	SPACER-SCREEN,43,54,62J8,ABS,-,-BLK,-	S,N,A
2		AA26-30006E	TRANS-FLYBACK,-,FWZ 50A0018(S),50KV,	
2		AA64-013848	CABINET-BACK,BOT,43,54,62J8,-HIPS,VO,BL	
2		AA64-013798	CABINET-BACK,TOP,54J8,-,HIPS,HB,BLK	
2		AA63-60131F	SPACER-FELT,PC,-,6128,FELT,-,-,-BLK,T0.5,	S,N,A
2		AA63-10007C	BAND-PP,-,-,W18,-CLEAR,1G,	S,N,A
2		AA61-20285A	HOLDER-BOX,-,3456,PPVO,WHT,	
2		AA61-00642A	SPRING-EARTH,MAIN,PRO,J17,-8,-9,STS,67	S,N,A
2		AA61-006188	GUIDE-FLOW,54J8,-J7,-ABS,HB,BLK,-	

ASSY CRT-(G)

Level	Loc. No.	Code No.	Description ; Specification	Remark
1	*	AA94-02870A	ASSY CRT-(G),P16LSC03HKA,-,380MG,7,BARE,	
2	BC-AL	AA60-10011A	SCREW-TAPTITE,HH,-,PC,M4,L12,ZPC(BLK),SW	
2		AA91-00469A	ASSY BRACKET,CRT,-,-SECC T1.0,PJT	
3		AA61-00473B	BRACKET-CRT,S3,SECC,T1.6,-	S,N,A
3		AA61-00478A	SPRING-WIRE,CRT,PJT,STS,-,-,-,-,-,-,-,-,-	S,N,A
3		AA61-00615B	BRACKET-EARTH,54J8,PBS,T0.5,-	S,N,A
2		AA67-10066A	LENS-ASSY,DELTA,37,-,-,CLEAR A/B,-,-	
2		AA65-30114A	CLAMP-LOCK,NYLON 66,V2,NTR,-,PROJECTION,	S,N,A
2		AA61-00555B	HOLDER-LANS,S3,J8,PC ABS,BLK,-,-GF20%	S,N,A
2		AA91-00491A	ASSY-HOLDER,PACK,-,-FILM PP RUBBER,54J8	
3		AA60-00062B	SPACER-O,RING,S3,SILICON,-,-,-GRAY,-	S,N,A
3		AA61-00477B	HOLDER-PACK,43,53,61J8,PP,-HB,-	S,N,A
2		AA60-00074A	SPACER-DY,PJT,SILICON RUBBER,-,-,-GRAY,	S,N,A
2		AA67-10071A	LENS,DELTA 77.79,-,GREEN,C ELEMENT,	
2		AA26-30006F	TRANS-FLYBACK,-,FWZ 50A001C,55,30KV	
2		AA64-013158	CASE-COUPLER,GREEN,43,53,61,T2.0,AL SHE	S,N,A
2		AA27-50005C	DEFLECTION-YOKE,-,DPD-4392AL,ST-3,PJTCRT	
2		AA03-00201A	CRT-MONO,P16LSC03HKA,-,7inch,-,-,FLAT	S,N,A
2		AA61-00476B	BRACKET-LENS,S3,SECC,T1.6,-	S,N,A
2		AA60-00063B	SPACER-CLENS,S3,SILICON,-,-,-GRAY,-	S,N,A
2		AA60-00061B	SPACER-CRT,S3,SILICON,-,-,-GRAY,-,-	S,N,A
2		AA39-00018A	LEAD-CONNECTOR-ASSY,-,1P,YFH800-01,YRH187	
2		AA33-00006A	MAGNET-CONVERGENCE,-,JH-92LT,29A,-,29.1m,0	

ASSY CRT-(B)

Level	Loc. No.	Code No.	Description ; Specification	Remark
1	*	AA94-02869A	ASSY CRT-(B),P16LSC03BMB,-,380MG,7,BARE,	
2	BC-AL	AA60-10011A	SCREW-TAPTITE,HH,-,PC,M4,L12,ZPC(BLK),SW	
2		AA65-30114A	CLAMP-LOCK,NYLON 66,V2,NTR,-,PROJECTION,	S,N,A
2		AA67-10005A	LENS-ASSY,-,DELTA,CLEAR,54J8B,-,77,-	
2		AA91-00469A	ASSY-BRACKET,CRT,-,-SECC T1.0,PJT	
3		AA61-00473B	BRACKET-CRT,S3,SECC,T1.6,-,-	S,N,A
3		AA61-00478A	SPRING-WIRE,CRT,PJT,STS,-,-,-,-,-,-,-,-,-	S,N,A
3		AA61-00615B	BRACKET-EARTH,54J8,PBS,T0.5,-	S,N,A
2		AA91-00491A	ASSY-HOLDER,PACK,-,-FILM PP RUBBER,54J8	
3		AA60-00062B	SPACER-O,RING,S3,SILICON,-,-,-GRAY,-	S,N,A
3		AA61-00477A	HOLDER-PACK,43,53,61J8,PP,-HB,-	S,N,A
2		AA60-00074A	SPACER-DY,PJT,SILICON RUBBER,-,-,-GRAY,	S,N,A
2		AA61-00602B	BRACKET-LENS,RB,PROJECTION,SECC,T1.6,-	
2		AA67-10007A	LENS,-,DELTA,CLEAR,PJT,-,77.79,-	
2		AA26-30006F	TRANS-FLYBACK,-,FWZ 50A001C,55,30KV	
2		AA64-013168	CASE-COUPLER,BLUE,53,T2.0,AL SHEET,-	S,N,A
2		AA27-50005C	DEFLECTION-YOKE,-,DPD-4392AL,ST-3,PJTCRT	
2		AA03-00202A	CRT-MONO,P16LSC03BMB,-,7inch,-,-,FLAT	S,N,A
2		AA61-00555B	HOLDER-LANS,S3,J8,PC ABS,BLK,-,GF20%	S,N,A
2		AA60-00063B	SPACER-CLENS,S3,SILICON,-,-,-GRAY,-	S,N,A
2		AA60-00061B	SPACER-CRT,S3,SILICON,-,-,-GRAY,-,-	S,N,A
2		AA39-00018A	LEAD-CONNECTOR-ASSY,-,1P,YFH800-01,YRH187	
2		AA33-00005A	MAGNET-CONVERGENCE,-,JH-92LTU-036,-,29.1m,	

ASSY CRT-(R)

Level	Loc. No.	Code No.	Description ; Specification	Remark
1	*	AA94-02868A	ASSY CRT-(R),P16LSC03RJA,-,380MG,7,BARE,	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	BC-AL	AA60-10011A	SCREW-TAPTITE,HH,-,PC,M4,L12,ZPC(BLK),SW	
2		AA65-30114A	CLAMP-LOCK,NYLON 66,V2,NTR,-,PROJECTION,	S,N,A
2		AA64-013148	CASE-COUPLER,RED,53,T2.0,AL SHEET,	S,N,A
2		AA67-10005A	LENS-ASSY,-,DELTA,CLEAR,54J8B,-,77,-	
2		AA67-10006A	LENS,-,DELTA,RED,PJT,-,77.79,-	
2		AA91-00469A	ASSY-BRACKET,CRT,-,-SECC T1.0,PJT	
3		AA61-00473B	BRACKET-CRT,S3,SECC,T1.6,-,-	S,N,A
3		AA61-00478A	SPRING-WIRE,CRT,PJT,STS,-,-,-,-,-,-,-,-,-	S,N,A
3		AA61-00615B	BRACKET-EARTH,54J8,PBS,T0.5,-	S,N,A
2		AA67-10066A	LENS-ASSY,DELTA,37,-,-,CLEAR A/B,-,-	
2		AA65-30114A	CLAMP-LOCK,NYLON 66,V2,NTR,-,PROJECTION,	S,N,A
2		AA61-00555B	HOLDER-LANS,S3,J8,PC ABS,BLK,-,GF20%	S,N,A
2		AA91-00491A	ASSY-HOLDER,PACK,-,-FILM PP RUBBER,54J8	
3		AA60-00062B	SPACER-O,RING,S3,SILICON,-,-,-GRAY,-	S,N,A
3		AA61-00477B	HOLDER-PACK,43,53,61J8,PP,-HB,-	S,N,A
2		AA60-00074A	SPACER-DY,PJT,SILICON RUBBER,-,-,-GRAY,	S,N,A
2		AA26-30006F	TRANS-FLYBACK,-,FWZ 50A001C,55,30KV	
2		AA61-00602B	BRACKET-LENS,RB,PROJECTION,SECC,T1.6,-	
2		AA27-50005C	DEFLECTION-YOKE,-,DPD-4392AL,ST-3,PJTCRT	
2		AA03-00200A	CRT-MONO,P16LSC03RJA,-,7inch,-,-,FLAT	S,N,A
2		AA61-00555B	HOLDER-LANS,S3,J8,PC ABS,BLK,-,GF20%	S,N,A
2		AA60-00063B	SPACER-CLENS,S3,SILICON,-,-,-GRAY,-	S,N,A
2		AA60-00061B	SPACER-CRT,S3,SILICON,-,-,-GRAY,-	S,N,A
2		AA39-00018A	LEAD-CONNECTOR-ASSY,-,1P,YFH800-01,YRH187	
2		AA33-00006A	MAGNET-CONVERGENCE,-,JH-92LT,29A,-,29.1m,0	

ASSY-WOOD

Level	Loc. No.	Code No.	Description ; Specification	Remark
1	*	AA91-00620A	ASSY-WOOD,-,WOOD KBM21 S8,SVP S4J8SR,J7	
2	AWTAWB	6006-001094	SCREW-ASS'Y WOOD,WW,HH,-,M7,L32,ZPC(YEL)	S,N,A
2		AA91-00474A	ASSY-WOOD,TOP,-,-,WOOD,SVP S4J8SR,S4J7	
3	CWTHCW	AA60-10061A	SCREW-WOOD,PH,-,M4,L16,ZPC(BLK),SWRCH18A	
3		AA64-01399A	CABINET-WOOD,TOP,S4J8,-,WOOD,	S,N,A
3		AA61-00510C	HOLDER-SCREEN,54J8,ABS,BLK,-#L L835	
3		AA61-00510B	HOLDER-SCREEN,54J8,ABS,BLK,-#L L1132	
3		AA61-005078	HOLDER-CABINET,WOOD,#3,54,SC,8,ABS,BLK,H	
2		AA91-00475A	ASSY-WOOD,BOT,-,-,WOOD,SVP S4J8SR,S4J7	
3	CASCWB	AA60-10051A	SCREW-WOOD,PH,-,M4,L16,ZPC(BLK),SWRCH18A	
3	HCMCWB	AA60-10051A	SCREW-WOOD,PH,-,M4,L16,ZPC(BLK),SWRCH18A	
3	HW-CWB	AA60-10051B	SCREW-WOOD,RH,-,M3.5,L11,ZPC(YEL),SWRCH1	
3	SPKCWB	AA60-10051A	SCREW-WOOD,PH,-,M4,L16,ZPC(BLK),SWRCH18A	
3		AA61-005068	HOLDER-CRT,MAIN,43,54,62J8,-HIPS,BLK,HB,	
3		AA61-005088	HOLDER-JERSEY,43,54,62J8,ABS,BLK,HB,-,-	
3		AA61-005338	BRACKET-GRILLE,43,54,62J8,SECC 1 T0.5,	
3		AA98-00049A	ASSY-LEAD,CON,-,LEAD-CON,CORE,AA39-20505	
4		3301-001201	CORE-FERRITE,AE,21x11x32mm,1500,2B0G	
3		AA60-00078A	SPACER-DUAL,LOCK,54J8,#250,49X25	
3		AA64-01402A	CABINET-WOOD,BOT,54J8,-,WOOD,	S,N,A
3		AA63-003488	COVER-DUCT,54,62J8,-HIPS,-,HB,BLK,-	
3		3001-001107	SPEAKER,20W,8ohm,95dB,1300Hz	
3		3001-001134	SPEAKER,30W,8ohm,93dB,60Hz	
3		AA39-00042A	LEAD-CONNECTOR-ASSY,-,2,JUSEC,REC,200MM	
3		AA61-00094C	HOLDER-RAIL,-,PC,-S33R,ABS,-HB,BLK,480	
3		AA61-00097A	HOLDER-WIRE,-,-,NYLON 6/6,-NTR,	
3		AA61-00458A	CASTER,-,-,TP4015-05 NYL,OH47,-,SR4	S,N,A

ASSY CABINET MASK

Level	Loc. No.	Code No.	Description ; Specification	Remark
1	*	AA91-00478C	ASSY CABINET-MASK,-,HB,GRAY,C906~D902 PA	
2	C/FRON	AA63-00380A	COVER-CORNER,PJT,POLYESTER,-,-,-,R572	
2		AA64-01495B	CABINET-MASK,SIDE,54J8,CD809P~DC902,ABS,	
3		AA64-01495A	CABINET-MASK,SIDE,54J8,L827.4 APCHU,ABS	S,N,A
2		AA64-01393J	CABINET-FRONT,MASK,SP54J8HF,C806~D902,J5	
3		AA64-01393A	CABINET-FRONT,MASK,54J8,L1088.4 APCHU,A	S,N,A
2		AA64-01393C	CABINET-FRONT,MASK,54J8,CD809P~DC902P,DO	
3		AA64-01393A	CABINET-FRONT,MASK,54J8,L1088.4 APCHU,A	S,N,A
2		AA61-005058	HOLDER-CORNER,43,54,62J8,ABS,GRAY,HB	

ASSY-PCB,TERMINAL

Level	Loc. No.	Code No.	Description ; Specification	Remark
1	*	AA95-00219E	ASSY PCB,TERMINAL,-,SP43J54F,-,51A,-,-2	
2	CNT01	3711-003630	CONNECTOR-HEADER,BOX,32P,2R,2.54mm,ANGLE	
2	CNT02	3711-003630	CONNECTOR-HEADER,BOX,32P,2R,2.54mm,ANGLE	
2	CNT03	3711-003601	CONNECTOR-HEADER,BOX,12P,1R,2.5mm,ANGLE,	
2	IC703	0904-001121	IC-I/O SUPPORT CHIP,8574,88IT,DIP16P,30	
2	IC704	1001-001022	IC-ANALOG SWITCH,TDA8601,BLANKING,DIP16	
2	IC705	0801-000213	IC-CMOS LOGIC,4052,MULTIPLEXER,DIP16P,3	
2	JKV01	3722-000498	JACK-SCART,21P,-,SN,BLK,NO	
2	JKV02	3722-001486	JACK-RCA,3P/3P,3.5mm,NI,BLK,	
2	JKV03	3722-001382	JACK-RCA,5P/5P,3.4MM,NI,R/WH/G/BLUE,	
2	JKV04	3722-001350	JACK-RCA,7P/9P,3.4MM,NI,BLK,	
2	JKV05	3701-001013	CONNECTOR-DSUB,15P,3R,FEMALE,STRAIGHT,AU	
2	JKV06	3701-001013	CONNECTOR-DSUB,15P,3R,FEMALE,STRAIGHT,AU	
2	JKV07	3722-000544	JACK-VHS,4P,11.5mm,AG,BLK,N	
2	JKV08	3722-000498	JACK-SCART,21P,-,SN,BLK,NO	
2	RN701	2011-000160	R-NETWORK,10Kohm,5%,1/8W,A,SIP9P,TP	
2		AA99-20082V	ASSY,PCB,SUB,AUTO,-,AA95-00219E,-,V	S,N,A
3	C701	2401-002009	C-AL,100uF,20%,16V,CP,TP6.3x7.5	
3	C702	2203-000181	C-CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP,	
3	C703	2401-002009	C-AL,100uF,20%,16V,CP,TP6.3x7.5	
3	C704	2203-000818	C-CERAMIC,CHIP,0.033nF,5%,50V,NP0,TP,201	
3	C705	2203-000818	C-CERAMIC,CHIP,0.033nF,5%,50V,NP0,TP,201	
3	C706	2203-000979	C-CERAMIC,CHIP,47nF,10%,50V,X7R,TP,2012	
3	C707	2203-000979	C-CERAMIC,CHIP,47nF,10%,50V,X7R,TP,2012	
3	C708	2203-000979	C-CERAMIC,CHIP,47nF,10%,50V,X7R,TP,2012	
3	C709	2203-000979	C-CERAMIC,CHIP,47nF,10%,50V,X7R,TP,2012	
3	C710	2203-000979	C-CERAMIC,CHIP,47nF,10%,50V,X7R,TP,2012	
3	C711	2203-000979	C-CERAMIC,CHIP,47nF,10%,50V,X7R,TP,2012	
3	C712	2203-000181	C-CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP,	
3	C713	2203-000979	C-CERAMIC,CHIP,47nF,10%,50V,X7R,TP,2012	
3	C714	2203-000979	C-CERAMIC,CHIP,47nF,10%,50V,X7R,TP,2012	
3	C715	2203-000979	C-CERAMIC,CHIP,47nF,10%,50V,X7R,TP,2012	
3	C716	2401-002009	C-AL,100uF,20%,16V,CP,TP6.3x7.5	
3	C717	2203-000181	C-CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP,	
3	C718	2203-000979	C-CERAMIC,CHIP,47nF,10%,50V,X7R,TP,2012	
3	C719	2203-000979	C-CERAMIC,CHIP,47nF,10%,50V,X7R,TP,2012	
3	C720	2203-000979	C-CERAMIC,CHIP,47nF,10%,50V,X7R,TP,2012	
3	C721	2203-000979	C-CERAMIC,CHIP,47nF,10%,50V,X7R,TP,2012	
3	C722	2203-000979	C-CERAMIC,CHIP,47nF,10%,50V,X7R,TP,2012	
3	C723	2203-000181	C-CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP,	
3	C724	2203-000979	C-CERAMIC,CHIP,47nF,10%,50V,X7R,TP,2012	
3	C725	2203-000181	C-CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP,	
3	C726	2203-000181	C-CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP,	
3	C727	2203-000979	C-CERAMIC,CHIP,47nF,10%,50V,X7R,TP,2012	
3	C730	2401-002298	C-AL,4.7uF,20%,50V,CP,TP5x7.5	
3	C731	2401-002299	C-AL,4.7uF,20%,50V,CP,TP5x7.5	
3	C732	2203-000444	C-CERAMIC,CHIP,1nF,10%,50V,X7R,TP,2012,	
3	C733	2203-000444	C-CERAMIC,CHIP,1nF,10%,50V,X7R,TP,2012,	
3	C734	2203-000444	C-CERAMIC,CHIP,1nF,10%,50V,X7R,TP,2012,	
3	C735	2203-000444	C-CERAMIC,CHIP,1nF,10%,50V,X7R,TP,2012,	
3	C736	2203-000444	C-CERAMIC,CHIP,1nF,10%,50V,X7R,TP,2012,	
3	C737	2203-000444	C-CERAMIC,CHIP,1nF,10%,50V,X7R,TP,2012,	
3	C740	2401-001840	C-AL,100uF,20%,16V,CP,TP8.3x11.5	
3	C741	2203-000181	C-CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP,	
3	C742	2401-001840	C-AL,100uF,20%,16V,CP,TP8.3x11.5	
3	C743	2203-000181	C-CERAMIC,CHIP,100nF,-80~20%,25V,Y5V,TP,	
3	C744	2203-000575	C-CERAMIC,CHIP,220nF,10%,25V,X7R,TP,2012	
3	C745	2203-000575	C-CERAMIC,CHIP,220nF,10%,25V,X7R,TP,2012	
3	C746	2203-000575	C-CERAMIC,CHIP,220nF,10%,25V,X7R,TP,2012	
3	C747	2203-000575	C-CERAMIC,CHIP,220nF,10%,25V,X7R,TP,2012	
3	C748	2203-000575	C-CERAMIC,CHIP,220nF,10%,25V,X7R,TP,2012	
3	C749	2203-000575	C-CERAMIC,CHIP,220nF,10%,25V,X7R,TP,2012	
3	C760	2401-000667	C-AL,2.2uF,20%,50V,WT,TP5x11.5	
3	C761	2401-000667	C-AL,2.2uF,20%,50V,WT,TP5x11.5	
3	C762	2401-000667	C-AL,2.2uF,20%,50V,WT,TP5x11.5	
3	C763	2401-000667	C-AL,2.2uF,20%,50V,WT,TP5x11.5	
3	C764	2401-000667	C-AL,2.2uF,20%,50V,WT,TP5x11.5	
3	C765	2401-000667	C-AL,2.2uF,20%,50V,WT,TP5x11.5	
3	C766	2401-000667	C-AL,2.2uF,20%,50V,WT,TP5x11.5	
3	C767	2401-000667	C-AL,2.2uF,20%,50V,WT,TP5x11.5	
3	C768	2203-000979	C-CERAMIC,CHIP,47nF,10%,50V,X7R,TP,2012	
3	C769	2203-000979	C-CERAMIC,CHIP,47nF,10%,50V,X7R,TP,2012	
3	C770	2203-000583	C-CERAMIC,CHIP,0.027nF,5%,50V,NP0,TP,201	
3	C771	2203-000583	C-CERAMIC,CHIP,0.027nF,5%,50V,NP0,TP,201	
3	C772	2203-000583	C-CERAMIC,CHIP,0.027nF,5%,50V,NP0,TP,201	
3	C773	2203-000239	C-CERAMIC,CHIP,0.1nF,5%,50V,NP0,TP,2012	

Level	Loc. No.	Code No.	Description ; Specification	Remark
3	C774	2203-000239	C CERAMIC,CHIP:0.1nF,5%,50V,NP0,TP,2012	
3	C775	2203-000444	C CERAMIC,CHIP:1nF,10%,50V,X7R,TP,2012,	
3	C776	2203-000444	C CERAMIC,CHIP:1nF,10%,50V,X7R,TP,2012,	
3	C777	2401-001496	C AL,47uF,20%,16V,GP,TP5x7.5	
3	C780	2401-000360	C AL,100uF,20%,50V,GP,TP8x11.5,5	
3	C782	2401-000471	C AL,10uF,20%,50V,BP,TP5x11.5mm	
3	C783	2401-000471	C AL,10uF,20%,50V,BP,TP5x11.5mm	
3	DZ701	0403-000314	DIODE ZENER;RLZ,9.1B,9.1V,8.80-9.30V,400	
3	DZ702	0403-000314	DIODE ZENER;RLZ,9.1B,9.1V,8.80-9.30V,400	
3	DZ703	0403-000314	DIODE ZENER;RLZ,9.1B,9.1V,8.80-9.30V,400	
3	DZ704	0403-001117	DIODE ZENER;RLZ12B,5%,500mW,LL-34,TP	
3	DZ705	0403-000620	DIODE ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
3	IC701	1001-001030	IC VIDEO SWITCH;TDA6920X,...SOP28P300MI	
3	IC702	1001-001030	IC VIDEO SWITCH;TDA6920X,...SOP28P300MI	
3	J701	3007-000029	R CHIP;0OHM,5%,1/10W,DA,TP,2012	
3	J702	3007-000029	R CHIP;0OHM,5%,1/10W,DA,TP,2012	
3	L701	2702-001094	INDUCTOR RADIAL,10uH,10%,6x4mm	
3	L702	2702-001094	INDUCTOR RADIAL,10uH,10%,6x4mm	
3	L703	2702-001094	INDUCTOR RADIAL,10uH,10%,6x4mm	
3	L704	2702-001094	INDUCTOR RADIAL,10uH,10%,6x4mm	
3	L705	2702-001094	INDUCTOR RADIAL,10uH,10%,6x4mm	
3	L706	2702-001094	INDUCTOR RADIAL,10uH,10%,6x4mm	
3	L707	2702-001094	INDUCTOR RADIAL,10uH,10%,6x4mm	
3	L708	2702-001094	INDUCTOR RADIAL,10uH,10%,6x4mm	
3	L709	2702-001094	INDUCTOR RADIAL,10uH,10%,6x4mm	
3	L710	2702-001094	INDUCTOR RADIAL,10uH,10%,6x4mm	
3	L719	2702-001094	INDUCTOR RADIAL,10uH,10%,6x4mm	
3	L720	2702-001094	INDUCTOR RADIAL,10uH,10%,6x4mm	
3	L721	2702-001094	INDUCTOR RADIAL,10uH,10%,6x4mm	
3	L722	2702-001094	INDUCTOR RADIAL,10uH,10%,6x4mm	
3	L723	2702-001094	INDUCTOR RADIAL,10uH,10%,6x4mm	
3	L724	2702-001094	INDUCTOR RADIAL,10uH,10%,6x4mm	
3	L725	2702-001094	INDUCTOR RADIAL,10uH,10%,6x4mm	
3	L726	2702-001094	INDUCTOR RADIAL,10uH,10%,6x4mm	
3	PCB	AA41-00076B	PCB-AV TERMINAL,SP43,USHF,R-4.2L,3.1 6T.	S.N.A
3	Q701	0501-000727	TR SMALL SIGNAL,BC848C,NPN,330mW,SOT-23,	
3	Q702	0501-000727	TR SMALL SIGNAL,BC848C,NPN,330mW,SOT-23,	
3	Q703	0501-000727	TR SMALL SIGNAL,BC848C,NPN,330mW,SOT-23,	
3	Q704	0501-000727	TR SMALL SIGNAL,BC848C,NPN,330mW,SOT-23,	
3	Q705	0501-000727	TR SMALL SIGNAL,BC848C,NPN,330mW,SOT-23,	
3	Q706	0501-000727	TR SMALL SIGNAL,BC848C,NPN,330mW,SOT-23,	
3	Q707	0501-000727	TR SMALL SIGNAL,BC848C,NPN,330mW,SOT-23,	
3	Q708	0501-000727	TR SMALL SIGNAL,BC848C,NPN,330mW,SOT-23,	
3	Q709	0501-000727	TR SMALL SIGNAL,BC848C,NPN,330mW,SOT-23,	
3	Q710	0501-000727	TR SMALL SIGNAL,BC848C,NPN,330mW,SOT-23,	
3	Q711	0501-000727	TR SMALL SIGNAL,BC848C,NPN,330mW,SOT-23,	
3	Q712	0501-000727	TR SMALL SIGNAL,BC848C,NPN,330mW,SOT-23,	
3	Q713	0501-000727	TR SMALL SIGNAL,BC848C,NPN,330mW,SOT-23,	
3	R701	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R702	2007-000300	R CHIP;10KOHM,5%,1/10W,DA,TP,2012	
3	R703	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
3	R704	2007-000511	R-CHIP;2.4KOHM,5%,1/10W,DA,TP,2012	
3	R705	2007-001166	R CHIP;750HM,5%,1/10W,DA,TP,2012	
3	R706	2007-001166	R CHIP;750HM,5%,1/10W,DA,TP,2012	
3	R708	2007-000290	R CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R709	2007-000290	R CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R710	2007-000290	R CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R711	2007-001166	R CHIP;750HM,5%,1/10W,DA,TP,2012	
3	R712	2007-000290	R CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R713	2007-000290	R CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R714	2007-000290	R CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R715	2007-000290	R CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R716	2007-000300	R CHIP;10KOHM,5%,1/10W,DA,TP,2012	
3	R717	2007-000401	R CHIP;150OHM,5%,1/10W,DA,TP,2012	
3	R718	2007-000300	R CHIP;10KOHM,5%,1/10W,DA,TP,2012	
3	R719	2007-000468	R CHIP;1KOHM,5%,1/10W,DA,TP,2012	
3	R720	2007-000511	R-CHIP;2.4KOHM,5%,1/10W,DA,TP,2012	
3	R721	2007-000290	R CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R722	2007-001166	R CHIP;750HM,5%,1/10W,DA,TP,2012	
3	R723	2007-000290	R CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R724	2007-000290	R CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R725	2007-001166	R CHIP;750HM,5%,1/10W,DA,TP,2012	
3	R726	2007-001166	R CHIP;750HM,5%,1/10W,DA,TP,2012	
3	R727	2007-001166	R CHIP;750HM,5%,1/10W,DA,TP,2012	
3	R728	2007-001166	R CHIP;750HM,5%,1/10W,DA,TP,2012	
3	R729	2007-001166	R CHIP;750HM,5%,1/10W,DA,TP,2012	
3	R730	2007-000282	R CHIP;100KOHM,5%,1/10W,DA,TP,2012	
3	R731	2007-000282	R CHIP;100KOHM,5%,1/10W,DA,TP,2012	
3	R732	2007-000282	R CHIP;100KOHM,5%,1/10W,DA,TP,2012	
3	R733	2007-000282	R CHIP;100KOHM,5%,1/10W,DA,TP,2012	
3	R734	2007-000941	R CHIP;47KOHM,5%,1/10W,DA,TP,2012	
3	R735	2007-000941	R CHIP;47KOHM,5%,1/10W,DA,TP,2012	
3	R736	2007-001166	R CHIP;750HM,5%,1/10W,DA,TP,2012	
3	R737	2007-000766	R-CHIP;330OHM,5%,1/10W,DA,TP,2012	
3	R740	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
3	R741	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
3	R742	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
3	R743	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
3	R744	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
3	R745	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
3	R746	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
3	R748	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
3	R749	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
3	R750	2007-000572	R-CHIP;220OHM,5%,1/10W,DA,TP,2012	
3	R751	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
3	R752	2007-000572	R-CHIP;220OHM,5%,1/10W,DA,TP,2012	
3	R753	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
3	R754	2007-000572	R-CHIP;220OHM,5%,1/10W,DA,TP,2012	
3	R755	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
3	R756	2007-000964	R-CHIP;5.1KOHM,5%,1/10W,DA,TP,2012	
3	R757	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
3	R758	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
3	R759	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
3	R760	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R761	2007-000221	R-CHIP;1.2KOHM,5%,1/10W,DA,TP,2012	
3	R762	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R763	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R764	2007-000221	R-CHIP;1.2KOHM,5%,1/10W,DA,TP,2012	
3	R765	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R766	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R767	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R768	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R769	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R770	2007-000766	R-CHIP;330OHM,5%,1/10W,DA,TP,2012	
3	R771	2007-001166	R-CHIP;750HM,5%,1/10W,DA,TP,2012	
3	R772	2007-001166	R-CHIP;750HM,5%,1/10W,DA,TP,2012	
3	R773	2007-001166	R-CHIP;750HM,5%,1/10W,DA,TP,2012	
3	R774	2007-001166	R-CHIP;750HM,5%,1/10W,DA,TP,2012	
3	R775	2007-001166	R-CHIP;750HM,5%,1/10W,DA,TP,2012	
3	R776	2007-001166	R-CHIP;750HM,5%,1/10W,DA,TP,2012	
3	R777	2007-000781	R-CHIP;330HM,5%,1/10W,DA,TP,2012	
3	R778	2007-000781	R-CHIP;330HM,5%,1/10W,DA,TP,2012	
3	R779	2007-001100	R-CHIP;620HM,5%,1/10W,DA,TP,2012	
3	R780	2007-001100	R-CHIP;620HM,5%,1/10W,DA,TP,2012	
3	R781	2007-001100	R-CHIP;620HM,5%,1/10W,DA,TP,2012	
3	R782	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
3	R783	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
3	R784	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
3	R785	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
3	R786	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R787	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R788	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
3	R791	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R792	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R793	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R794	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
3	R795	2007-001155	R-CHIP;750OHM,5%,1/10W,DA,TP,2012	
3	R796	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
3	R797	2007-001155	R-CHIP;750OHM,5%,1/10W,DA,TP,2012	
3	R798	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
3	R799	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
3	R800	2007-001166	R-CHIP;750HM,5%,1/10W,DA,TP,2012	
3	R801	2007-001166	R-CHIP;750HM,5%,1/10W,DA,TP,2012	
3	R802	2007-001166	R-CHIP;750HM,5%,1/10W,DA,TP,2012	
3	R803	2007-000328	R-CHIP;110KOHM,5%,1/10W,DA,TP,2012	
3	R804	2007-000328	R-CHIP;110KOHM,5%,1/10W,DA,TP,2012	
3	R805	2007-000001	R-CHIP;68KOHM,5%,1/10W,DA,TP,2012	
3	R806	2007-000001	R-CHIP;68KOHM,5%,1/10W,DA,TP,2012	
3	R807	2007-000001	R-CHIP;68KOHM,5%,1/10W,DA,TP,2012	
3	R808	2007-000001	R-CHIP;68KOHM,5%,1/10W,DA,TP,2012	
3	R809	2007-000001	R-CHIP;68KOHM,5%,1/10W,DA,TP,2012	
3	R810	2007-000001	R-CHIP;68KOHM,5%,1/10W,DA,TP,2012	
3	R811	2007-000001	R-CHIP;68KOHM,5%,1/10W,DA,TP,2012	
3	R812	2007-000001	R-CHIP;68KOHM,5%,1/10W,DA,TP,2012	

Level	Loc. No.	Code No.	Description ; Specification	Remark
3	R813	2007-000300	R CHIP;10KOHM,5%,1/10W,DA,TP,2012	
3	R814	2007-000300	R CHIP;10KOHM,5%,1/10W,DA,TP,2012	
3	R815	2007-000300	R CHIP;10KOHM,5%,1/10W,DA,TP,2012	
3	R816	2007-000774	R CHIP;33KOHM,5%,1/10W,DA,TP,2012	
3	R817	2007-000615	R CHIP;24KOHM,5%,1/10W,DA,TP,2012	
3	R818	2007-000774	R CHIP;33KOHM,5%,1/10W,DA,TP,2012	
3	R819	2007-000615	R CHIP;24KOHM,5%,1/10W,DA,TP,2012	
2		AA65-30105A	CLAMP WIRE;NYLON 66,V2,NTR,15MM,ALL MODE	S.N.A
2		0202-001004	SOLDER CREAM;SQ-2030M SZH-1,S63A,20.04.6	S.N.A
2		0202-000187	SOLDER WIRE FLUX(...RS60S,D1.2,63Sn/37Pb)	S.N.A

ASSY-PCB,H/V

1	*	AA95-00056C	ASSY PCB,H/V,...SP43;5HP3S/XTT,...51A...	
2	BK01	AA61-10068A	BRACKET PCB;...M2160,SPTE,T0.3,...	S.N.A
2	BK02	AA61-10068A	BRACKET PCB;...M2160,SPTE,T0.3,...	S.N.A
2	BK03	AA61-10068A	BRACKET PCB;...M2160,SPTE,T0.3,...	S.N.A
2	CN401	3711-001049	CONNECTOR HEADER;BOX,6P,1R,2.5mm,ANGLE,	
2	CN402	3711-002709	CONNECTOR HEADER;NOWALL,12P,1R,2.5MM,ANG	
2	CN403	AA39-20052A	LEAD CONNECTOR ASSY,,4P,YBN4025-04,YSH02	
2	CN404	3711-001283	CONNECTOR HEADER;NOWALL,14P,1R,2.5mm,ANG	
2	IC471	1203-000610	IC PWM CONTROLLER;494,DIP16P300MIL,PLA	
2	L351	AA27-10003M	COIL CHOKE;...5100uH,1.40,34mA,TPE,L0507R	
2	PCB	AA41-00199C	PCB-H/V MODULE;P53A,CEM-1,1L,G.1.6T,330x	S.N.A
2	Q371	AA96-50291A	ASSY;H/S;...,AA62-30154B,2SC4536,	
3		0205-000129	GREASE SILICON;SC102,,JAPAN	S.N.A
3		0502-000442	TR POWER;2SC4536RB,NPN,2W,TO-220,ST-10	
3		6003-000333	SCREW-TAPTITE;RH,-,2S,M3,L10,ZPC(YELL);W	
3		AA62-30154B	HEAT SINK-ES,,,A6063,EXTR,,,;SILVER ANO	
2	Q422	0505-000156	FET-SILICON;IRF620,N,200V,5A,0.8ohm,50W,	
2	R425	2003-000736	R METAL OXIDE(S);560ohm,5%,3W,AA,TP5x16	
2	R485	2008-001096	R FUSIBLE(S);3.3OHM,5%,1/2W,AC,BK,2.5XG,	
2		2001-000262	R CARBON;1.8MOHM,5%,1/8W,AA,TP1.8X3.2M	
2		AA99-20071J	ASSY PCB SUB,AUTO(...AA95-00056C...V	S.N.A
3	C341	2401-001914	C AL,1uF,20%,50V,BP,TP5x11.5	
3	C342	2401-000962	C AL,22uF,20%,50V,GP,TP5x11.5	
3	C351	2301-000175	C FILM,PEF,15nF,5%,50V,TP,7.1x3.5x13mm,5	
3	C352	2401-000480	C AL,10uF,20%,50V,GP,TP5x11.5	
3	C353	2301-000204	C FILM,PEF,2.7nF,5%,50V,TP,7.4x3.9x13mm,	
3	C354	2301-000261	C FILM,PEF,4.7nF,5%,100V,TP,10.5x12.5x6,	
3	C355	2401-000480	C AL,10uF,20%,50V,GP,TP5x11.5	
3	C356	2201-000180	C CERAMIC,DISC,10nF,10%,50V,Y5V,TP,7x3.5	
3	C357	2401-001989	C AL,4.7uF,20%,50V,BP,TP5x11.5	
3	C358	2401-000471	C AL,10uF,20%,50V,BP,TP5x11,5mm	
3	C360	2305-000289	C FILM,MPEF,220nF,5%,63V,TP,..5mm	
3	C361	2305-000122	C FILM,MPPF,100nF,5%,50V,TP,7.3x4.0x5.0m	
3	C362	2305-000149	C FILM,MPEF,100nF,5%,100V,TP,12x12.5x6.5	
3	C371	2401-000302	C AL,100uF,20%,25V,GP,TP5.3x11.5	
3	C372	2401-000480	C AL,10uF,20%,50V,GP,TP5x11.5	
3	C373	2401-000302	C AL,100uF,20%,25V,GP,TP5.3x11.5	
3	C374	2401-001621	C AL,6.8uF,20%,450V,GP,TP13x20,5	
3	C405	2201-000558	C CERAMIC,DISC,0.47nF,10%,50V,Y5P,TP5x3	
3	C406	2201-000370	C CERAMIC,DISC,0.22nF,10%,50V,Y5P,TP,4x3	
3	C421	2401-000302	C AL,100uF,20%,25V,GP,TP5.3x11.5	
3	C429	2305-000704	C FILM,MPEF,100nF,5%,250V,TP,16.5x10.3x5	
3	C454	2303-000331	C FILM,PPF,4.7nF,5%,630V,TP,19.5x12x7.7	
3	C455	2401-001527	C AL,47uF,20%,250V,HR,TP,13x25mm,5m	
3	C456	2201-000132	C CERAMIC,DISC,0.1nF,10%,500V,Y5P,TP6.5	
3	C461	2201-000600	C CERAMIC,DISC,0.56nF,10%,50V,Y5P,TP5x3	
3	C462	2301-000246	C FILM,PEF,33nF,5%,100V,TP,7x5.0x9.5mm,5	
3	C480	2305-000122	C FILM,MPPF,100nF,5%,50V,TP,7.3x4.0x5.0m	
3	C481	2401-000914	C AL,22uF,20%,16V,GP,TP5x11,5	
3	C482	2305-000178	C FILM,MPEF,10nF,5%,100V,TP,..5mm	
3	C484	2401-001026	C AL,3.3UF,20%,50V,GP,TP5X11,5	
3	C485	2201-000146	C-CERAMIC,DISC,0.1nF,5%,50V,SL,TP5x3.5,	
3	C486	2201-000146	C CERAMIC,DISC,0.1nF,5%,50V,SL,TP5x3.5,	
3	C487	2401-001026	C AL,3.3UF,20%,50V,GP,TP5X11,5	
3	C488	2401-002144	C AL,47uF,20%,16V,GP,TP5x11,5	
3	C489	2401-001840	C AL,100uF,20%,16V,GP,TP5,3x11,5	
3	C490	2201-000119	C CERAMIC,DISC,100nF,+80-20%,50V,Y5V,TP,	
3	C492	2401-002144	C AL,47uF,20%,16V,GP,TP5x11,5	
3	C493	2201-000119	C CERAMIC,DISC,100nF,+80-20%,50V,Y5V,TP,	
3	C494	2201-000471	C CERAMIC,DISC,0.33nF,10%,50V,Y5P,TP,4x3	
3	C495	2301-000192	C FILM,PEF,1nF,5%,50V,TP5,3x10mm,5mm	
3	C496	2401-000832	C AL,220uF,20%,25V,GP,TP8x11.5,5	
3	D342	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D343	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D344	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D345	0403-001325	DIODE ZENER;MTZJ,15C,14.35-15.09V,500mW,D	
3	D352	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D353	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D355	0402-000546	DIODE RECTIFIER;TVR10C,400V,1.0A,DO-41,T	
3	D363	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D364	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D371	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D372	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D373	0402-000243	DIODE RECTIFIER;RC2,V1,2000V,0.2A,DO-201	
3	D384	0402-000132	DIODE RECTIFIER;1N4004,400V,1A,DO-41,TP	
3	D385	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D386	0403-001316	DIODE ZENER;MTZJ,3.0A,2.85-3.07V,500mW,DO	
3	D395	0403-001319	DIODE ZENER;MTZJ,4.7C,4.68-4.93V,500mW,DO	
3	D442	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D443	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D451	0402-000534	DIODE RECTIFIER;RG10V,400V,1.2A,DO-201,T	
3	D456	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D457	0403-000714	DIODE ZENER;MTZJ,3.3B,3.3V,3.32-3.57V,500	
3	D474	0403-000734	DIODE ZENER;TZP15B,15V,14.7-16.5V,1W,DO-	
3	D475	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D476	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D477	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D478	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D479	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D480	0402-000132	DIODE RECTIFIER;1N4004,400V,1A,DO-41,TP	
3	D483	0403-000720	DIODE ZENER;MTZJ,9.1B,9.1V,8.57-9.01V,500	
3	D484	0402-000132	DIODE RECTIFIER;1N4004,400V,1A,DO-41,TP	
3	D491	0401-000005	DIODE SWITCHING,1N4148,100V,200mA,DO-35,	
3	D492	0403-000716	DIODE ZENER;MTZJ,4.7B,4.7V,4.55-4.8V,500m	
3	D493	0403-001325	DIODE ZENER;MTZJ,15C,14.35-15.09V,500mW,D	
3	IC481	1203-001217	IC POSI,ADJUST REG.,431,TO-92,3P,4.5/8MIL	
3	L341	2701-000116	INDUCTOR AXIAL,10uH,10%,4.2x9.8mm	
3	Q342	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q343	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q344	0501-000283	TR SMALL SIGNAL,KSA539,PNP,400mW,TO-92,T	
3	Q350	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q351	0501-000283	TR SMALL SIGNAL,KSA539,PNP,400mW,TO-92,T	
3	Q352	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q353	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q354	0501-000283	TR SMALL SIGNAL,KSA539,PNP,400mW,TO-92,T	
3	Q355	0501-000366	TR SMALL SIGNAL,KSC2330-Y,NPN,TW,TO-92L,	
3	Q381	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q382	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q401	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q402	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q421	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q451	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q452	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q453	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q454	0501-000283	TR SMALL SIGNAL,KSA539,PNP,400mW,TO-92,T	
3	Q461	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q471	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q473	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q481	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	Q482	0501-000283	TR SMALL SIGNAL,KSA539,PNP,400mW,TO-92,T	
3	Q483	0501-000283	TR SMALL SIGNAL,KSA539,PNP,400mW,TO-92,T	
3	Q491	0501-000389	TR SMALL SIGNAL,KSC815,NPN,400mW,TO-92,T	
3	R339	2001-000613	R CARBON;3.9KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R340	2001-000241	R CARBON;1.5KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R341	2001-000429	R CARBON;10KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R342	2001-000273	R CARBON;100KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R343	2001-000812	R CARBON;5.6KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R344	2001-000890	R CARBON;6.8KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R345	2001-001098	R-CARBON(S);1KOHM,5%,1/2W,AA,TP2.4X6.4M	
3	R345A	2001-000429	R CARBON;10KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R346	2001-000290	R CARBON;10KOHM,5%,1/8W,AA,TP1.8X3.2MM	
3	R347	2001-001098	R CARBON(S);1KOHM,5%,1/2W,AA,TP2.4X6.4M	
3	R348	2001-000591	R CARBON;3.3KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R349	2001-000252	R CARBON;1.8KOHM,5%,1/8W,AA,TP1.8X3.2M	
3	R351	2001-001178	R CARBON(S);680OHM,5%,1/2W,AA,TP2.4X6.4	
3	R352	2001-000003	R CARBON;330ohm,5%,1/8W,AA,TP1.8x3.2mm	
3	R353	2001-000890	R CARBON;6.8KOHM,5%,1/8W,AA,TP1.8X3.2M	

Level	Loc. No.	Code No.	Description ; Specification	Remark
3	R354	2001-000890	R CARBON;6.8KOHM 5% 1/8W AA,TP1.9X3.2M	
3	R355	2001-000006	R CARBON;2.4KOHM 5% 1/8W AA,TP1.9X3.2M	
3	R357	2001-000613	R CARBON;3.9KOHM 5% 1/8W AA,TP1.8X3.2M	
3	R358	2001-000008	R CARBON;15KOHM 5% 1/8W AA,TP1.8X3.2MM	
3	R359	2001-000766	R CARBON;43KOHM 5% 1/8W AA,TP1.8X3.2MM	
3	R360	2001-000857	R CARBON;560OHM 5% 1/8W AA,TP1.9X3.2MM	
3	R361	2001-001191	R CARBON(S);820KOHM 5% 1/2W AA,TP2.4X6	
3	R362	2001-000660	R CARBON;33KOHM 5% 1/8W AA,TP1.8X3.2MM	
3	R363	2001-000723	R CARBON;4.3KOHM 5% 1/8W AA,TP1.9X3.2M	
3	R364	2001-000938	R CARBON;680HM 5% 1/8W AA,TP1.8X3.2MM	
3	R365	2001-001120	R CARBON(S);3.3OHM 5% 1/2W AA,TP2.4X6.4	
3	R366	2001-000109	R CARBON(S);470OHM 5% 1/2W AA ,TP2.4X6.4	
3	R367	2001-001065	R CARBON(S);110KOHM 5% 1/2W AA,TP2.4X6.	
3	R368	2001-001065	R CARBON(S);110KOHM 5% 1/2W AA,TP2.4X6.	
3	R369	2001-001065	R CARBON(S);110KOHM 5% 1/2W AA,TP2.4X6.	
3	R369A	2001-001065	R CARBON(S);110KOHM 5% 1/2W AA,TP2.4X6.	
3	R370	2001-001065	R CARBON(S);110KOHM 5% 1/2W AA,TP2.4X6.	
3	R371	2001-001065	R CARBON(S),110KOHM 5% 1/2W AA,TP2.4X6.	
3	R372	2001-001110	R CARBON(S);240KOHM 5% 1/2W AA,TP2.4X6.	
3	R373	2001-001110	R CARBON(S);240KOHM 5% 1/2W AA,TP2.4X6.	
3	R374	2001-001110	R CARBON(S),240KOHM 5% 1/2W AA,TP2.4X6.	
3	R375	2001-001113	R CARBON(S);270KOHM 5% 1/2W AA,TP2.4X6.	
3	R376	2001-000613	R CARBON;3.9KOHM 5% 1/8W AA,TP1.8X3.2M	
3	R377	2004-001892	R METAL(S);162Kohm 1% 1/2W AA,TP2.5x6.5	
3	R378	2004-001892	R METAL(S);162Kohm 1% 1/2W AA,TP2.5x6.5	
3	R379	2004-001892	R METAL(S);162Kohm 1% 1/2W AA,TP2.5x6.5	
3	R380	2004-001892	R METAL(S);162Kohm 1% 1/2W AA,TP2.5x6.5	
3	R381	2001-001088	R CARBON(S);1KOHM 5% 1/2W AA,TP2.4X6.4M	
3	R384	2001-001150	R CARBON(S);47OKOHM 5% 1/2W AA,TP2.4X6.	
3	R385	2001-000577	R CARBON;2KOHM 5% 1/8W AA,TP1.8X3.2MM	
3	R386	2001-000786	R CARBON;47KOHM 5% 1/8W AA,TP1.8X3.2MM	
3	R387	2001-000009	R CARBON;20KOHM 5% 1/8W AA,TP1.8X3.2MM	
3	R388	2001-000522	R CARBON;22KOHM 5% 1/8W AA,TP1.8X3.2MM	
3	R389	2001-000577	R CARBON;2KOHM 5% 1/8W AA,TP1.8X3.2MM	
3	R395	2001-000734	R CARBON;4.7KOHM 5% 1/8W AA,TP1.9X3.2M	
3	R397	2001-000429	R CARBON;1KOHM 5% 1/8W AA,TP1.8X3.2MM	
3	R411	2001-000734	R CARBON;4.7KOHM 5% 1/8W AA,TP1.8X3.2M	
3	R412	2001-001088	R CARBON(S),1KOHM 5% 1/2W AA,TP2.4X6.4M	
3	R413	2001-000515	R CARBON;220OHM 5% 1/8W AA,TP1.8X3.2MM	
3	R414	2001-000290	R CARBON;10KOHM 5% 1/8W AA,TP1.9X3.2MM	
3	R415	2001-000734	R CARBON;4.7KOHM 5% 1/8W AA,TP1.9X3.2M	
3	R416	2001-000006	R CARBON;2.4KOHM 5% 1/8W AA,TP1.8X3.2M	
3	R420	2001-000281	R CARBON;100OHM 5% 1/8W AA,TP1.8X3.2MM	
3	R421	2003-002159	R METAL OXIDE;150OHM 5% 1W,AG,TP4.3X12M	
3	R422	2001-000028	R CARBON(S);100OHM 5% 1/2W,AA,TP2.4X6.4	
3	R423	2001-000613	R CARBON;3.9KOHM 5% 1/8W AA,TP1.8X3.2M	
3	R437	2008-001087	R-FUSIBLE(S);1.8ohm 5% 2W,AG,TP3.9x12mm	
3	R438	2001-000085	R-CARBON(S);100KOHM 5% 1/2W,AA,TP2.4X6.	
3	R439	2001-000085	R-CARBON(S);100KOHM 5% 1/2W,AA,TP2.4X6.	
3	R442	2008-000254	R-FUSIBLE(S);0.68ohm 5% 2W,AF,TP3.9x10m	
3	R442A	2008-000254	R-FUSIBLE(S);0.68ohm 5% 2W,AF,TP3.9x10m	
3	R443	2003-002156	R-METAL OXIDE;560OHM 5% 2W,AG,TP5X16MM	
3	R443A	2003-002156	R-METAL OXIDE;560OHM 5% 2W,AG,TP5X16MM	
3	R445	2001-000258	R CARBON;1.8KOHM 5% 1/8W AA,TP1.8X3.2M	
3	R446	2001-000522	R CARBON;22KOHM 5% 1/8W AA,TP1.8X3.2MM	
3	R447	2001-000812	R CARBON;5.6KOHM 5% 1/8W AA,TP1.8X3.2M	
3	R448	2001-000411	R CARBON;18KOHM 5% 1/8W AA,TP1.8X3.2MM	
3	R449	2001-000660	R CARBON;33KOHM 5% 1/8W AA,TP1.8X3.2MM	
3	R450	2001-000290	R CARBON;10KOHM 5% 1/8W AA,TP1.8X3.2MM	
3	R451	2001-000812	R CARBON;5.6KOHM 5% 1/8W AA,TP1.8X3.2M	
3	R452	2001-000241	R CARBON;1.5KOHM 5% 1/8W AA,TP1.8X3.2M	
3	R454	2001-000761	R CARBON;430OHM 5% 1/8W AA,TP1.8X3.2MM	
3	R455	2001-000761	R CARBON;430OHM 5% 1/8W AA,TP1.8X3.2MM	
3	R456	2001-000761	R CARBON;430OHM 5% 1/8W AA,TP1.8X3.2MM	
3	R458	2001-000677	R CARBON;2KOHM 5% 1/8W,AA,TP1.8X3.2MM	
3	R459	2001-001192	R CARBON(S);820OHM 5% 1/2W,AA,TP2.4X6.4	
3	R460	2003-002044	R-METAL OXIDE(S);100ohm 5% 1W,AF,TP2.5x	
3	R461	2001-000613	R CARBON;3.9KOHM 5% 1/8W AA,TP1.8X3.2M	
3	R464	2001-000734	R CARBON;4.7KOHM 5% 1/8W AA,TP1.8X3.2M	
3	R471	2001-001146	R CARBON(S);4.7OHM 5% 1/2W,AA,TP2.4X6.4	
3	R472	2001-000800	R CARBON;5.1KOHM 5% 1/8W AA,TP1.8X3.2M	
3	R473	2001-000800	R CARBON;5.1KOHM 5% 1/8W AA,TP1.8X3.2M	
3	R474	2001-000009	R CARBON;20KOHM 5% 1/8W AA,TP1.8X3.2MM	
3	R474A	2001-000908	R CARBON;220KOHM 5% 1/8W AA,TP1.8X3.2M	
3	R475	2004-001023	R METAL;5.6Kohm 1% 1/8W AA,TP1.8x3.2m	
3	R475B	2001-000734	R CARBON;4.7KOHM 5% 1/8W AA,TP1.8X3.2M	
3	R477	2001-000429	R CARBON;1KOHM 5% 1/8W AA,TP1.8X3.2MM	
3	R479	2001-000005	R CARBON;390ohm 5% 1/8W AA,TP1.8x3.2mm	
3	R480	2001-000449	R CARBON;2.2KOHM 5% 1/8W AA,TP1.8X3.2M	
3	R481	2001-000290	R CARBON;10KOHM 5% 1/8W AA,TP1.8X3.2MM	
3	R482	2001-001031	R CARBON;15KOHM 5% 1/8W AA,TP1.8X3.2MM	
3	R483	2001-000429	R CARBON;1KOHM 5% 1/8W AA,TP1.8X3.2MM	
3	R484	2001-000429	R CARBON;1KOHM 5% 1/8W AA,TP1.8X3.2MM	
3	R487	2001-000924	R CARBON;680OHM 5% 1/8W AA,TP1.8X3.2MM	
3	R489	2001-000522	R CARBON;22KOHM 5% 1/8W AA,TP1.8X3.2MM	
3	R490	2001-000723	R CARBON;4.3KOHM 5% 1/8W AA,TP1.9X3.2M	
3	R491	2001-001178	R CARBON(S);680OHM 5% 1/2W,AA,TP2.4X6.4	
3	R492	2001-000591	R CARBON;3.3KOHM 5% 1/8W AA,TP1.8X3.2M	
3	R493	2001-000429	R CARBON;1KOHM 5% 1/8W AA,TP1.8X3.2MM	
3	R494	2001-000066	R CARBON(S);10KOHM 5% 1/2W,AA,TP2.4X6.4	
3	R495	2001-000037	R CARBON(S);330OHM 5% 1/2W,AA,TP2.4X6.4	
3	R496	2001-000347	R CARBON;13KOHM 5% 1/8W AA,TP1.8X3.2MM	
3	R497	2001-000003	R CARBON;330ohm 5% 1/8W AA,TP1.8x3.2mm	
3	R498	2001-001070	R CARBON(S);120OHM 5% 1/2W,AA,TP2.4X6.4	
2		0202-000187	SOLDER-WIRE FLUX ;RS60S,D1.2,63Sn/37Pb	S.N.A
2		AA65-30105C	CLAMP WIRE,ALL MODEL,NYLON 66,V2,NTR,SMM	S.N.A

ASSY-PCB,CONV AMP

1	*	AA96-00055L	ASSY-PCB,CONV AMP; ,SP53,JSHF,J51A, , ,	
2	C491	2305-000322	C-FILM,MPPF,12nF,5% 1.6KV,TP,29x20.5x13,	
2	CN203	AA39-00115A	LEAD CONNECTOR ASSY,,10P,YBNH250-10.3515	
2	CN401	AA39-00128A	LEAD CONNECTOR ASSY,,8P,YBNH250-08.3515S	
2	CN402	AA39-00116A	LEAD CONNECTOR ASSY,,12P,YBNH250-12.3515	
2	CN802	AA39-00128A	LEAD CONNECTOR ASSY,,8P,YBNH250-08.3515S	
2	IC2101	AA96-50152C	ASSY-H/S; ,TR,AA62-30012A,KA7806A,30MM	
3		1203-000284	IC-POSI FIXED REG.,7806,TO-220,3P, PLAS	
3		3003-000333	SCREW,TAPTITE,PH- ,2S,M3.L10,ZPC(YELL,SW	
3		AA62-30012A	HEAT SINK ES. ,A6063,EXTR. ,T0220, , ,	
2	IC2102	1203-000121	IC-NEGA FIXED REG.,7906,TO-220,3P, PLAS	
2	IC2103	AA96-00034A	ASSY-H/S, ,CONVERGENCE,AA62-30173D,STK3	
3		3205-000129	GREASE,SILICON,SC102,,JAPAN	S.N.A
3		1201-001225	IC-VIDEO AMP,362,SIP22P, TRIPLE, ,PLAS	
3		3003-001021	SCREW,TAPTITE,PH- ,-,B,M3.L15,ZPC(YELL),SWR	
3		AA62-30173D	HEAT SINK ES. ,T1.0,WHITE,SCREW HOLE(2	
2	IC2104	AA96-00034A	ASSY-H/S, ,CONVERGENCE,AA62-30173D,STK3	
2	PCB	AA41-00135D	PCB-CONVERGENCE AMP,P51A,1L,CEM-1,330x24	S.N.A
2	SG303	4715-001050	SURGE ABSORBER,2.4kV,20%,1500A, ,DISC,RA	
2		0202-000187	SOLDER-WIRE FLUX ;RS60S,D1.2,63Sn/37Pb	S.N.A
2		AA99-20071E	ASSY-PCB SUB,ALTO; AA96-00055L , ,V	S.N.A
3	CN403	3711-002643	CONNECTOR-HEADER;BOX,4P,1R,2.5MM,STRAIGH	
3	CZ101	2401-001429	C-AL;470uF,20%,50V,CP,TP,13x20.5	
3	CZ102	2401-001429	C-AL;470uF,20%,50V,CP,TP,13x20.5	
3	CZ103	2401-000689	C-AL;2200uF,20%,16V,CP,TP,13x25.5	
3	CZ105	2401-000689	C-AL;2200uF,20%,16V,CP,TP,13x25.5	
3	CZ106	2201-000180	C-CERAMIC,DISC,10nF,10%,50V,Y5V,TP,7x3.5	
3	CZ107	2201-000180	C-CERAMIC,DISC,10nF,10%,50V,Y5V,TP,7x3.5	
3	CZ108	2201-000499	C-CERAMIC,DISC,0.39nF,5%,50V,SL,TP8.5x3	
3	CZ109	2201-000499	C-CERAMIC,DISC,0.39nF,5%,50V,SL,TP8.5x3	
3	CZ110	2201-000499	C-CERAMIC,DISC,0.39nF,5%,50V,SL,TP8.5x3	
3	CZ111	2201-000976	C-CERAMIC,DISC,0.022nF,5%,50V,NP0,TP,5x3	
3	CZ112	2201-000863	C-CERAMIC,DISC,0.68nF,10%,50V,Y5P,TP,5x3	
3	CZ113	2201-000976	C-CERAMIC,DISC,0.022nF,5%,50V,NP0,TP,5x3	
3	CZ114	2201-000863	C-CERAMIC,DISC,0.68nF,10%,50V,Y5P,TP,5x3	
3	CZ115	2201-000976	C-CERAMIC,DISC,0.022nF,5%,50V,NP0,TP,5x3	
3	CZ116	2201-000863	C-CERAMIC,DISC,0.68nF,10%,50V,Y5P,TP,5x3	
3	CZ117	2201-000327	C-CERAMIC,DISC,2.2nF,10%,50V,Y5V,TP,6.5x	
3	CZ118	2201-000327	C-CERAMIC,DISC,2.2nF,10%,50V,Y5V,TP,6.5x	
3	CZ119	2201-000119	C-CERAMIC,DISC,100nF,-80-20%,50V,Y5V,TP,	
3	CZ120	2201-000119	C-CERAMIC,DISC,100nF,-80-20%,50V,Y5V,TP,	
3	CZ121	2201-000764	C-CERAMIC,DISC,0.082nF,5%,50V,NP0,TP,8x3	
3	CZ126	2201-000499	C-CERAMIC,DISC,0.39nF,5%,50V,SL,TP8.5x3	
3	CZ127	2201-000499	C-CERAMIC,DISC,0.39nF,5%,50V,SL,TP8.5x3	
3	CZ128	2201-000499	C-CERAMIC,DISC,0.39nF,5%,50V,SL,TP8.5x3	
3	CZ132	2201-000976	C-CERAMIC,DISC,0.022nF,5%,50V,NP0,TP,5x3	
3	CZ133	2201-000863	C-CERAMIC,DISC,0.68nF,10%,50V,Y5P,TP,5x3	
3	CZ134	2201-000976	C-CERAMIC,DISC,0.022nF,5%,50V,NP0,TP,5x3	
3	CZ135	2201-000863	C-CERAMIC,DISC,0.68nF,10%,50V,Y5P,TP,5x3	
3	CZ136	2201-000976	C-CERAMIC,DISC,0.022nF,5%,50V,NP0,TP,5x3	
3	CZ137	2201-000863	C-CERAMIC,DISC,0.68nF,10%,50V,Y5P,TP,5x3	
3	CZ138	2201-000327	C-CERAMIC,DISC,2.2nF,10%,50V,Y5V,TP,6.5x	

Level	Loc. No.	Code No.	Description ; Specification	Remark
3	CZ139	2201-000327	C-CERAMIC,DISC,2.2nF,10%,50V,Y5V,TP,6.5x	
3	CZ144	2401-001840	C-AL,100uF,20%,16V,CP,TP,6.3x11.5	
3	CZ145	2201-000119	C-CERAMIC,DISC,100nF,-80-20%,50V,Y5V,TP,	
3	CZ146	2401-001840	C-AL,100uF,20%,16V,CP,TP,6.3x11.5	
3	CZ147	2201-000119	C-CERAMIC,DISC,100nF,-80-20%,50V,Y5V,TP,	
3	CZ151	2202-000796	C-CERAMIC,MLC,AXIAL,1NF,10%,50V,Y5P,TP,3	
3	CZ152	2202-000796	C-CERAMIC,MLC,AXIAL,1NF,10%,50V,Y5P,TP,3	
3	CZ153	2202-000796	C-CERAMIC,MLC,AXIAL,1NF,10%,50V,Y5P,TP,3	
3	CZ154	2202-000796	C-CERAMIC,MLC,AXIAL,1NF,10%,50V,Y5P,TP,3	
3	CZ155	2202-000796	C-CERAMIC,MLC,AXIAL,1NF,10%,50V,Y5P,TP,3	
3	CZ156	2202-000796	C-CERAMIC,MLC,AXIAL,1NF,10%,50V,Y5P,TP,3	
3	D453	0402-001286	DIODE,RECTIFIER,RP1H,2000V,1A, ,TP	
3	D501	0401-000005	DIODE,SWITCHING,1N4148,100V,200mA,DO-35	
3	DZ120	0403-000510	DIODE,ZENER;MTZJ,6.2B,6.2V,5.96-6.27V,500	
3	DZ121	0403-000510	DIODE,ZENER;MTZJ,6.2B,6.2V,5.96-6.27V,500	
3	DZ122	0403-000510	DIODE,ZENER;MTZJ,6.2B,6.2V,5.96-6.27V,500	
3	DZ126	0402-000546	DIODE,RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
3	DZ127	0402-000546	DIODE,RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
3	DZ129	0403-000510	DIODE,ZENER;MTZJ,6.2B,6.2V,5.96-6.27V,500	
3	DZ129	0403-000510	DIODE,ZENER;MTZJ,6.2B,6.2V,5.96-6.27V,500	
3	DZ130	0403-000510	DIODE,ZENER;MTZJ,6.2B,6.2V,5.96-6.27V,500	
3	DZ131	0403-000510	DIODE,ZENER;MTZJ,6.2B,6.2V,5.96-6.27V,500	
3	LZ101	2701-001030	INDUCTOR,AXIAL,4.3uH,10%,5x14mm	
3	LZ102	2701-001030	INDUCTOR,AXIAL,4.3uH,10%,5x14mm	
3	LZ103	2701-000142	INDUCTOR,AXIAL,1uH,10%,2.5x3.4mm	
3	LZ104	2701-000142	INDUCTOR,AXIAL,1uH,10%,2.5x3.4mm	
3	LZ107	2701-000142	INDUCTOR,AXIAL,1uH,10%,2.5x3.4mm	
3	LZ108	2701-000142	INDUCTOR,AXIAL,1uH,10%,2.5x3.4mm	
3	LZ109	2701-000142	INDUCTOR,AXIAL,1uH,10%,2.5x3.4mm	
3	LZ110	2701-000142	INDUCTOR,AXIAL,1uH,10%,2.5x3.4mm	
3	LZ111	2701-000142	INDUCTOR,AXIAL,1uH,10%,2.5x3.4mm	
3	LZ112	2701-000142	INDUCTOR,AXIAL,1uH,10%,2.5x3.4mm	
3	R382	2002-001006	R COMPOSITION;4.7Kohm,5%,1/2W,AA,TP3.7x	
3	R476	2004-004046	R METAL(S);430Kohm,1%,1/2W,AA,TP2.5x6.5	
3	R476A	2004-004001	R METAL(S);180Kohm,1%,1/2W,AA,TP2.5x6.5	
3	R476B	2004-001892	R METAL(S);162Kohm,1%,1/2W,AA,TP2.5x6.5	
3	R476C	2004-004046	R METAL(S);430Kohm,1%,1/2W,AA,TP2.5x6.5	
3	R478	2004-001892	R METAL(S);162Kohm,1%,1/2W,AA,TP2.5x6.5	
3	R501	2004-001376	R METAL(S);11Kohm,1%,1/2W,AA,TP2.4x6.4m	
3	R502	2004-004366	R METAL(S);1.3Kohm,1%,1/2W,AA,TP2.5x6.5	
3	RF219	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP3.9x10mm	
3	RF220	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP3.9x10mm	
3	RF221	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP3.9x10mm	
3	RF222	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP3.9x10mm	
3	RF250	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP3.9x10mm	
3	RF251	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP3.9x10mm	
3	RF252	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP3.9x10mm	
3	RF253	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP3.9x10mm	
3	RZ101	2001-000429	R CARBON;1KOHM 5% 1/8W AA,TP1.8X3.2MM	
3	RZ102	2001-000429	R CARBON;1KOHM 5% 1/8W AA,TP1.8X3.2MM	
3	RZ103	2001-000429	R CARBON;1KOHM 5% 1/8W AA,TP1.8X3.2MM	
3	RZ104	2001-001114	R CARBON(S);270OHM 5% 1/2W,AA,TP2.4X6.4	
3	RZ105	2001-001114	R CARBON(S);270OHM 5% 1/2W,AA,TP2.4X6.4	
3	RZ106	2001-001114	R CARBON(S);270OHM 5% 1/2W,AA,TP2.4X6.4	
3	RZ107	2001-001114	R CARBON(S);270OHM 5% 1/2W,AA,TP2.4X6.4	
3	RZ108	2001-001114	R CARBON(S);270OHM 5% 1/2W,AA,TP2.4X6.4	
3	RZ109	2001-001114	R CARBON(S);270OHM 5% 1/2W,AA,TP2.4X6.4	
3	RZ110	2001-000563	R CARBON;27KOHM 5% 1/8W,AA,TP1.8X3.2MM	
3	RZ111	2001-000563	R CARBON;27KOHM 5% 1/8W,AA,TP1.8X3.2MM	
3	RZ112	2001-000563	R CARBON;27KOHM 5% 1/8W,AA,TP1.8X3.2MM	
3	RZ113	2001-000591	R CARBON;3.3KOHM 5% 1/8W,AA,TP1.8X3.2M	
3	RZ114	2001-000857	R CARBON;560OHM 5% 1/8W,AA,TP1.8X3.2MM	
3	RZ115	2001-000591	R CARBON,3.3KOHM 5% 1/8W,AA,TP1.8X3.2M	
3	RZ116	2001-000857	R CARBON;560OHM 5% 1/8W,AA,TP1.8X3.2MM	
3	RZ117	2001-000591	R CARBON;3.3KOHM 5% 1/8W,AA,TP1.8X3.2M	
3	RZ118	2001-000857	R CARBON;560OHM 5% 1/8W,AA,TP1.8X3.2MM	
3	RZ120	2001-000281	R CARBON;100OHM 5% 1/8W,AA,TP1.8X3.2MM	
3	RZ121	2001-000281	R CARBON;100OHM 5% 1/8W,AA,TP1.8X3.2MM	
3	RZ122	2001-000003	R CARBON;330ohm 5% 1/8W,AA,TP1.8x3.2mm	
3	RZ123	2003-002148	R-METAL OXIDE;3.9OHM 2% 2W,AF,TP3.9X10M	
3	RZ124	2003-002148	R-METAL OXIDE;3.9OHM 2% 2W,AF,TP3.9X10M	
3	RZ125	2003-002148	R-METAL OXIDE;3.9OHM 2% 2W,AF,TP3.9X10M	
3	RZ126	2003-002148	R-METAL OXIDE;3.9OHM 2% 2W,AF,TP3.9X10M	
3	RZ127	2003-002148	R-METAL OXIDE;3.9OHM 2% 2W,AF,TP3.9X10M	
3	RZ128	2003-002148	R-METAL OXIDE;3.9OHM 2% 2W,AF,TP3.9X10M	
3	RZ129	2003-001024	R METAL OXIDE(S);150ohm 5% 2W,AF,TP3.9x	
3	RZ129A	2003-001024	R METAL OXIDE(S);150ohm 5% 2W,AF,TP3.9x	
3	RZ130	2003-001024	R METAL OXIDE(S);150ohm 5% 2W,AF,TP3.9x	
3	RZ130A	2003-001024	R METAL OXIDE(S);150ohm 5% 2W,AF,TP3.9x	
3	RZ131	2003-002157	R METAL OXIDE;220OHM 5% 2W,AG,TP5X16MM	
3	RZ131A	2003-002157	R METAL OXIDE;220OHM 5% 2W,AG,TP5X16MM	
3	RZ132	2003-002157	R METAL OXIDE;220OHM 5% 2W,AG,TP5X16MM	
3	RZ132A	2003-002157	R METAL OXIDE;220OHM 5% 2W,AG,TP5X16MM	
3	RZ133	2001-000563	R CARBON;27KOHM 5% 1/8W,AA,TP1.8X3.2MM	
3	RZ134	2001-000563	R CARBON;27KOHM 5% 1/8W,AA,TP1.8X3.2MM	
3	RZ135	2001-000563	R CARBON;27KOHM 5% 1/8W,AA,TP1.8X3.2MM	
3	RZ136	2001-000591	R CARBON;3.3KOHM 5% 1/8W,AA,TP1.8X3.2M	
3	RZ137	2001-000857	R CARBON;560OHM 5% 1/8W,AA,TP1.8X3.2MM	
3	RZ138	2001-000591	R CARBON;3.3KOHM 5% 1/8W,AA,TP1.8X3.2M	
3	RZ139	2001-000857	R CARBON;560OHM 5% 1/8W,AA,TP1.8X3.2MM	
3	RZ140	2001-000591	R CARBON;3.3KOHM 5% 1/8W,AA,TP1.8X3.2M	
3	RZ141	2001-000857	R CARBON;560OHM 5% 1/8W,AA,TP1.8X3.2MM	
3	RZ142	2003-002148	R-METAL OXIDE;3.9OHM 2% 2W,AF,TP3.9X10M	
3	RZ143	2003-002148	R-METAL OXIDE;3.9OHM 2% 2W,AF,TP3.9X10M	
3	RZ144	2003-002148	R-METAL OXIDE;3.9OHM 2% 2W,AF,TP3.9X10M	
3	RZ145	2003-002148	R-METAL OXIDE;3.9OHM 2% 2W,AF,TP3.9X10M	
3	RZ146	2003-002148	R-METAL OXIDE;3.9OHM 2% 2W,AF,TP3.9X10M	
3	RZ147	2003-002148	R-METAL OXIDE;3.9OHM 2% 2W,AF,TP3.9X10M	
3	RZ148	2003-002157	R-METAL OXIDE;220OHM 5% 2W,AG,TP5X16MM	
3	RZ148A	2003-002157	R-METAL OXIDE;220OHM 5% 2W,AG,TP5X16MM	
3	RZ149	2003-001024	R METAL OXIDE(S);150ohm 5% 2W,AF,TP3.9x	
3	RZ149A	2003-001024	R METAL OXIDE(S);150ohm 5% 2W,AF,TP3.9x	
3	VR472	2103-001086	VR SEMI;100KOHM,25%,0.3W,TOP	

ASSY ACCESSORY

1	*	AA94-03473A	ASSY ACCESSORY;SP53,JSHFX/BWT,,51A,RL,SS/A	S.N.A
2		AA68-01307B	MANUAL (USER'S,SP43,JSHF/53,JSHF,WWT,RL(S W/P	S.N.A
2		AA68-01402A	MANUAL,GOOD WILL LETTER,,CIS,BS,1P/A/GE,,W	S.N.A
2		AA69-30009C	BAG,SHEET,LDPE,T0.08,W150,L120,	S.N.A
2		AA68-01120A	MANUAL,SERVICE, ,CIS,A4,6PAGE,F(OLD),W/	S.N.A
2		AA61-20126A	HOLDER LEG, ,ABS,HB,BLK,	S.N.A
2		AA39-40001B	CABLE,RCA,,1500MM	

REMOCON

1	*	AA59-00100A	REMOCON, ,TM57,KS88P04165,53J,/GRAY,S/	
2		AA09-00100A	IC MICOM;Z86L88085SC R 50MQ, ,28PIN,2-.3	
2		2802-000194	RESONATOR,CERAMIC,8MHz,1.0%,TP,8.5x4.5x5	

8. Block Diagrams

8-1 Main Signal

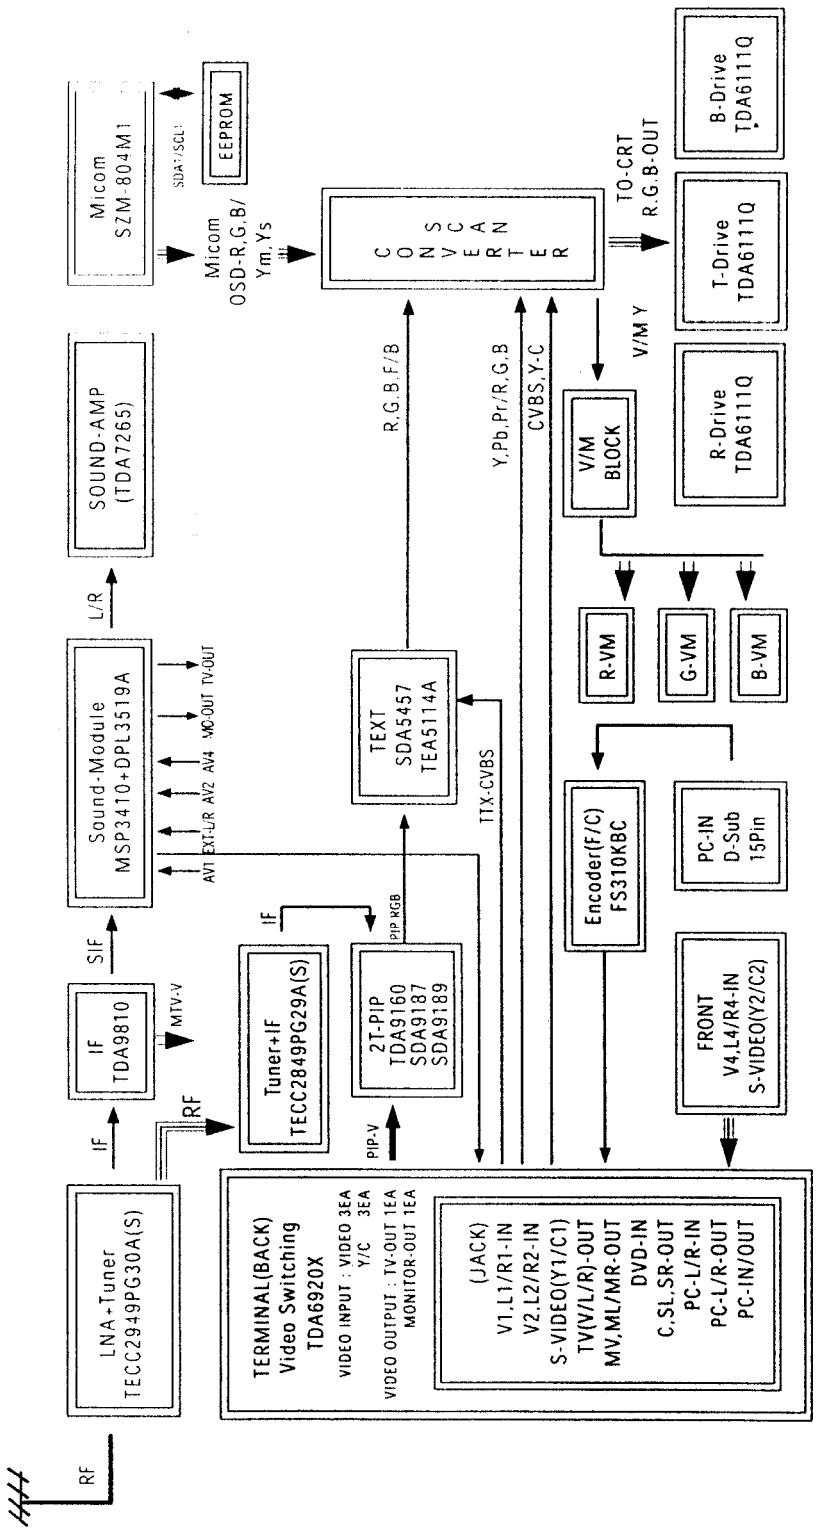

8-2 Video Signal

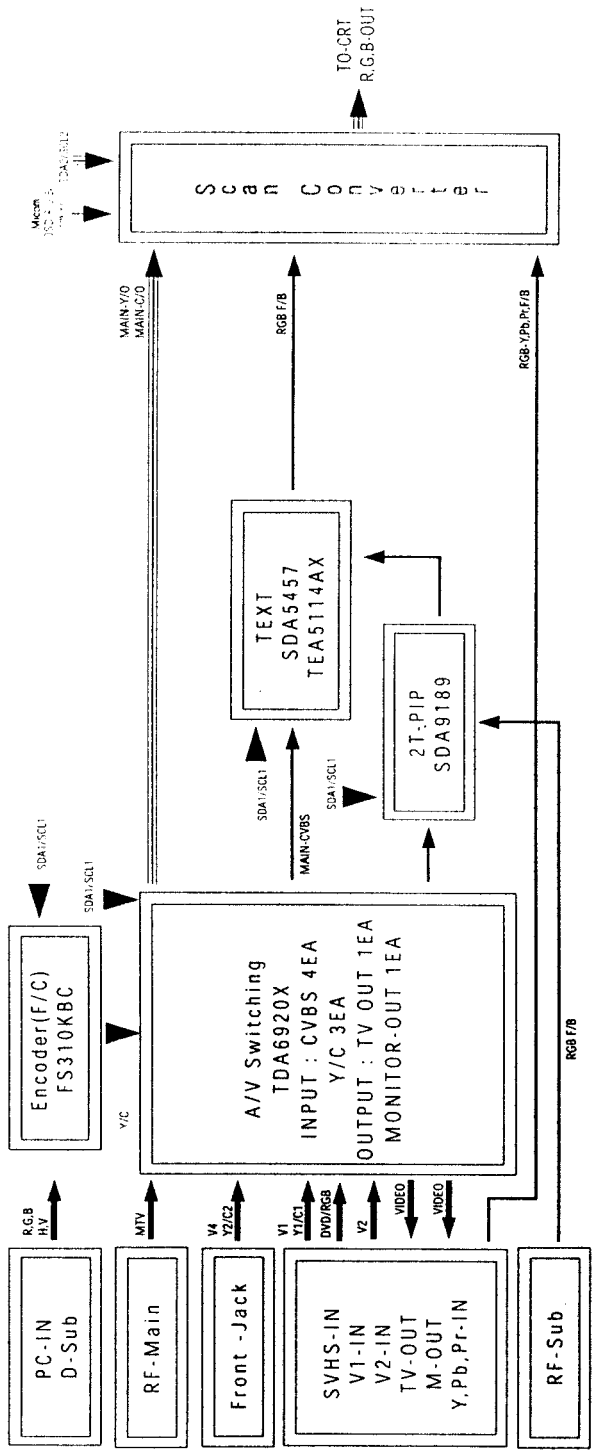

8-3 Sound Signal

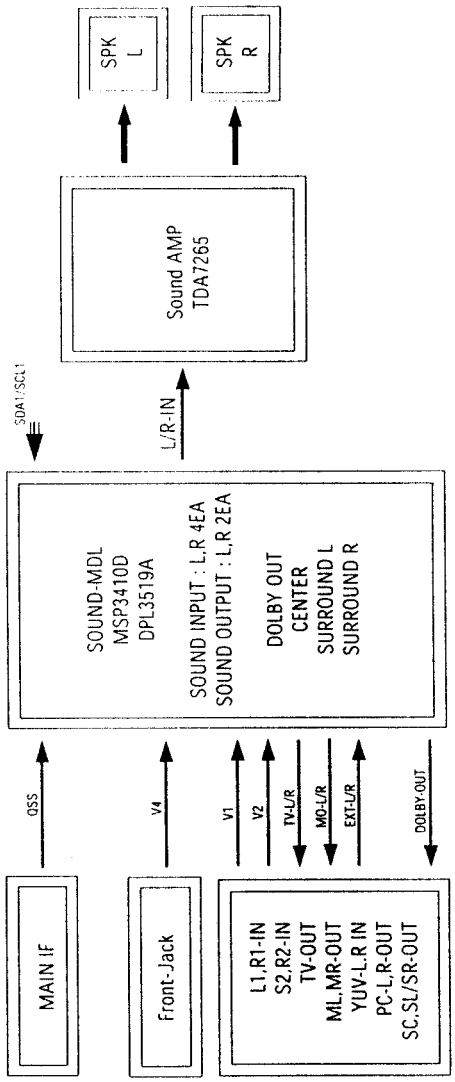

8-4 POWER SUPPLY

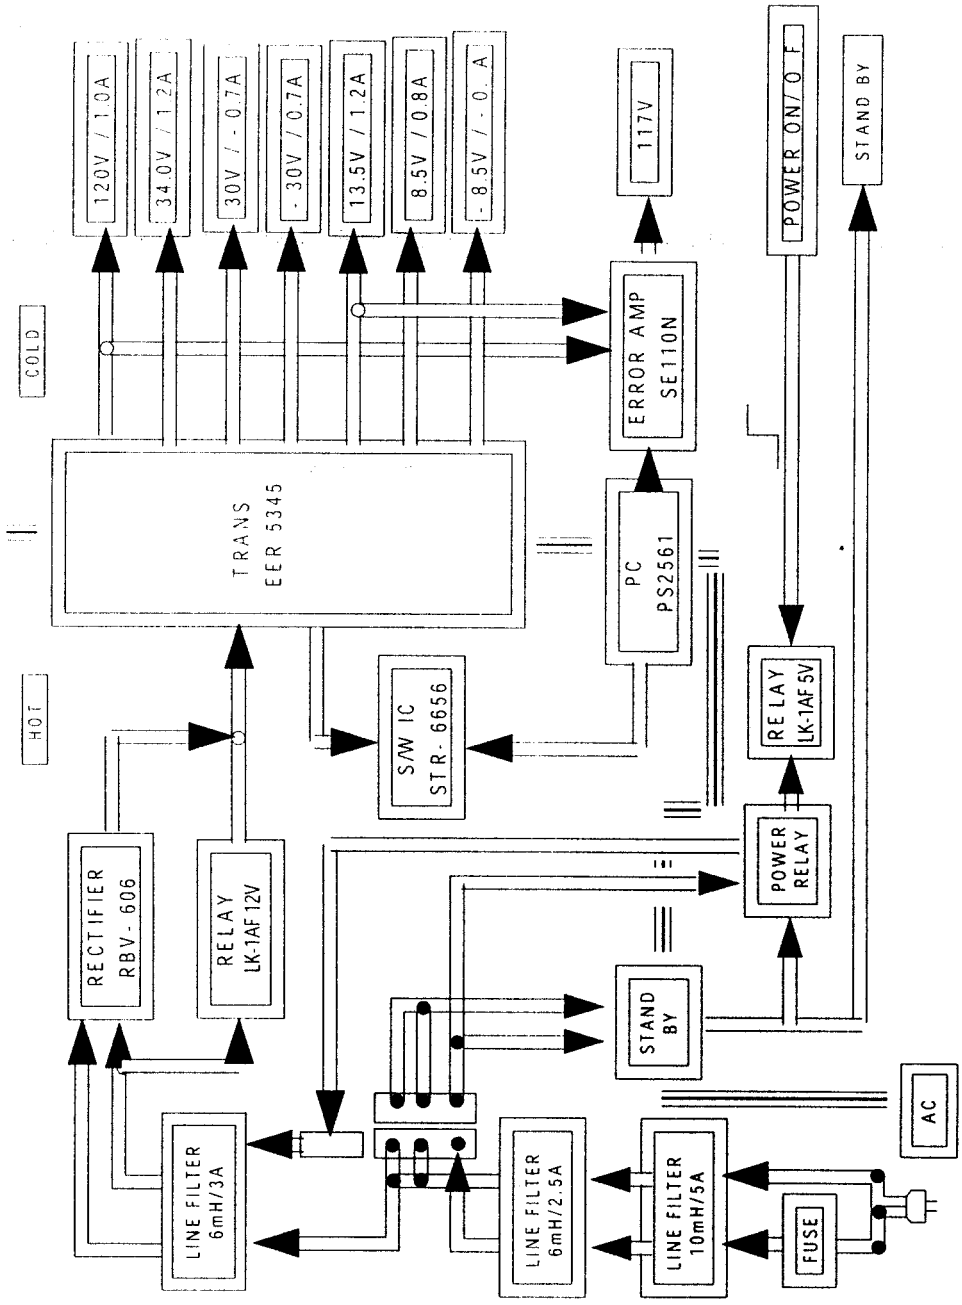

9. Wiring Diagram

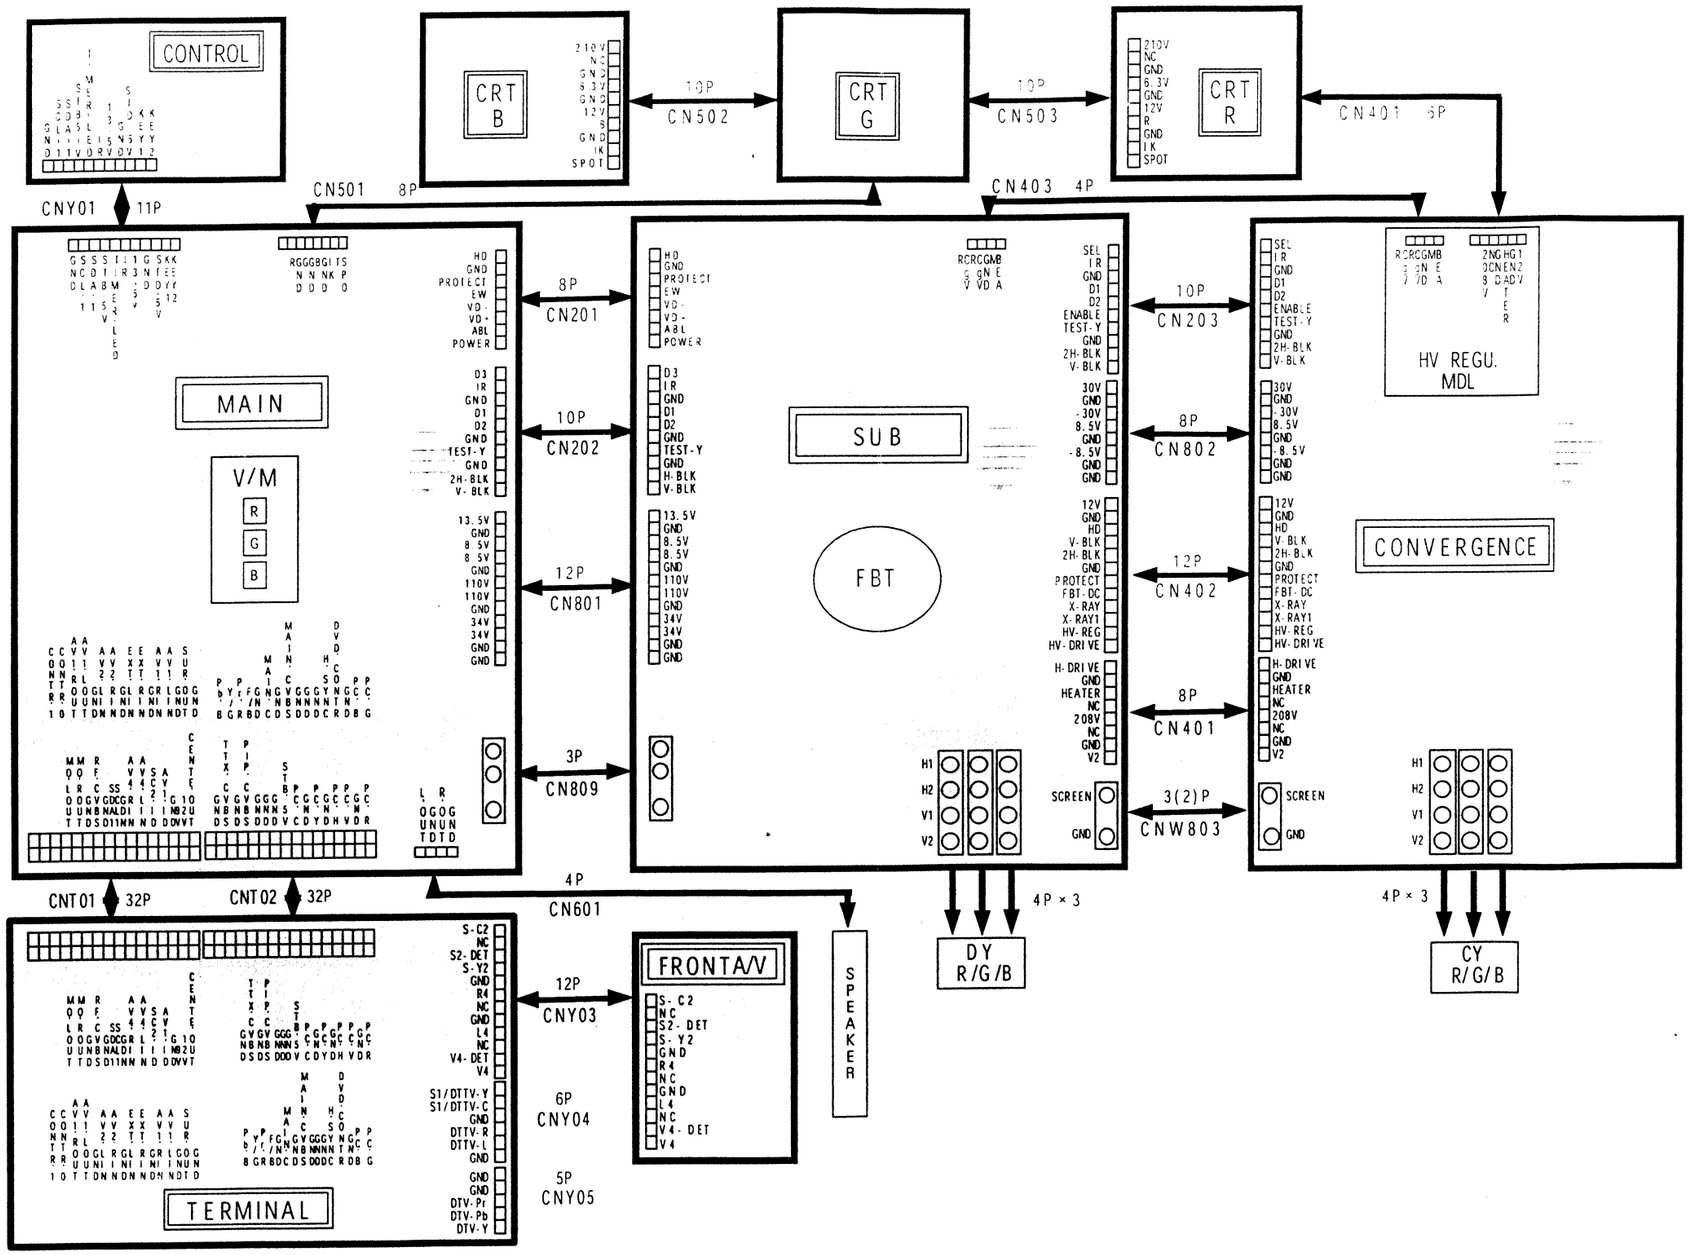

10. Schematic Diagrams

10-1 MAIN A

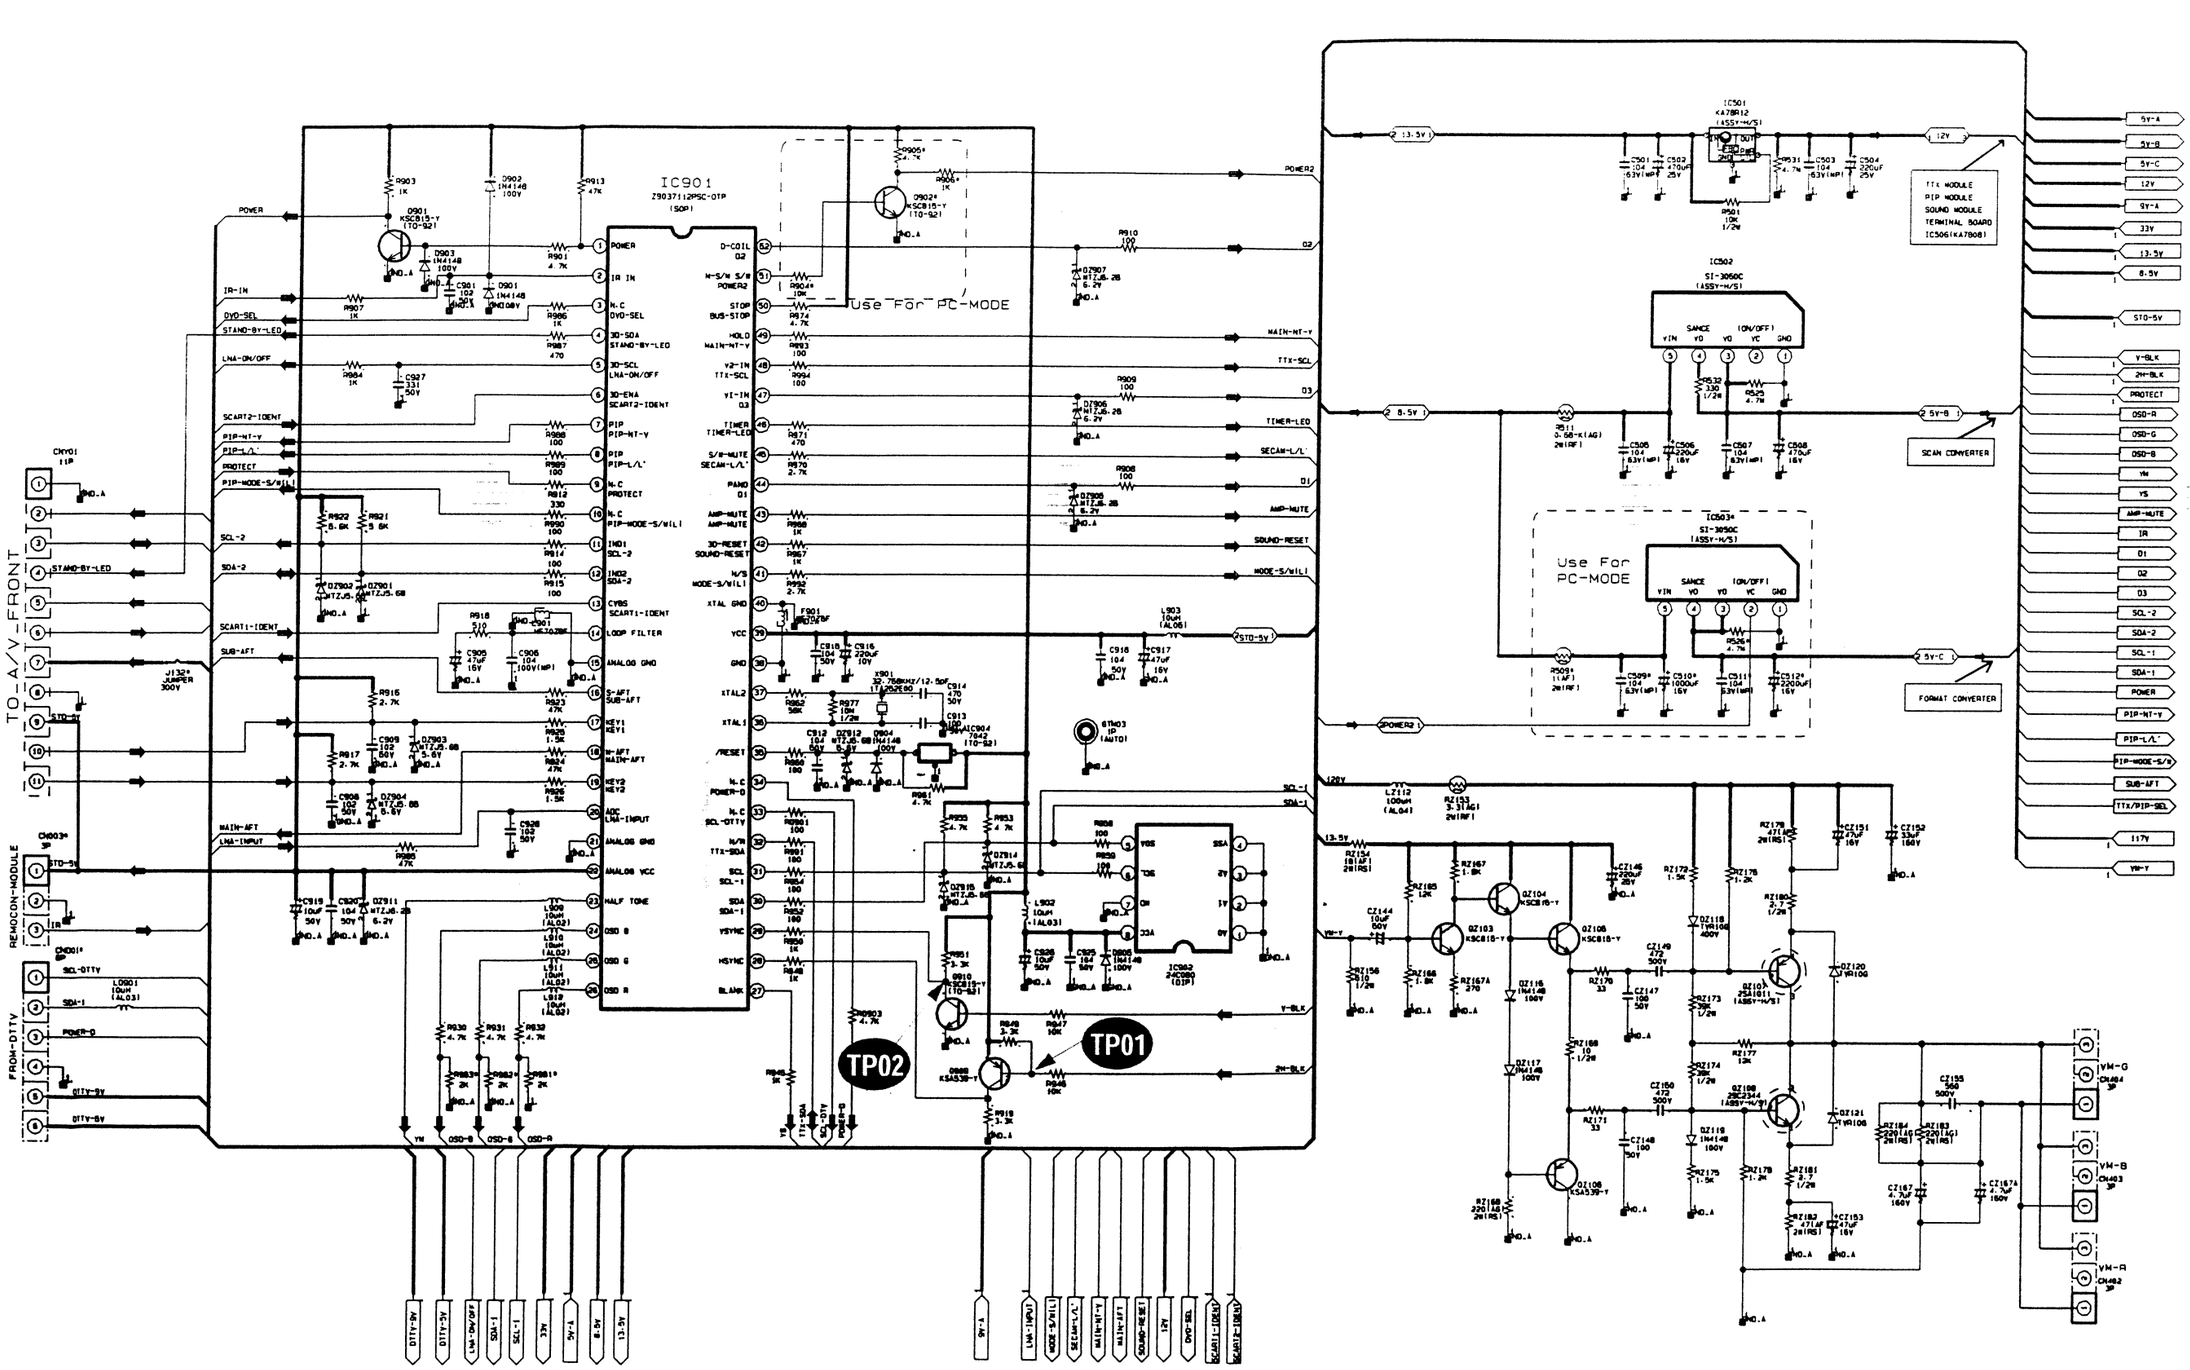

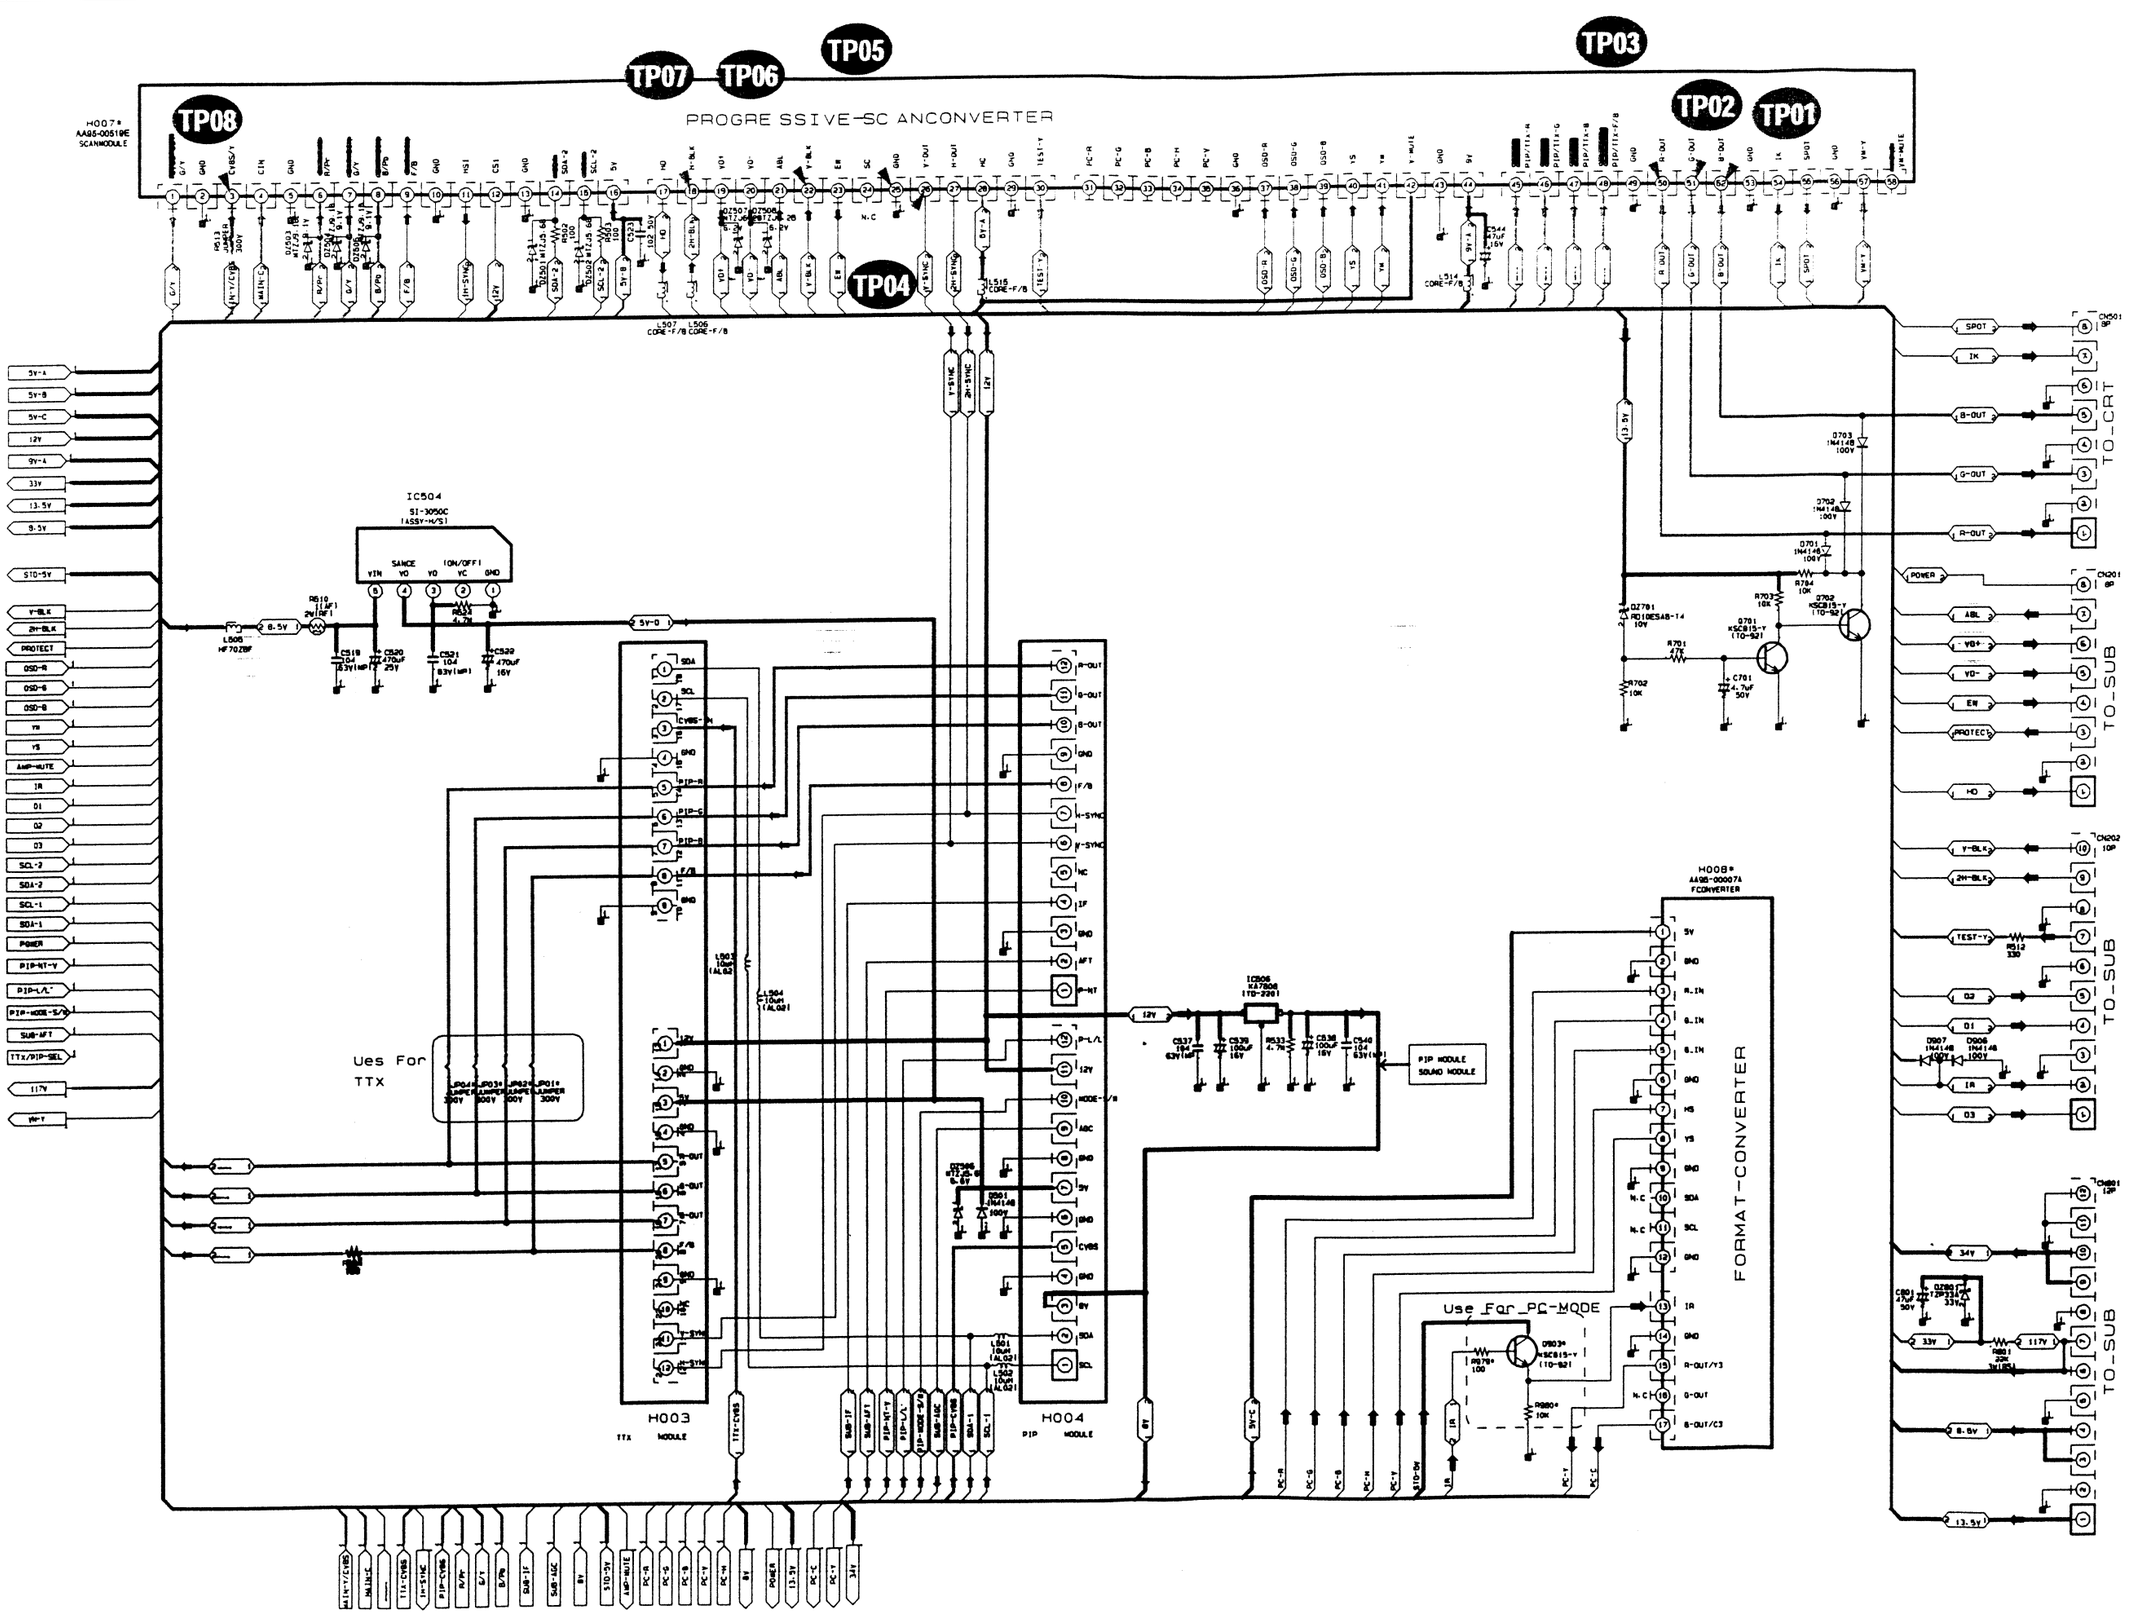
TP01
TP02
TP03
TP04
TP05
TP06
TP07
TP08
PROGRE SSIVE-SC ANCONVERTER
H007*
AAG5-00519E
SCANMODULE
IC504
SI-3050C
(ASSY-M/S)
H003
TTx MODULE
H004
PIP MODULE
PIP MODULE
SOUND MODULE
H008*
AA96-00007A
FCONVERTER
FORMAT-CONVERTER
TO_CRT
TO-SUB
TO_SUB
TO_SUB
Ues For
TTX
Use For PC-MODE
Power Line
Signal Line

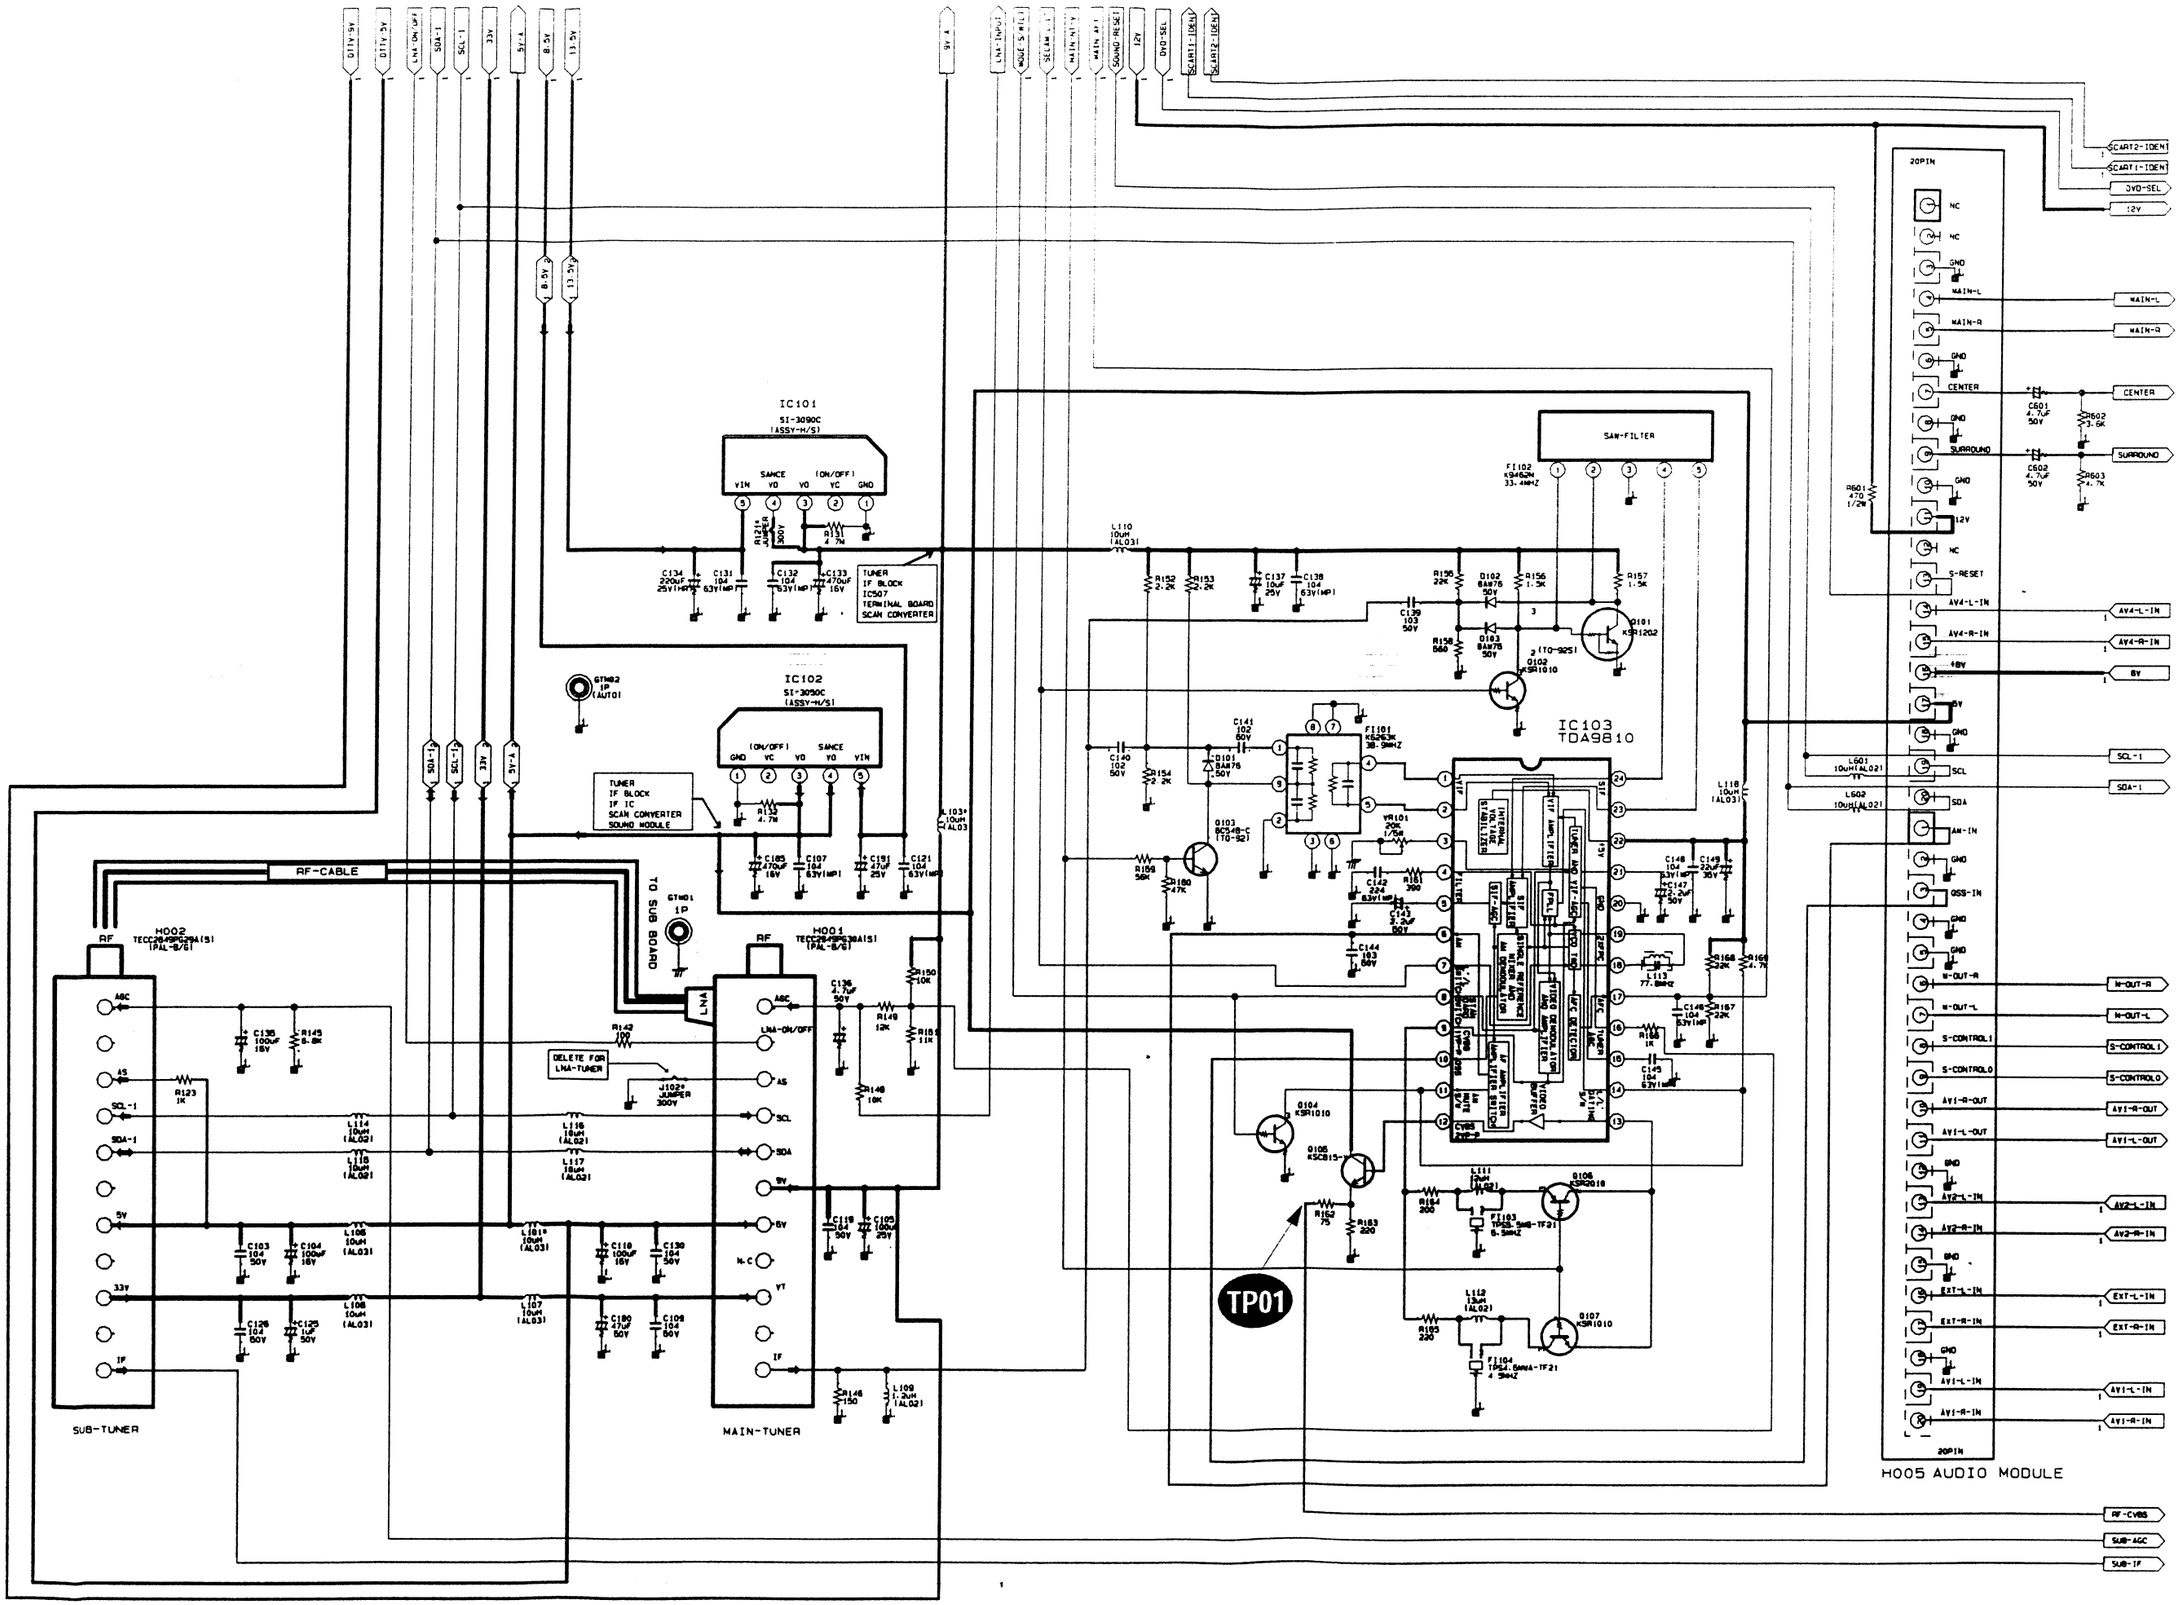
TP01
IC101
SI-3090C
(ASSY-H/S)
IC102
SI-3050C
(ASSY-H/S)
IC103
TDA9810
SAW-FILTER
TUNER
IF BLOCK
IC507
TERMINAL BOARD
SCAN CONVERTER
TUNER
IF BLOCK
IF IC
SCAN CONVERTER
SOUND MODULE
DELETE FOR
LNA-TUNER
RF-CABLE
TO SUB BOARD
SUB-TUNER
MAIN-TUNER
20PIN
H005 AUDIO MODULE
: Power Line
Signal Line

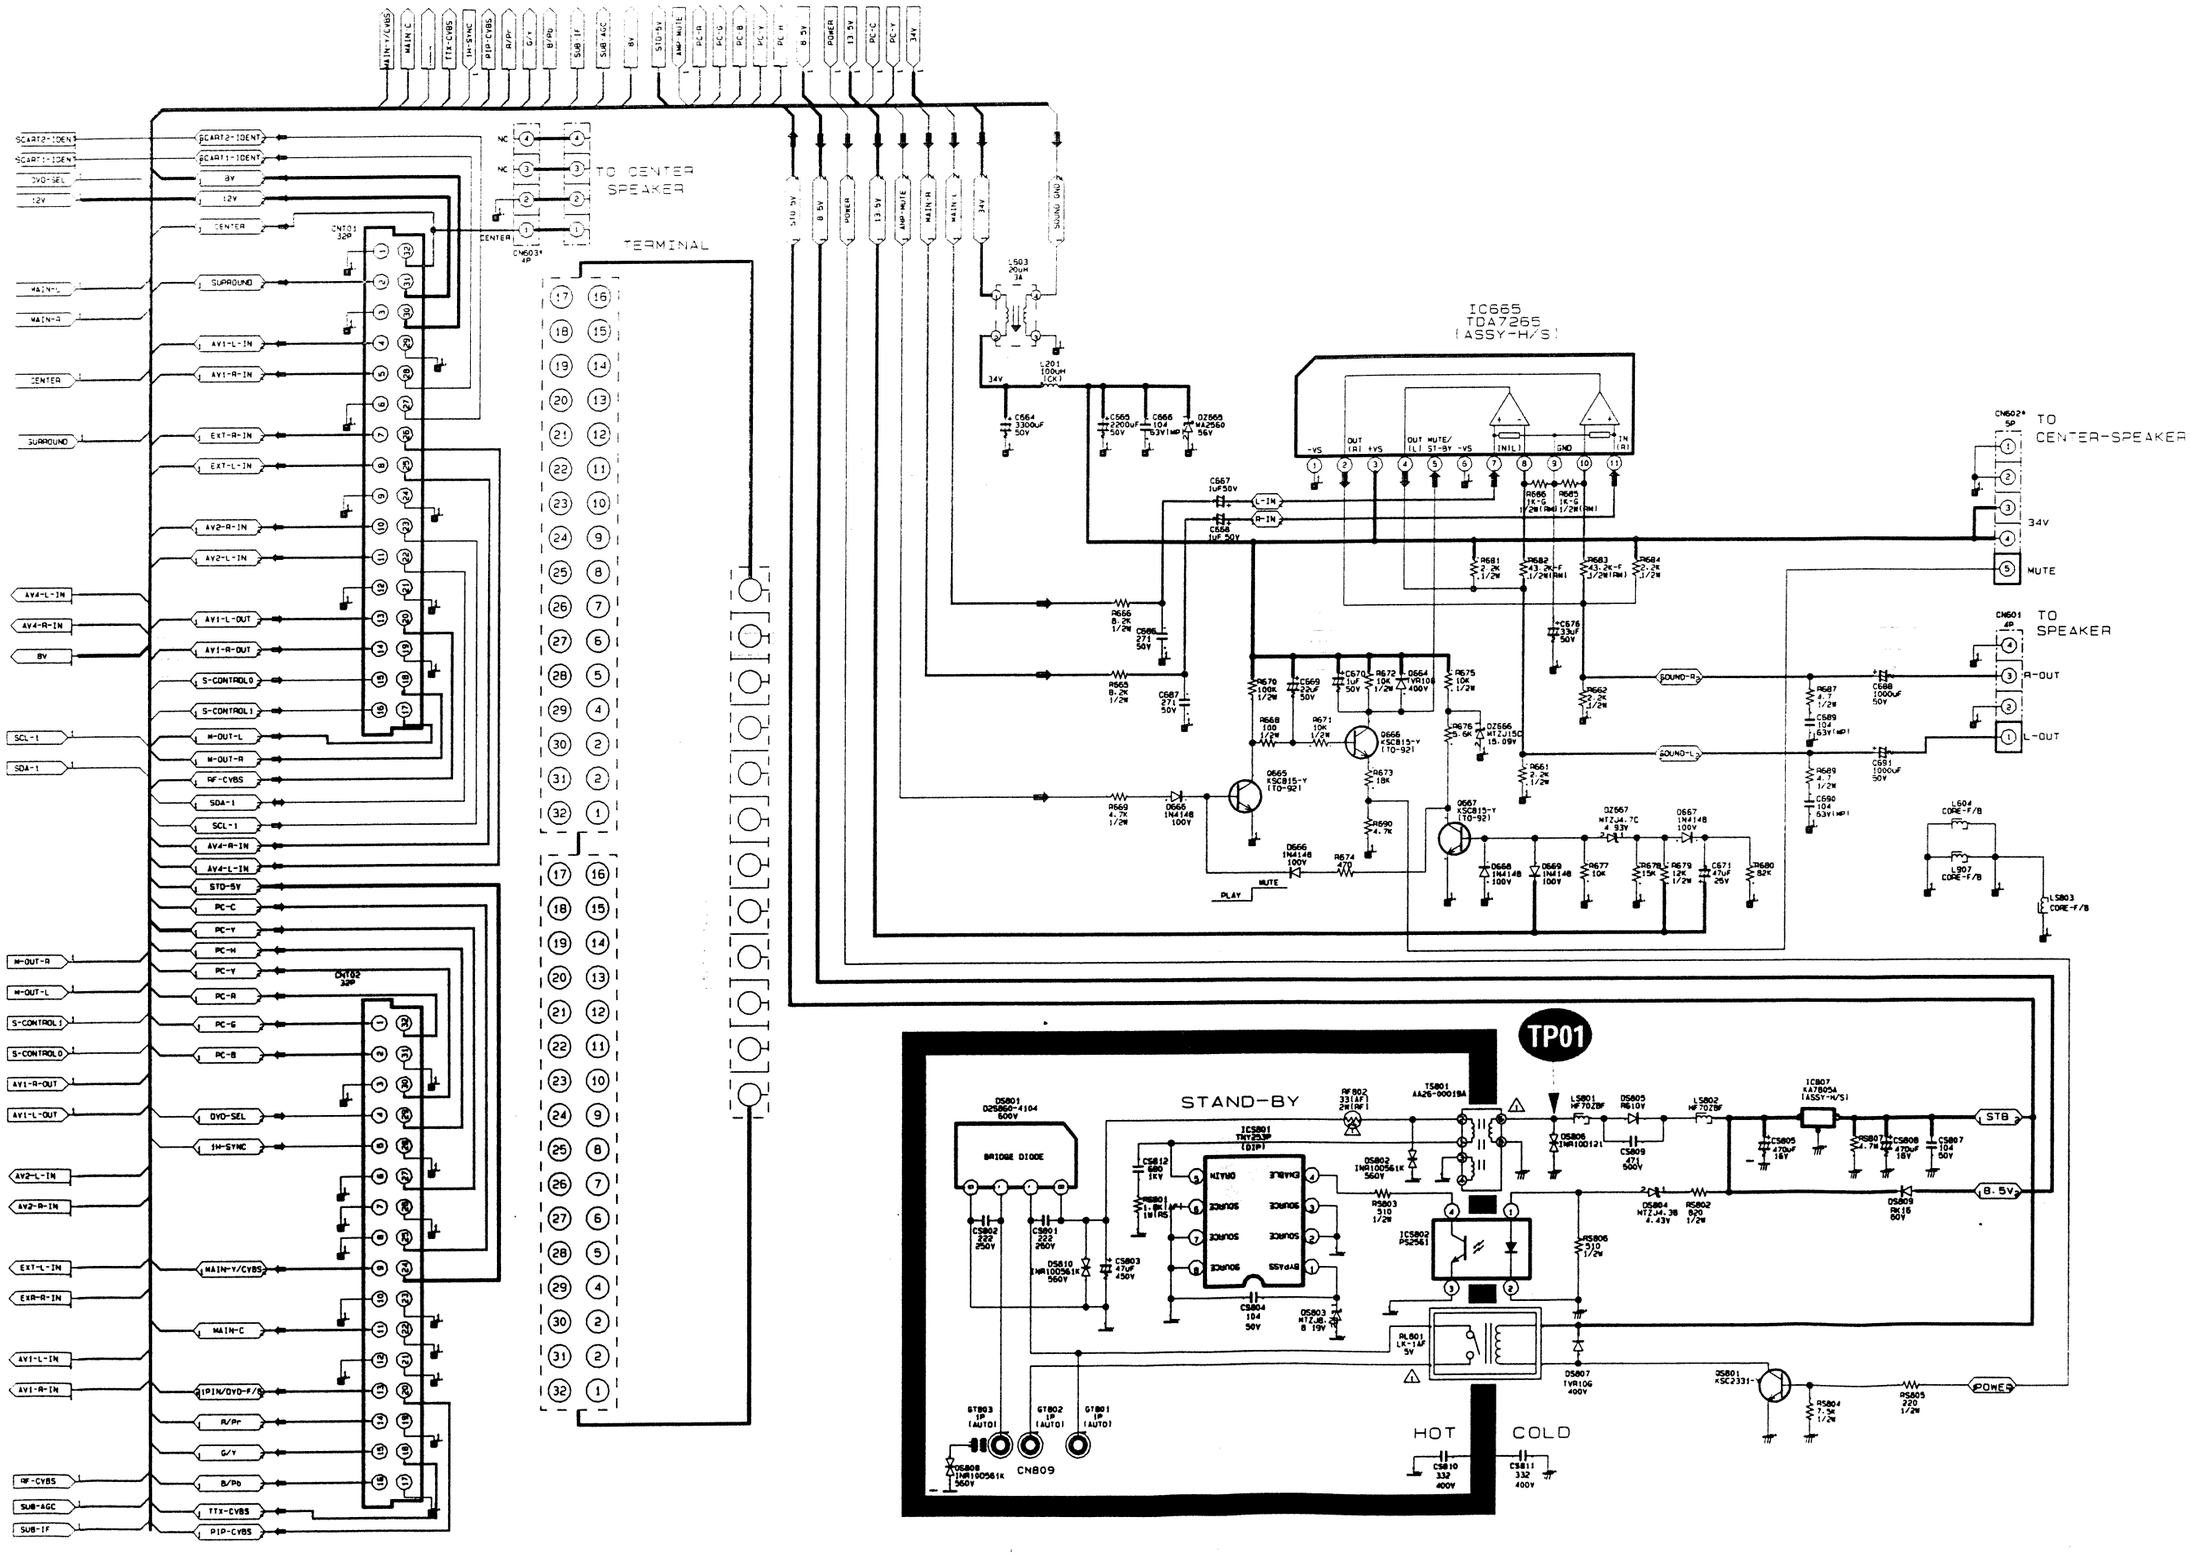
TP01
TO CENTER SPEAKER
TERMINAL
IC665
TDA7265
(ASSY-H/S)
TO CENTER-SPEAKER
TO SPEAKER
STAND-BY
HOT
COLD
CN809
: Power Line
: Signal Line

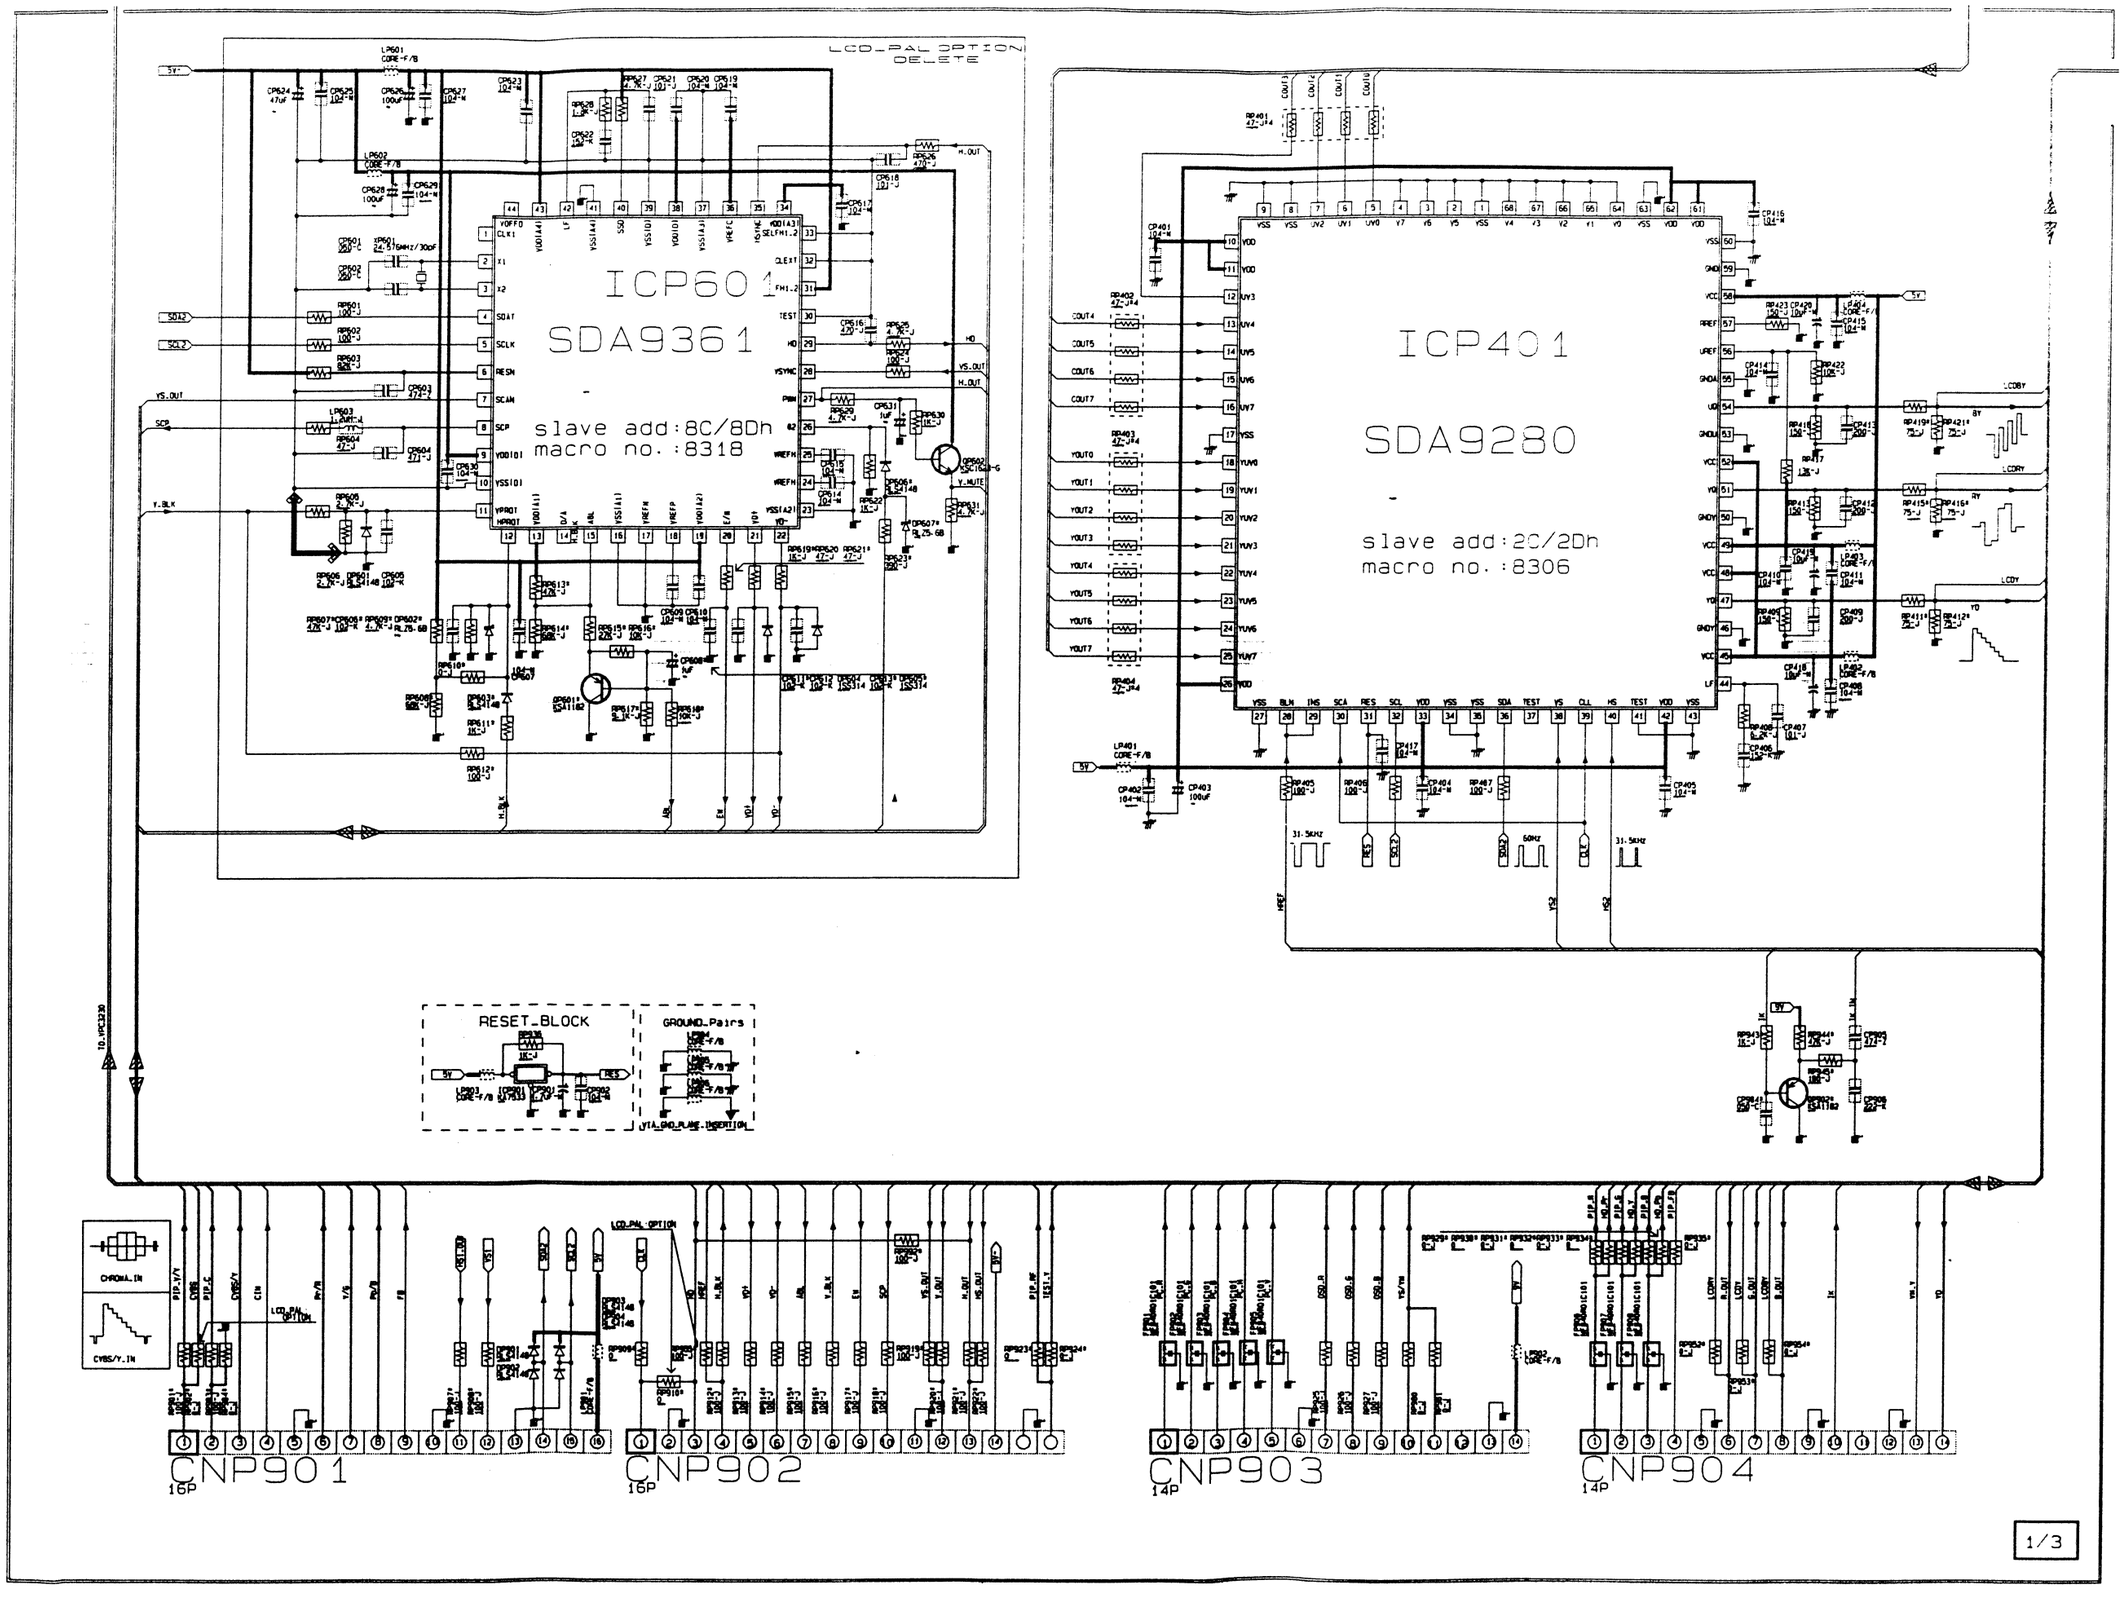
LCD_PAL OPTION DELETE
ICP601
SDA9361
slave add:8C/8Dh
macro no.:8318
ICP401
SDA9280
slave add:2C/2Dh
macro no.:8306
RESET_BLOCK
GROUND_Pairs
CNP901
16P
CNP902
16P
CNP903
14P
CNP904
14P
: Power Line
: Signal Line
1/3

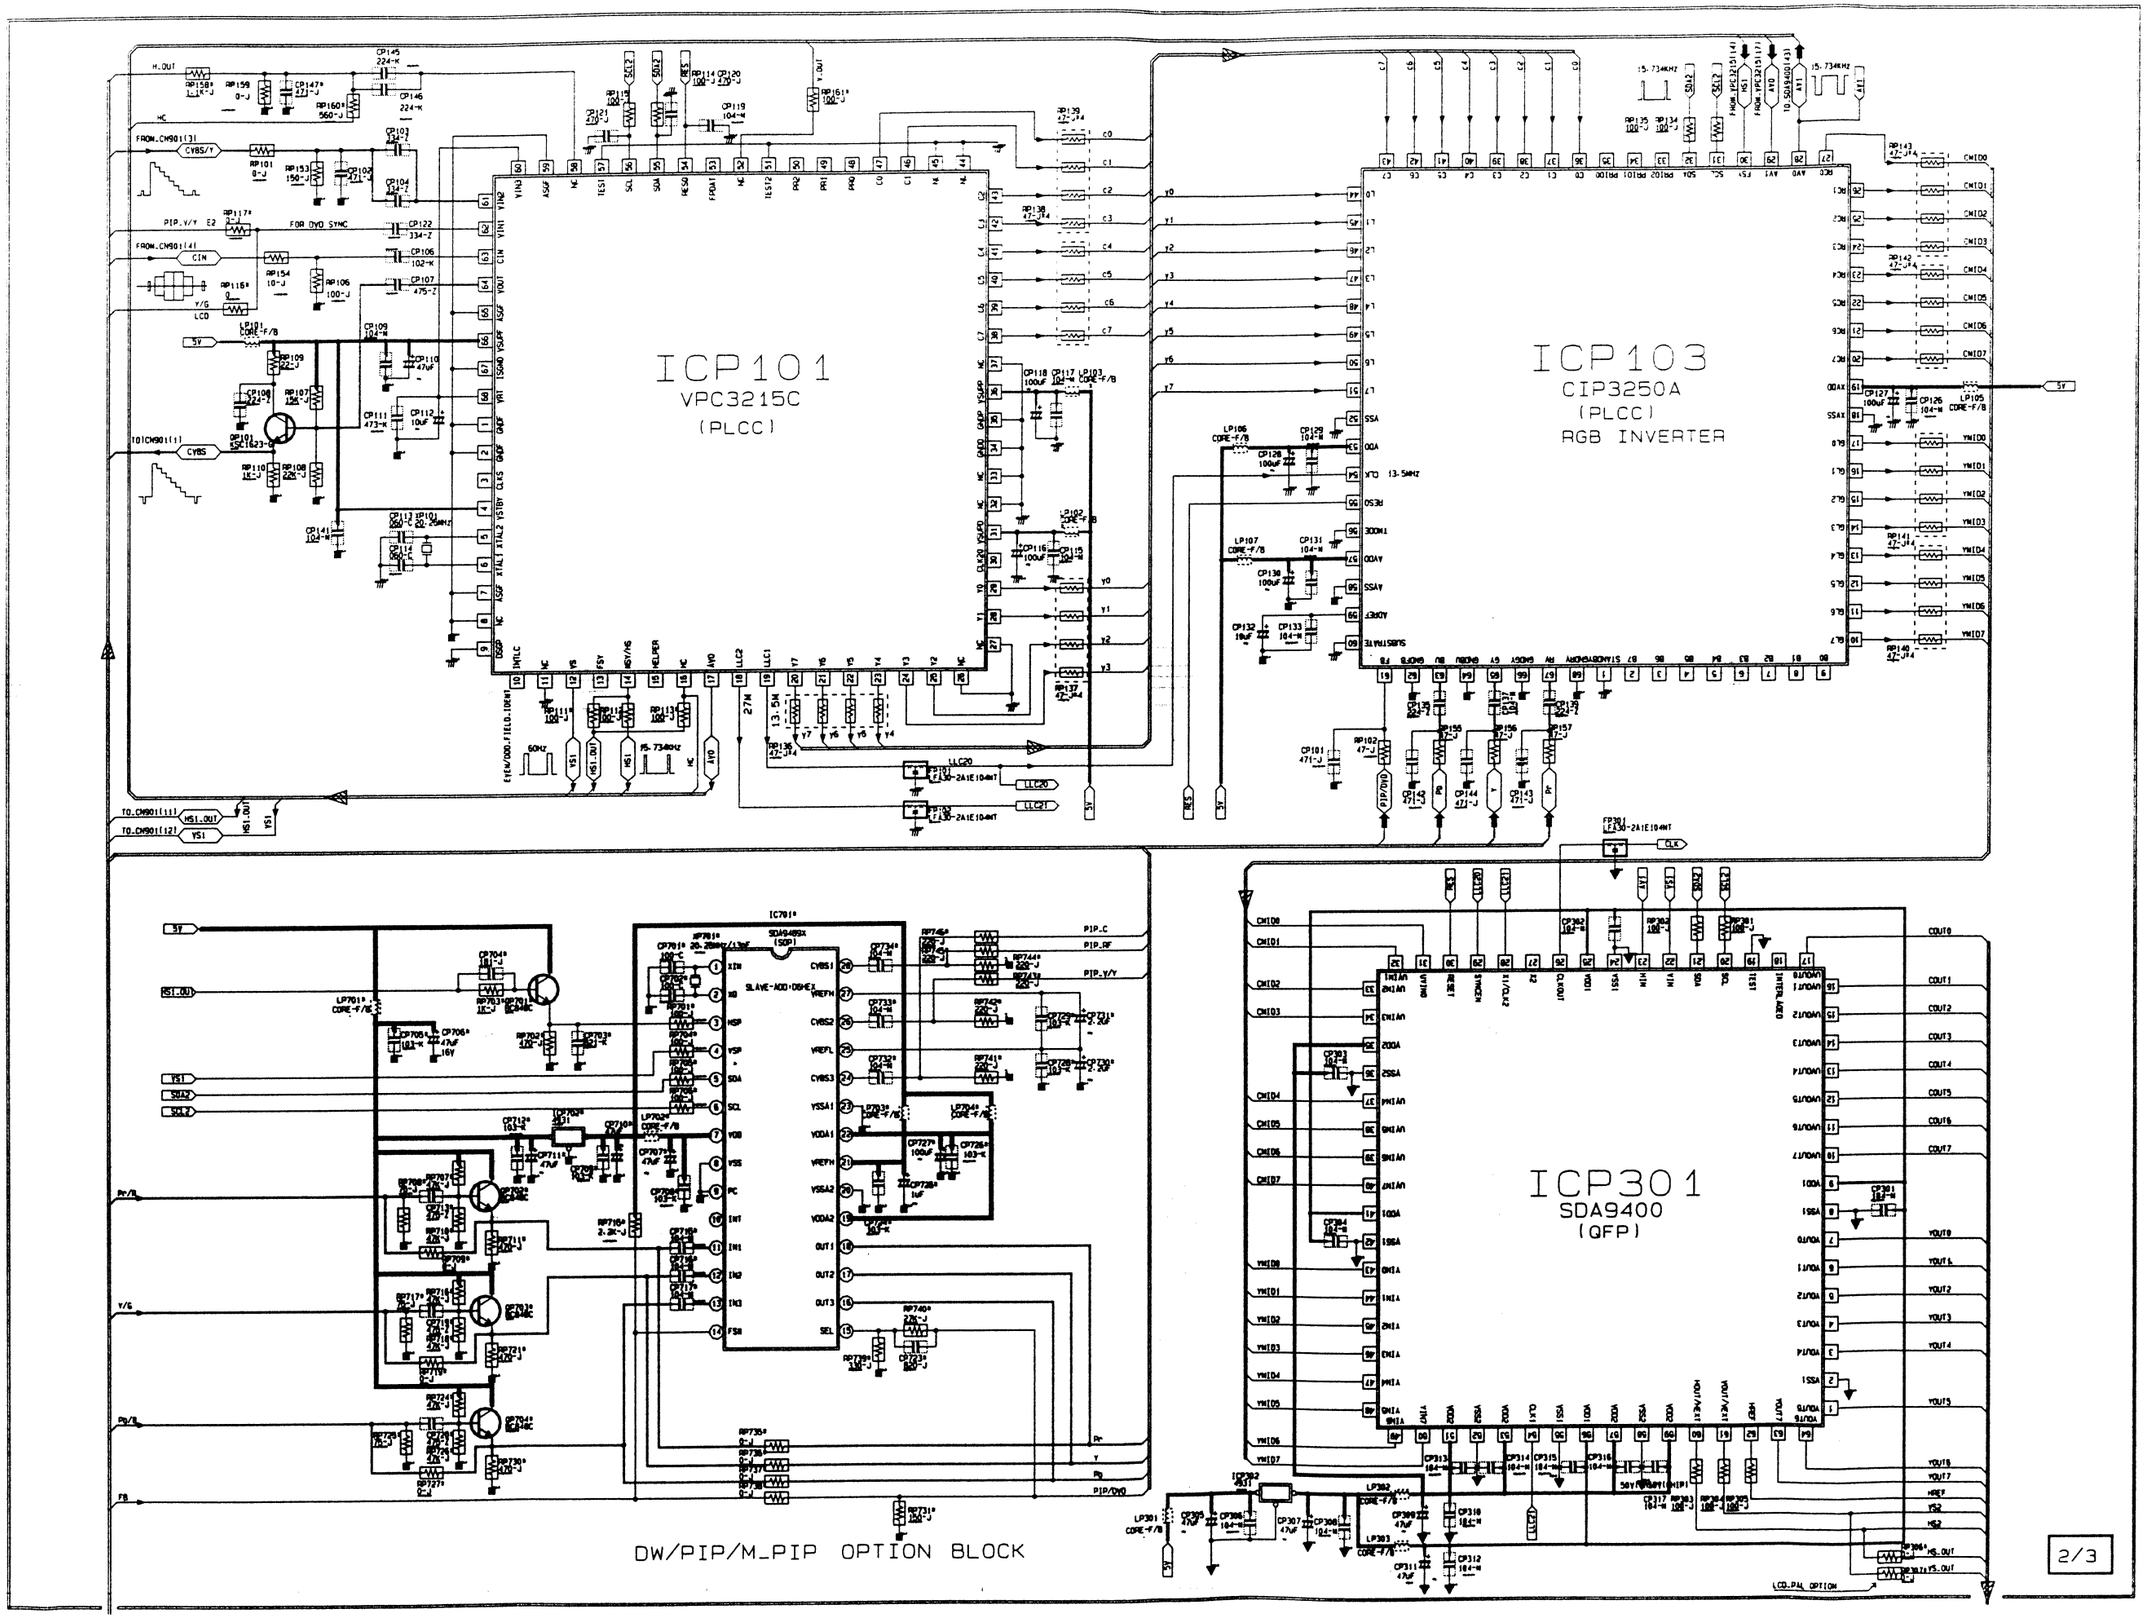
ICP101
VPC3215C
(PLCC)
ICP103
CIP3250A
(PLCC)
RGB INVERTER
ICP301
SDA9400
(QFP)
DW/PIP/M_PIP OPTION BLOCK
2/3
: Power Line
: Signal Line

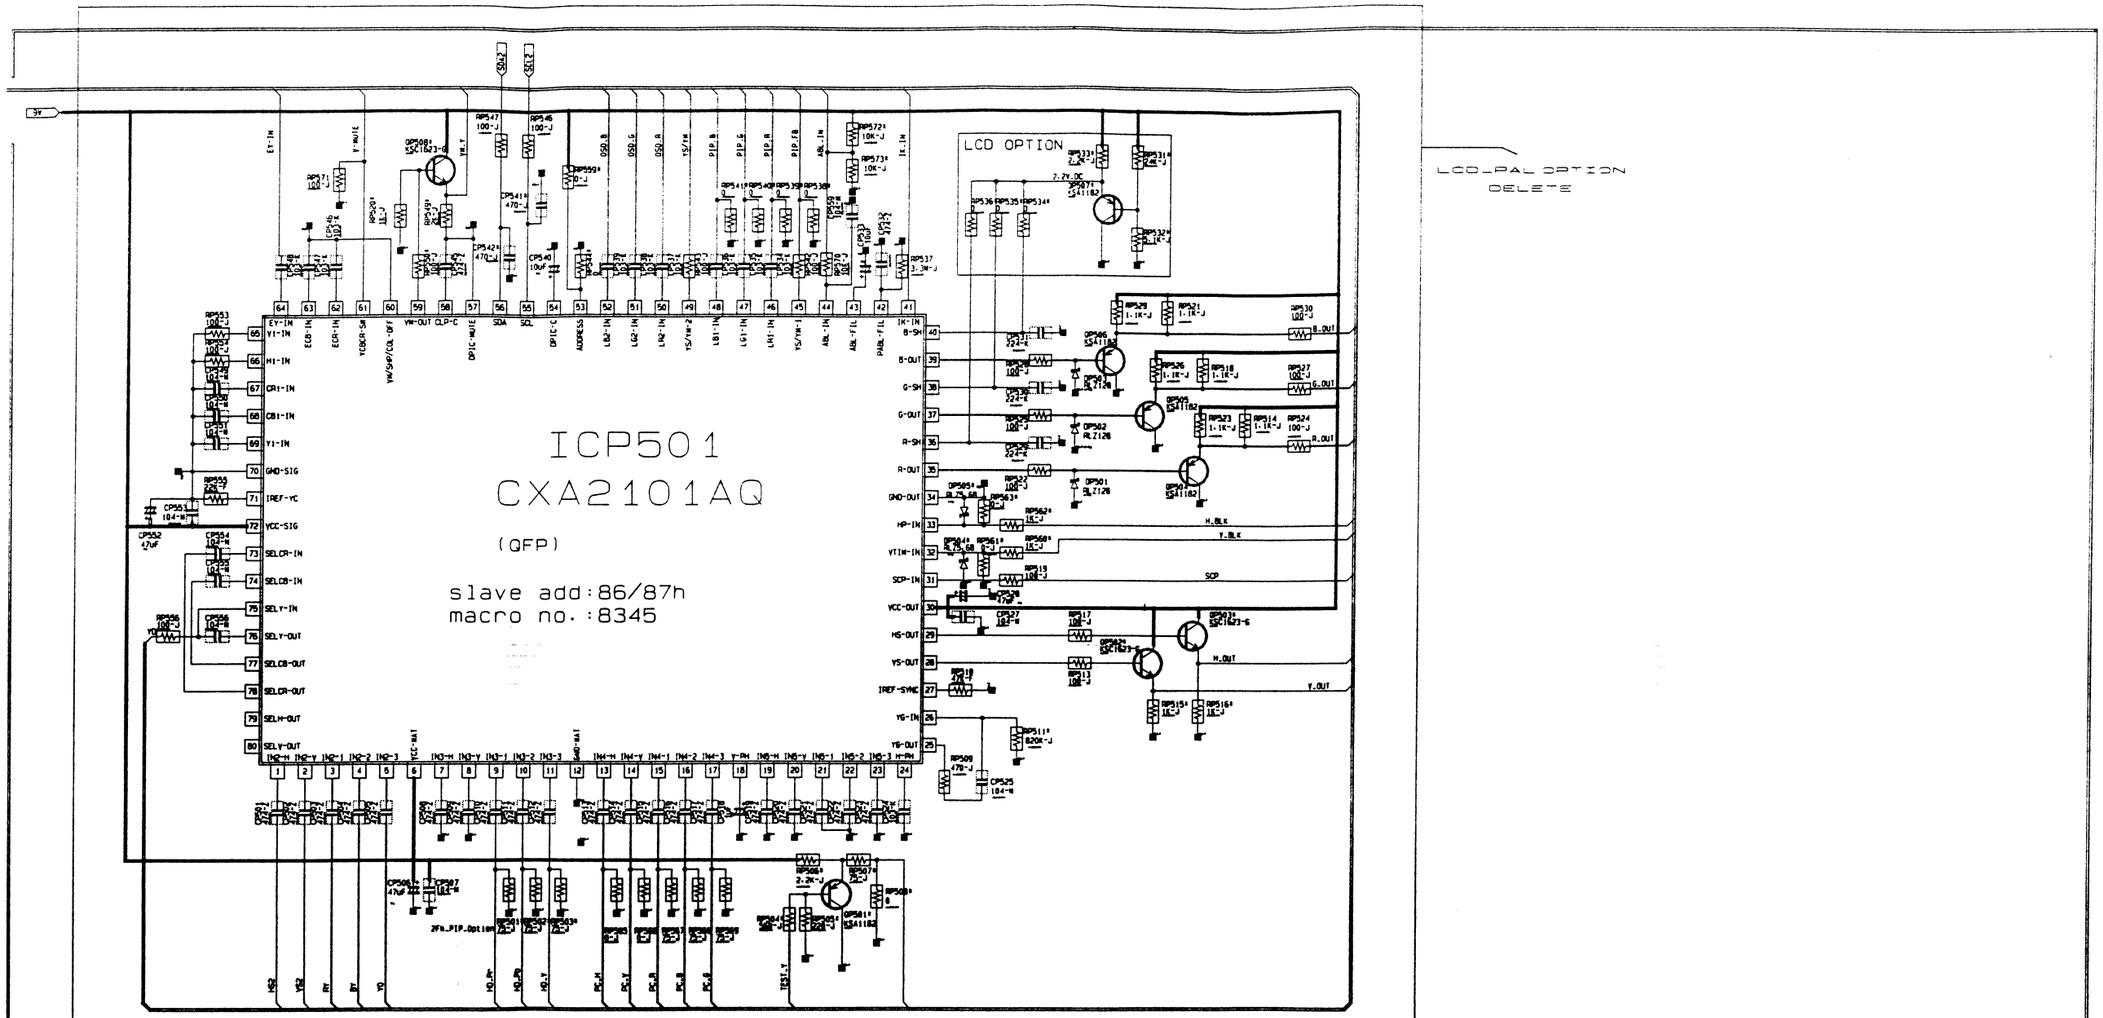

LOCATION	SPEC	E2NTSC	E2_PAL	LCDNTSC	LCD_PAL
RP107	15K-J	0	X	0	0
RP108	22K-J	0	0-J	0	0
RP109	33-J	0	X	0	0
RP110	1K-J	0	X	0	0
RP111	100-J	X	X	0	0
RP113	100-J	0	0	X	X
RP115	0-J	X	X	X	0
RP117	0-J	0	0	0	0
RP158	75-J	X	X	0	0
RP398	0-J	X	X	X	0
RP397	0-J	X	X	X	0
RP412*	75-J	0	0	0	X
RP419*	150-J	0	0	0	X
RP421*	150-J	0	0	0	X
RP501	75-J	0	0-J	0	-
RP502	75-J	0	0-J	0	-
RP503	75-J	0	0-J	0	-
RP504	560-J	0	0	X	-
RP505	220-J	0	0	X	-
RP506	390-J	0	0	X	-
RP507	75-J	0	0	X	-
RP508	0-J	X	X	0	-
RP534	0-J	X	X	0	-
RP535	0-J	X	X	0	-
RP536	0-J	X	X	0	-
RP538	0-J	0	X	0	-
RP539	0-J	0	X	0	-
RP540	0-J	0	X	0	-
RP541	0-J	0	X	0	-
RP544	0-J	0	0	X	-
RP559	0-J	X	X	0	-
RP560	1K-J	X	X	X	-
RP561	0-J	0	0	0	-
RP562	1K-J	X	X	X	-

LOCATION	SPEC	E2NTSC	E2_PAL	LCDNTSC	LCD_PAL
RP563	0-J	0	0	0	-
RP607	47K-J	X	X	0	-
RP608	68K-J	X	X	0	-
RP609	4.7K-J	0	0	X	-
RP610	0-J	X	X	0	-
RP611	1K-J	0	0	X	-
RP612	100-J	X	X	0	-
RP615	27K-J	X	X	X	-
RP618	10K-J	X	X	X	-
RP623	390-J	X	X	X	-
RP502	0-J	X	X	X	0
RP509	0-J	X	X	X	0
RP510	0-J	X	X	X	0
RP512	100-J	0	0	X	X
RP513	100-J	0	0	X	X
RP514	100-J	0	0	X	X
RP515	100-J	0	0	X	X
RP516	100-J	0	0	X	X
RP517	100-J	0	0	X	X
RP519	100-J	X	X	0	0
RP520	100-J	0	0	X	0
RP521	100-J	0	0	X	0
RP522	100-J	X	X	0	0
RP523	0-J	X	X	X	0
RP524	0-J	0	0	X	0
RP529	0-J	X	X	0	0
RP530	0-J	0	X	0	X
RP531	0-J	X	X	0	0
RP532	0-J	0	X	0	0
RP533	0-J	X	X	0	0
RP534	0-J	0	X	0	0
RP535	0-J	X	X	0	0

LOCATION	SPEC	E2NTSC	E2_PAL	LCDNTSC	LCD_PAL
RP543	1K-J	0	0	X	X
RP544	47K-J	0	0	X	X
RP545	100-J	0	0	X	X
RP552	0-J	X	X	X	0
RP553	0-J	X	X	X	0
RP554	0-J	X	X	X	0
RP555	100-J	X	X	0	0
RP562	100-J	X	X	0	X
CP107	475-Z	0	0-J	0	0
CP108	224-Z	0	X	0	0
CP605	102-K	X	X	X	-
CP611	102-K	0	0	X	-
CP613	102-K	0	0	X	-
CP804	050-C	0	0	X	X
CP805	474-Z	0	0	0	X
QP101	KSC1623G	0	X	0	0
QP505	KSA1162	0	0	X	-
QP562	KSA1162	0	0	X	X
QP564	9125-14	0	X	X	X
QP565	9125-14	0	X	X	X
QP602	9125-14	0	0	X	X
QP603	RL54148	0	0	X	X
QP605	1SS314	0	0	0	X
QP606	RL54148	0	0	X	X
QP607	9125-14	0	0	X	X

LOCATION	SPEC	PIP(0)	E2_PAL	PIP(1)	
RP701	100-J	0	X	X	
RP702	470-J	0	X	X	
RP703	1K-J	0	X	X	
RP704	100-J	0	X	X	
RP705	100-J	0	X	X	
RP706	100-J	0	X	X	
RP707	47K-J	0	X	X	
RP708	75-J	0	X	X	
RP709	100-J	X	0	0	
RP710	47K-J	0	X	X	
RP711	470-J	0	X	X	
RP715	2.2K-J	0	X	X	
RP716	47K-J	0	X	X	
RP717	75-J	0	X	X	
RP718	47K-J	0	X	X	
RP719	0-J	X	0	0	
RP721	470-J	0	X	X	
RP724	47K-J	0	X	X	
RP725	75-J	0	X	X	
RP726	47K-J	0	X	X	
RP727	0-J	X	0	0	
RP729	470-J	0	X	X	
RP731	151-J	X	0	0	
RP735	0-J	X	0	0	
RP736	0-J	X	0	0	
RP737	0-J	X	0	0	
RP738	0-J	X	100-J	0	
RP739	330-J	0	X	X	
RP740	27K-J	0	X	X	
RP741	220-J	0	X	X	
RP742	220-J	0	X	X	
RP743	220-J	0	X	X	
RP744	220-J	0	X	X	
RP745	220-J	0	X	X	

LOCATION	SPEC	PIP(0)	E2_PAL	PIP(1)	
RP745	220-J	0	X	X	
CP701	100-C	0	X	X	
CP702	100-C	0	X	X	
CP703	821-K	0	X	X	
CP704	181-J	0	X	X	
CP705	103-K	0	X	X	
CP706	47uF	0	X	X	
CP707	47uF	0	X	X	
CP708	103-K	0	X	X	
CP709	103-K	0	X	X	
CP710	47uF	0	X	X	
CP711	47uF	0	X	X	
CP712	103-K	0	X	X	
CP713	475-Z	0	X	X	
CP715	104-M	0	X	X	
CP716	104-M	0	X	X	
CP717	104-M	0	X	X	
CP718	475-Z	0	X	X	
CP720	475-Z	0	X	X	
CP723	820-J	0	X	X	
CP724	103-K	0	X	X	
CP725	1uF	0	X	X	
CP726	103-K	0	X	X	
CP727	1000uF	0	X	X	
CP728	103-K	0	X	X	
CP729	103-K	0	X	X	
CP730	2.2uF	0	X	X	
CP731	2.2uF	0	X	X	
CP732	104-M	0	X	X	
CP733	104-M	0	X	X	
CP734	104-M	0	X	X	
RP883	100-J	0	X	X	
RP884	0-J	X	0	0	
RP923	0-J	0	X	X	

LOCATION	SPEC	PIP(0)	E2_PAL	PIP(1)	
ICP701	SDA5405X	0	X	X	
ICP702	4931	0	X	X	
LP701	CORE_F/B	0	X	X	
LP702	CORE_F/B	0	X	X	
LP703	CORE_F/B	0	X	X	
LP704	CORE_F/B	0	X	X	
QP701	BC848C	0	X	X	
QP702	BC848C	0	X	X	
QP703	BC848C	0	X	X	
QP704	BC848C	0	X	X	
XP701	28.25MHz	0	X	X	
RP883	100-J	0	X	X	
RP884	0-J	X	0	0	
RP923	0-J	0	X	X	

: Power Line
: Signal Line

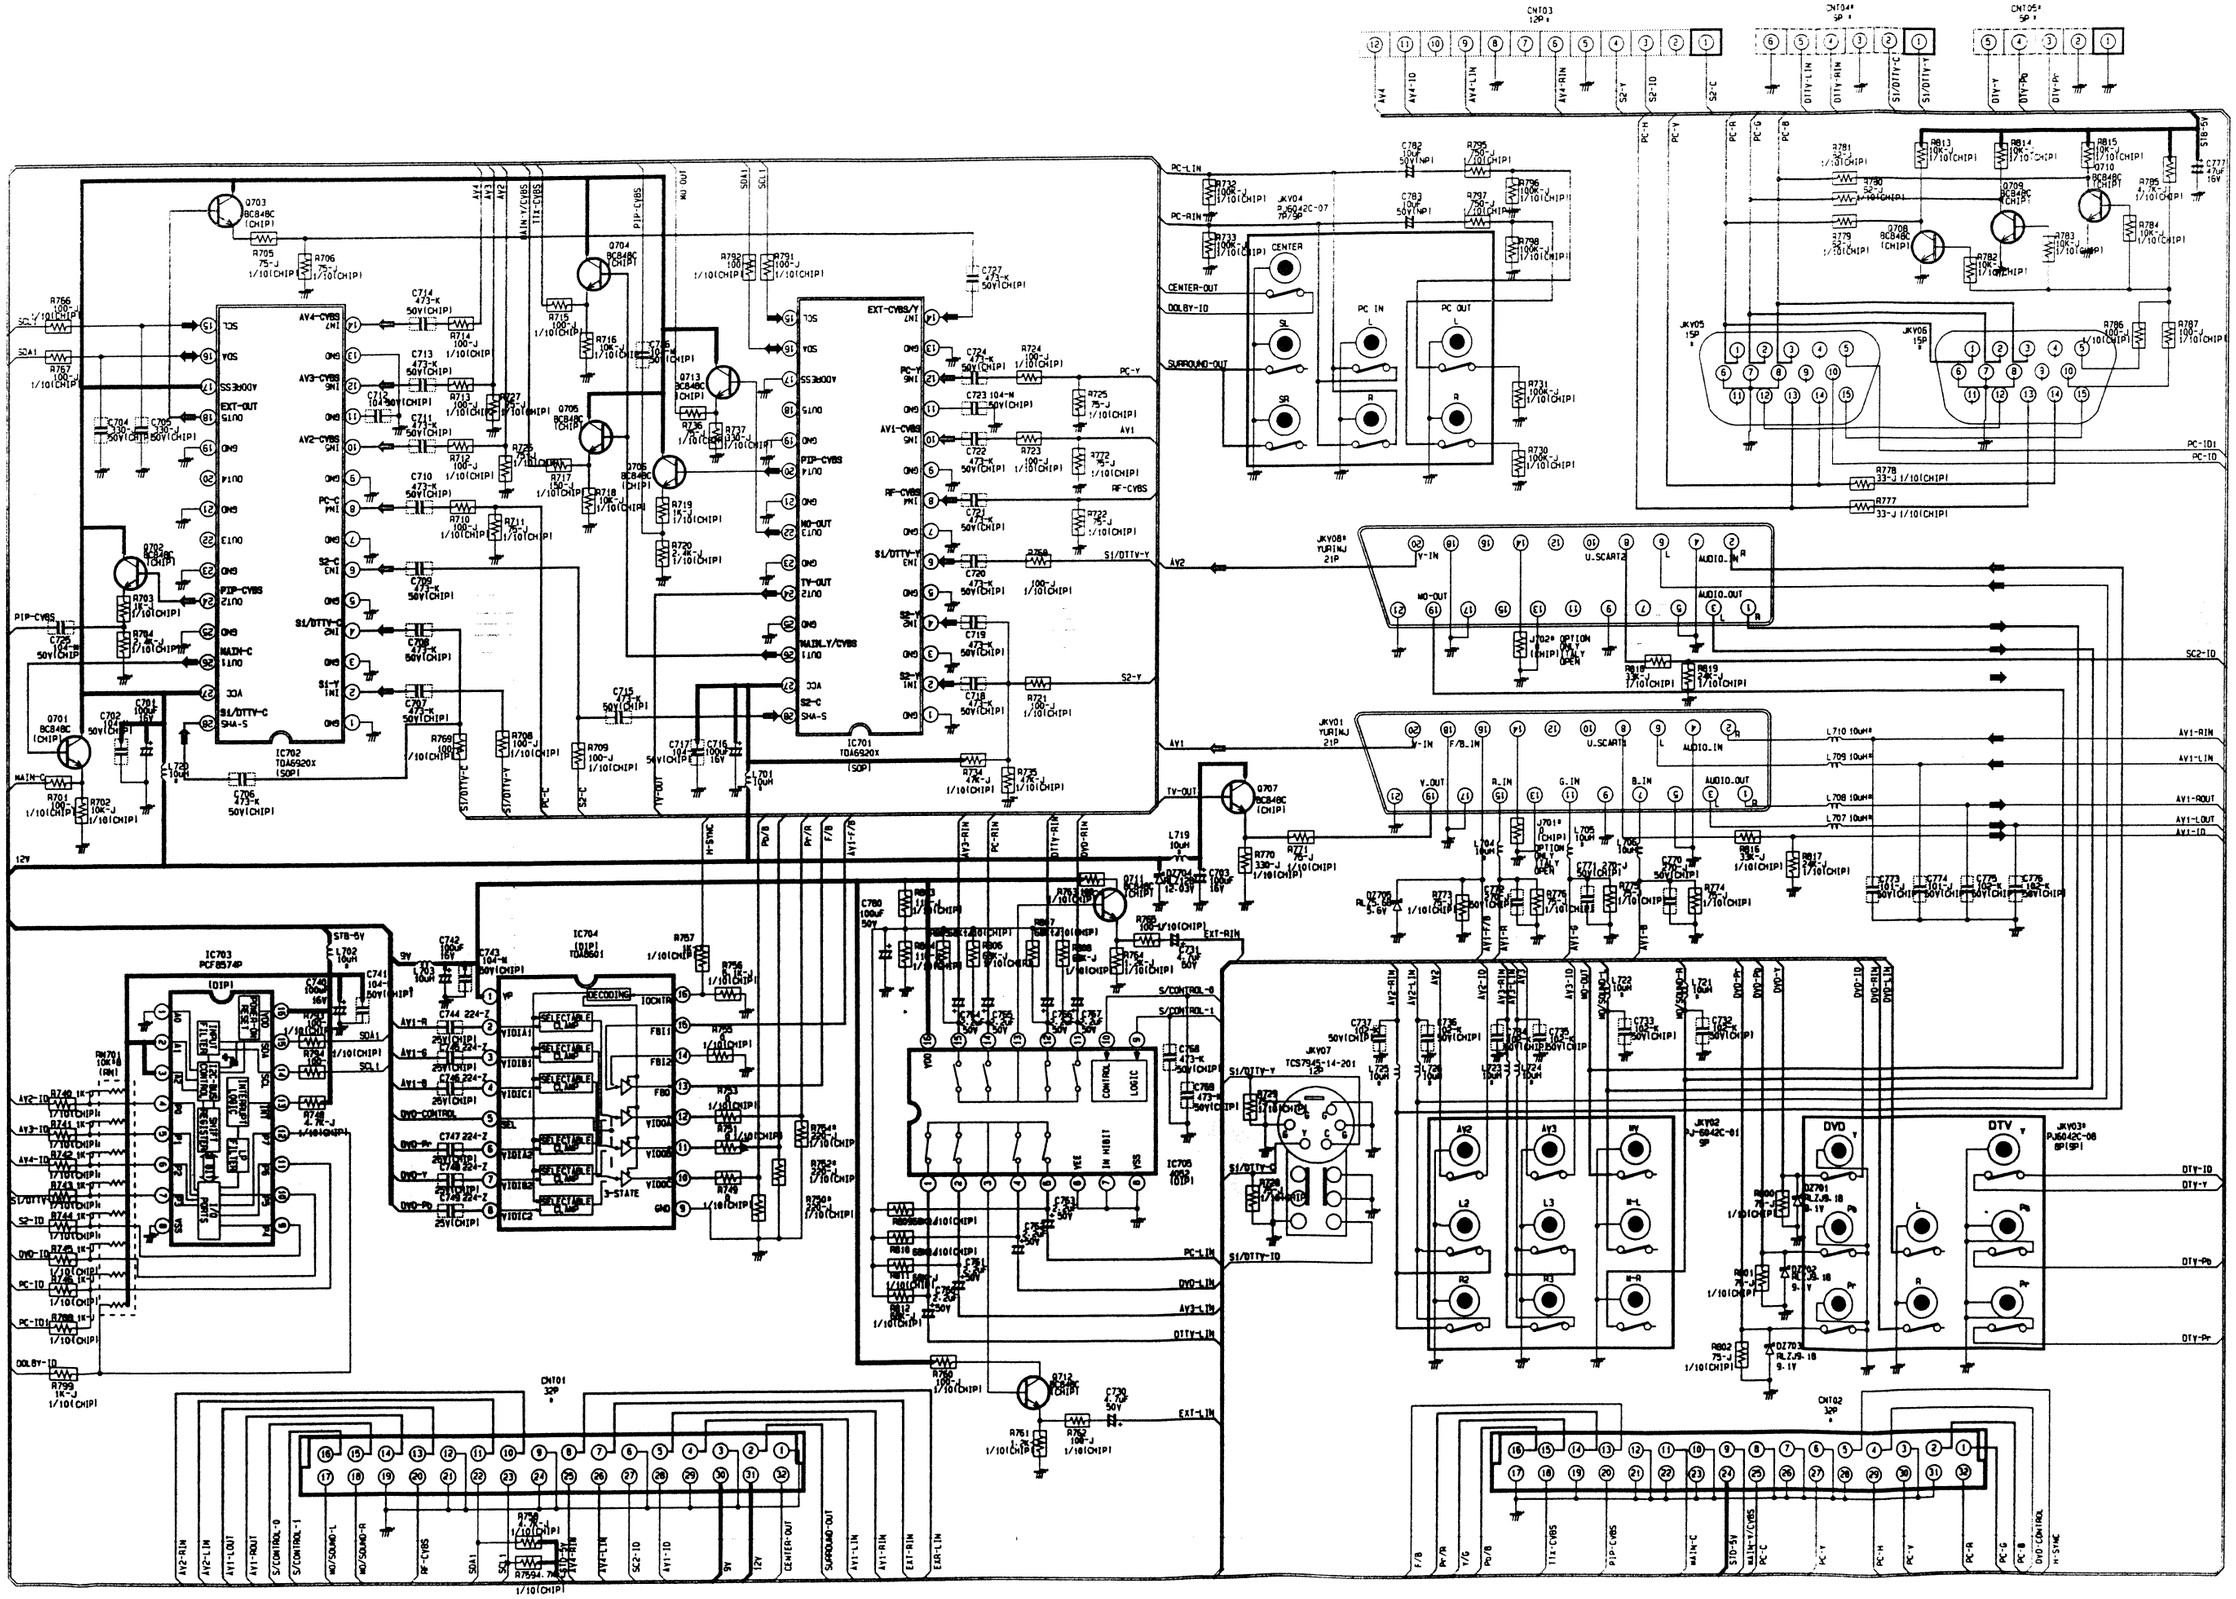
CN103
CN104*
CN105*
JKV04
JKV05
JKV06
JKV08*
JKV01
JKV07
JKV02
JKV03*
IC702
TDA9320X
IC703
PCF8574P
IC704
TDA8601
IC705
IC701
TDA9320X
CN101
CN102
CENTER
SL
SR
PC IN
PC OUT
CENTER-OUT
DOLBY-IO
SURROUND-OUT
PC-LIN
PC-RIN
PC-IO
PC-IO1
SC2-IO
AV1-RIN
AV1-LIN
AV1-ROUT
AV1-LOUT
AV1-IO
DTV-IO
DTV-Y
DTV-Pb
DTV-Pr
DVD
DTV
Power Line
Signal Line

10-9 SOUND-MODULE

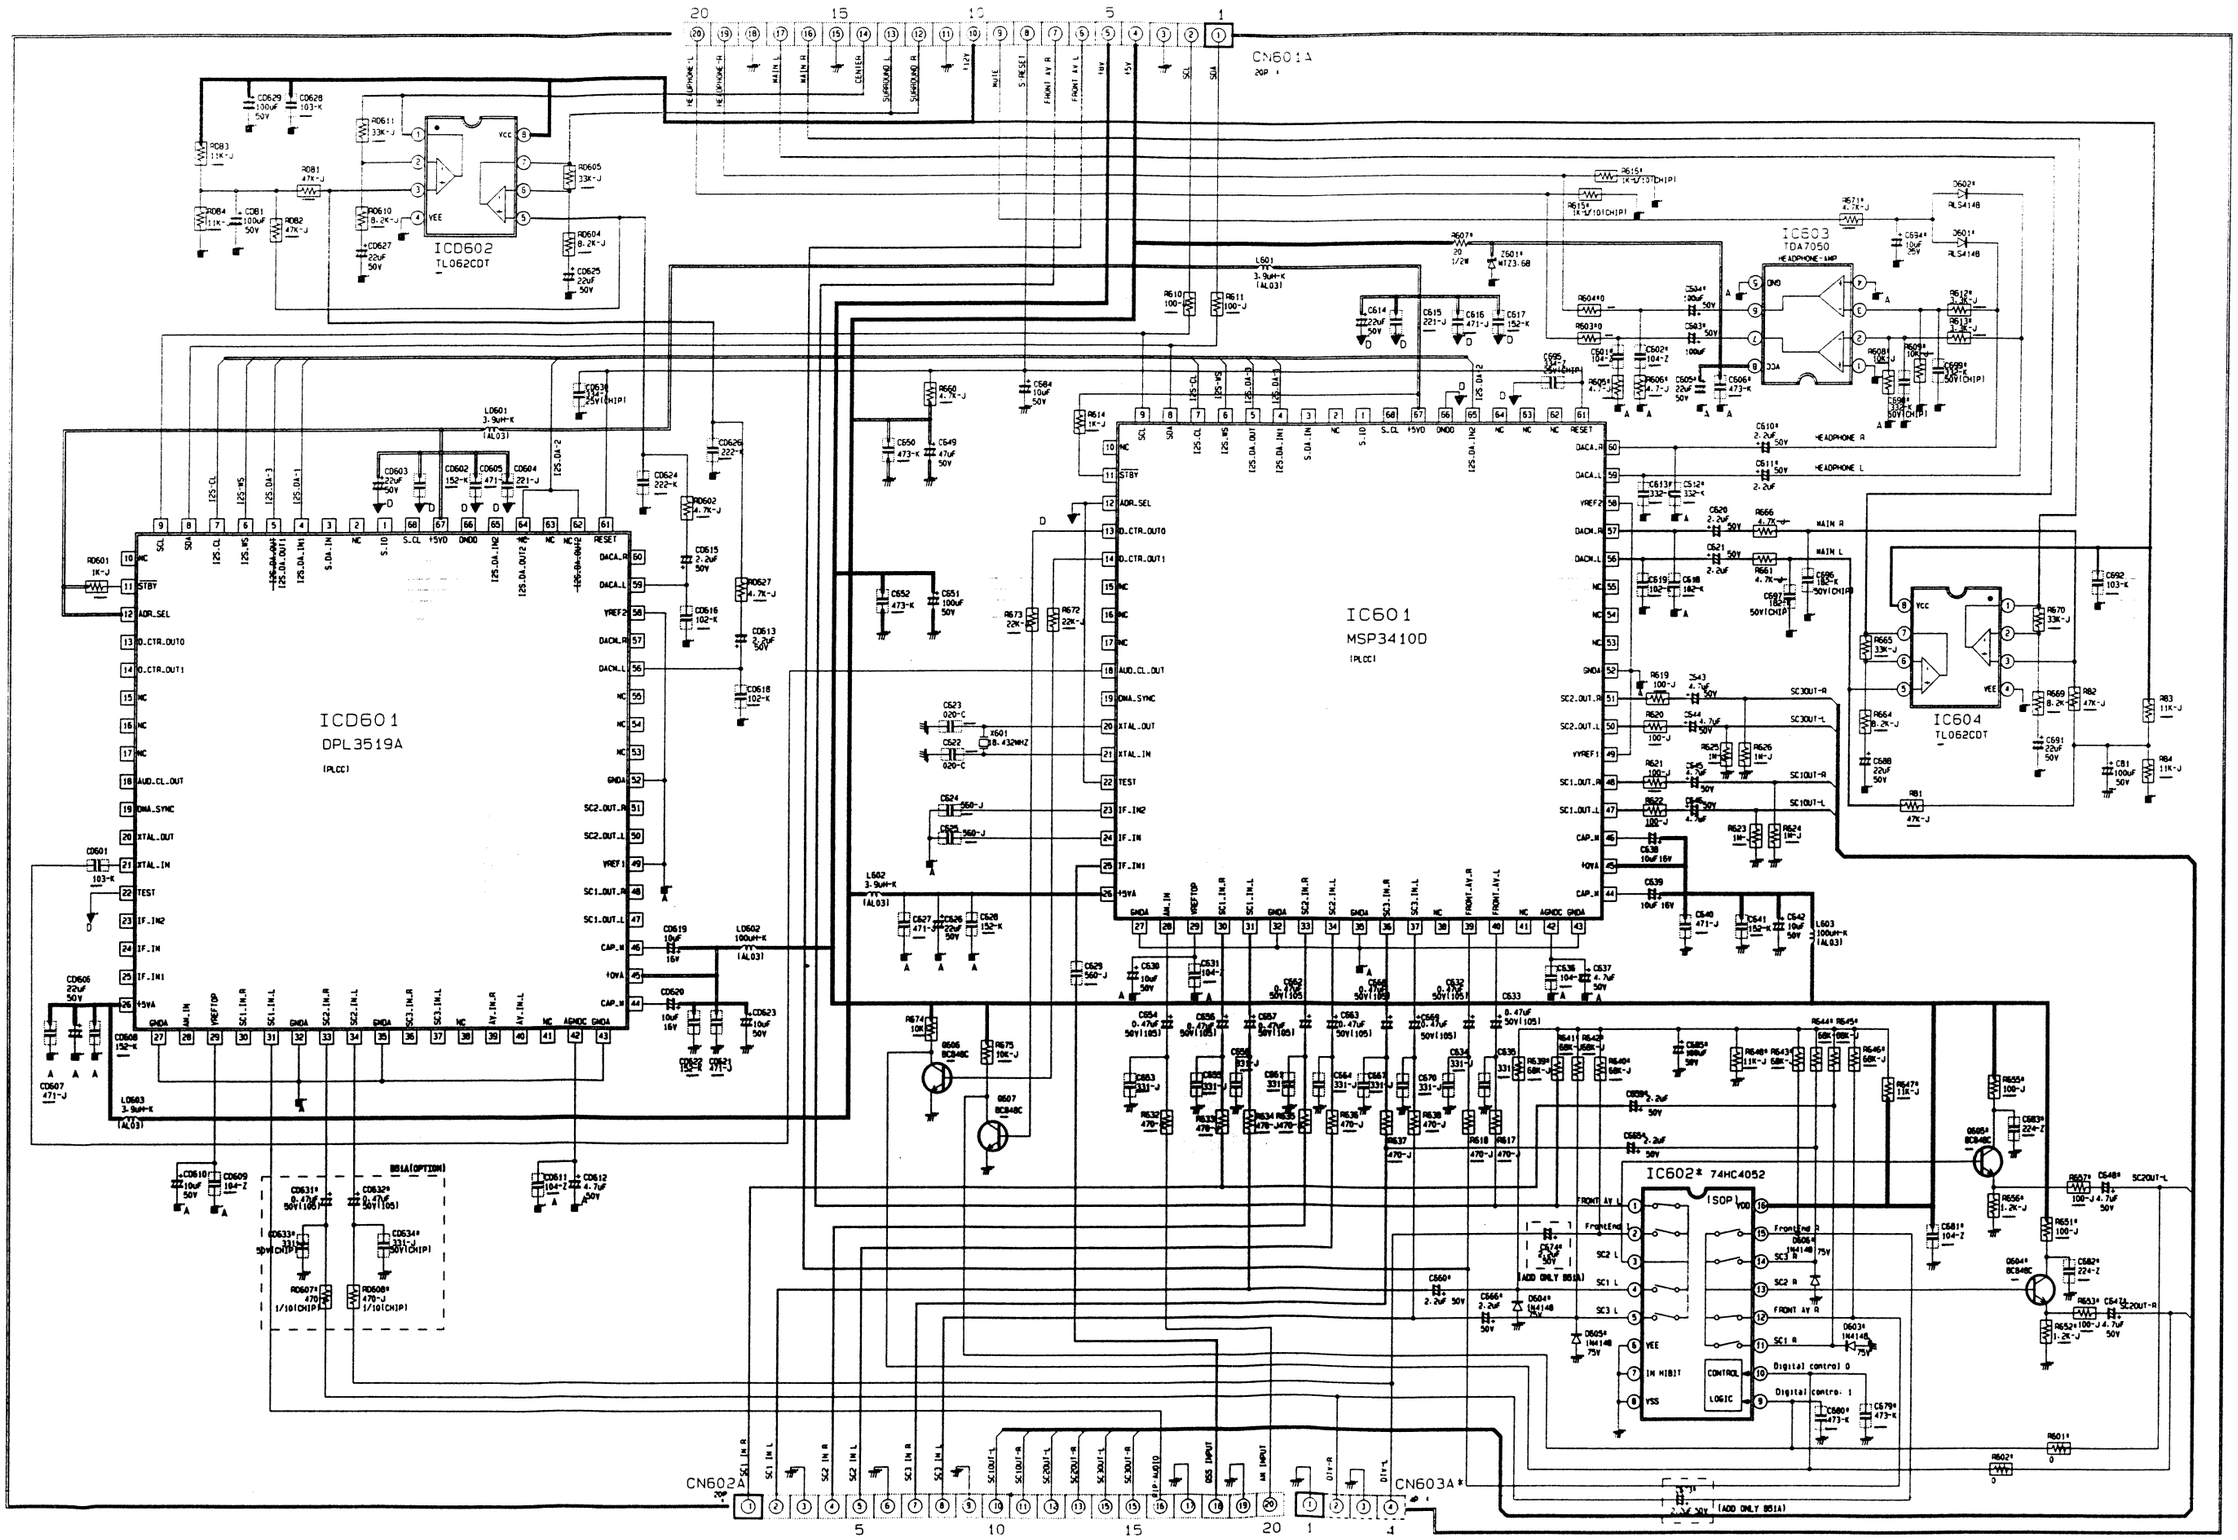

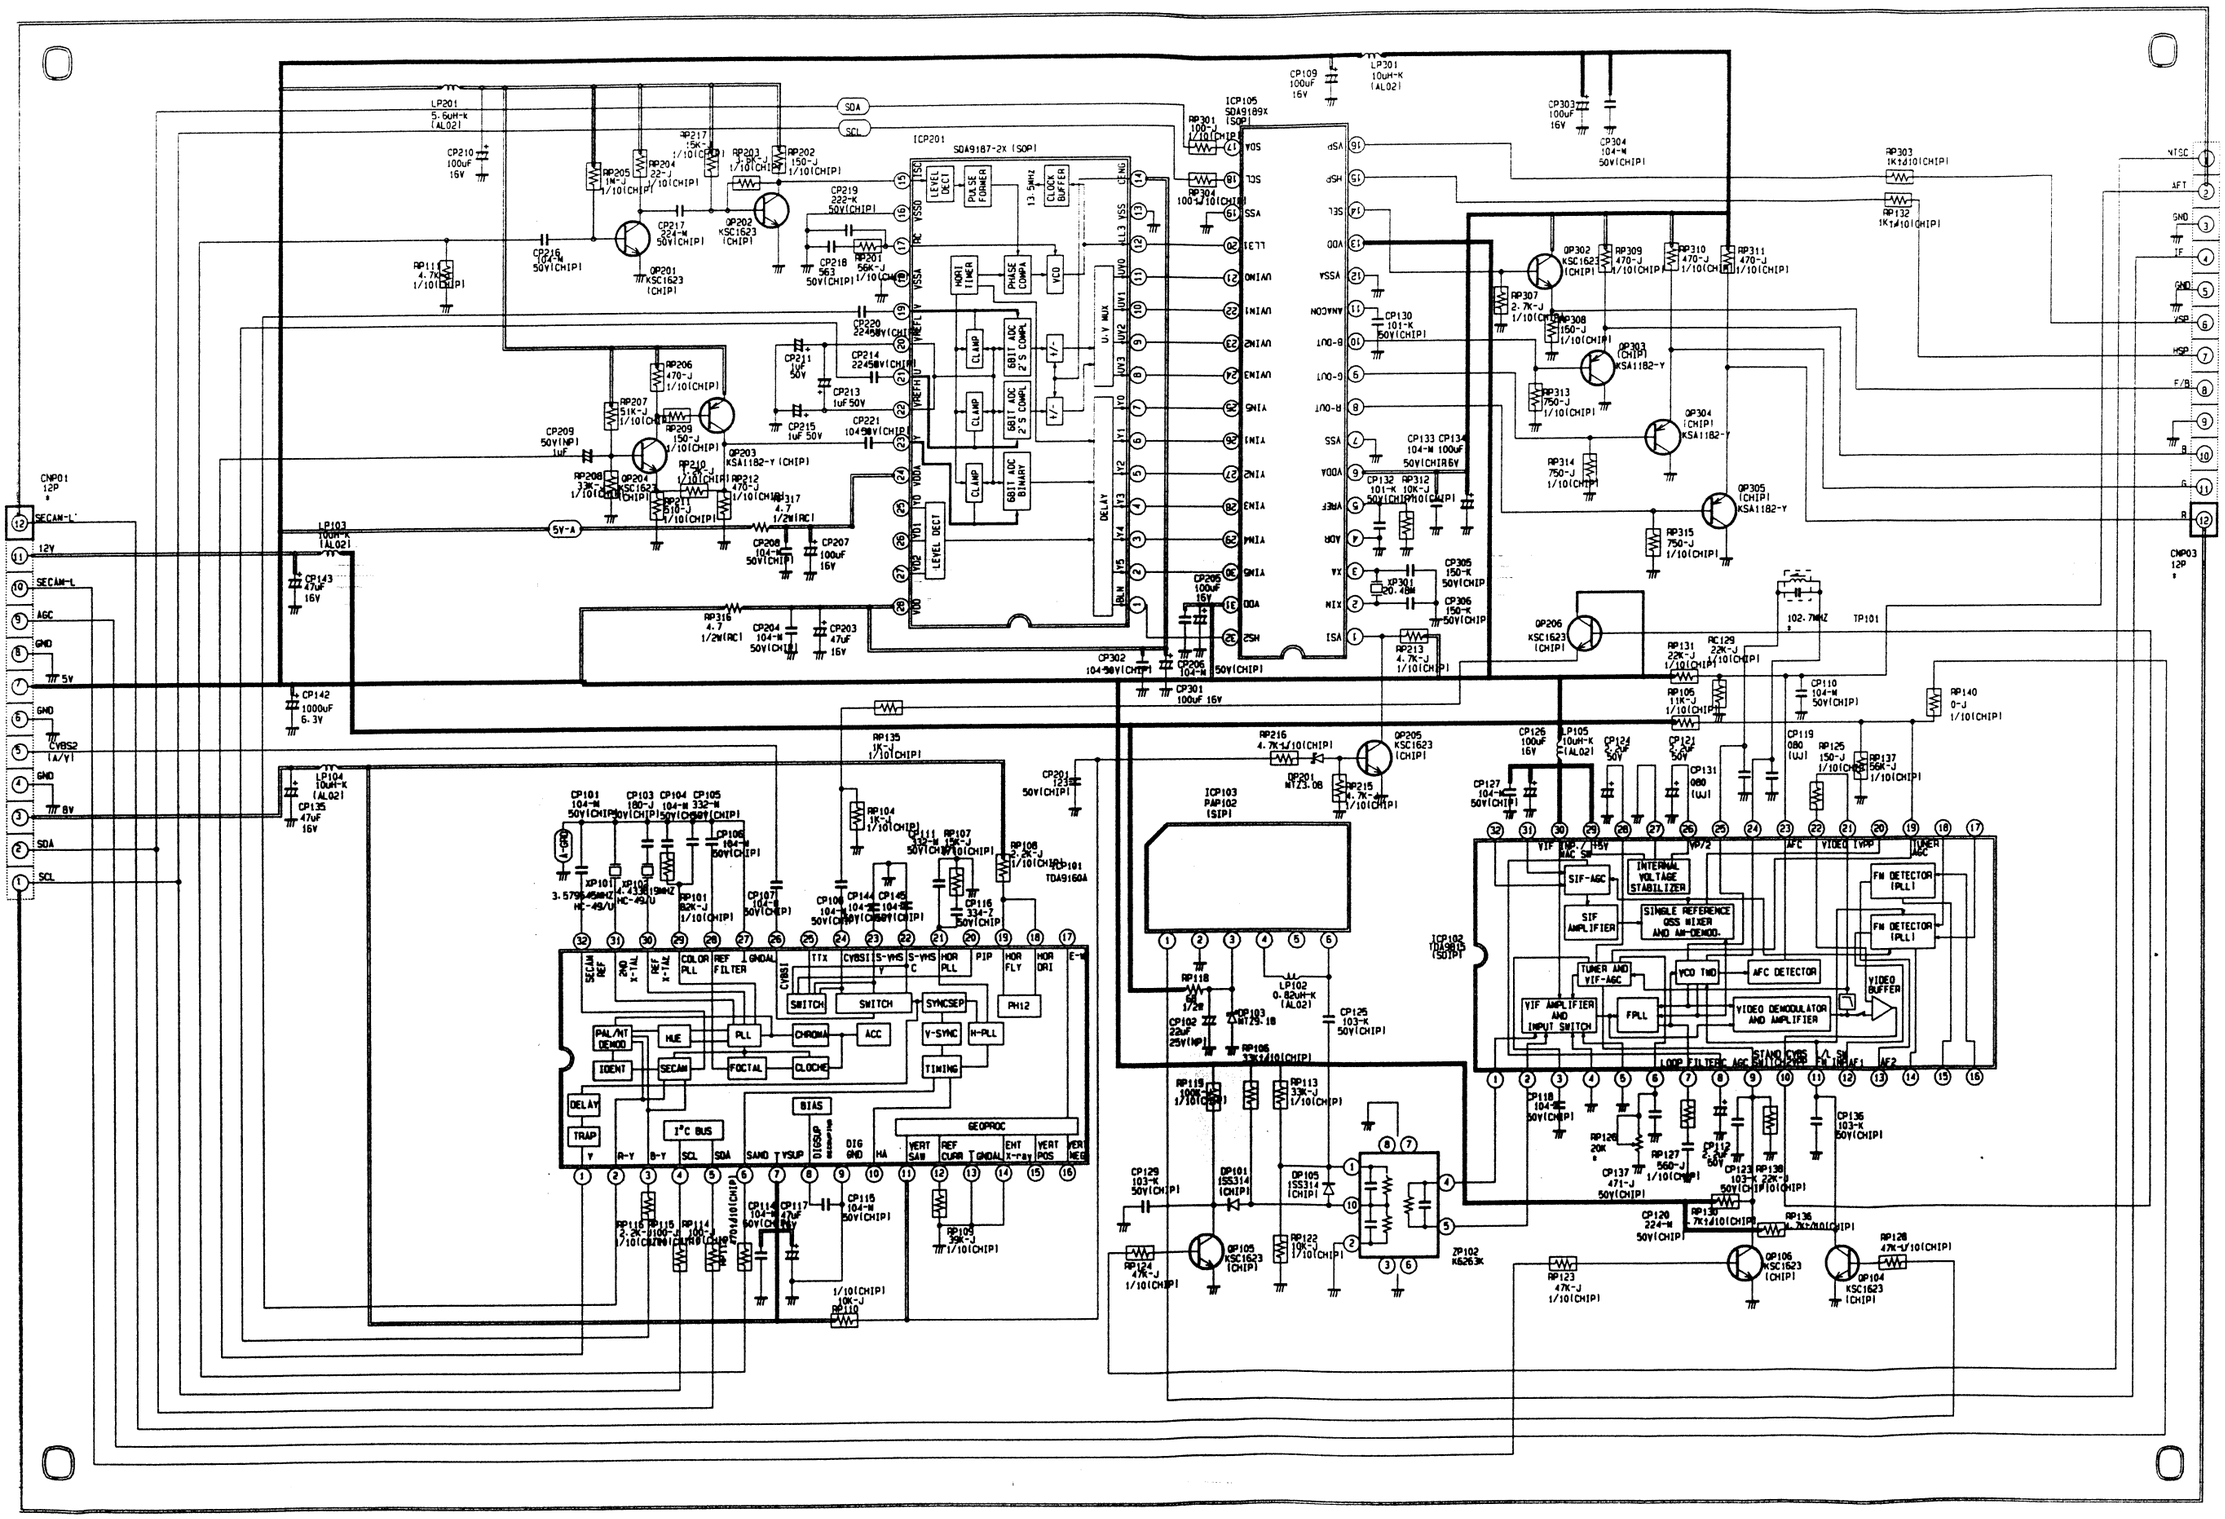
SDA
SCL
ICP201
SDA9187-2X (SOP)
ICP105
SDA9189X
(SOP)
ICP103
PAP102
(SIP)
ICP102
TDA9160A
(SOP)
CNP01
12P
CNP03
12P
SECAM-L'
12V
SECAM-L
AGC
GND
5V
GND
CVBS2
(A/V1)
GND
8V
SDA
SCL
5V-A
NTSC
AFT
GND
IF
GND
VSP
HSP
F/B
B
G
R
TP101
102.7MHZ
XP101
3.579545MHZ
HC-49/U
XP102
4.433619MHZ
HC-49/U
XP301
20.48M
ZP102
KS263K
SECAM REF
PAL/NT DEMOD
IDENT
DELAY
TRAP
HUE
SECAM
PLL
FOCTAL
CLOCHE
COLOR PLL
REF FILTER
CHROMA
ACC
SWITCH
SYNCSEP
Y-SYNC
H-PLL
TIMING
PH12
HOR FLY
HOR DRI
I²C BUS
BIAS
GEOPROC
SIF-AGC
SIF AMPLIFIER
INTERNAL VOLTAGE STABILIZER
SINGLE REFERENCE QSS MIXER AND AM-DEMOD.
FM DETECTOR (PLL)
TUNER AND VIF-AGC
VCO TWD
AFC DETECTOR
VIDEO BUFFER
VIF AMPLIFIER AND INPUT SWITCH
FPLL
VIDEO DEMODULATOR AND AMPLIFIER
LOOP FILTER
AGC
STAND CVBS SWITCH
Power Line
Signal Line

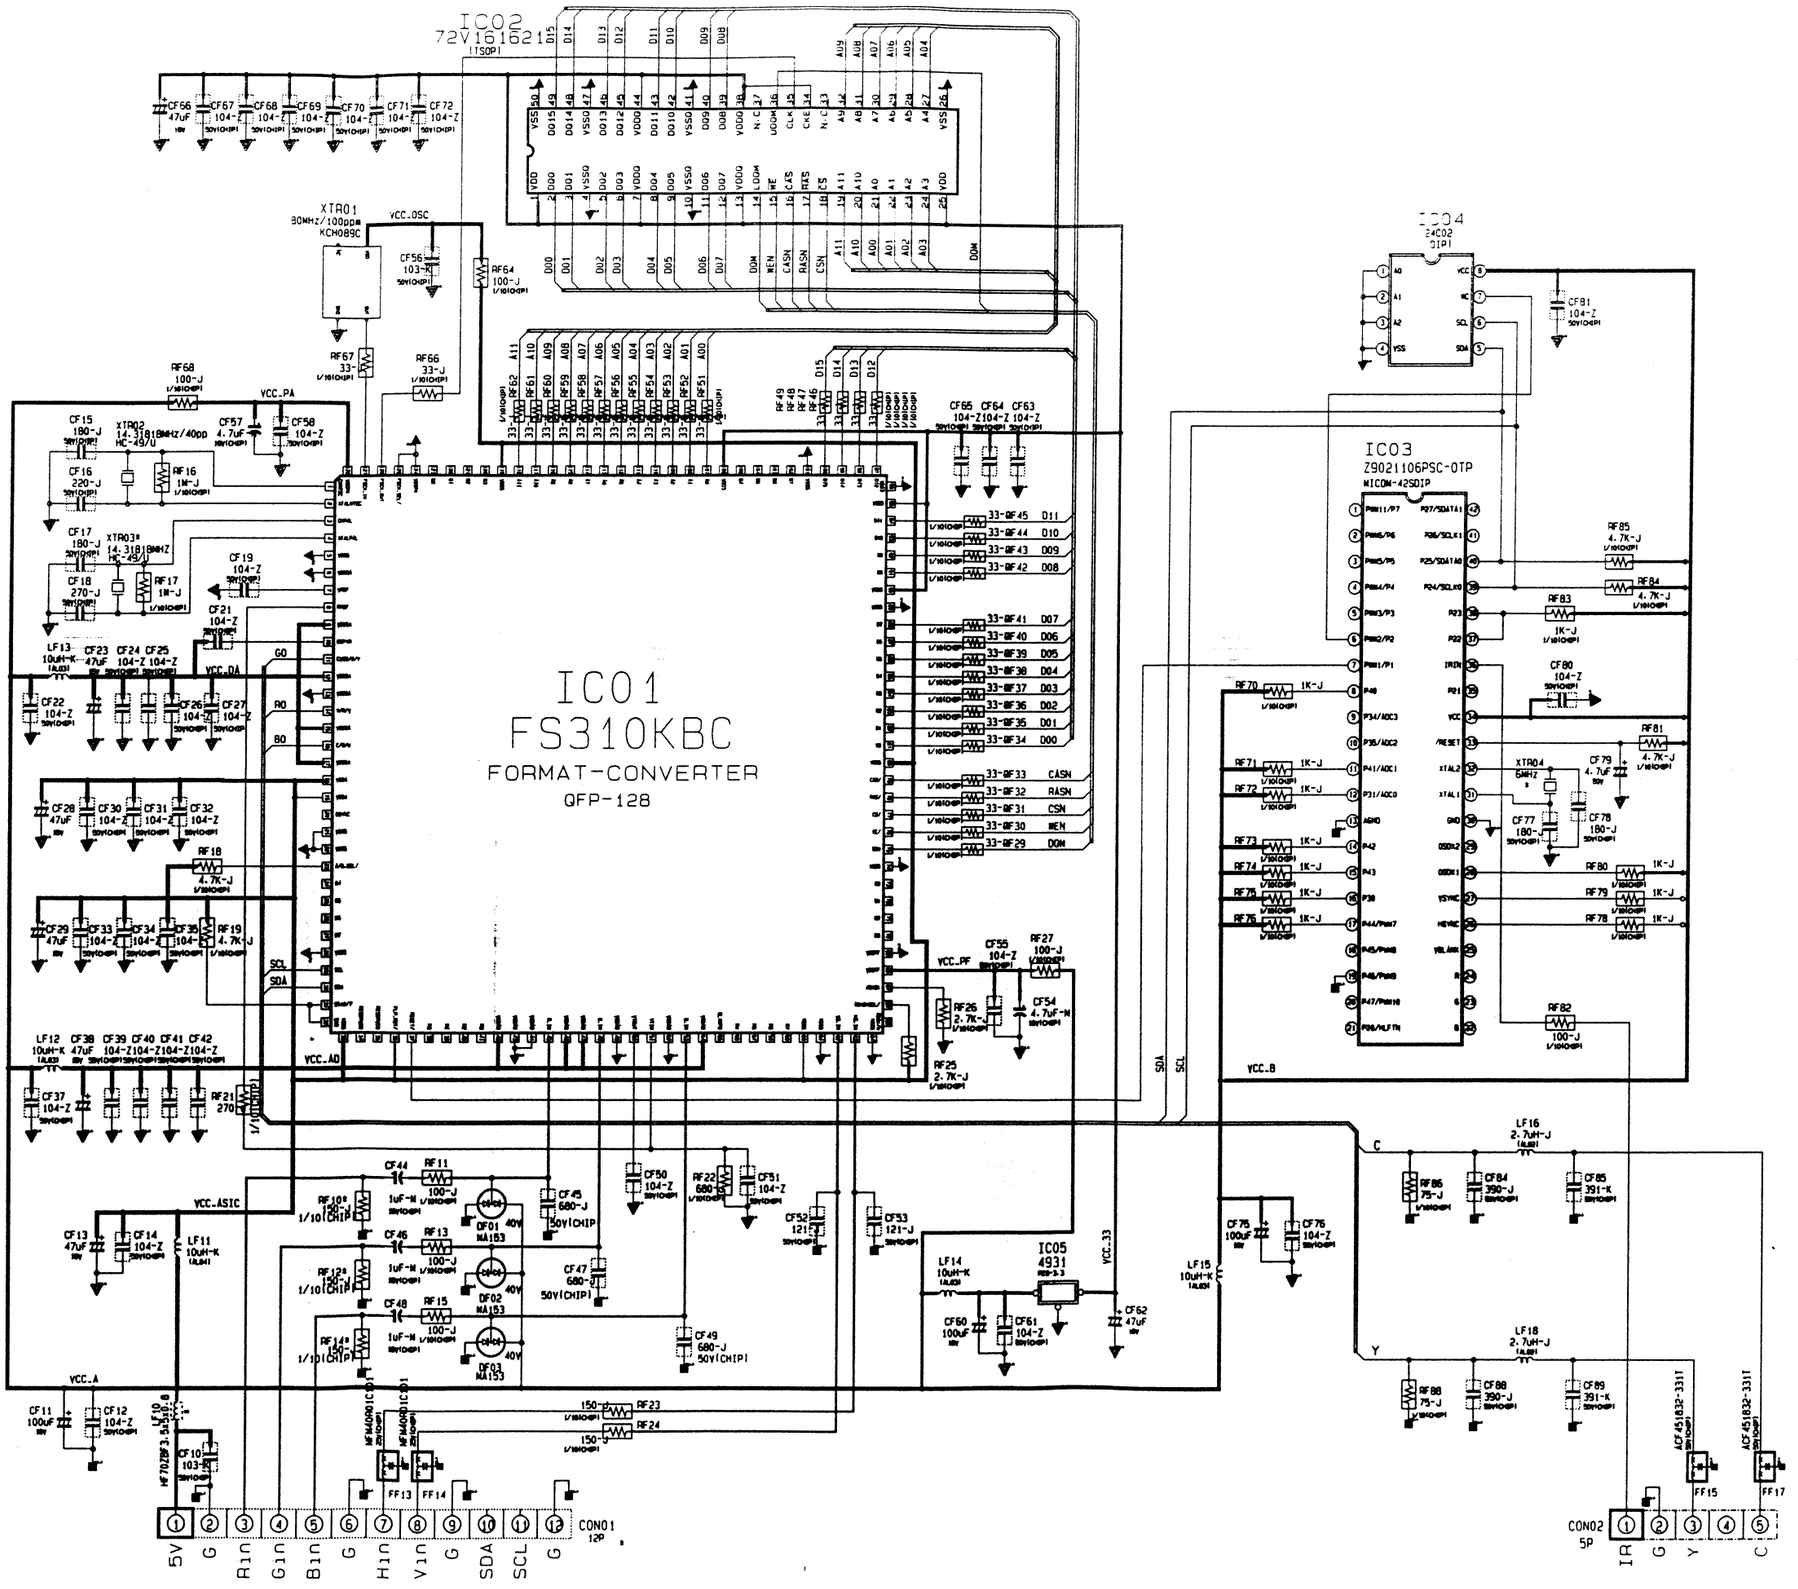
IC01
FS310KBC
FORMAT-CONVERTER
QFP-128
IC02
72V16162L
IC03
Z9021106PSC-OTP
IC04
24C02
IC05
4931
XTR01
80MHz/100ppm
XTR02
14.31818MHz/40pp
XTR03*
14.31818MHZ
XTR04
6MHZ
VCC_OSC
VCC_PA
VCC_DA
VCC_AD
VCC_ASIC
VCC_A
VCC_PF
VCC_B
VCC_33
SDA
SCL
CON01
12P
5V
G
Rin
Gin
Bin
G
Hin
Vin
G
SDA
SCL
G
CON02
5P
IR
G
Y
C
: Power Line
: Signal Line

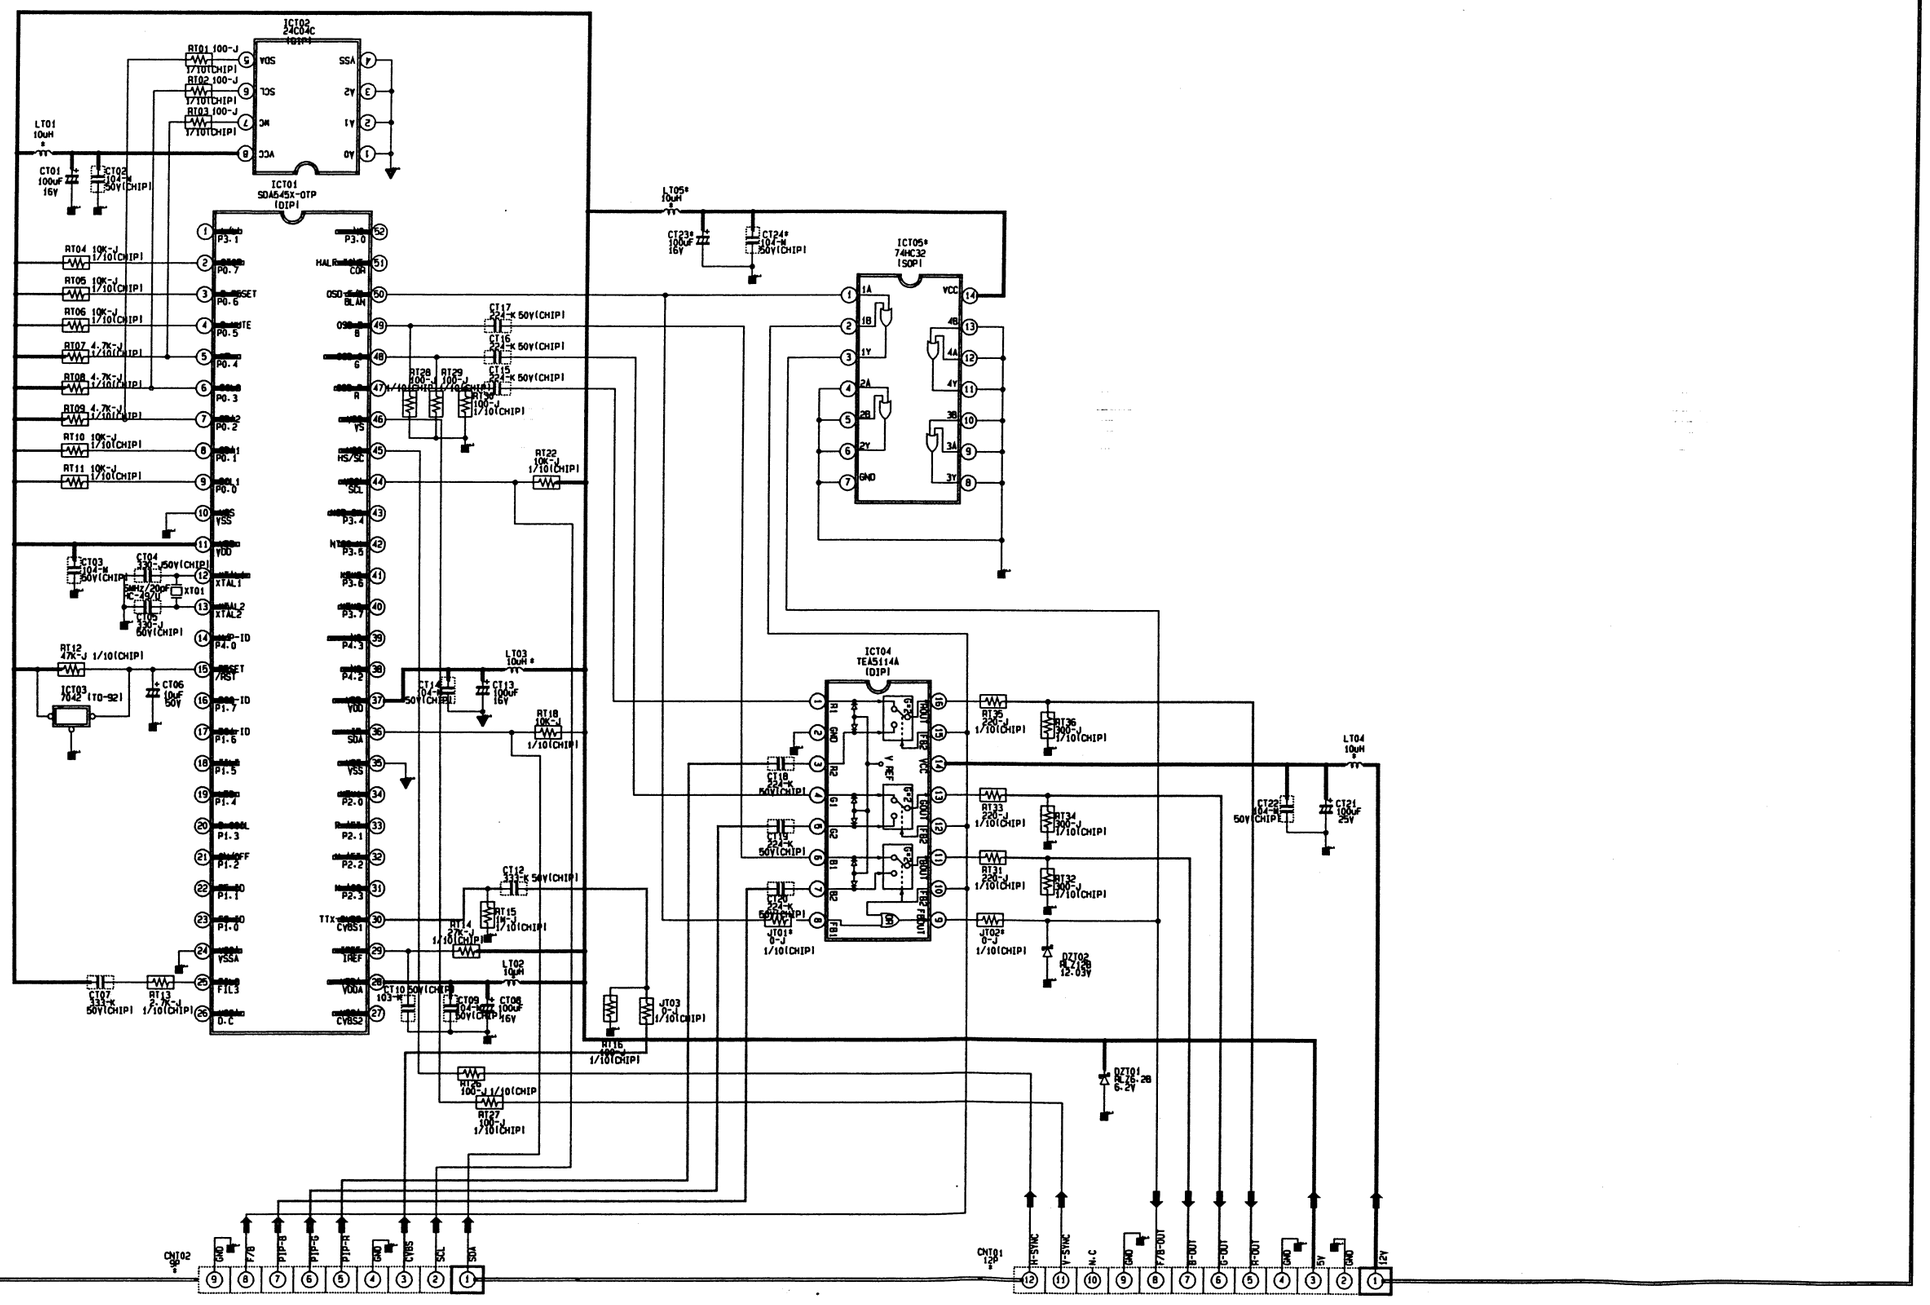
ICT02
24C04C
(DIP8)
RT01 100-J 1/10(CHIP)
RT02 100-J 1/10(CHIP)
RT03 100-J 1/10(CHIP)
LT01 10uH
CT01 100uF 16V
CT02 104-Z 50V(CHIP)
ICT01
SDA5455X-OTP
(DIP)
RT04 10K-J 1/10(CHIP)
RT05 10K-J 1/10(CHIP)
RT06 10K-J 1/10(CHIP)
RT07 4.7K-J 1/10(CHIP)
RT08 4.7K-J 1/10(CHIP)
RT09 4.7K-J 1/10(CHIP)
RT10 10K-J 1/10(CHIP)
RT11 10K-J 1/10(CHIP)
CT03 104-Z 50V(CHIP)
CT04 33P-J 50V(CHIP)
XT01 4MHz/20PF IC-16V
CT05 330-J 50V(CHIP)
RT12 47K-J 1/10(CHIP)
ICT03 7042 (TO-92)
CT06 10uF 50V
CT07 333-Z 50V(CHIP)
RT13 2.2K-J 1/10(CHIP)
CT08 100uF 16V
CT09 104-Z 50V(CHIP)
CT10 50V(CHIP) 103-Z
RT14 27K-J 1/10(CHIP)
RT15 1K-J 1/10(CHIP)
CT11 333-Z 50V(CHIP)
LT02 10uH
LT03 10uH
CT12 104-Z 50V(CHIP)
CT13 100uF 16V
RT16 680-J 1/10(CHIP)
JT03 0-J 1/10(CHIP)
RT17 10K-J 1/10(CHIP)
RT18 10K-J 1/10(CHIP)
CT14 104-Z 50V(CHIP)
CT15 224-K 50V(CHIP)
CT16 224-K 50V(CHIP)
CT17 224-K 50V(CHIP)
RT28 200-J 1/10(CHIP)
RT29 100-J 1/10(CHIP)
RT30 100-J 1/10(CHIP)
RT22 10K-J 1/10(CHIP)
RT25 100-J 1/10(CHIP)
RT27 10K-J 1/10(CHIP)
LT05 10uH
CT23 100uF 16V
CT24 104-M 50V(CHIP)
ICT05
74HC32
(SOP)
ICT04
TEA5114A
(DIP)
CT18 224-K 50V(CHIP)
CT19 224-K 50V(CHIP)
CT20 224-K 50V(CHIP)
JT01 0-J 1/10(CHIP)
JT02 0-J 1/10(CHIP)
RT35 22K-J 1/10(CHIP)
RT36 39K-J 1/10(CHIP)
RT33 22K-J 1/10(CHIP)
RT34 39K-J 1/10(CHIP)
RT31 22K-J 1/10(CHIP)
RT32 39K-J 1/10(CHIP)
DZ02 RLZ5.6B 12.03V
LT04 10uH
CT22 104-Z 50V
CT21 100uF 25V
DZ101 RLZ5.6B 6.24V
CN102
GND
F/B
P/P-B
P/P-G
P/P-R
GND
CVBS
SCL
SDA
CN101
H-SYNC
V-SYNC
N.C
GND
R-OUT
B-OUT
G-OUT
R-OUT
GND
5V
GND
12V
: Power Line
: Signal Line

10-13 SUB(POWER+DEFL)-1

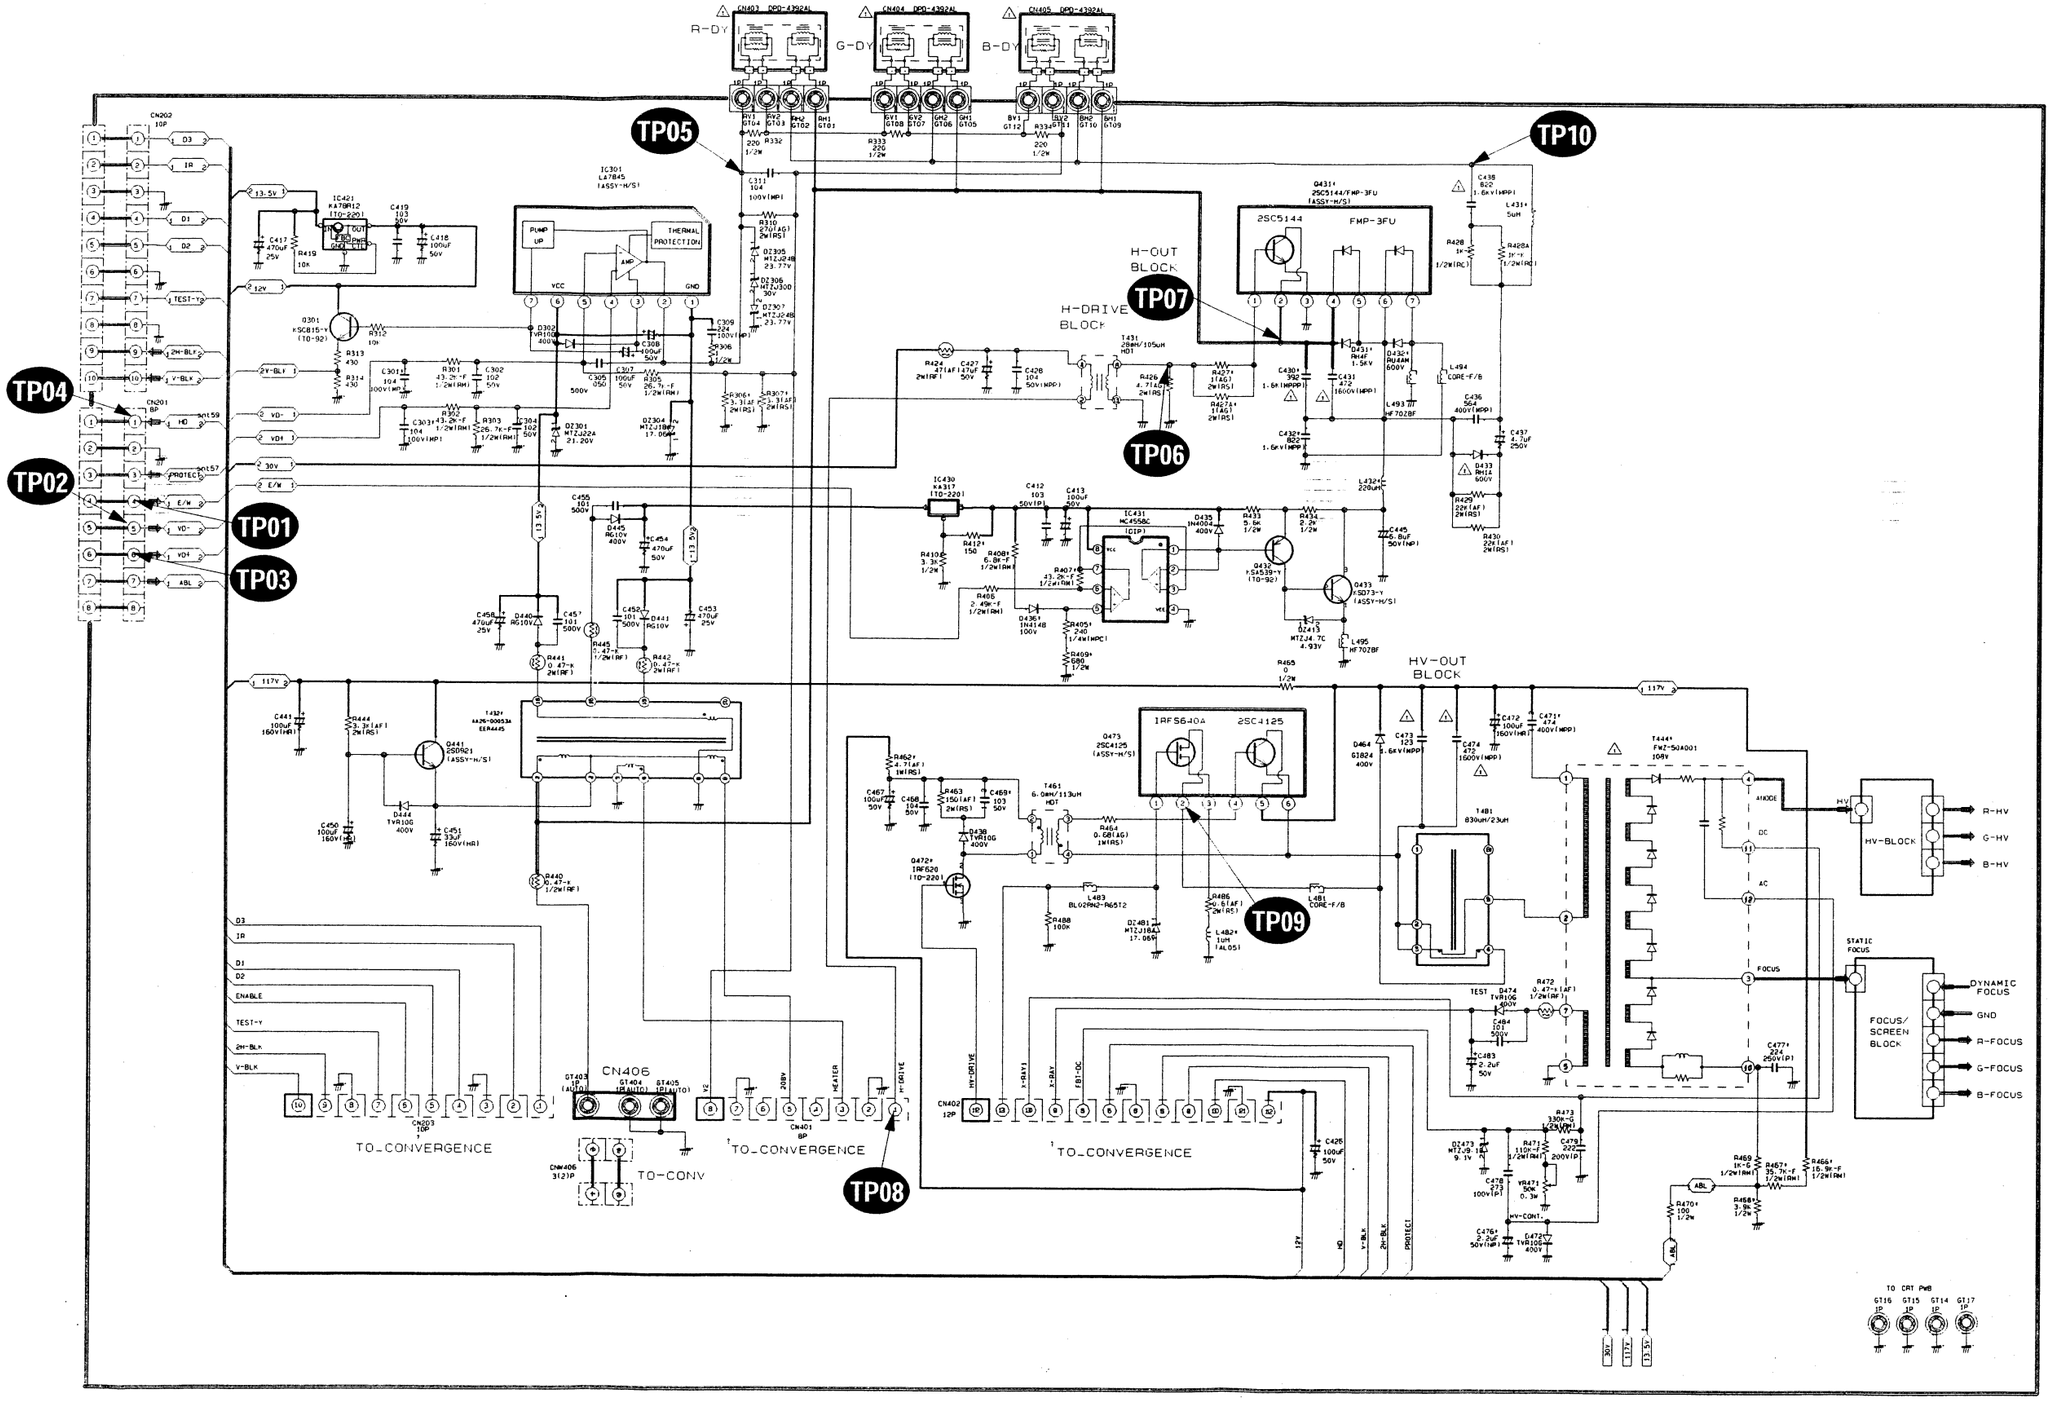





















LOC	FREE VOLT	ONLY 220V
CB12	2200uF. 250V	680uF. 450V
CB13	2200uF. 250V	DELETE
CB35	22uF. 25V	DELETE
CB42	47uF. 450V	DELETE
DB05	TVR10G	DELETE
DB39	RC2V1	DELETE
DB42	TVR10G	DELETE
DZ833	P6KE180A	DELETE
DZ837	1N4762	DELETE
DZ840	MA2560	DELETE
DZ841	R2K	DELETE
IC802	SVD001	DELETE
J172	DELETE	JUMPER

HOT

LOC	FREE VOLT	ONLY 220V
J176	DELETE	JUMPER
L801	1mH. 5A	6mH. 2.5A
L803	1mH. 5A	6mH. 3A
R808A	JUMPER	200K. 1/2W
R809	200K. 1/2W	DELETE
R816	DELETE	10K. 1/2W
R833	150. 2W	DELETE
R835	8.2K. 1/2W	DELETE
R842	47K. 2W	DELETE
R842A	47K. 2W	DELETE
R844	91K. 2W	DELETE
R845	91K. 2W	DELETE
R846	56K. 2W	DELETE

COLD

LOC	FREE VOLT	ONLY 220V
R847	56K. 2W	DELETE
R848	240K. 1/2W	DELETE
R850	4. 7. 2W(RF)	DELETE
RL802	LK-1AF. 12V	DELETE

TP01



: Power Line

: Signal Line

TP01
TP02
TP03
TP04
TP05
TP06
TP07
TP08
TP09
TP10

IC101
SDC91
(QFP)

: Power Line
: Signal Line

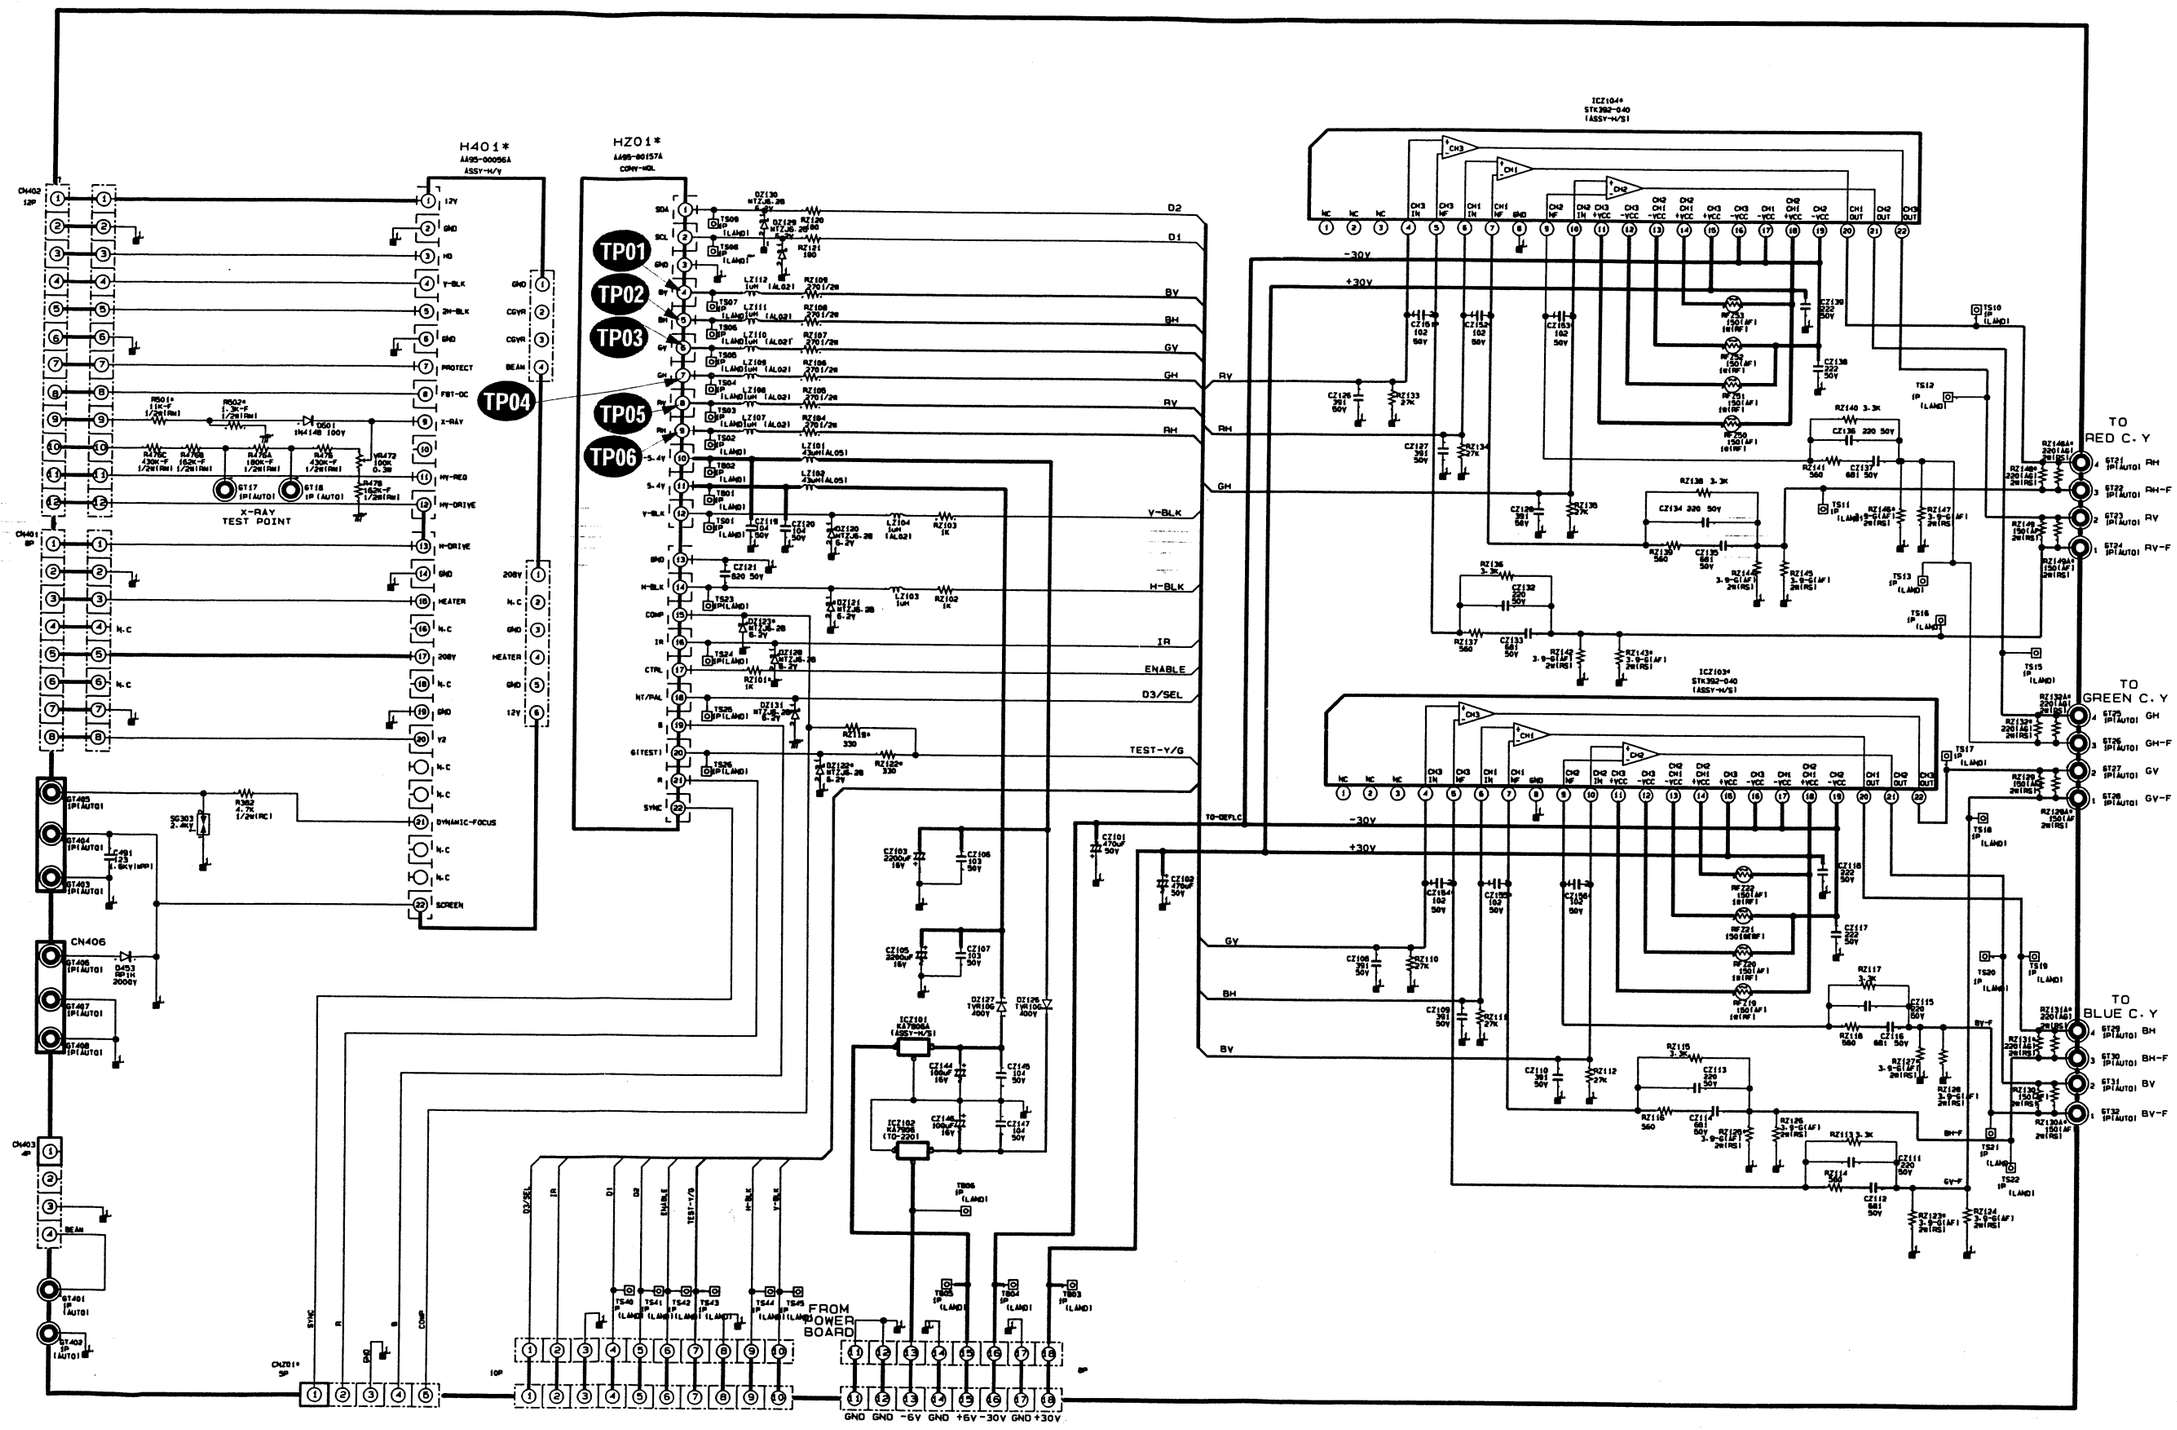
H401*
A495-00056A
ASSY-H/Y
HZ01*
A495-00157A
CONV-HOL
TP01
TP02
TP03
TP04
TP05
TP06
X-RAY
TEST POINT
CN402
CN401
CN406
CN403
CH201*
ICZ104*
STK392-040
(ASSY-H/S)
ICZ103*
STK392-040
(ASSY-H/S)
ICZ101
KA7808A
(ASSY-H/S)
ICZ102
KIA7809A
(TO-220)
+30V
-30V
TO-DEFLC
TO
RED C. Y
GREEN C. Y
BLUE C. Y
FROM
POWER
BOARD
GND GND -6V GND +6V -30V GND +30V
: Power Line
: Signal Line

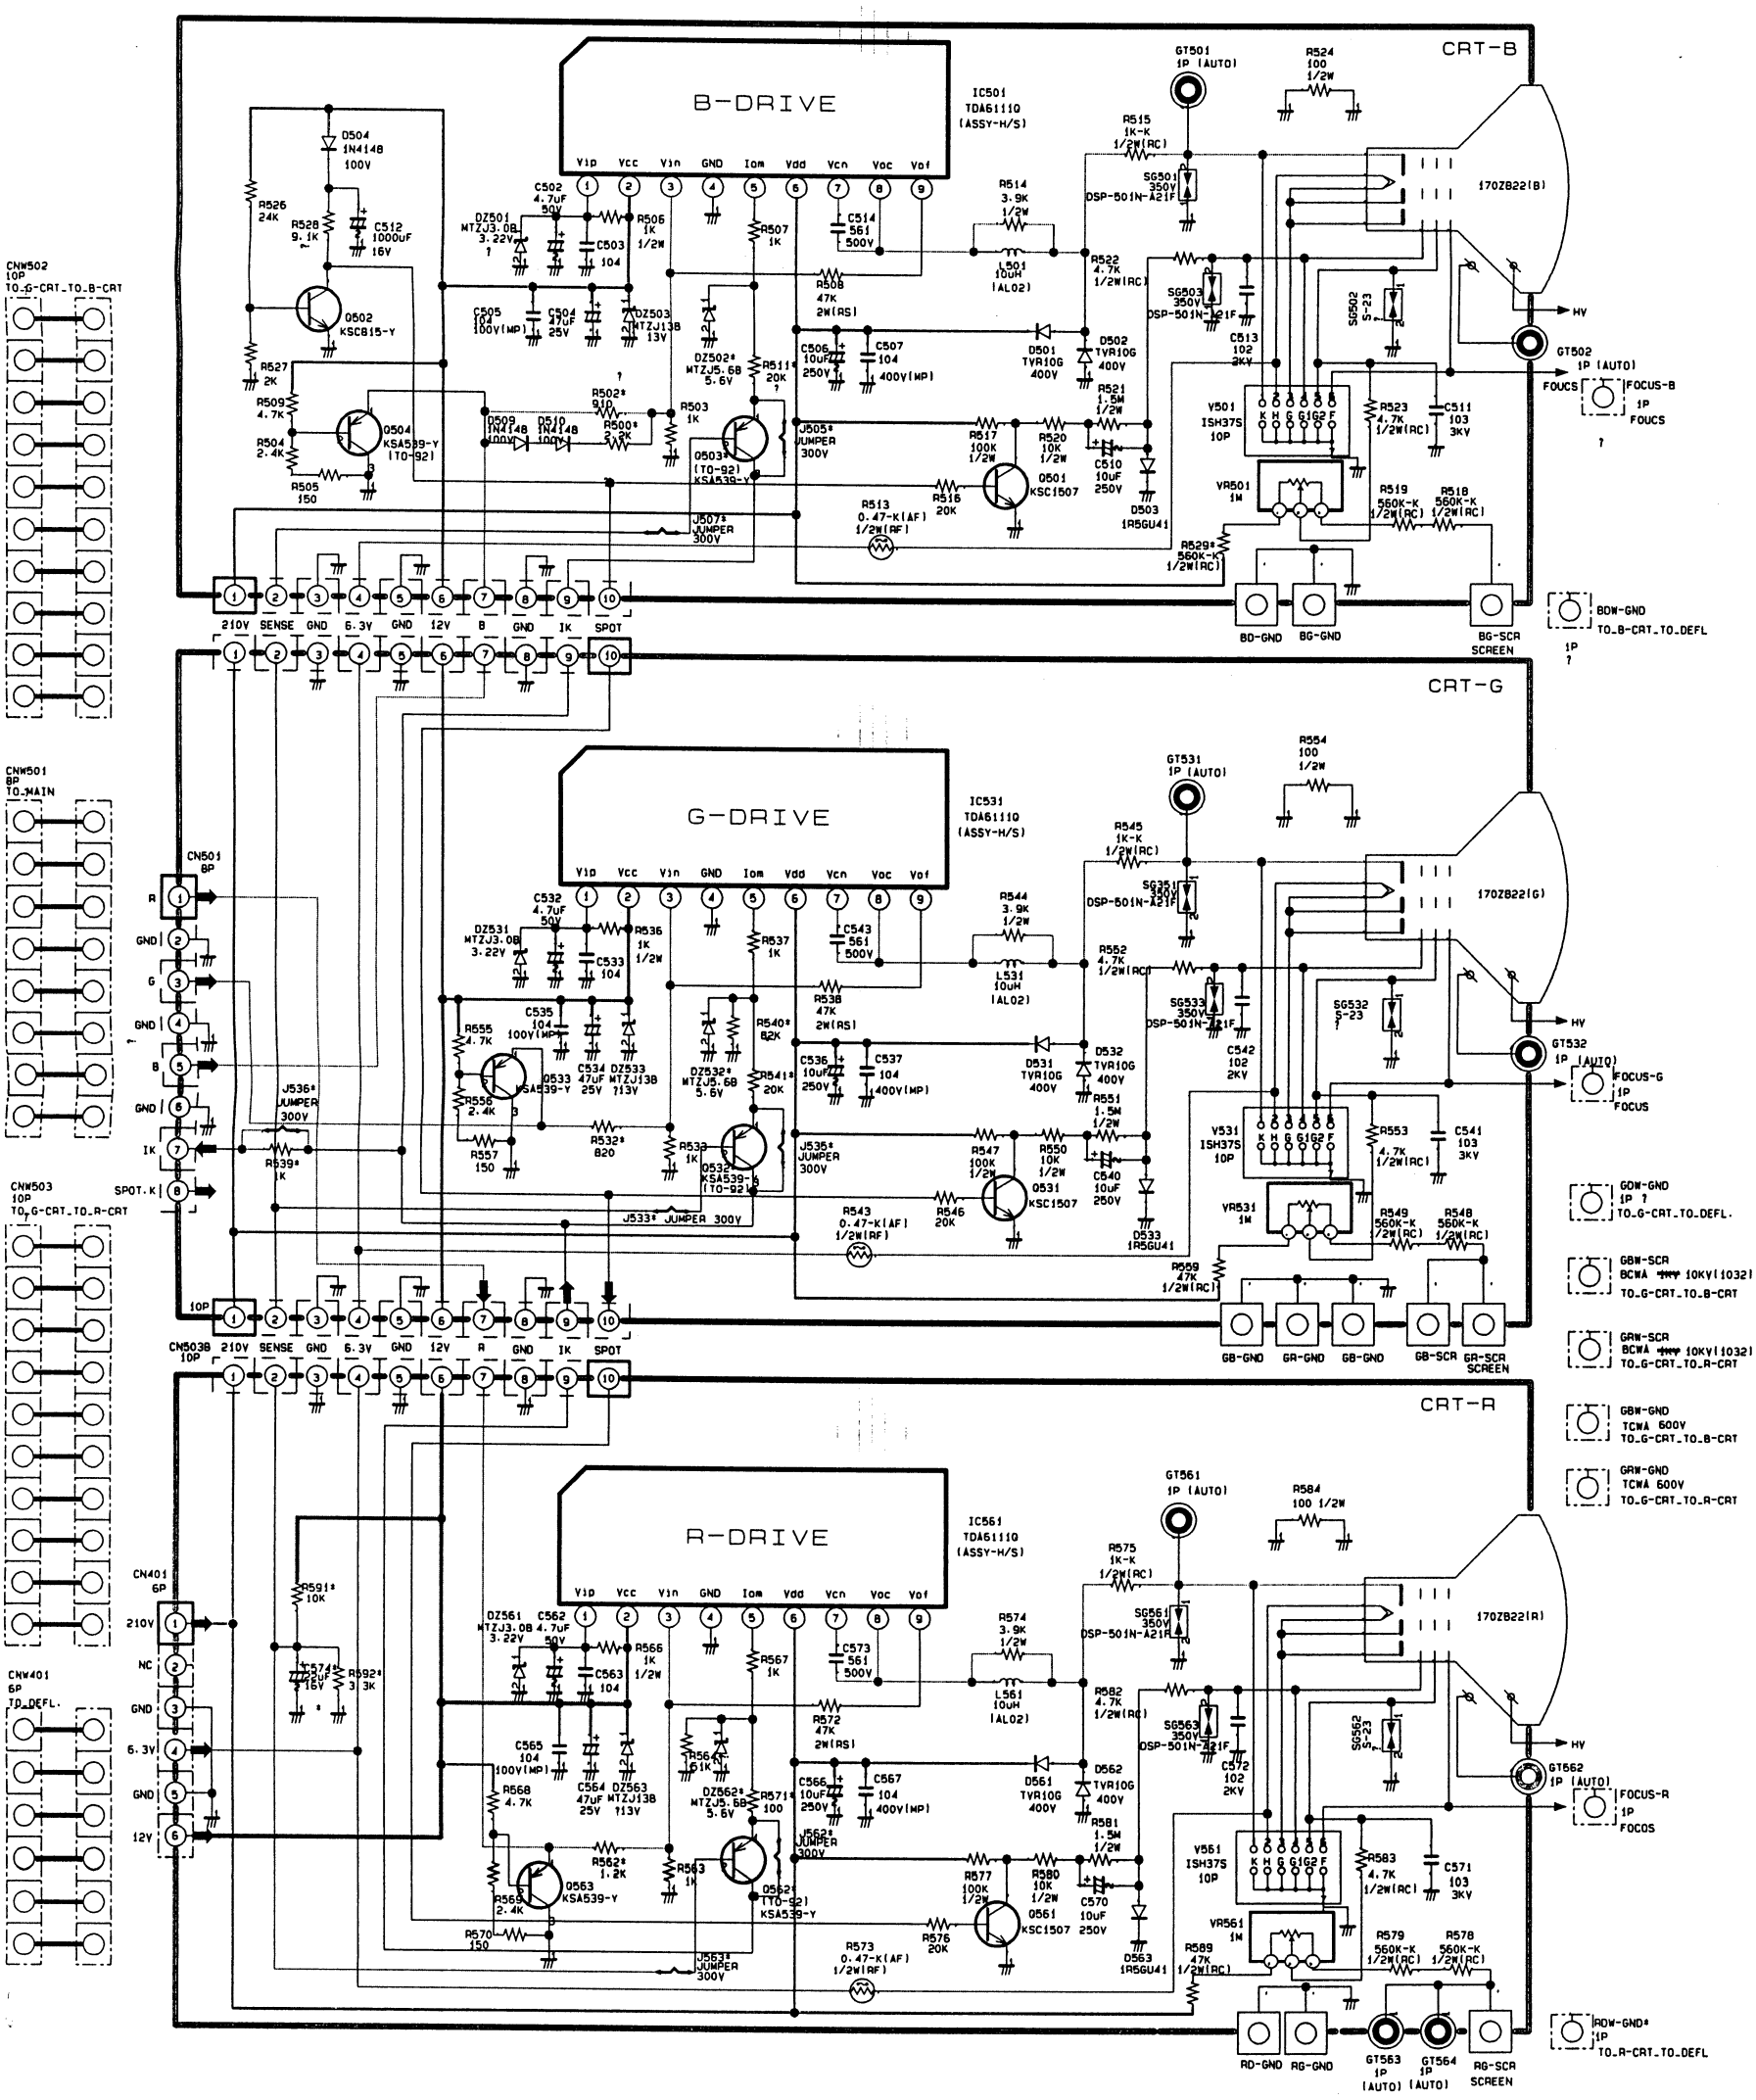
CRT-B
B-DRIVE
IC501
TDA6111Q
(ASSY-H/S)
Vip Vcc Vin GND Iom Vdd Vcn Voc Vof
GT501
1P (AUTO)
R524
100
1/2W
R515
1K-K
1/2W(RC)
SG501
350V
DSP-501N-A21F
170Z822(B)
HV
GT502
1P (AUTO)
FOUCS
FOCUS-B
1P
FOUCS
R514
3.9K
1/2W
L501
10UH
(AL02)
R522
4.7K
1/2W(RC)
SG503
350V
DSP-501N-A21F
SG502
S-23
C513
102
2KV
D501
TVR10G
400V
D502
TVR10G
400V
R521
1.5M
1/2W
C510
10uF
250V
D503
1R5GU41
R523
4.7K
1/2W(RC)
C511
103
3KV
V501
ISH37S
10P
K H G G1G2 F
VR501
1M
R519
560K-K
1/2W(RC)
R518
560K-K
1/2W(RC)
R529*
560K-K
1/2W(RC)
BD-GND
BG-GND
BG-SCR
SCREEN
BDW-GND
TO_B-CRT_TO_DEFL
1P
?
CRT-G
G-DRIVE
IC531
TDA6111Q
(ASSY-H/S)
GT531
1P (AUTO)
R554
100
1/2W
R545
1K-K
1/2W(RC)
SG531
350V
DSP-501N-A21F
170Z822(G)
HV
GT532
1P (AUTO)
FOCUS-G
1P
FOCUS
R544
3.9K
1/2W
L531
10uH
(AL02)
R552
4.7K
1/2W(RC)
SG533
350V
DSP-501N-A21F
SG532
S-23
C542
102
2KV
D531
TVR10G
400V
D532
TVR10G
400V
R551
1.5M
1/2W
C540
10uF
250V
D533
1R5GU41
R553
4.7K
1/2W(RC)
C541
103
3KV
V531
ISH37S
10P
K H G G1G2 F
VR531
1M
R549
560K-K
1/2W(RC)
R548
560K-K
1/2W(RC)
R559
47K
1/2W(RC)
GB-GND
GR-GND
GB-GND
GB-SCR
GR-SCR
SCREEN
GBW-GND
1P ?
TO_G-CRT_TO_DEFL.
GBW-SCR
BCWA 10KV(1032)
TO_G-CRT_TO_B-CRT
GRW-SCR
BCWA 10KV(1032)
TO_G-CRT_TO_R-CRT
GBW-GND
TCWA 600V
TO_G-CRT_TO_B-CRT
GRW-GND
TCWA 600V
TO_G-CRT_TO_R-CRT
CRT-R
R-DRIVE
IC561
TDA6111Q
(ASSY-H/S)
GT561
1P (AUTO)
R584
100 1/2W
R575
1K-K
1/2W(RC)
SG561
350V
DSP-501N-A21R
170Z822(R)
HV
GT562
1P (AUTO)
FOCUS-R
1P
FOCOS
R574
3.9K
1/2W
L561
10UH
(AL02)
R582
4.7K
1/2W(RC)
SG563
350V
DSP-501N-A21F
SG562
S-23
C572
102
2KV
D561
TVR10G
400V
D562
TVR10G
400V
R581
1.5M
1/2W
C570
10uF
250V
D563
1R5GU41
R583
4.7K
1/2W(RC)
C571
103
3KV
V561
ISH37S
10P
K H G G1G2 F
VR561
1M
R579
560K-K
1/2W(RC)
R578
560K-K
1/2W(RC)
R589
47K
1/2W(RC)
RD-GND
RG-GND
GT563
1P
(AUTO)
GT564
1P
(AUTO)
RG-SCR
SCREEN
RDW-GND*
1P
TO_R-CRT_TO_DEFL
CNW502
10P
TO_G-CRT_TO_B-CRT
CNW501
8P
TO_MAIN
CNW503
10P
TO_G-CRT_TO_R-CRT
CNW401
6P
TO_DEFL.
CN501
8P
R
GND
G
GND
B
GND
IK
SPOT.K
CN5038
10P
210V SENSE GND 6.3V GND 12V B GND IK SPOT
10P
210V SENSE GND 6.3V GND 12V R GND IK SPOT
CN401
6P
210V
NC
GND
6.3V
GND
12V
J536* JUMPER 300V
J533* JUMPER 300V
J535* JUMPER 300V
J562* JUMPER 300V
J563* JUMPER 300V
J507* JUMPER 300V
J505* JUMPER 300V
R513 0.47-K(AF) 1/2W(RF)
R543 0.47-K(AF) 1/2W(RF)
R573 0.47-K(AF) 1/2W(RF)
R526 24K
R528 9.1K
C512 1000UF 16V
D504 1N4148 100V
Q502 KSC815-Y
R527 2K
R509 4.7K
R504 2.4K
R505 150
Q504 KSA539-Y (TO-92)
D509 1N4148 100V
D510 1N4148 100V
R500* 2.2K
R502* 910
R503 1K
Q503* (TO-92) KSA539-Y
C502 4.7uF 50V
DZ501 MTZJ3.0B 3.22V
R506 1K 1/2W
C503 104
C505 102 100V(MP)
C504 47UF 25V
DZ503 MTZJ13B 13V
DZ502* MTZJ5.6B 5.6V
R507 1K
R511* 20K
C506 10uF 250V
C507 104 400V(MP)
R508 47K 2W(RS)
C514 561 500V
R517 100K 1/2W
R520 10K 1/2W
Q501 KSC1507
R516 20K
R591* 10K
C574 2.2uF 16V
R592* 3.3K
C532 4.7uF 50V
DZ531 MTZJ3.0B 3.22V
R536 1K 1/2W
C533 104
C535 104 100V(MP)
C534 47UF 25V
DZ533 MTZJ13B 13V
DZ532* MTZJ5.6B 5.6V
R537 1K
R540* 82K
R541* 20K
C536 10uF 250V
C537 104 400V(MP)
R538 47K 2W(RS)
R555 4.7K
Q533 KSA539-Y
R556 2.4K
R557 150
R532* 820
R539* 1K
R538 1K
Q532* (TO-92) KSA539-Y
R547 100K 1/2W
R550 10K 1/2W
Q531 KSC1507
R546 20K
C543 561 500V
C562 4.7uF 50V
DZ561 MTZJ3.0B 3.22V
R566 1K 1/2W
C563 104
C565 104 100V(MP)
C564 47UF 25V
DZ563 MTZJ13B 13V
DZ562* MTZJ5.6B 5.6V
R567 1K
R564 51K
R571* 100
C566 10uF 250V
C567 104 400V(MP)
R572 47K 2W(RS)
R568 4.7K
Q563 KSA539-Y
R562* 1.2K
R563 1K
Q562* (TO-92) KSA539-Y
R570 150
R577 100K 1/2W
R580 10K 1/2W
Q561 KSC1507
R576 20K
C573 561 500V
R574 3.9K 1/2W
L561 10UH (AL02)
R582 4.7K 1/2W(RC)
R581 1.5M 1/2W
C570 10uF 250V
R583 4.7K 1/2W(RC)
C571 103 3KV
R589 47K 1/2W(RC)
R579 560K-K 1/2W(RC)
R578 560K-K 1/2W(RC)
: Power Line
: Signal Line

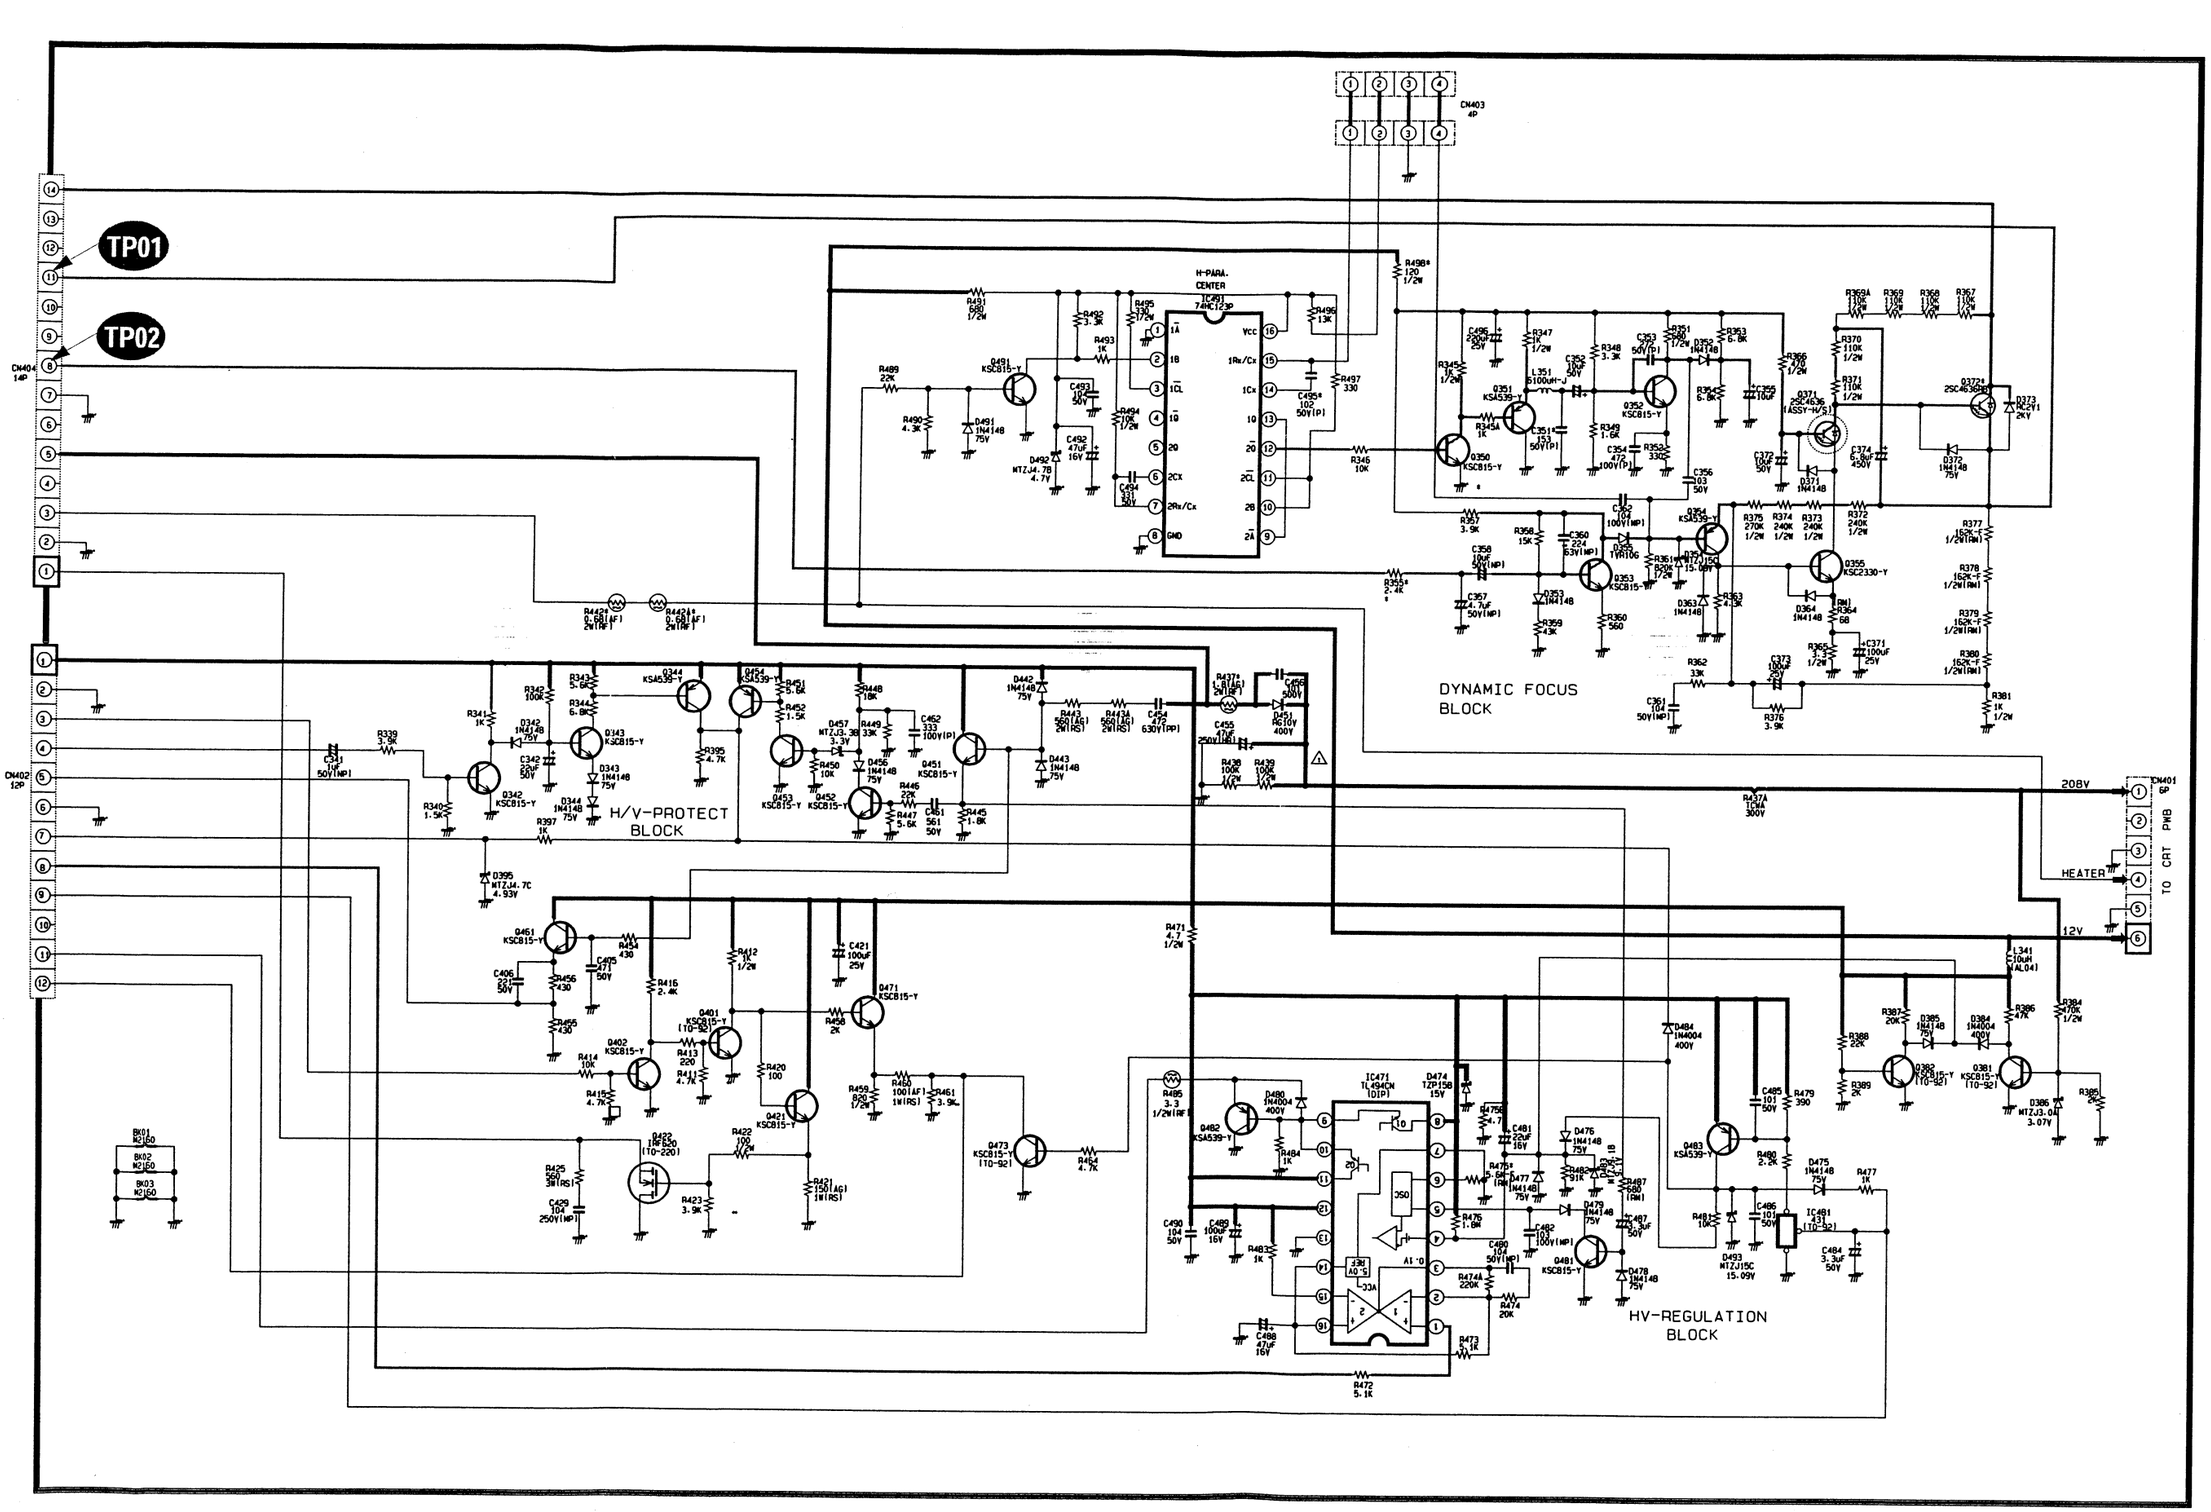
TP01
TP02
CN403 4P
H-PARA. CENTER
IC491 74HC123P
DYNAMIC FOCUS BLOCK
H/V-PROTECT BLOCK
HV-REGULATION BLOCK
CN404 14P
CN402 12P
CN401 6P
208V
HEATER
12V
TO CRT PWB
BK01 K2150
BK02 K2150
BK03 K2150
: Power Line
: Signal Line


TP01


TP02

10-20 FRONT-A/V

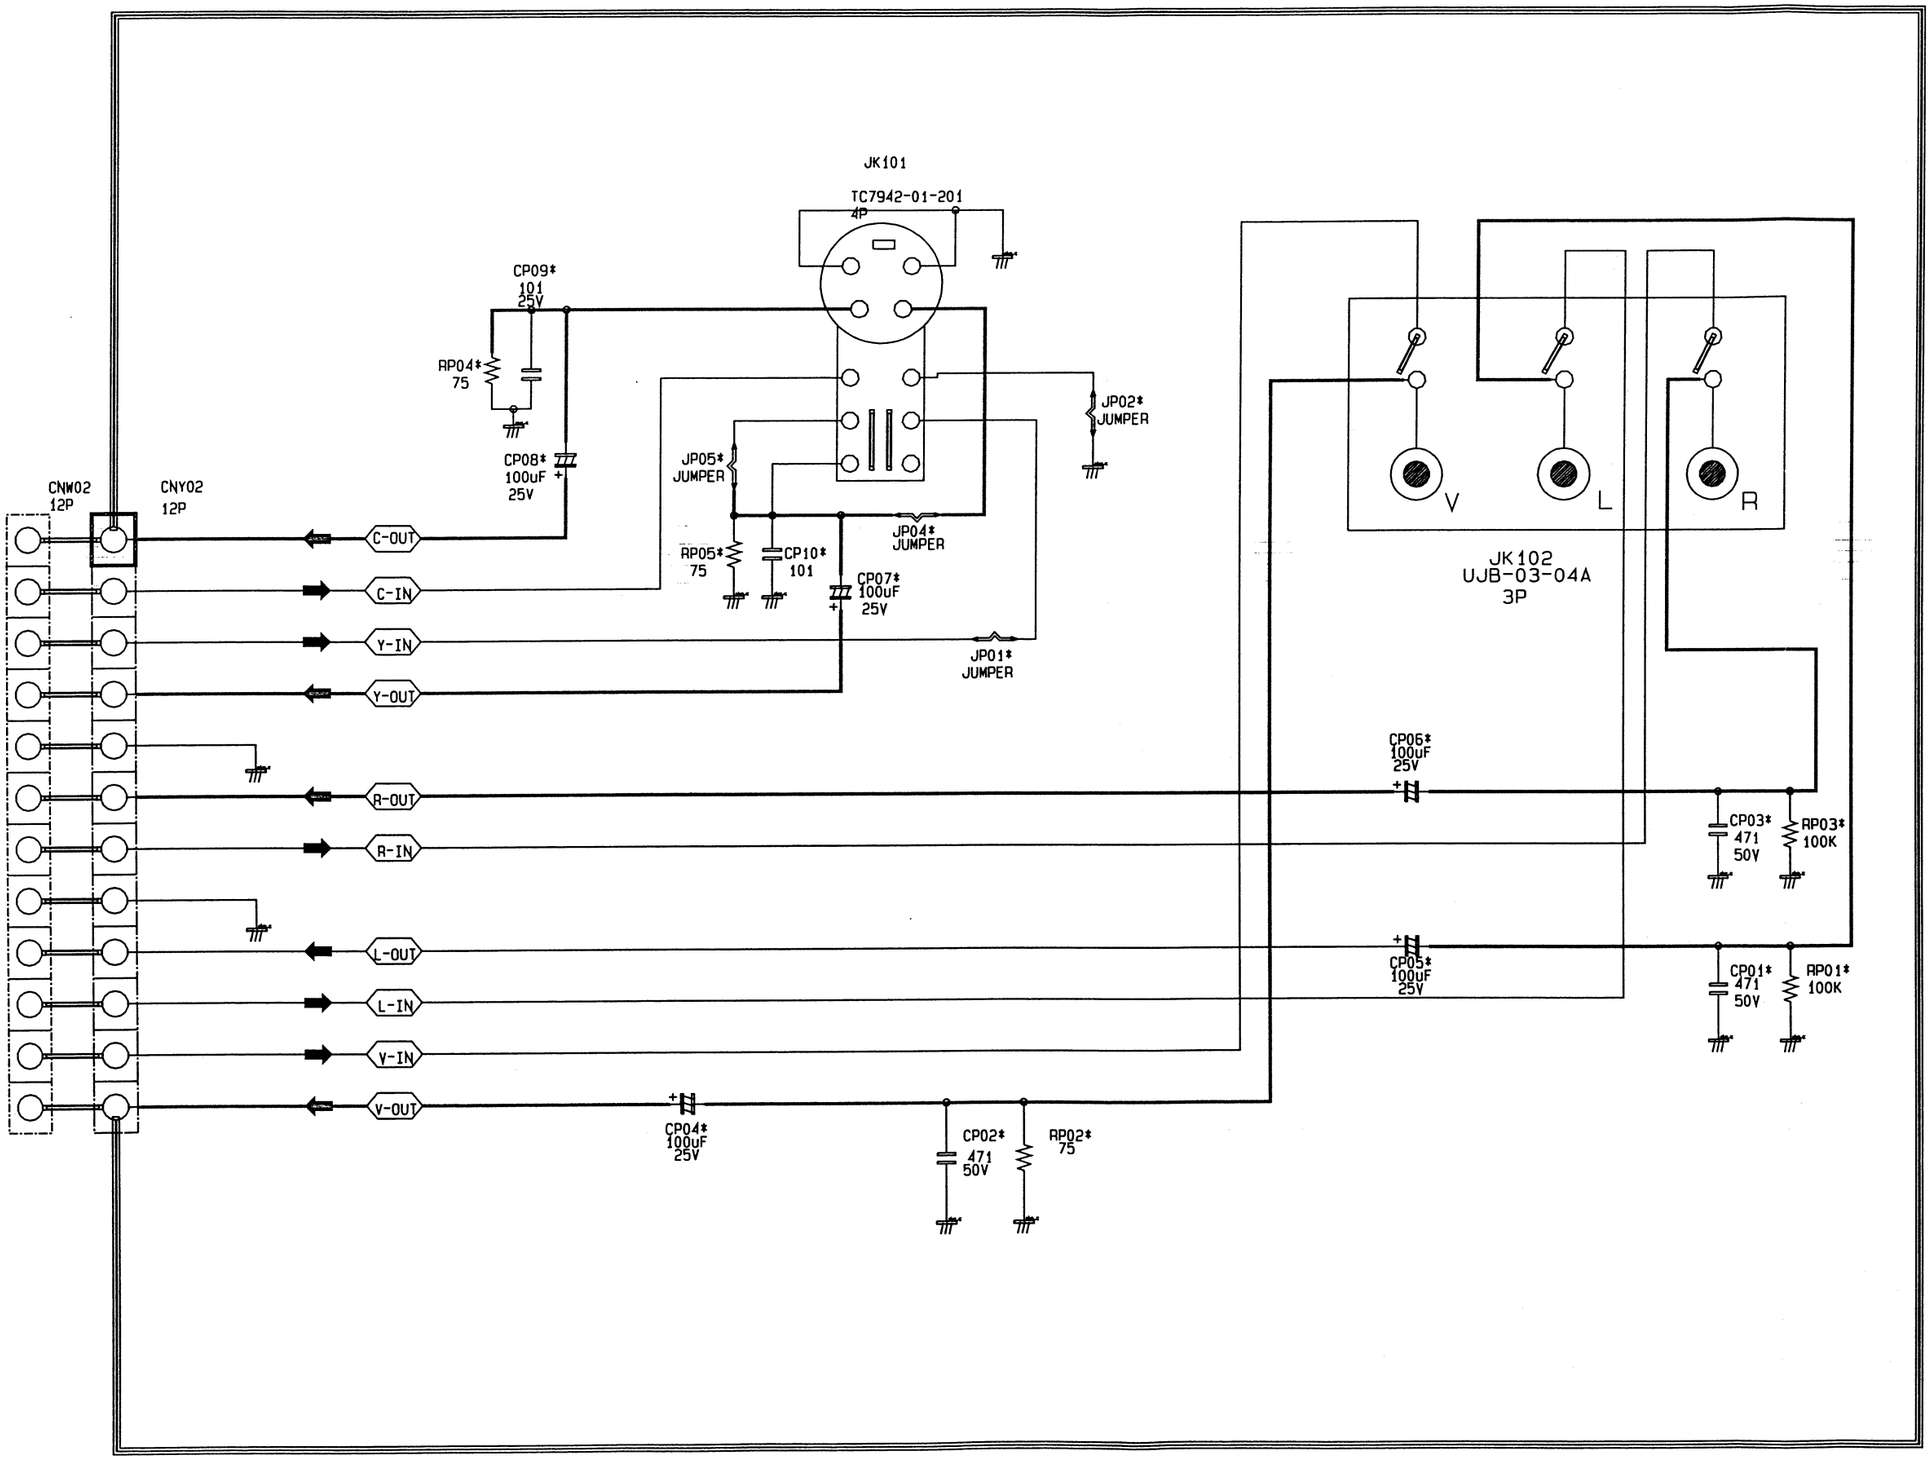

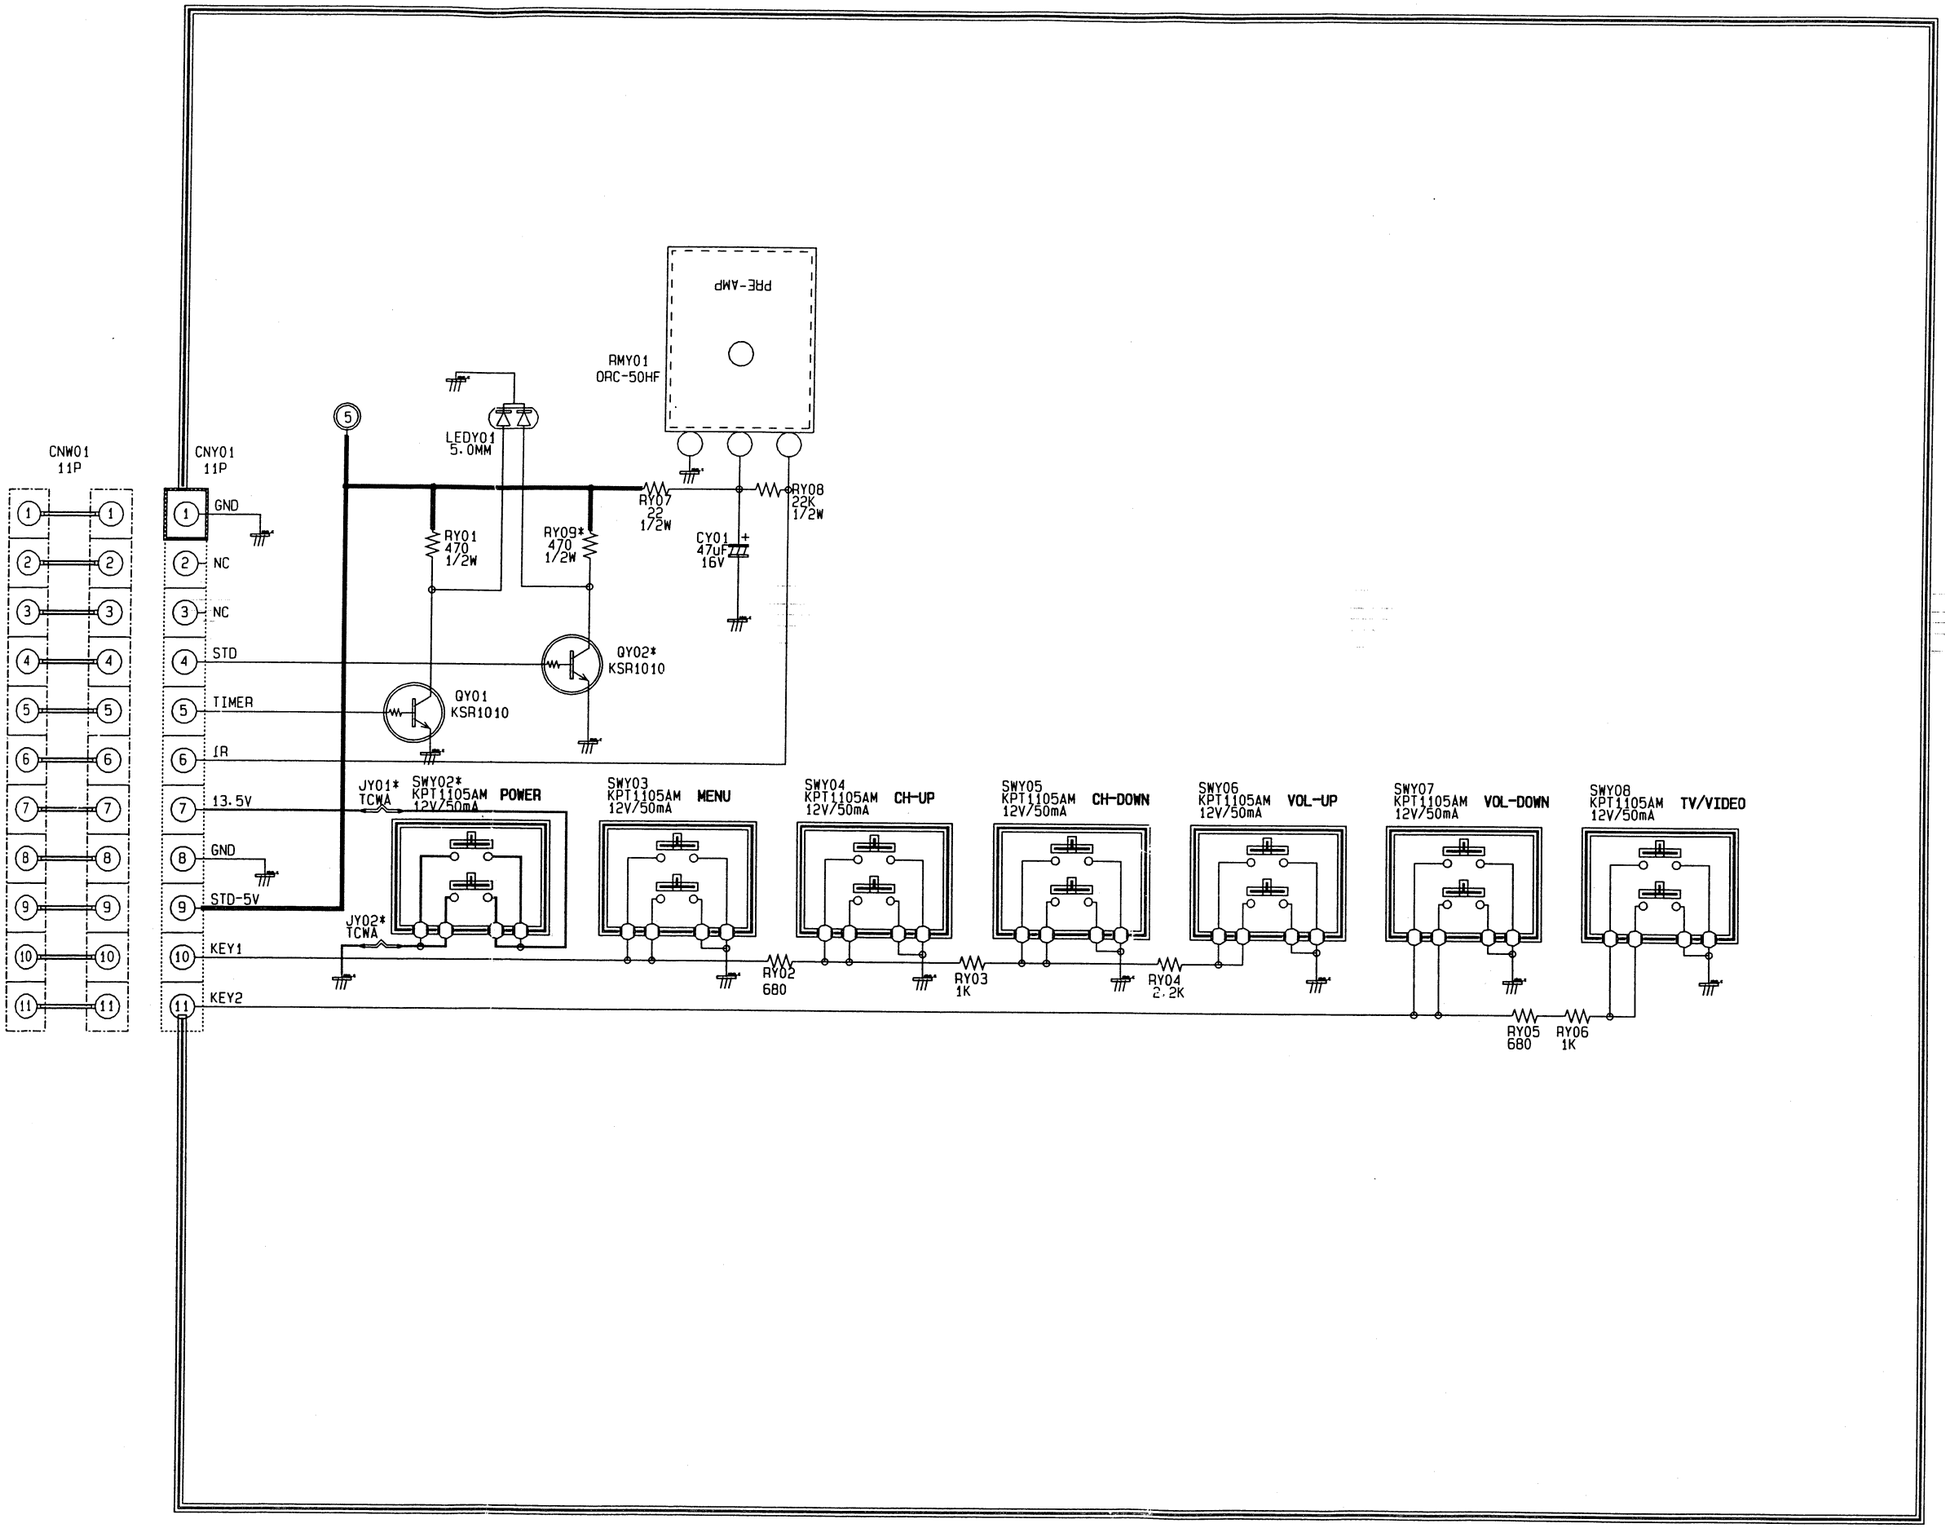

: Power Line
: Signal Line